



WIS 19

Division Street – River Road

Wisconsin Department of Transportation

Public Involvement Meeting


May 21, 2025

Presentation Agenda

- Project Location
- Purpose and Need
- Proposed Improvements
- Traffic Control
- Project Schedule
- Business Coordination
- Contact Information



Project Location

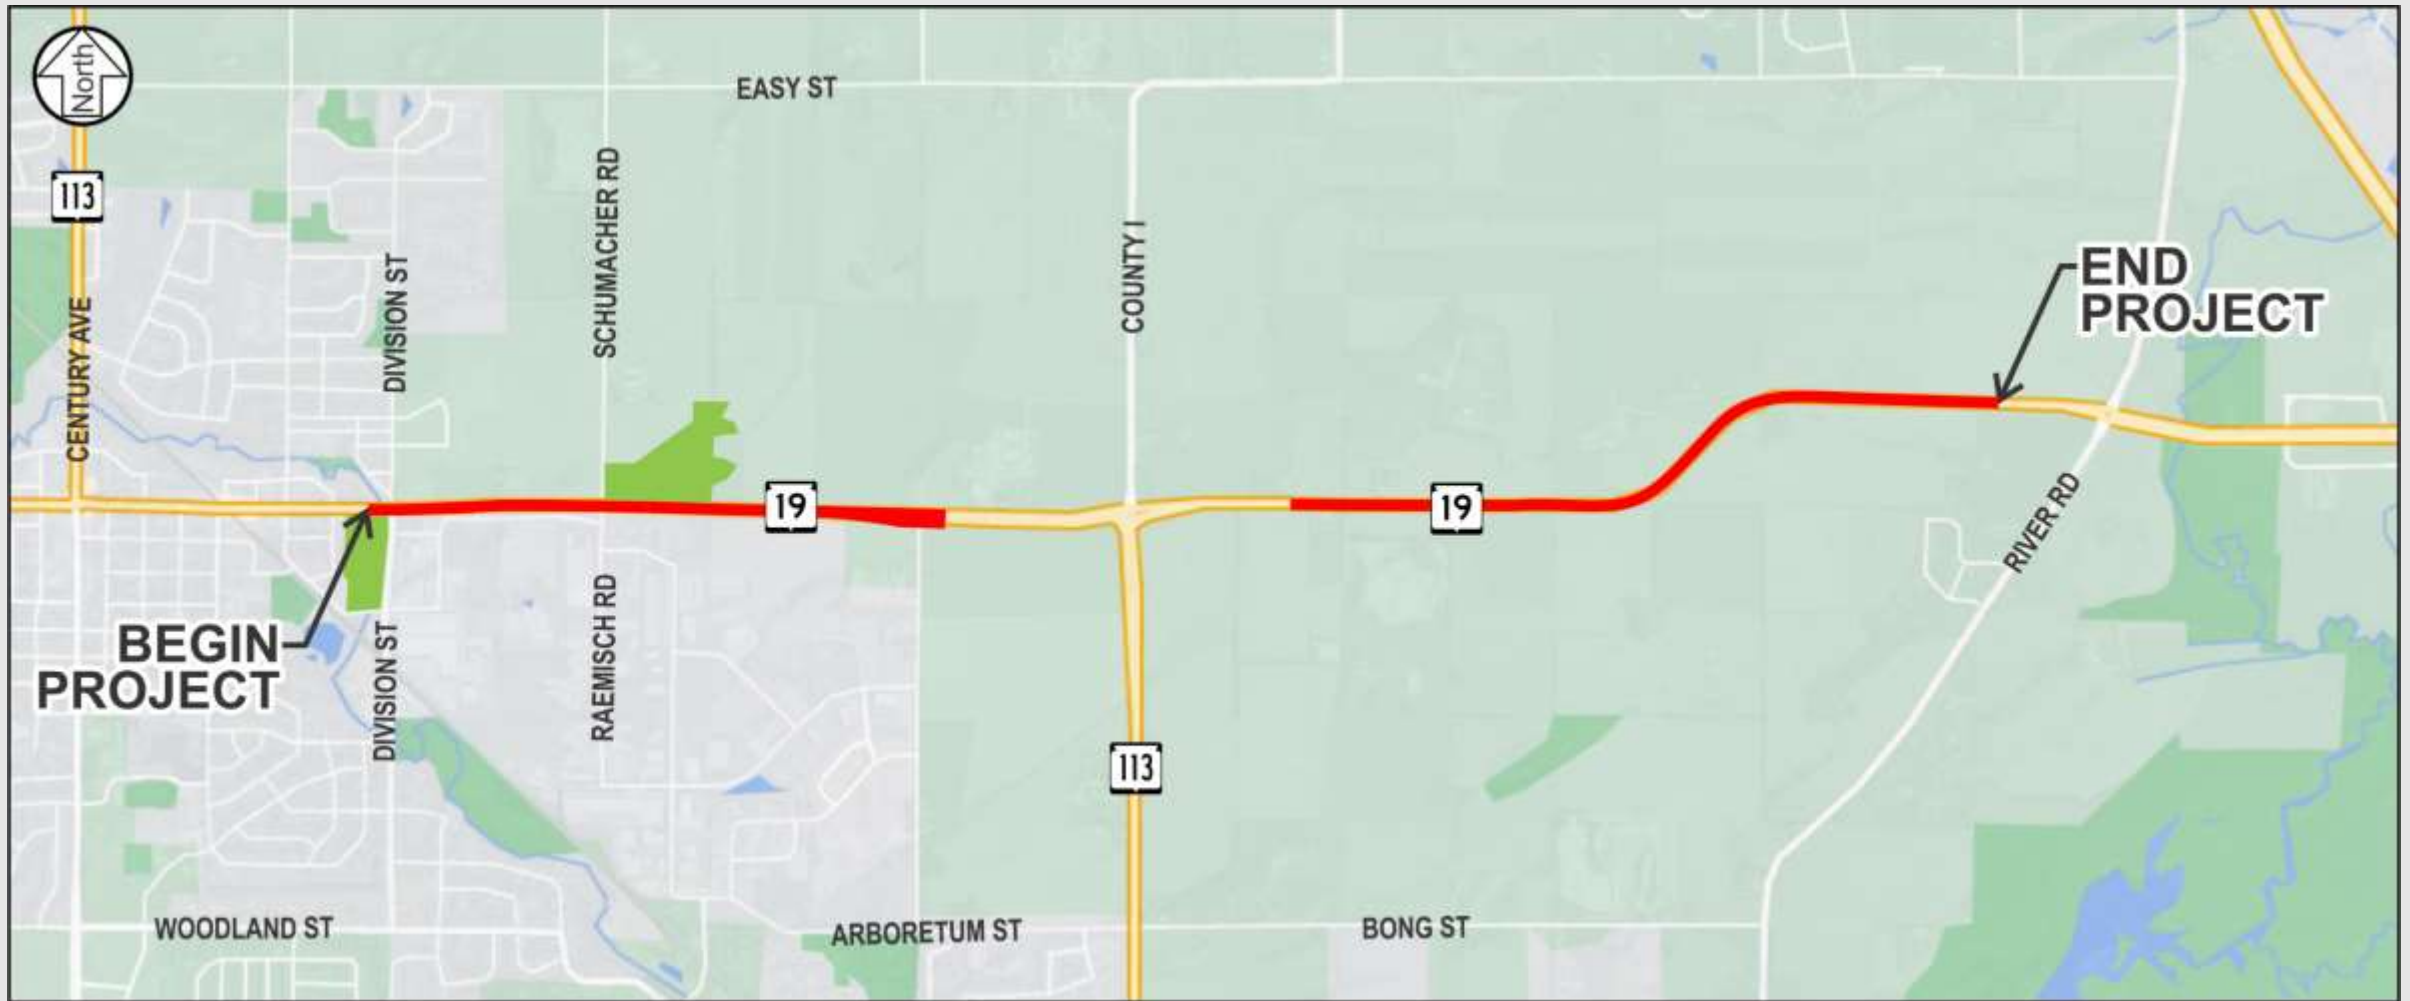

Purpose and Need

- Safety

- Schumacher/Raemisch Road left turn crashes



- Operations

- Division Street and Hogan Road intersections do not meet the needs of forecasted traffic volumes



Purpose and Need

- Roadway Condition

- Existing pavement has reached the end of its useful life
- Existing curb ramps do not meet standards

- Drainage

- Culverts in poor condition
- Stormwater management needs at Six Mile Creek structure




Proposed Improvements



Proposed Improvements

Division Street to Schumacher Road

- Pavement improvements
 - Full-depth reconstruction
 - 14-foot raised median

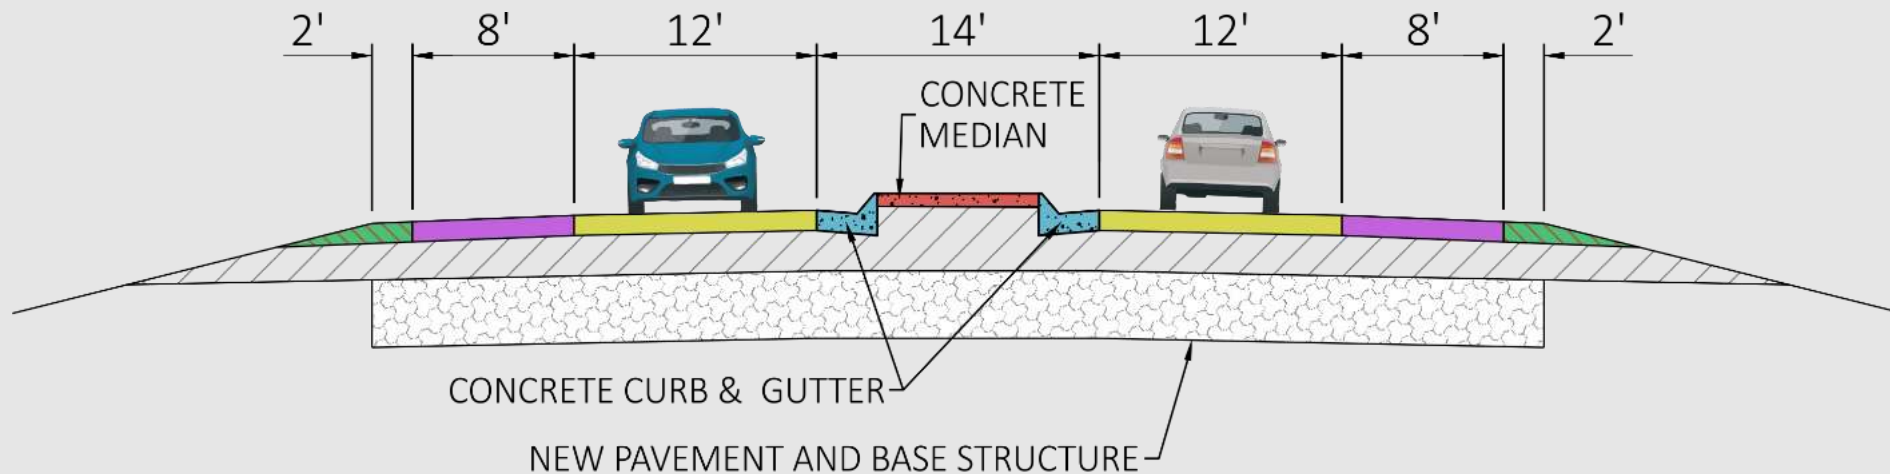

Proposed Improvements

Division Street to Schumacher Road

- Intersection Improvements

Division Street Intersection

- New traffic signals
- Improved pedestrian facilities
- Dedicated turn lanes on WIS 19
- New storm sewer




Proposed Improvements

Division Street to Schumacher Road

- Intersection Improvements

Schumacher/Raemisch Road Intersection

- New traffic signals
- Offset left-turn lanes on WIS 19
- New culvert

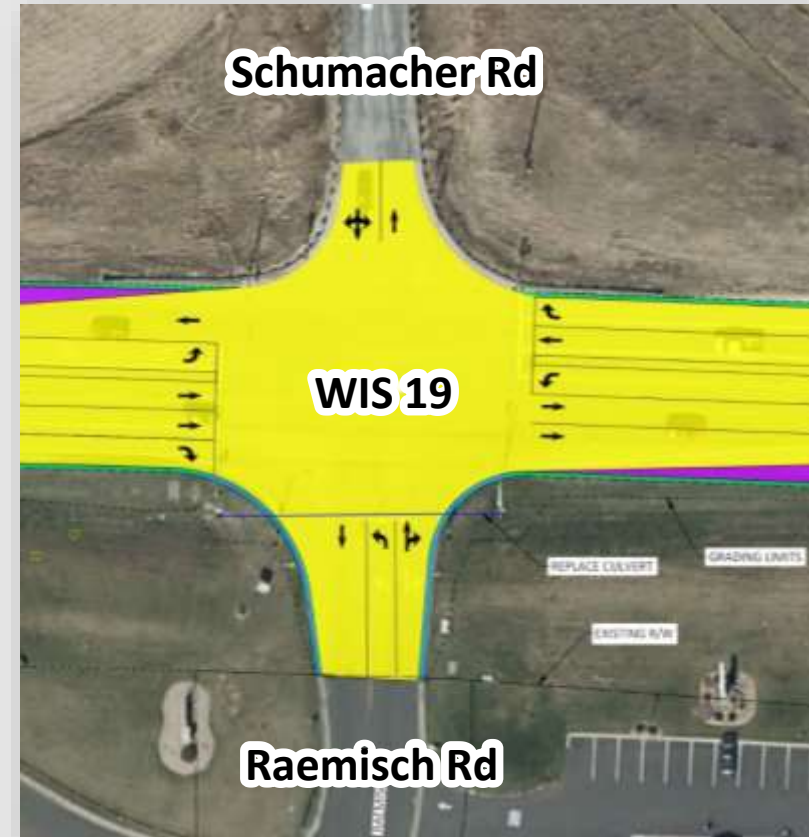

Proposed Improvements

Six Mile Creek Bridge

- Repaint the bridge rail on the bridge structure
- Remove inlets on bridge structure and outlet north of WIS 19



Proposed Improvements

Hogan Road


- Intersection Improvements
 - Raised medians
 - Channelized offset left turn lanes
 - Dedicated turn lanes on Hogan Road
 - New storm sewer
- Traffic signals
 - Signal warrant will be conducted summer of 2025



Proposed Improvements

Schumacher Road to River Road

- Pavement improvements
 - Mill existing pavement and overlay with new pavement
 - Reshape aggregate shoulders

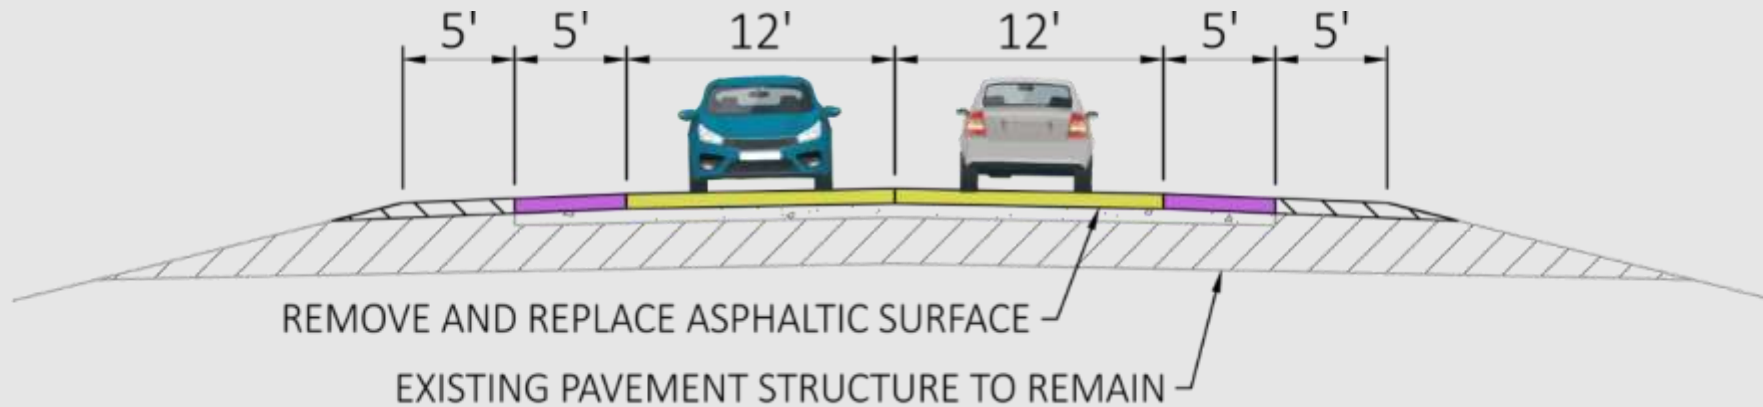

Proposed Improvements

Schumacher Road to River Road

- Drainage improvements
 - Replace culverts in poor condition
- Safety improvements
 - Enhanced friction surface treatment for horizontal s-curve
 - Replacing shoulder and centerline rumble strips



Traffic Control

2026 Construction

- Keep WIS 19 open to traffic
 - Staged construction between Division and Schumacher Road
 - Flagging operations from Schumacher Road to River Road
 - Nighttime closures are required for culvert replacements
- Maintain access to residences and businesses
- Minimize side road closures
- Maintain bicycle and pedestrian access at Division Street
 - At least one north-south crossing of WIS 19 will be provided at all times.



Traffic Control – Stage 1

Division Street to Schumacher Road

- Shift traffic north, construct eastbound WIS 19 lanes



Division Street – Substage 1B



Schumacher/Raemish Road – Substage 1C

Traffic Control – Stage 2

Division Street to Schumacher Road

- Shift traffic south, construct westbound WIS 19 lanes



Division Street – Substage 2A



Schumacher/Raemish Road – Substage 2B

Traffic Control – Stage 3

Division Street to Schumacher Road

- Split traffic to outside shoulders, construct raised median



Division Street – Substage 3B



Schumacher/Raemish Road – Substage 3A

Traffic Control

Hogan Road

- Construct turn lanes and side roads in stages



Hogan Road – Substage 2A



Hogan Road – Substage 2B



Hogan Road – Substage 3B

Traffic Control

Schumacher Road to River Road

- Mill and overlay work will be done with a one-way flagging operation during off-peak traffic times
- Two nighttime closures required for culvert replacements



Project Schedule


- Public Involvement Meeting #1 – May 2022
- Public Involvement Meeting #2 – May 2025
- Final Plans – August 2025
- Construction Begins – Spring 2026



Business Coordination

In This Together

- Use WisDOT's “**Road Construction Guide for Business**” for tips, tools, and resources.
- Project team is here to help
- Early coordination is very important!
- Visit: wisconsindot.gov/together

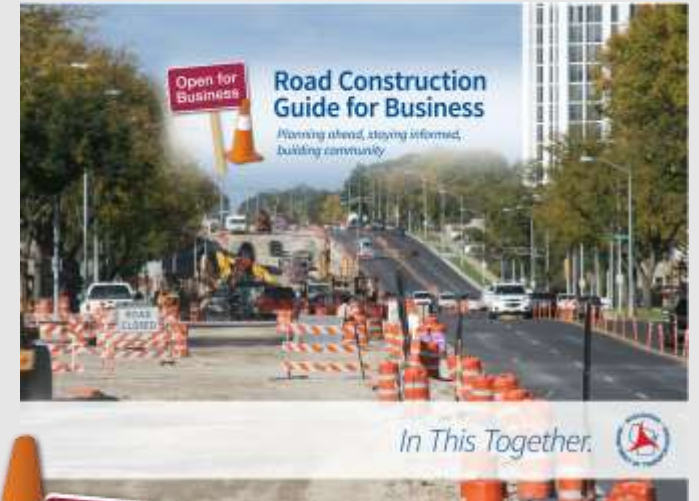

Contact Information

Kevin Drunasky, PE
kevin.drunasky@dot.wi.gov

(608) 246-1467

2101 Wright Street
Madison, WI 53704



Project Website:

wisconsindot.gov/Pages/projects/by-region/sw/wis19-danecounty

