



Wisconsin Department of Transportation

March 6, 2019

Division of Transportation Systems Development

Bureau of Project Development
4822 Madison Yards Way, 4th Floor South
Madison, WI 53705

Telephone: (608) 266-1631
Facsimile (FAX): (608) 266-8459

NOTICE TO ALL CONTRACTORS:

Proposal #44: 1009-44-68
Regionwide Bridge Maintenance
Locations On Stn Per Annual Plan
Various Hwy
North Central Region Wide

Letting of March 12, 2019

This is Addendum No. 01, which provides for the following:

Special Provisions:

Revised Special Provisions	
Article No.	Description
20	Preparation and Anchorage for Vinyl Sheet Piling, Item SPV.0060.01

Schedule of Items:

Revised Bid Item Quantities					
Bid Item	Item Description	Unit	Old Quantity	Revised Quantity	Proposal Total
204.0115	Removing Asphaltic Surface Butt Joints	SY	392	-98	294
465.0105	Asphaltic Surface	TON	44	-11	33

Plan Sheets:

Revised Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of changes to sheet)
7	B-43-41 Construction Detail (modified limits)
15 – 16	Miscellaneous Quantities (revised quantities)
66	Structure B-63-17 General Plan (revised elevation view note)

The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.

Sincerely,

Mike Coleman

Proposal Development Specialist
Proposal Management Section

ADDENDUM NO. 01

1009-44-68

March 6, 2019

Special Provisions

20. Preparation and Anchorage for Vinyl Sheet Piling, Item SPV.0060.01

Replace paragraph two under section titled E Payment with the following:

Payment is full compensation for preparing and leveling the ground surface under the piers. Payment for furnishing and installing grout bags will be made separately.

Schedule of Items

Attached, dated March 6, 2019, are the revised Schedule of Items Page 1.

Plan Sheets

The following 8½ x 11-inch sheets are attached and made part of the plans for this proposal:

Revised: 7, 15, 16, and 66.

END OF ADDENDUM

REMOVE AND REPLACE ASPHALTIC SURFACE BUT JOINTS. PAVE ASPHALT SURFACE WITH 2-INCH THICKNESS. MAINTAIN EXISTING CROSS SECTIONS.

Addendum No. 01
ID 1009-44-68
Revised Sheet 7
March 6, 2019



REMOVE AND REPLACE CONCRETE SIDEWALK WITH CONCRETE SIDEWALK SUPPORTED ON WINGWALL PAVING NOTCH

REMOVE AND REPLACE 20.5" CONCRETE CURB & GUTTER 30-INCH TYPE A


B-43-41

REMOVE AND REPLACE CONCRETE PAVEMENT APPROACH SLAB(S) WITH CONCRETE PAVEMENT APPROACH SLAB TIES

SAWING CONCRETE (TYP.)

REMOVE AND REPLACE 20.5" CONCRETE CURB & GUTTER 30-INCH TYPE A

PLAN - NORTH ABUT. AREA

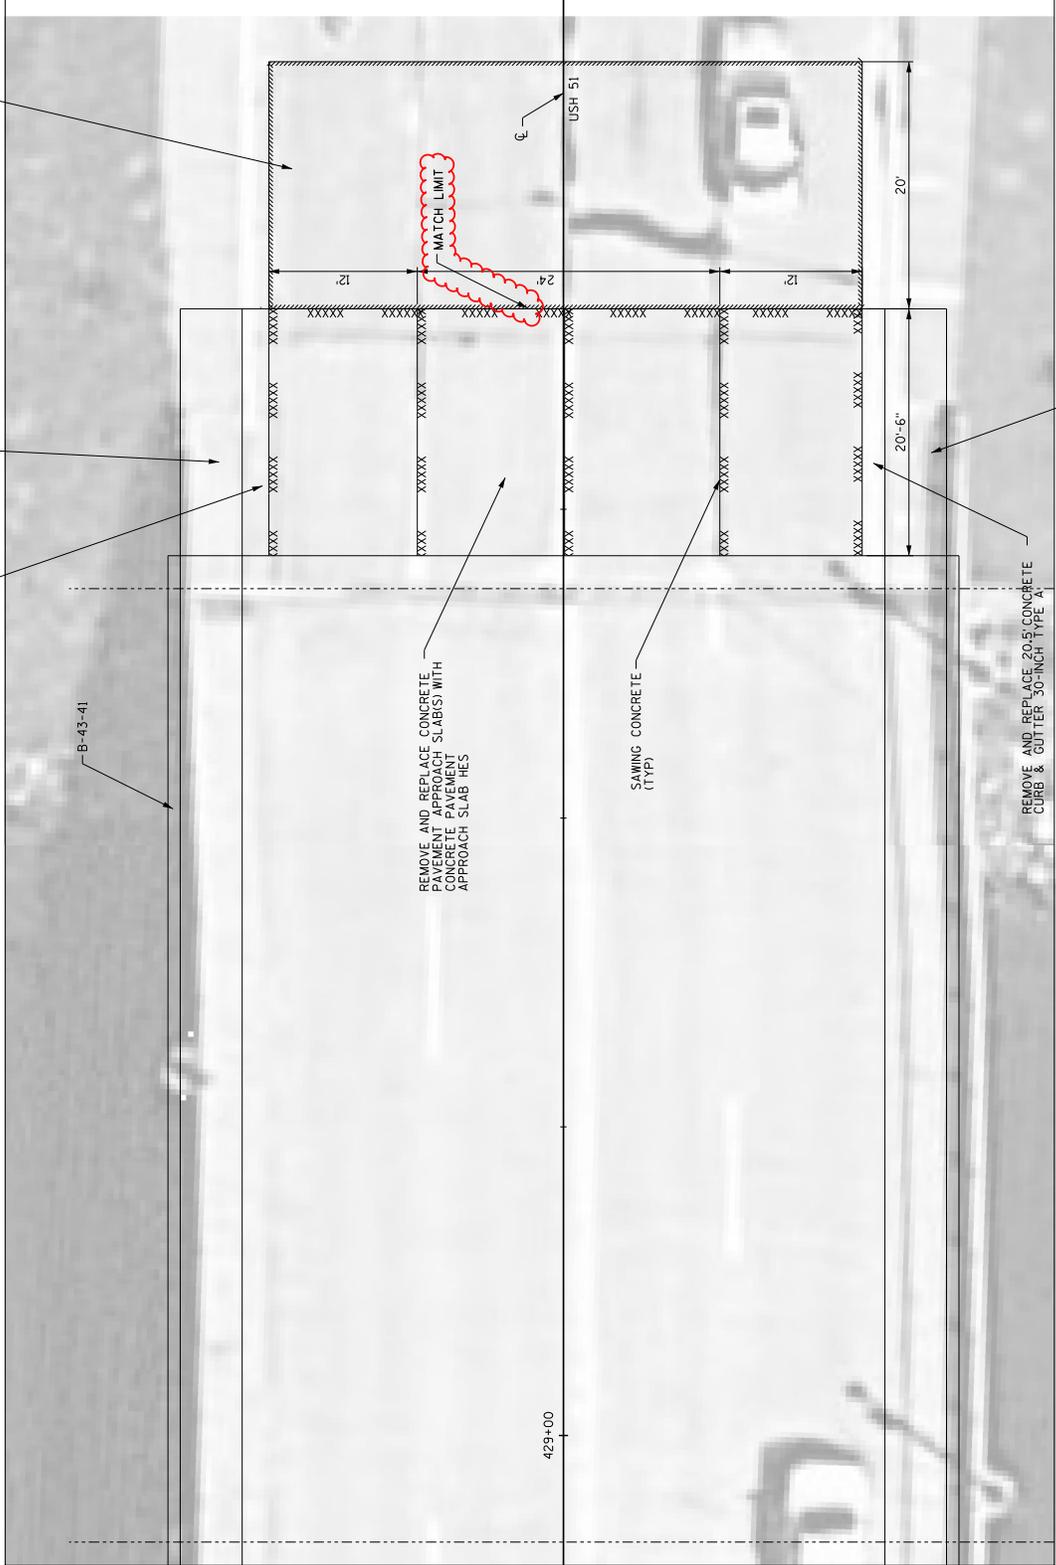

REMOVE AND REPLACE CONCRETE SIDEWALK WITH CONCRETE SIDEWALK (ADJACENT TO THE EXISTING SIDEWALK) SUPPORTED ON WINGWALL PAVING NOTCH

LANDSCAPING ITEMS

CATEGORY	LOCATION	SY	SY	CWT	LB	SEEDING MIXTURE NO. 10	SEEDING MIXTURE NO. 40	630.0110	630.0140
0010	B-26-0671	100	-	0.07	2	-	-		
0010	B-63-0017	100	-	0.07	-	2	-		
0010	B-43-0023	-	100	0.07	2	-	-		
0010	B-43-0041	100	-	0.07	-	2	-		
	1009-44-68 TOTAL	300	100	0.28	4	4			

PAVEMENT MARKING

CATEGORY	LOCATION	LF	LF	646.1020	646.9000	649.0150
				MARKING LINE EPOXY 4-INCH	MARKING REMOVAL LINE 4-INCH	TEMPORARY MARKING LINE REMOVABLE TAPE 4-INCH
0010	B-43-0023 STAGE 1	250	250			
0010	B-43-0023 STAGE 2	250	250			
0010	B-43-0041 STAGE 1	-	-			
0010	B-43-0041 STAGE 2	-	-			
	1009-44-68 TOTAL	500	500			

PAVEMENT ITEMS


CATEGORY	LOCATION	SY	EACH	TON	LF	LF	LF	601.0405	601.0405	602.0405
								CONCRETE CURB & GUTTER 18-INCH TYPE A	CONCRETE CURB & GUTTER 30-INCH TYPE A	CONCRETE SIDEWALK 4-INCH
0010	B-43-0023 WEST APPROACH	103	12	11	20	-	-			
0010	B-43-0023 EAST APPROACH	103	-	11	-	-	-			
0010	B-43-0041 NORTH APPROACH	103	-	11	-	42	200			
0010	B-43-0041 SOUTH APPROACH	103	-	11	-	42	175			
	1009-44-68 TOTAL	412	12	33	20	84	375			

CATEGORY	LOCATION	LS	642.5201
			FIELD OFFICE TYPE C*
0010	B-26-0671	1	0.25
0010	B-63-0017	1	0.25
0010	B-43-0023	1	0.25
0010	B-43-0041	1	0.25
	1009-44-68 TOTAL	4	1

*FIELD OFFICE IS PAID AS 1 EACH FOR CONTRACT LOCATED AT 1 LOCATION IN 2019 AND 1 LOCATION IN 2020 AS APPROVED BY ENGINEER

Addendum No. 01
ID 1009-44-68
Revised Sheet 16
March 6, 2019

STATE PROJECT NUMBER
1009-44-68

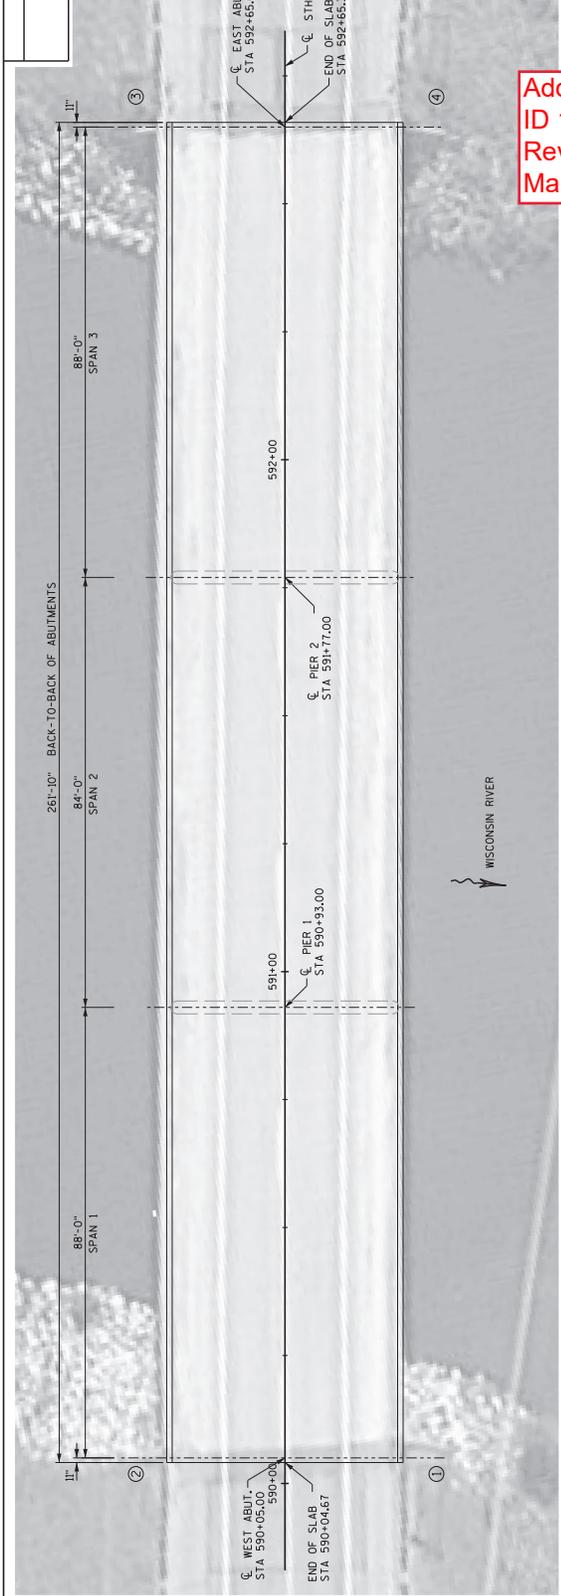


Addendum No. 01
ID 1009-44-68
Revised Sheet 66
March 6, 2019

William C. Decker
03/05/19

PLAN
3 SPAN - 45" PRESTRESSED GIRDERS

⊗ - INDICATES WING NUMBER

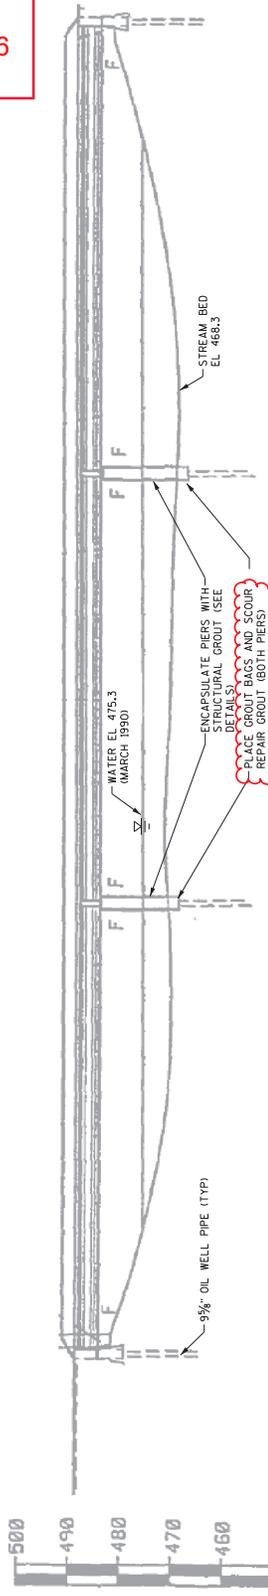

GENERAL NOTES

DRAWINGS SHALL NOT BE SCALED.
DIMENSIONS SHOWN ARE BASED ON THE ORIGINAL STRUCTURE PLANS.
SEE TRAFFIC CONTROL PLANS FOR STAGING AND WORK ZONE

DESIGN DATA

MATERIAL PROPERTIES:
CONCRETE MASONRY SUPERSTRUCTURE $f'_c = 4,000$ PSI
ALL OTHER $f'_c = 3,500$ PSI
HIGH STRENGTH BAR STEEL REINFORCEMENT, GRADE 60 $f_y = 60,000$ PSI
CONCRETE MASONRY GROUT $f'_c = 3,000$ PSI

LIVE LOAD

DESIGN LOAD RATING: HS20
INVENTORY LOAD RATING: HS23 (TAKEN FROM HSI, 9-15-92)
OPERATING LOAD RATING: HS46 (TAKEN FROM HSI, 9-15-92)
WISCONSIN STANDARD PERMIT VEHICLE (WIS-SPV) - 250 KIPS (TAKEN FROM HSI, 9-15-92)

TRAFFIC DATA

A.A.D.T.=6,500 (2012)
A.A.D.T.=9,470 (2023)
R.D.S.=55 MPH

LIST OF DRAWINGS

1. GENERAL PLAN
2. CROSS SECTION & QUANTITIES
3. TYPICAL PIER PHOTOS
4. PIER DETAILS
5. PIER DETAILS

BRIDGE OFFICE CONTACT:

WILLIAM DREHER
(608) 266-8489

CONSULTANT CONTACT

DANIEL DURIG
(608) 241-5481

NO.	DATE	REVISION	BY
8			
ACCEPTED: <i>William C. Decker</i> 11/20/18 CHIEF STRUCTURES DESIGN ENGINEER DATE			
BAXTER WOODMAN 2005 N. Belvidere Hwy, Ste 201 JANESVILLE, WISCONSIN 53113			
DEPARTMENT OF TRANSPORTATION			
STRUCTURE B-63-17			
COUNTY	VILAS	TOWN/VILLAGE	CLOVERLAND
DESIGN SER.	N/A	DESIGN	PLANS
REVISION	N/A	DRAWN	CD
BY	CD	BY	CD
GENERAL PLAN			SHEET 1 OF 5
			66



Proposal Schedule of Items

Proposal ID: 20190312044 Project(s): 1009-44-68

Federal ID(s): N/A

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0002	203.0200 Removing Old Structure (station) 01. STA 81+30	LS	LUMP SUM	_____.
0004	204.0100 Removing Pavement	430.000 SY	_____.	_____.
0006	204.0115 Removing Asphaltic Surface Butt Joints	294.000 SY	_____.	_____.
0008	204.0150 Removing Curb & Gutter	84.000 LF	_____.	_____.
0010	204.0155 Removing Concrete Sidewalk	42.000 SY	_____.	_____.
0012	206.1000 Excavation for Structures Bridges (structure) 01. B-43-23	LS	LUMP SUM	_____.
0014	210.1500 Backfill Structure Type A	30.000 TON	_____.	_____.
0016	213.0100 Finishing Roadway (project) 01. 1009- 44-68	1.000 EACH	_____.	_____.
0018	305.0110 Base Aggregate Dense 3/4-Inch	159.000 TON	_____.	_____.
0020	415.1410 Concrete Pavement Approach Slab HES	412.000 SY	_____.	_____.
0022	416.0610 Drilled Tie Bars	12.000 EACH	_____.	_____.
0024	465.0105 Asphaltic Surface	33.000 TON	_____.	_____.
0026	502.0100 Concrete Masonry Bridges	2.000 CY	_____.	_____.
0028	502.3210 Pigmented Surface Sealer	4.000 SY	_____.	_____.
0030	502.4204 Adhesive Anchors No. 4 Bar	270.000 EACH	_____.	_____.
0032	502.4205 Adhesive Anchors No. 5 Bar	3.000 EACH	_____.	_____.

