



Wisconsin Department of Transportation

March 6, 2019

Division of Transportation Systems Development

Bureau of Project Development
4822 Madison Yards Way, 4th Floor South
Madison, WI 53705

Telephone: (608) 266-1631
Facsimile (FAX): (608) 266-8459

NOTICE TO ALL CONTRACTORS:

Proposal #64: 1500-37-74, WISC 2019 210
Waldo Blvd, City of Manitowoc
14th Street – 8th Street
USH 10
Manitowoc County

1500-37-75
Waldo Blvd, City of Manitowoc
Fleetwood Drive – 8th Street
USH 10
Manitowoc County

4570-12-71, WISC 2018 472
Waldo Blvd, City of Manitowoc
8th Street – Maritime Drive
STH 42
Manitowoc County

4570-12-72
Waldo Blvd, City of Manitowoc
8th Street – Maritime Drive
STH 42
Manitowoc County

Letting of March 12, 2019

This is Addendum No. 01, which provides for the following:

Special Provisions:

Revised Special Provisions	
Article No.	Description
7	Utilities
8	Municipality Acceptance of Sanitary Sewer and Water Main Construction
158	Sanitary Manhole 4-Foot, Item SPV.0200.60

Plan Sheets:

Revised Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of changes to sheet)
144	Permanent Signing (Added signs)

Other

Revise the contract time for completion from a completion date of November 1, 2019 to a completion date of November 8, 2019.

The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.

Sincerely,

Mike Coleman

Proposal Development Specialist
Proposal Management Section

ADDENDUM NO. 01

1500-37-74, 1500-37-75, 4570-12-71, 4570-12-72

March 6, 2019

Special Provisions

7. Utilities

Under Project ID 1500-37-74 replace entire section titled Wisconsin Public Service (gas/petroleum) with the following:

Wisconsin Public Service (gas/petroleum) has underground facilities throughout the project limits. Prior to construction (Spring/Summer/Fall 2018) WPS will discontinue the existing facilities in place and place new gas facilities, typically at a depth of 3-ft to 5-ft, in the following general locations along USH 10/Waldo Blvd.

- Sta. 93+80 to Sta. 152+25 below the south sidewalk. Gas main facilities will cross USH 10 at the following approximate locations: Sta. 134+35, Sta. 137+90, and Sta. 148+60. Side road main crossings will typically follow the USH 10 sidewalk alignment, except where the gas main facilities will cross outside of the construction limits at the following side roads: N. 11th St. and N. 8th St.
- Sta. 137+90 to Sta. 141+25 and Sta. 148+60 to Sta. 151+25 below the north sidewalk.

During relocations, Wisconsin Public Service identified several areas (listed below) where gas facilities could not be installed at planned depths due to conflicts with existing sewer and/or existing utilities. Contact Dan Conner at (920) 657-1862 (telephone) or (920) 655-6042 (mobile) two working days prior work in these areas. Wisconsin Public Service anticipates one working day per location will be required to relocate facilities.

- 134+50 – 4-inch plastic main crossing USH 10 west of Menasha Avenue (current depth<4-feet)
- 145+25 – 8-inch plastic main crossing N. 10th St. south of USH 10 (current depth<3.5-feet)
- 148+50 – 8-inch plastic main crossing N. 9th St. south of USH 10 (current depth<3.5')

The field contact is Mike Lowther, 933 S. Wildwood Avenue, Sheboygan, WI 53081; Mobile Telephone: (920) 849-7903.

Under Project ID 4570-12-71 replace entire section titled Wisconsin Public Service (gas/petroleum) with the following:

Wisconsin Public Service (gas/petroleum) has underground facilities throughout the project limits. Prior to construction (Spring/Summer/Fall 2018) WPS will discontinue the existing facilities in place and place new gas facilities, typically at a depth of 3-ft to 5-ft, in the following general locations along STH 42/Waldo Blvd.

- Sta. 152+25 to Sta. 186+50 along the south side of the roadway. A main crossing will be located at Sta. 160+15. Side road main crossings will be within the construction limits, except at N. 6th St. where the crossing will be outside of the construction limits.
- Sta. 152+15 to Sta. 156+00 below the north sidewalk. The main crossing of Lincoln Blvd. will cross outside of the construction limits.

During relocations, Wisconsin Public Service identified several areas (listed below) where gas facilities could not be installed at planned depths due to conflicts with existing sewer and/or existing utilities. Contact Dan Conner at (920) 657-1862 (telephone) or (920) 655-6042 (mobile) two working days prior work in these areas. Wisconsin Public Service anticipates one working day per location will be required to relocate facilities.

- 167+50 – 1-inch plastic service crossing STH 42 to property address 320 Waldo Blvd. (current depth<3-feet)
- 168+50 – 1-inch plastic service crossing STH 42 to property address 310 Waldo Blvd. (current depth<3-feet)

The field contact is Mike Lowther, 933 S. Wildwood Avenue, Sheboygan, WI 53081; Mobile Telephone: (920) 849-7903.

8. Municipality Acceptance of Sanitary Sewer and Water Main Construction.

Replace entire article language with the following:

Both the department and City of Manitowoc (Sanitary Sewer only) and Manitowoc Public Utilities (Water Main only) personnel will inspect construction of sanitary sewer and water main under this contract. However, construction staking, and acceptance of the sanitary sewer and water main construction will be by the City of Manitowoc (Sanitary Sewer), and Manitowoc Public Utilities (Water Main).

158. Sanitary Manhole 4-Foot, Item SPV.0200.60.

Under section C Construction replace first sentence of the first paragraph with the following:

Excavate a minimum area of 2 feet from the outside walls of the manhole structure to install manhole.

Plan Sheets

The following 8½ x 11-inch sheets are attached and made part of the plans for this proposal:
Revised: 144.


END OF ADDENDUM

SIGNING NOTES

WHEN AN EXISTING STOP SIGN AND SUPPORT IS TO BE REMOVED AND A NEW STOP SIGN AND SUPPORT ERRECTED THE WORK SHALL BE DONE CONCURRENTLY. FOR OTHER SIGNS AND SUPPORTS THAT ARE TO BE REMOVED AND NEW SIGNS AND SUPPORTS ERRECTED, THE REMOVAL OF THE EXISTING SIGN/SUPPORT AND ERECTION OF THE NEW SIGN/SUPPORT SHOULD BE DONE AS CONCURRENTLY AS POSSIBLE. THE SIGN AND SUPPORT SHALL BE MORE THAN ONE SIGN OF THE SAME LEGEND MISSING IN A ROW. THE SIGN POSTS SIZES, FOR TYPE II SIGNING, ARE ESTIMATED LENGTHS AND THE ACTUAL LENGTH WILL BE DETERMINED IN THE FIELD. TRAFFIC SIGNALS SHALL BE 51" H. CLEARANCE ABOVE THE ROADWAY. THIS WILL ALLOW FOR THE PLACEMENT OF FUTURE SIGNS BENEATH THE STOP SIGN. ALL OF THE WAYFINDING AND STREET NAME SIGNAGE WILL BE REMOVED AND REPLACED BY THE CITY OF MANITOWOC.

NOTE: INSTALL 18" X 18" ORANGE FLAGS DURING FIRST SIX MONTHS OF OPERATION OF THE ROUNDABOUT.

Addendum No. 01
ID 4570-12-71/72
Revised Sheet 144
March 6, 2019

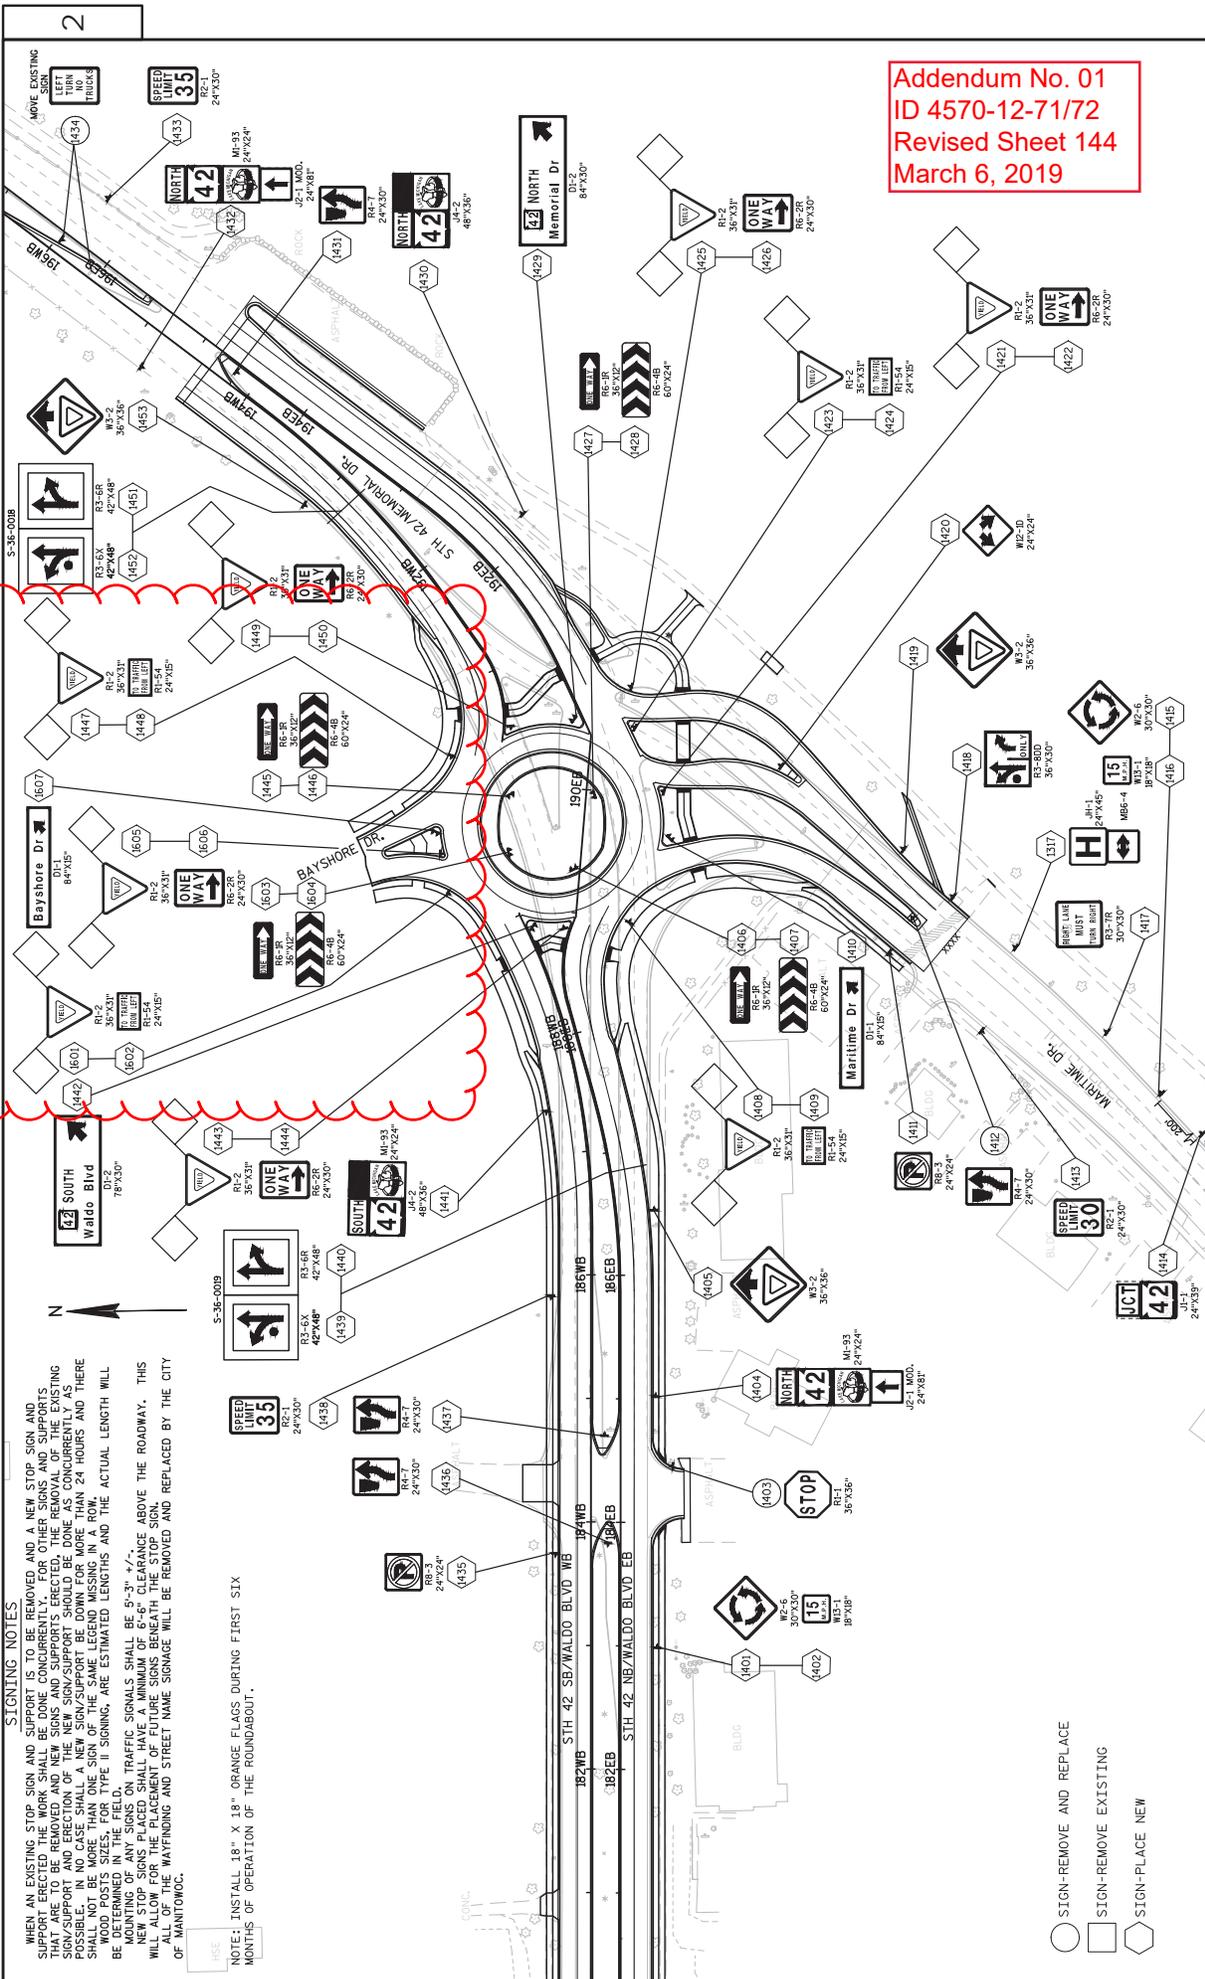

- SIGN-REMOVE AND REPLACE
- SIGN-REMOVE EXISTING
- ◊ SIGN-PLACE NEW

