


GENERAL NOTES

1. The 150 foot distance from the physical gore (where pavement ends) will normally provide the offsets as shown.
2. If roadway geometrics permit, the sign may be closer than the 150 foot distance as long as the offsets are maintained.
3. At no time shall the location be greater than 150 feet. If the normal offsets cannot be maintained, they can be reduced to 6 feet from the edge of the paved shoulder (both freeway and ramp).
4. The offset from edge of sign to the yellow edge line on the ramp is shown as a minimum of 12 feet and a maximum of 17 feet, 6 inches. Preference is adhering to the maximum rather than the minimum dimension.
5. When L is equal to or exceeds 10 feet, use 3 posts as per A4-4.
6. The ( $\bar{\pm}$ ) tolerance for the mounting height is 3 inches.

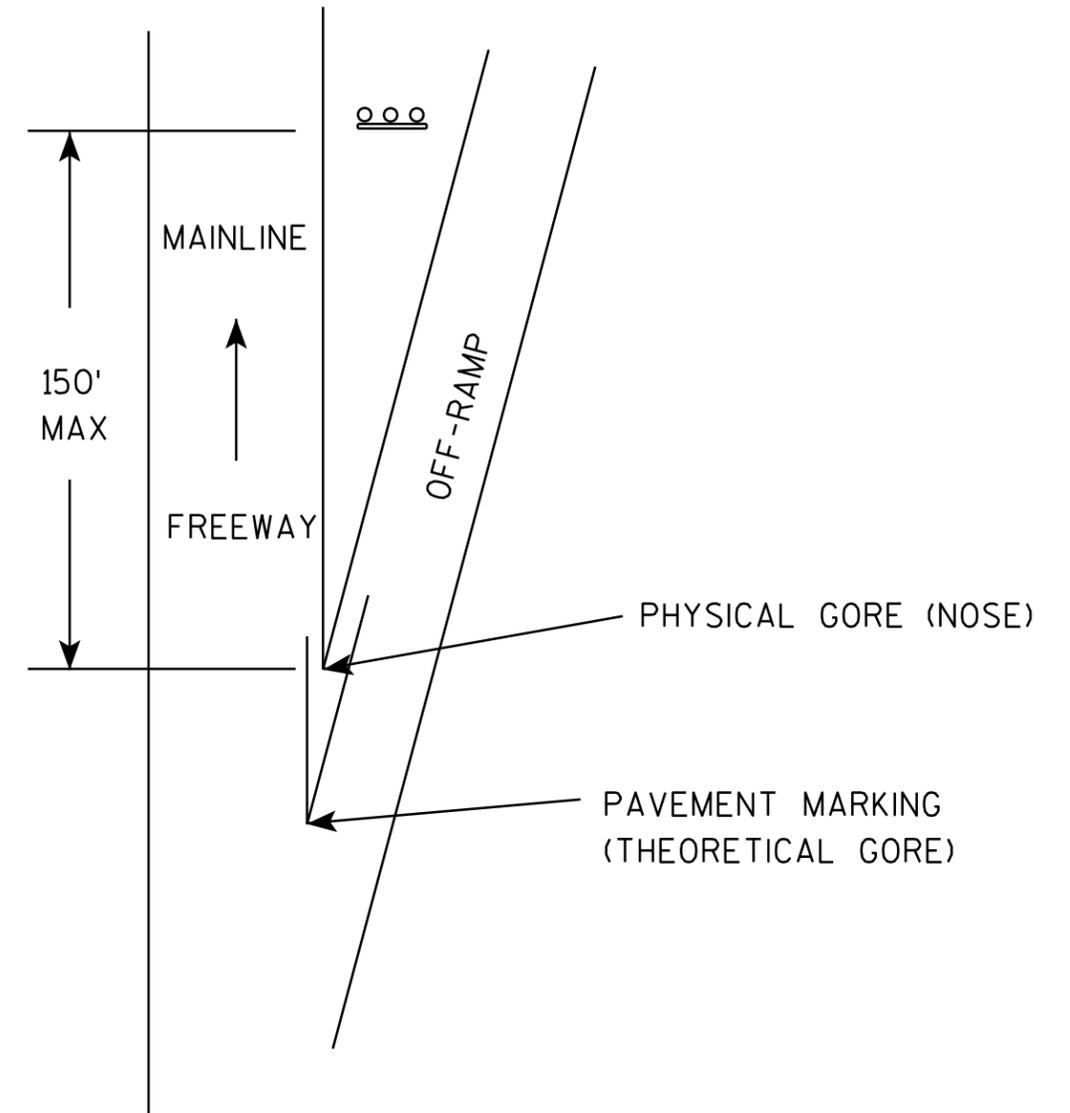

7

7

TYPICAL INSTALLATION OF TYPE II SIGNS ON WOOD POSTS IN GORE	
WISCONSIN DEPT OF TRANSPORTATION	
APPROVED	<i>Matthew R. Raub</i> for State Traffic Engineer
DATE 2/06/14	PLATE NO. A4-2.3