



Wisconsin Department of Transportation

Division of Transportation Systems Development

Bureau of Project Development
4822 Madison Yards Way, 4th Floor South
Madison, WI 53705

March 3, 2020

Telephone: (608) 266-1631
Facsimile (FAX): (608) 266-8459

NOTICE TO ALL CONTRACTORS:

Proposal #13: 2759-03-70, WISC 2020 074
North Avenue
N. Calhoun Road to E County Line
CTH M
Waukesha County

Letting of March 10, 2020

This is Addendum No. 01, which provides for the following:

Special Provisions:

Revised Special Provisions	
Article No.	Description
3	Prosecution and Progress
33	Excavation Below Subgrade

Schedule of Items:

Revised Bid Item Quantities					
Bid Item	Item Description	Unit	Old Quantity	Revised Quantity	Proposal Total
646.7420	Marking Crosswalk Epoxy Transverse Line 6-Inch	LF	5,534	-200	5,334

Plan Sheets:

Revised Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of changes to sheet)
39	Pond Outfall Structure Detail (Revision to restrictor diameter and invert elevation)

Added Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of why sheet was added)
511A	Miscellaneous Quantities (missing Traffic Control Pavement Marking table)

The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.

Sincerely,

Mike Coleman

Proposal Development Specialist
Proposal Management Section

ADDENDUM NO. 01

2759-03-70

March 3, 2020

Special Provisions

3. Prosecution and Progress.

*Add the following to end of section titled **General**:*

Mound Zion Cemetery

Do not perform any work within the catalogued burial site limits of the Mound Zion Cemetery prior to receiving authorization from the Wisconsin Historical Society. Contractor shall notify the engineer one year prior to any planned work within the burial site limits. The engineer will notify WisDOT Cultural Resource Team to petition the Wisconsin Historical Society for authorization to work within the burial site limits.

Remove the following section:

Supplement standard specification 108.10 with the following:

The department will not grant time extensions for the following:

Severe weather as specified in standard specification 108.10.2.2.

Labor disputes that are not industry wide.

Delays in material deliveries.

33. Excavation Below Subgrade

Replace the third paragraph with the following:

Excavation below subgrade found necessary and required after the completion of the rough grading operations shall be according to the pertinent requirements of standard spec 205.3.4.

Replace the fourth paragraph with the following:

Paragraph 1.1 of standard spec 205.5.2.3.3 (1) 1 shall be changed to read as follows:

“Excavation Below Subgrade performed either before or after rough grading operations are complete will be paid for at the Contract unit price for Excavation Common.”

Schedule of Items

Attached, dated March 3, 2020, are the revised Schedule of Items Page 17.


Plan Sheets

The following 8½ x 11-inch sheets are attached and made part of the plans for this proposal:

Revised: 39


Added: 511A,

END OF ADDENDUM

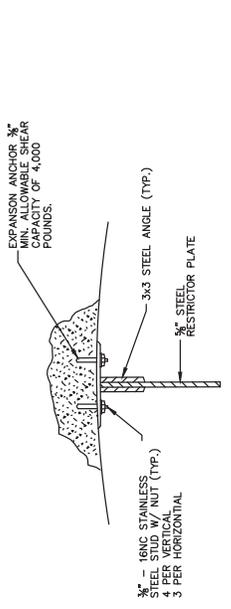


ANGLE FASTENER DETAIL


- NOTES:
1. ALL STEEL ANGLES AND PLATES TO BE GALVANIZED AFTER FABRICATION. PRIOR TO GALVANIZING THE STEEL SHALL BE GIVEN A NO. 6 BLAST CLEANING PER SSPC-SP-13.3.
 2. ALL RESTRICTOR PLATES, ANGLES AND HARDWARE TO BE INCLUDED IN THE COST OF THE MANHOLE.
 3. BASIS OF PAYMENT: RESTRICTOR PLATE MANHOLE 6'FT" OR RESTRICTOR PLATE MANHOLE 5'-FT" EACH

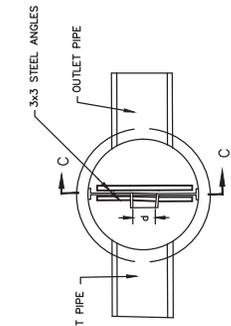


SECTION B-B

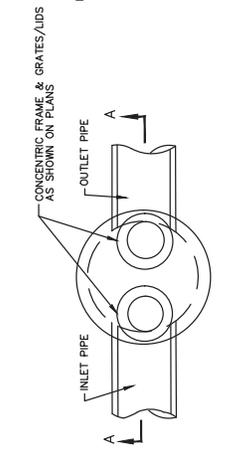

PLAN

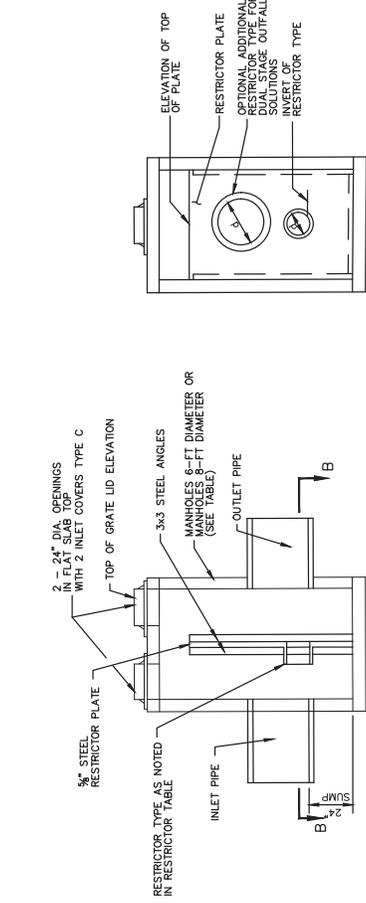

SECTION A-A

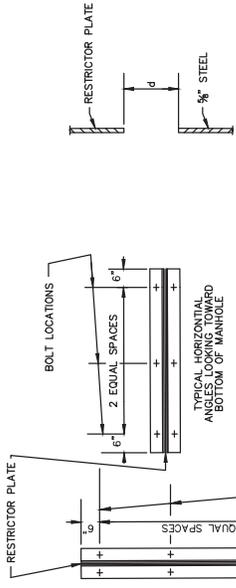

INLET TUBE DETAIL

- NOTE:
1. ANGLES SHALL BE 3x3x3/8
 2. TYPICAL HORIZONTAL ANGLE TO BE 30 DEGREES FROM THE BOTTOM OF THE RESTRICTOR PLATE TO THE TOP.
 3. HORIZONTAL ANGLES SHALL EXTEND FROM VERTICAL ANGLE TO VERTICAL ANGLE.

TYPICAL VERTICAL ANGLES LOOKING TOWARD MANHOLE WALL

STEEL ANGLE BOLTING DETAILS

1

Addendum No. 01
ID 2759-03-70
Revised Sheet 39
March 3, 2020

POND_OUTFALL_STRUCTURE_DETAIL

STRUCTURE NUMBER	MANHOLE DIAMETER	FRAME AND GRATE	RESTRICTOR TYPE	RESTRICTOR DIAMETER in. (d)	INVERT OF RESTRICTOR TYPE	ELEVATION OF TOP OF PLATE OVERFLOW	TOP OF GRATE LID ELEVATION	100-YR WATER SURFACE ELEVATION
200.15	6'	SOLID LID	ORIFICE	2	819.50	824.20	825.20	824.30
204.02	6'	SOLID LID	ORIFICE	2	818.50	823.50	824.50	822.03
504.02	8'	SOLID LID	ORIFICE	2X32	754.10	758.60	759.60	759.00



Proposal Schedule of Items

Proposal ID: 20200310013 Project(s): 2759-03-70

Federal ID(s): WISC 2020074

SECTION: 0001

Roadway Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0482	646.7120 Marking Diagonal Epoxy 12-Inch	602.000 LF	_____.	_____.
0484	646.7420 Marking Crosswalk Epoxy Transverse Line 6-Inch	5,334.000 LF	_____.	_____.
0486	646.8120 Marking Curb Epoxy	490.000 LF	_____.	_____.
0488	646.8220 Marking Island Nose Epoxy	48.000 EACH	_____.	_____.
0490	646.9000 Marking Removal Line 4-Inch	3,200.000 LF	_____.	_____.
0492	646.9100 Marking Removal Line 8-Inch	1,050.000 LF	_____.	_____.
0494	646.9300 Marking Removal Special Marking	5.000 EACH	_____.	_____.
0496	649.0105 Temporary Marking Line Paint 4-Inch	46,810.000 LF	_____.	_____.
0498	649.0205 Temporary Marking Line Paint 8-Inch	1,140.000 LF	_____.	_____.
0500	649.0505 Temporary Marking Arrow Paint	2.000 EACH	_____.	_____.
0502	649.0805 Temporary Marking Stop Line Paint 18-Inch	44.000 LF	_____.	_____.
0504	650.4000 Construction Staking Storm Sewer	517.000 EACH	_____.	_____.
0506	650.4500 Construction Staking Subgrade	16,244.000 LF	_____.	_____.
0508	650.5000 Construction Staking Base	16,244.000 LF	_____.	_____.
0510	650.5500 Construction Staking Curb Gutter and Curb & Gutter	68,075.000 LF	_____.	_____.
0512	650.6500 Construction Staking Structure Layout (structure) 01. B-67-374	LS	LUMP SUM	_____.