



Wisconsin Department of Transportation

Division of Transportation Systems Development

Bureau of Project Development
4822 Madison Yards Way, 4th Floor South
Madison, WI 53705

January 3, 2022

Telephone: (608) 266-1631
Facsimile (FAX): (608) 266-8459

NOTICE TO ALL CONTRACTORS:

Proposal #43: 7864-03-72, WISC 2022138
Granton - Loyal
CTH H to Chickadee Road
CTH K
Clark County

Letting of January 11, 2022

This is Addendum No. 01, which provides for the following:

Schedule of Items:

Added Bid Item Quantities					
Bid Item	Item Description	Unit	Old Quantity	Revised Quantity	Proposal Total
465.0450	Asphaltic Intersection Rumble Strips	SY	0	71	71

Plan Sheets:

Revised Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of changes to sheet)
29	Miscellaneous Quantities – added Asphaltic Intersection Rumble Strips.

Added Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of why sheet was added)
46A	Standard Detail Drawing S.D.D. 13 A 8-1, Asphaltic Rumble Strips at Intersection. Sheet is added to correspond with bid item.

Schedule of Items

Attached, dated January 3, 2022, are the revised Schedule of Items Page 3.

Plan Sheets

The following 8½ x 11-inch sheets are attached and made part of the plans for this proposal:

Revised: 29.

Added: 46A.

The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.

Sincerely,

Mike Coleman

Proposal Development Specialist
Proposal Management Section

END OF ADDENDUM

ASPHALTIC PAVEMENT ITEMS

CATEGORY	STATION	TO	STATION	LOCATION	TACK COAT GAL	HMA PAVEMENT 3 MT 58-28 S TON	HMA PAVEMENT 4 MT 58-34 S TON	REMARKS
0010	10+35	-	63+15	CTH K	1,742	2,032	1,626	
0010	63+15	-	115+95	CTH K	1,724	2,012	1,610	
0010	115+95	-	168+75	CTH K	1,712	1,997	1,597	
0010	168+75	-	221+55	CTH K	1,737	2,027	1,621	
0010	221+55	-	274+35	CTH K	1,781	2,079	1,663	
0010	274+35	-	290+71	CTH K	546	637	509	
				TOTAL 0010	9,242	10,784	8,626	

ASPHALTIC SURFACE

CATEGORY	STATION	LOCATION	TON	REMARKS
0010	11+25	CTH K, LT	4	
0010	13+34	CTH K, LT	3	
0010	15+67	CTH K, LT	3	
0010	40+77	CTH K, LT	3	
		TOTAL 0010	13	

Addendum No. 01
ID 7864-03-72
Revised Sheet 29
January 3, 2022

CATEGORY	STATION	TO	STATION	LOCATION	SY	REMARKS
0010	13+35	-	21+25	CTH K, LT	71	SOUTHBOUND APPROACH TO CTH H
				TOTAL 0010	71	

PROJECT NO: 7864-03-72

HWY: CTH K

COUNTY: CLARK

MISCELLANEOUS QUANTITIES

SHEET

29

E

FILE NAME:


PLOT BY:

PLOT DATE:


ORG DATE:

ORIGINATOR: DIST

PLOT SCALE: 1:1

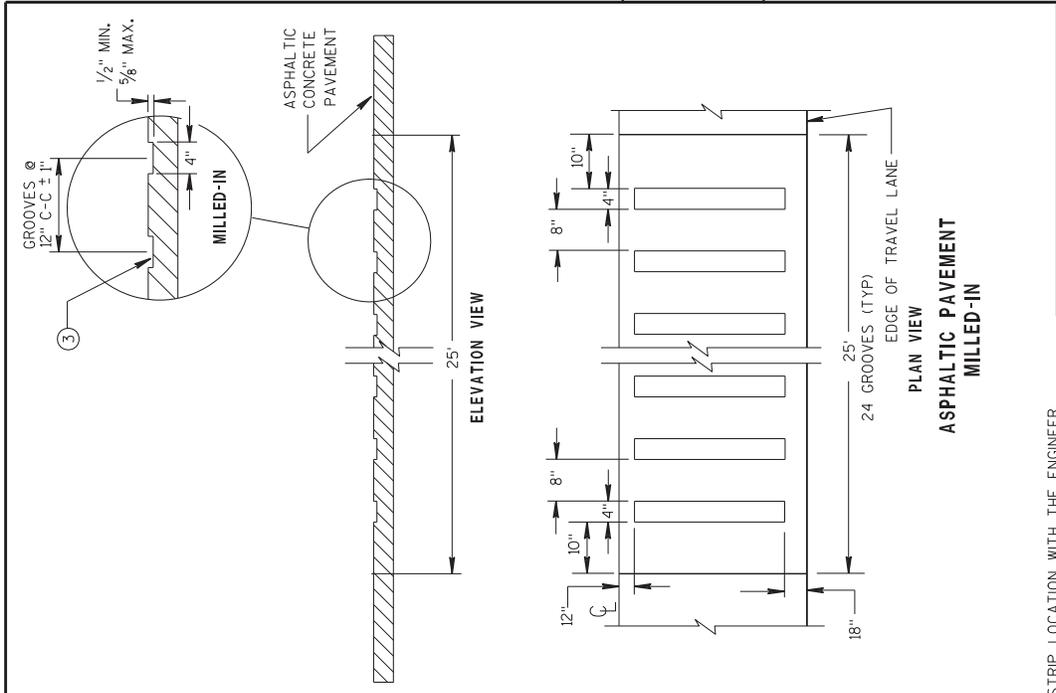

Addendum No. 01
ID 7864-03-72
Added Sheet 46A
January 3, 2022

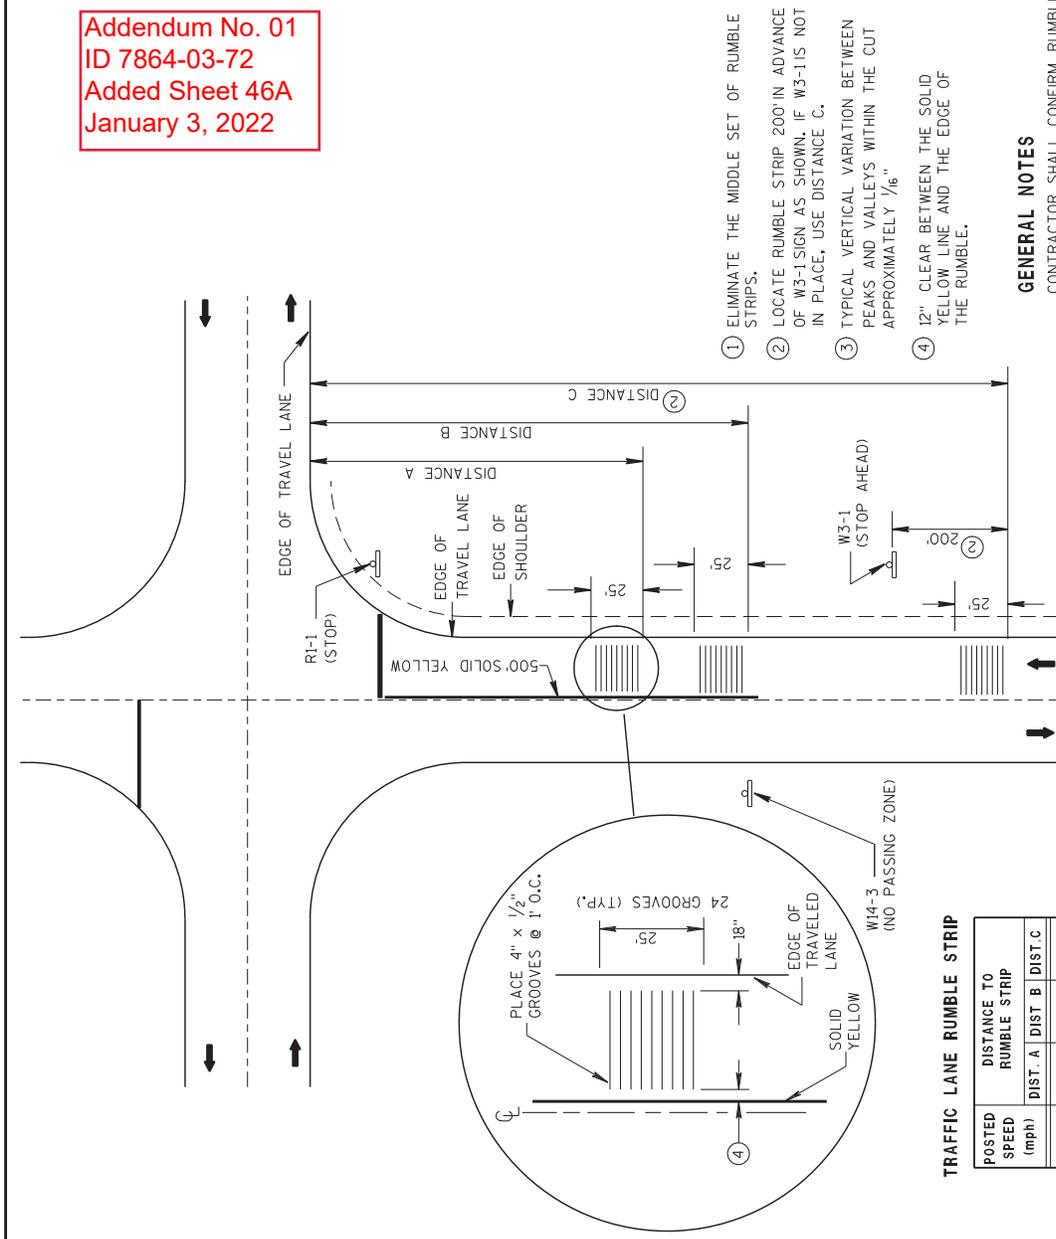

POSTED SPEED (mph)	DISTANCE TO RUMBLE STRIP		
	DIST. A	DIST. B	DIST. C
55	425'	650'	1000'
50	325'	450'	800'
45	275'	400'	650'
40	225'	(1)	550'
35	175'	(1)	475'
< 30	125'	(1)	425'

- ① ELIMINATE THE MIDDLE SET OF RUMBLE STRIPS.
- ② LOCATE RUMBLE STRIP 200' IN ADVANCE OF W3-1 SIGN AS SHOWN. IF W3-1 IS NOT IN PLACE, USE DISTANCE C.
- ③ TYPICAL VERTICAL VARIATION BETWEEN PEAKS AND VALLEYS WITHIN THE CUT APPROXIMATELY 1/16".
- ④ 12" CLEAR BETWEEN THE SOLID YELLOW LINE AND THE EDGE OF THE RUMBLE.

GENERAL NOTES

CONTRACTOR SHALL CONFIRM RUMBLE STRIP LOCATION WITH THE ENGINEER PRIOR TO INSTALLATION. THE ENGINEER MAY MODIFY THE RUMBLE STRIP LOCATION AS FIELD CONDITIONS DICTATE.

WHEN ASPHALTIC PAVEMENT IS NEW IN THE RUMBLE AREA THE CONTRACTOR SHALL ALLOW THE PAVEMENT TO CURE A MINIMUM OF 7 DAYS PRIOR TO RUMBLE INSTALLATION.

PAVEMENT MARKING AND SIGNING DETAILS AND SPECIFICATIONS ARE PROVIDED ELSEWHERE IN THE CONTRACT.

ASPHALTIC RUMBLE STRIPS AT INTERSECTION

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED _____
DATE 8/17/2011
ROADWAY STANDARDS DEVELOPMENT ENGINEER
PHWA



Proposal Schedule of Items

Proposal ID: 20220111043 Project(s): 7864-03-72

Federal ID(s): WISC 2022138

SECTION: 0001 Roadway Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0066	649.0770 Temporary Marking Raised Pavement Marker Type II	166.000 EACH	_____.	_____.
0068	650.4500 Construction Staking Subgrade	200.000 LF	_____.	_____.
0070	650.5000 Construction Staking Base	300.000 LF	_____.	_____.
0072	650.8000 Construction Staking Resurfacing Reference	28,617.000 LF	_____.	_____.
0074	650.9910 Construction Staking Supplemental Control (project) 01. 7864-03-72	LS	LUMP SUM	_____.
0076	690.0150 Sawing Asphalt	216.000 LF	_____.	_____.
0078	740.0440 Incentive IRI Ride	21,239.000 DOL	1.00000	21,239.00
0080	ASP.1T0A On-the-Job Training Apprentice at \$5.00/HR	300.000 HRS	5.00000	1,500.00
0082	ASP.1T0G On-the-Job Training Graduate at \$5.00/HR	300.000 HRS	5.00000	1,500.00
0084	SPV.0060 Special 01. Adjusting Sanitary Sewer Manhole Cover	1.000 EACH	_____.	_____.
0086	SPV.0060 Special 02. Adjusting Water Valve Cover	2.000 EACH	_____.	_____.
0088	465.0450 Asphaltic Intersection Rumble Strips	71.000 SY	_____.	_____.
Section: 0001			Total:	_____.
			Total Bid:	_____.

