Wisconsin Department of Transportation

Division of Transportation Systems Development
Bureau of Project Development
4822 Madison Yards Way, 4th Floor South
Madison, WI 53705

Telephone: (608) 266-1631
Facsimile (FAX): (608) 266-8459

February 4, 2022

NOTICE TO ALL CONTRACTORS:

Proposal #02: 1016-05-70
Tomah – Mauston
STH 82 Interchng/B29-36,152-155,157
IH 90
Juneau County

Letting of February 8, 2022

This is Addendum No. 02, which provides for the following:

Special Provisions:

Revised Special Provisions	
Article No.	Description
6	Traffic
9	Other Contracts
10	Work by Others
12	Information to Bidders, U.S. Army Corps of Engineers Section 404 Permit
55	Ramp Closure Gates 37-FT, Item 662.1037.S; Ramp Closure Gates 40-FT, Item 662.1040.S
80	Maintenance and Removal of Concrete Barrier Temporary Precast Left In Place by Others, Item SPV.0090.01

Added Special Provisions	
Article No.	Description
87	Notice to Contractor, Parcels 1, 2, 3, and 4 of Right of Way Project 1016-05-21.
88	Ramp Closure Gate 40-FT, Item 662.1040.S

Deleted Special Provisions	
Article No.	Description
22	Incentive/Disincentive for Interim Completion of Work, Item 108.3100.S.01
23	Incentive/Disincentive for Interim Completion of Work, Item 108.3100.S.02
55.	Ramp Closure Gate 37-FT, Item 662.1037.S; Ramp Closure Gate 40-FT, Item 662.1040.S

Schedule of Items:

Revised Bid Item Quantities					
Bid Item	Item Description	Unit	Old Quantity	Revised Quantity	Proposal Total
205.0100	Excavation Common	CY	136,955	136,995	136,995

208.1100	Select Borrow	CY	46,923	41,755	41,755
654.0105	Concrete Bases Type 5	EACH	37	2	39
662.1040.S	Ramp Closure Gates 40-FT	EACH	1	2	2

Added Bid Item Quantities					
Bid Item	Item Description	Unit	Old Quantity	Revised Quantity	Proposal Total
208.0100	Borrow	CY	0	27,663	27,663

Deleted Bid Item Quantities					
Bid Item	Item Description	Unit	Old Quantity	Revised Quantity	Proposal Total
108.3100.S	Incentive/Disincentive for Interim Completion of Work 01.	CD	20	0	0
180.3100.S	Incentive/Disincentive for Interim Completion of Work 02.	CD	1	0	0
108.4300	RBC Progress Schedule	EACH	1	0	0
662.1037.S	Ramp Closure Gates 37-FT	EACH	1	0	0

Plan Sheets:

Revised Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of changes to sheet)
27	Construction Detail (Removed cross drain installation detail)
31	Construction Detail (Added detail to show areas of borrow & select borrow)
52-53	Paving Details (Moved ramp gates)
55-56	Paving Details (Moved ramp gates)
145	Permanent Signing (Moved ramp gates)
151-152	Permanent Signing (Moved ramp gates)
445-447	Miscellaneous Quantities (Revised earthwork table for borrow)
501-502	Miscellaneous Quantities (Revised ramp gates and bases)
513	Plan and profile (Added storm sewer pipe that was not shown)
520-521	Plan and profile (Added note to not work in parcels 1 and 2)
528-529	Plan and profile (Added note to not work in parcels 2 and 3)
532-533	Plan and profile (Moved ramp gate locations)
543	Plan and profile (Moved ramp gate locations)
548-549	Plan and profile (Moved ramp gate locations)
575-576	Plan and profile (Moved ramp gate locations)
578	Plan and profile (Moved ramp gate locations)
581	Plan and profile (Moved ramp gate locations)
583	Plan and profile (Moved ramp gate locations)
998-1018	Earthwork (Revised earthwork charts for borrow & select borrow)

The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.

Sincerely,

Mike Coleman

Proposal Development Specialist
Proposal Management Section

ADDENDUM NO. 02

1016-05-70

February 4, 2022

Special Provisions

6. Traffic

Replace paragraphs one and two under section titled **Stage 2 and 3A – STH 82** *with the following:*

- STH 82 shall remain open to all traffic except as follows: STH 82 may be closed between the ramp terminals, including sidewalks, for three 8-hour periods between the hours of 9:00 PM and 5:00 AM, three separate nights, for removal of each bridge, the IH 90 eastbound and westbound overhead bridge slab and adjacent piers, and debris clean-up within 10 feet of the STH 82 roadway edges. A detour for STH 82 utilizing IH 90 as shown in the plans shall be in place for this short-term closure. Provide pedestrian overhead protection while IH90/94 bridge construction takes place.

- STH 82 may be closed between the ramp terminals, including sidewalks, for two separate 8 hour periods between the hours of 9:00 PM and 5:00 AM for installation of the girders of the IH 90 eastbound and westbound bridge. Utilize the same detour used for removal of the bridge.

Replace the first paragraph under section titled **Stage 3A – CTH G/Sherman Street** *with the following:*

CTH G shall remain open to all traffic except as follows: CTH G may be closed under the IH 90 bridges, including sidewalks, for three 8-hour periods between the hours of 9:00 PM and 5:00 AM, three separate nights, for removal of the westbound overhead bridge slab and adjacent piers, and debris clean-up within 10 feet of the CTH G roadway edges. CTH G/Sherman Street will utilize temporary signals for work on the substructure for the new IH 90 westbound bridge over CTH G/Sherman Street. This includes the piers and restoration work immediately around these elements. The temporary signals may be used for 14 consecutive days. See article Temporary Traffic Signals for Bridges (B-29-0037 underneath on CTH G) for signal timing.

Add the paragraphs under section titled **Stage 4***:*

STH 82 shall remain open to all traffic except as follows: STH 82 may be closed between the ramp terminals, including sidewalks, for three 8-hour periods between the hours of 9:00 PM and 5:00 AM, three separate nights, for removal of the temporary bridge on IH 90, overhead bridge slab and adjacent piers, and debris clean-up within 10 feet of the STH 82 roadway edges. A detour for STH 82 utilizing IH 90 as shown in the plans shall be in place for this short-term closure.

CTH G/Sherman Street shall remain open to all traffic except as follows: CTH G may be closed under the IH 90 bridges, including sidewalks, for three 8-hour periods between the hours of 9:00 PM and 5:00 AM, three separate nights, for removal of the temporary bridge on IH 90, overhead bridge slab and debris clean-up within 10 feet of the CTH G roadway edges. Do not close CTH G at the same time that STH 82 is closed.

9. Other Contracts.

Add the following paragraph:

Project 5880-00-66, USH 12, Tomah – Mauston (Monroe County Line to A Street), Juneau County will be constructed in 2022. This project is a resurface and will be open to traffic. Coordinate with this project when Interstate traffic may use USH 12 as an alternate route.

10. Work by Others.

Add the following paragraph:

Coordinate with Chippewa Concrete after the removal of the temporary concrete barrier left in place for them to remove the pins. Contact Barry Bohman at Chippewa Concrete Services, Inc. at (715) 210-1515.

12. Information to Bidders, U.S. Army Corps of Engineers Section 404 Permit.

Replace entire article language with the following:

The department has obtained a U.S. Army Corps of Engineers Section 404 permit. Comply with the requirements of the permit in addition to requirements of the special provisions. A copy of the permit is available from the regional office by contacting John Bainter at (608) 785-9729.

stp-107-054 (20210708)

22. Deleted

23. Deleted

55. DELETED.

80. Maintenance and Removal of Concrete Barrier Temporary Precast Left In Place by Others, Item SPV.0090.01.

Add the following sentence under section titled **C Construction***:*

The pins are property of Chippewa Concrete Services, Inc. Coordinate with Chippewa Concrete to remove the pins.

Replace paragraph three under section titled **E Payment** *with the following:*

Payment is full compensation for maintaining and removing the concrete barrier temporary precast; and for removing and disposing of all materials.

86. Notice to Contractor, Parcels 1, 2, and 3 of Right of Way Project 1016-05-21.

The department has taken ownership of Parcels 1, 2, and 3 for right of way project 1016-05-21 but utility easements will not be cleared until October 7, 2022. No work is allowed on Parcels 1, 2, and 3 prior to October 7, 2022.
Move portions of Stage 2D work on the westbound on ramp to Stage 3.

87. Ramp Closure Gates 40-FT, Item 662.1040.S;

A Description

This special provision describes providing freeway on-ramp closure gates on type 5 steel luminaire poles.

B Materials

B.1 General

Provide five user manuals and a listing of vendors and contact information for each manufactured component including flasher electrical components.

The engineer may allow alternates equal to specified manufactured components. The engineer may require plan detail modifications to accommodate alternates. The engineer may accept alternate arms or mounting adaptors only if the contractor can demonstrate that the department can easily remove and replace the arms.

B.2 Components

Furnish type 5 steel poles designed to carry twin 15-foot luminaire arms and conforming to standard spec 657 and with dimensions for acceptable installation of the ramp gate hardware as shown on the detail. Ensure a contiguous pole by eliminating the hand hole near base of pole, thus allowing uninhibited mounting of the gate pivot assembly.

Furnish galvanized steel nuts and bolts conforming to ASTM A307 except where designated as high strength (HS), conform to ASTM F3125. For the ramp closure gate locking mechanism, furnish a 3/4-inch handle nut.

Furnish grade A36 steel for the gate supports, gate pivot assembly, and associated hardware galvanized after fabrication by either a mechanical or hot-dip process. Grind welded connections, rough edges, and burrs smooth before galvanizing to ensure a finished appearance. Ensure that the galvanized coating conforms to ASTM A 153.

Provide aluminum/fiberglass gate arms of the nominal length the bid item indicates and conforming to plan dimensions. Cover gate arms on two sides with alternating red and white shop-applied type H reflective from the department's approved products list. Also provide a shear pin base that is the manufacturer’s "permanent pivot" style. Obtain components from:

B&B Roadway
15191 Hwy 243
Russellville, AL 35654
Tel: (888) 560-2060
Gate arm: Model MU605

Furnish a worm gear winch with a single line vertical lift capacity of 2000 lbs. Ensure that the winch has hardened steel gears, a handgrip, permanently lubricated bearings, a reinforced arc-welded reel assembly, and mounting plate. Ensure that the winch can be mounted to the winch mount plate shown on the construction details and the handgrip can be operated without conflict with the pole or ramp gate assembly. Furnish a 2-inch outdoor rated, rot resistant polyester strap for the connection between the worm gear winch and the gate arm pivot assembly.

C Construction

Provide ramp closure gate at the locations the plans show. Apply marine grade anti seize compound compound to all bolt threads and to the interface between the aluminum base and steel pole. The engineer may direct adjustment of the gate arm assembly to ensure the correct vertical and angular orientation of the completed closure gate.

Install structure identification plaques in the location the plan details show.

D Measurement

The department will measure the Ramp Closure Gates bid items as each individual installation, acceptably completed.

E Payment

The department will pay for measured quantities at the contract unit price under the following bid item:

ITEM NUMBER	DESCRIPTION	UNIT
662.1040.S	Ramp Closure Gates 40-FT	EACH

Payment for the Ramp Closure Gate bid items is full compensation for providing ramp closure gates including support poles; for gate arm assemblies including guides, collars, and gate arms; and for structure identification plaques.

stp-662-005 (20191121)

Schedule of Items
Attached, dated February 4, 2022, are the revised Schedule of Items Pages 1 – 28.


Plan Sheets
The following 8½ x 11-inch sheets are attached and made part of the plans for this proposal:
Revised: 27, 31, 52-53, 55-56, 145, 151-152, 445-447, 501-502, 513, 520-521, 528-529, 532-533, 543, 548-549, 575-576, 578, 581, 583, and 998-1018.

END OF ADDENDUM

2


2

Addendum No. 02
ID 1016-05-70
Revised Sheet 27
February 4, 2022




*WHERE DRIVEWAY IS PAVED. APPROACH PAVEMENT SHOULD BE EXTENDED TO MATCH DRIVEWAY PAVEMENT.

PLAN VIEW
(PAVED SHOULDER ON HIGHWAY)
DRIVEWAY INTERSECTION DETAIL



* OR MATCH EXIST. ASPH. DEPTH


TYPICAL CROSS SECTION FOR PRIVATE DRIVE OR FIELD ENTRANCE

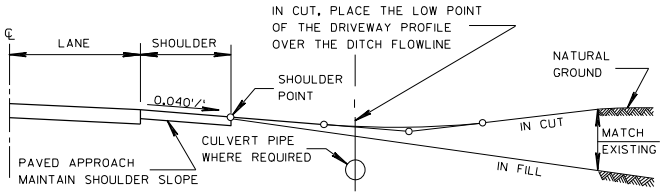

TYPICAL DRIVEWAY PROFILES

PROJECT NO: 1016-05-70	HWY: IH 90/94	COUNTY: JUNEAU	CONSTRUCTION DETAILS	SHEET 27	E

FILE NAME : P:\90S\93\00093367\CADD\SHEETSPLAN\1016-05-70 PLAN SHEETS\DETAILS\021001_CD.DWG
LAYOUT NAME - 021004_cd
PLOT DATE : 2/3/2022 6:59 AM
PLOT BY : CONNOR GIRTEN
PLOT NAME :
PLOT SCALE : 1 IN:10 FT
WISDOT/CADDS SHEET 42

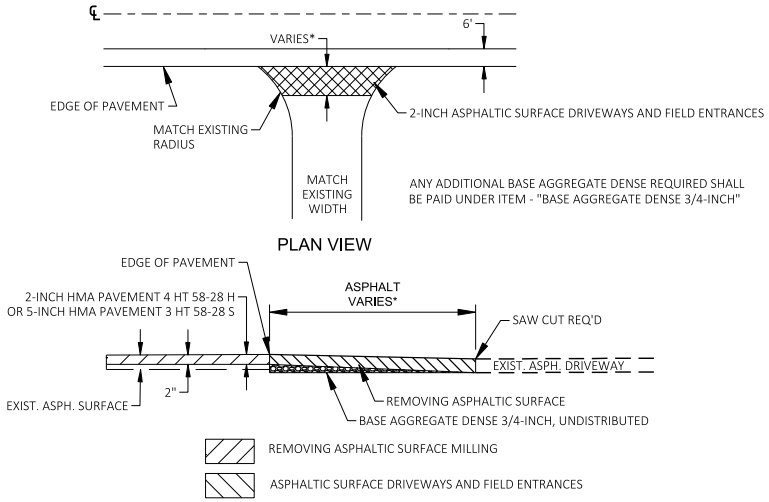


PLAN VIEW


ELEVATION VIEW

ASPHALTIC DRIVEWAY DETAIL FOR MILL AND OVERLAY

* EXACT DIMENSIONS TO BE DETERMINED BY ENGINEER IN THE FIELD

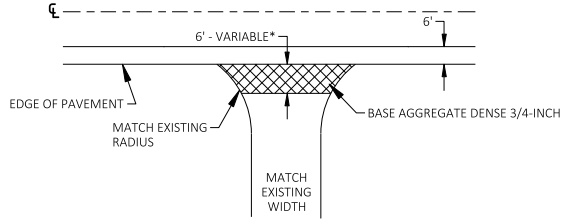


PLAN VIEW

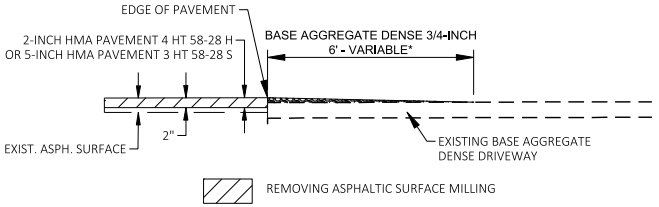

ELEVATION VIEW

BASE AGGREGATE DRIVEWAY DETAIL FOR MILL AND OVERLAY

* EXACT DIMENSIONS TO BE DETERMINED BY ENGINEER IN THE FIELD

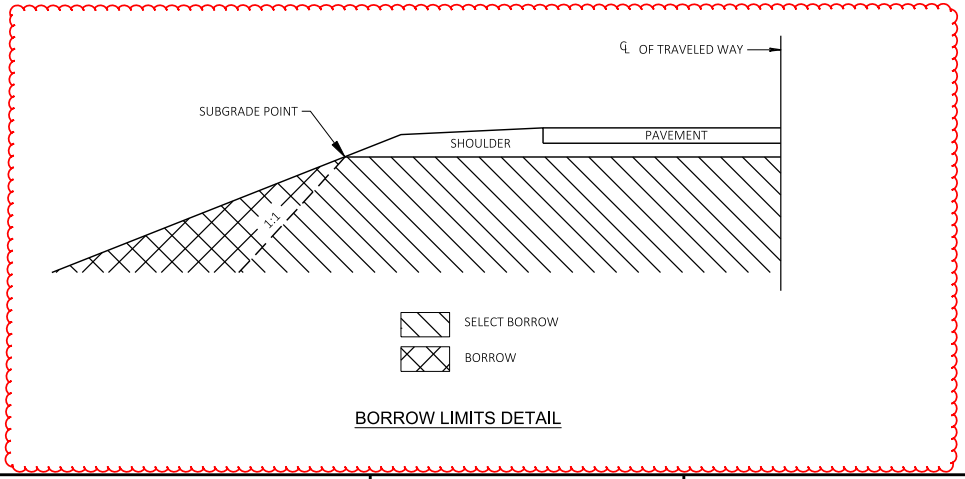

BORROW LIMITS DETAIL


Addendum No. 02
ID 1016-05-70
Revised Sheet 31
February 4, 2022

PROJECT NO: 1016-05-70	HWY: IH 90/94	COUNTY: JUNEAU	PLAN: CONSTRUCTION DETAILS	SHEET 31	E

POINT	STATION	OFFSET	ELEVATION
102	11+08.64SWBP	0.00' LT	871.38
103	11+13.91SWBP	6.00' LT	---
104	11+13.71WSN	0.00' LT	871.47
105	140+73.10WB82	0.00' LT	871.35
106	140+74.87WB82	5.73' RT	---
107	140+80.84WB82	6.29' RT	871.48
108	140+81.22EB82	4.88' LT	871.48
109	140+77.34EB82	3.85' LT	---
110	140+76.26EB82	0.00' LT	871.38
111	980+35.34C	0.00' LT	871.26
112	980+03.38C	3.00' RT	871.82
113	141+35.26WB82	104.00' LT	871.38
114	140+52.59WB82	96.52' LT	---
115	141+35.34WB82	70.18' LT	870.91
116	141+39.29WB82	69.57' LT	---
117	141+40.40WB82	65.73' LT	870.91
118	141+61.44EB82	26.13' LT	---
119	10+00.00WB82L	0.00' LT	870.27

POINT	STATION	OFFSET	ELEVATION
120	12+74.15WSN	0.00' LT	871.07
121	12+51.48SWBP	4.00' LT	---
122	12+51.48SWBP	0.00' LT	870.96
123	981+82.81D	0.00' LT	870.08
124	981+82.81D	22.50' LT	870.53
125	142+49.64EB82	0.00' LT	869.93
126	142+48.08EB82	5.79' LT	---
127	142+42.24EB82	7.17' LT	870.05
128	142+45.89WB82	4.14' RT	870.01
129	142+49.87WB82	3.67' RT	---
130	142+51.46WB82	0.00' LT	869.92
132	12+28.66SWBR	40.37' RT	869.55


POINT	STATION	OFFSET	ELEVATION
134	11+22.79SWBR	43.41' RT	869.19
135	10+64.20SWBR	44.53' RT	---
136	10+69.66SWBR	34.77' RT	869.87
137	10+23.57SWBR	2.50' RT	872.11
147	10+73.73WRNW	40.56' LT	867.55
148	11+40.22WRNW	30.31' LT	---
150	8+82.81W82L	21.06' LT	---
151	9+84.36W82L	19.10' LT	871.24
152	10+15.68W82L	19.43' LT	870.98
153	11+07.60W82L	20.00' LT	870.07

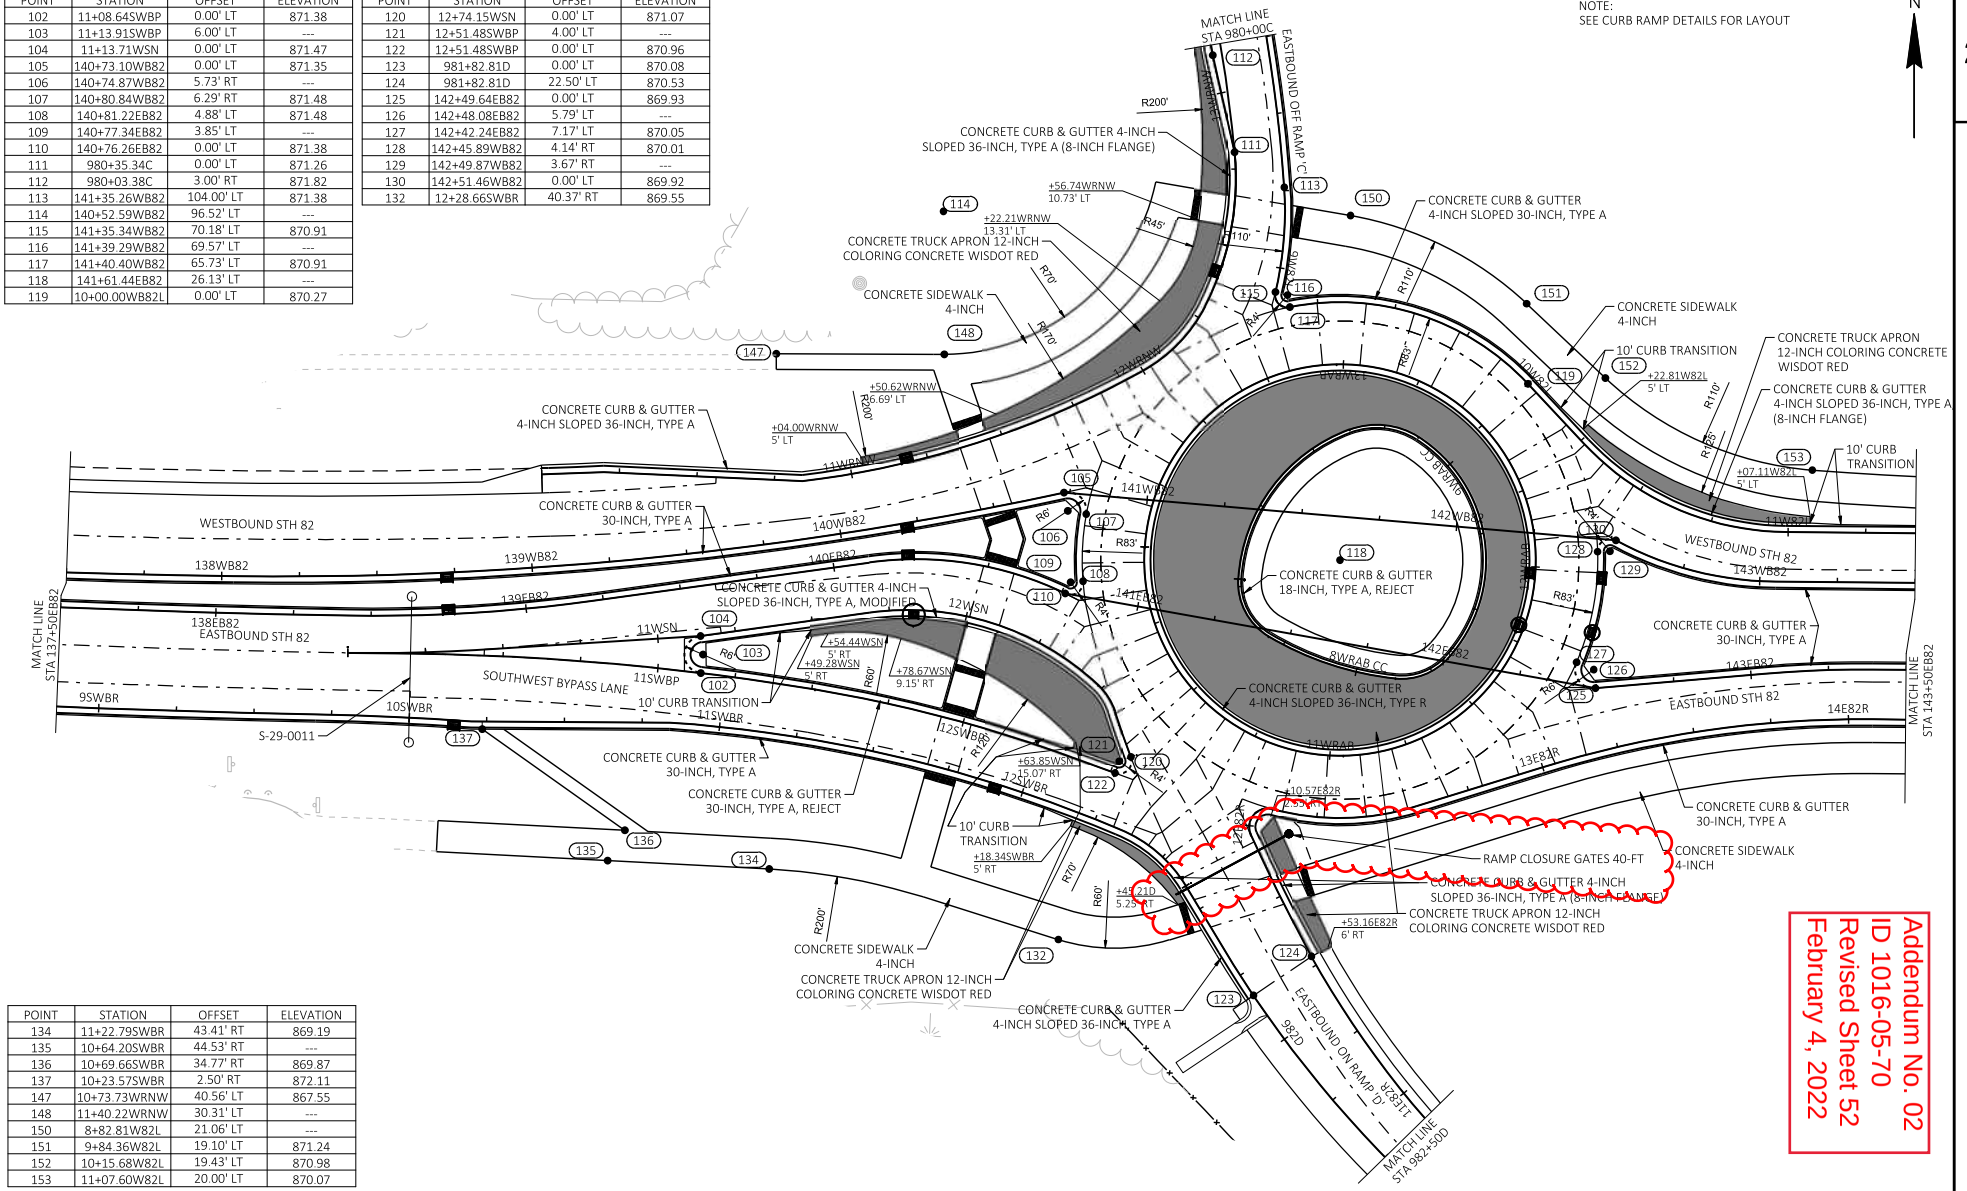

Addendum No. 02
ID 1016-05-70
Revised Sheet 52
February 4, 2022

PROJECT NO: 1016-05-70	HWY: IH 90/94	COUNTY: JUNEAU	PAVING DETAILS	SHEET 52	E

FILE NAME : P:\90S\93\00093367\CADD\SHEETSPLAN\1016-05-70 PLAN SHEETS\DETAILS\021201-PD.DWG
LAYOUT NAME - 021212-pd
PLOT DATE : 2/3/2022 12:51 PM
PLOT BY : CONNOR GIRTEN
PLOT NAME :
PLOT SCALE : 1 IN:40 FT
ADDS SHEET 42

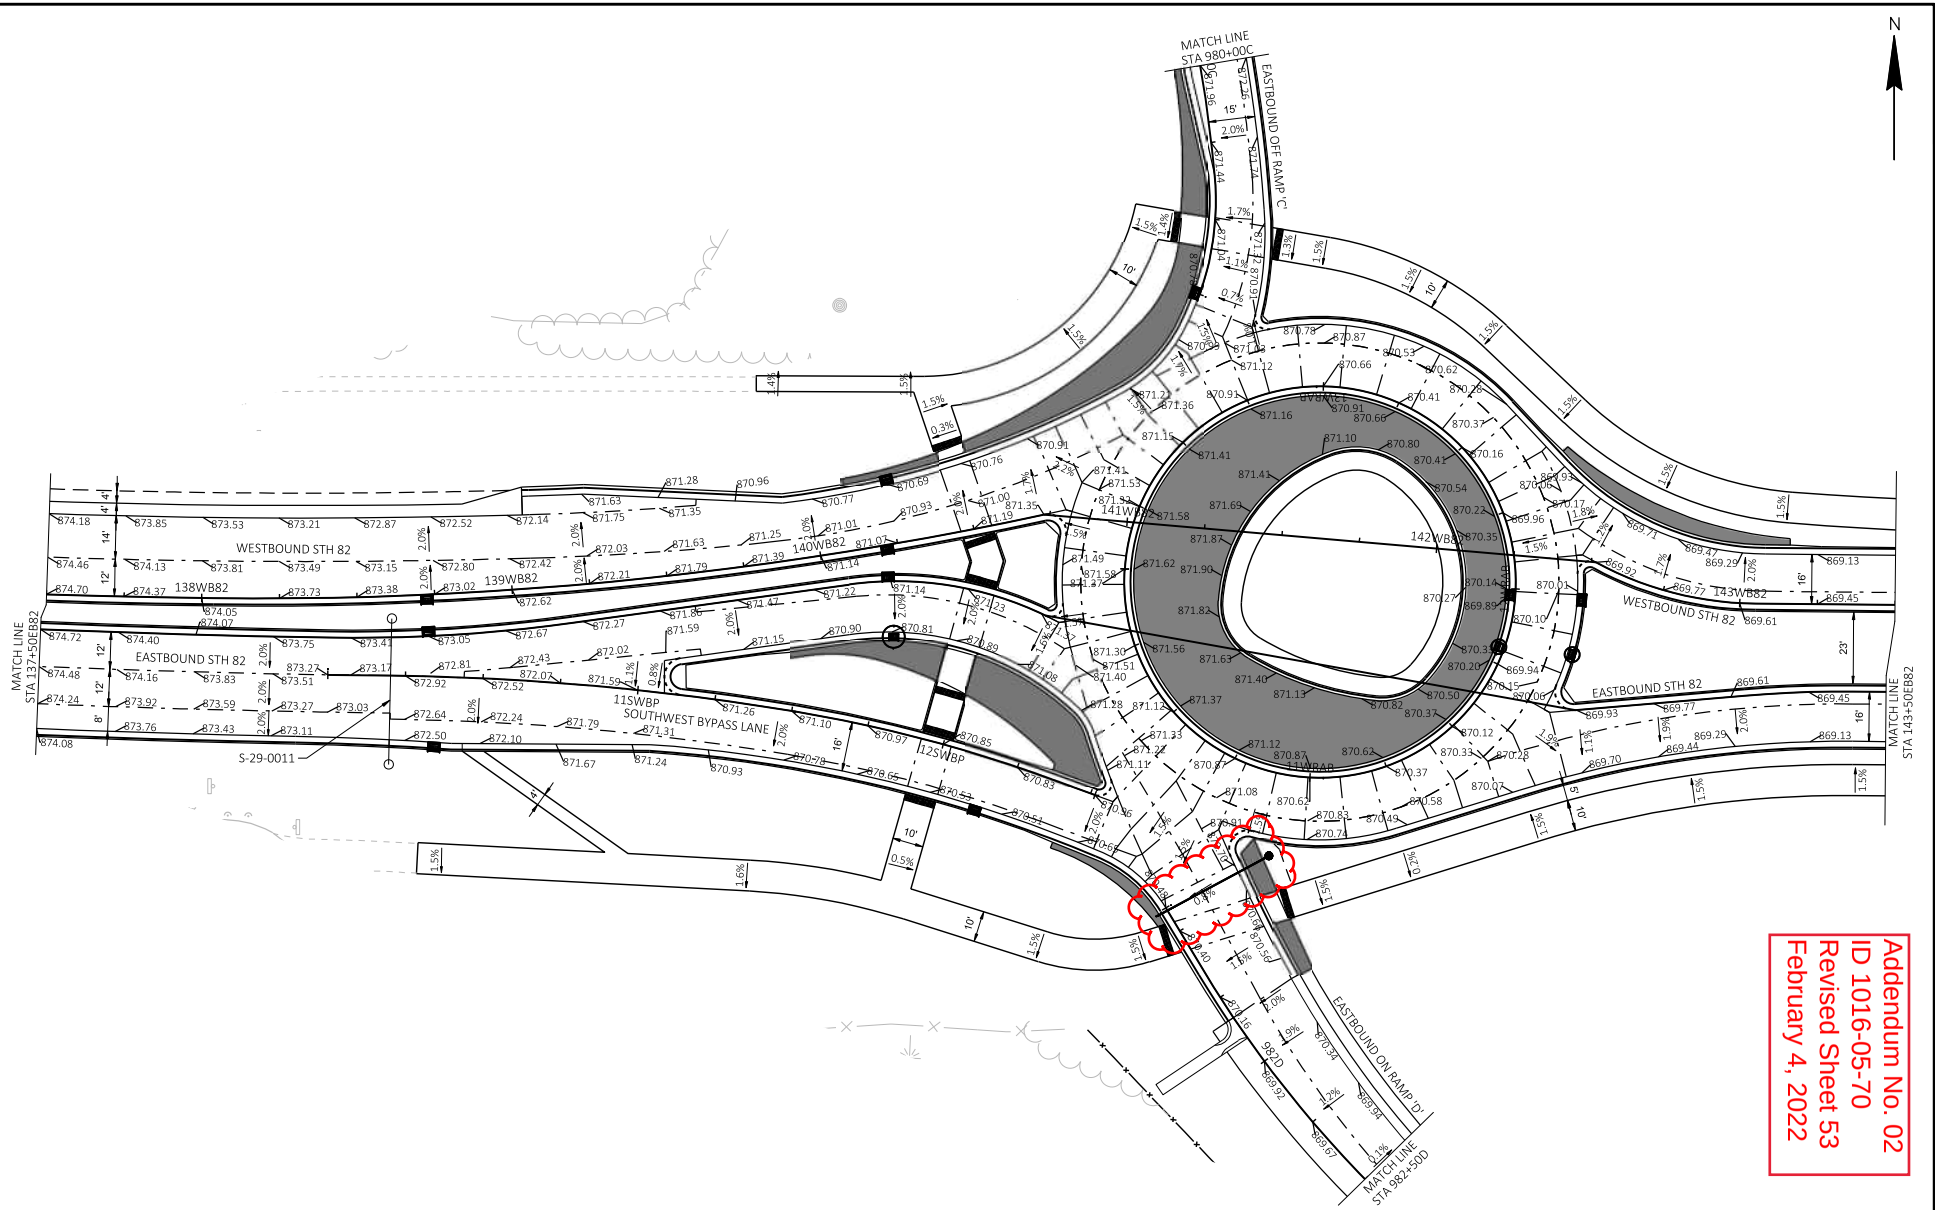


Addendum No. 02
ID 1016-05-70
Revised Sheet 53
February 4, 2022

PROJECT NO: 1016-05-70	HWY: IH 90/94	COUNTY: JUNEAU	PAVING DETAILS	SHEET 53	E

FILE NAME : P:\90S\93\00093367\CADD\SHEETSPLAN\1016-05-70 PLAN SHEETS\DETAILS\021201-PD.DWG
LAYOUT NAME - 021213-pd
PLOT DATE : 2/3/2022 12:51 PM
PLOT BY : CONNOR GIRTEN
PLOT NAME :
PLOT SCALE : 1 IN:40 FT
CADDS SHEET 42

Addendum No. 02
ID 1016-05-70
Revised Sheet 55
February 4, 2022

NOTE:
SEE CURB RAMP DETAILS FOR LAYOUT

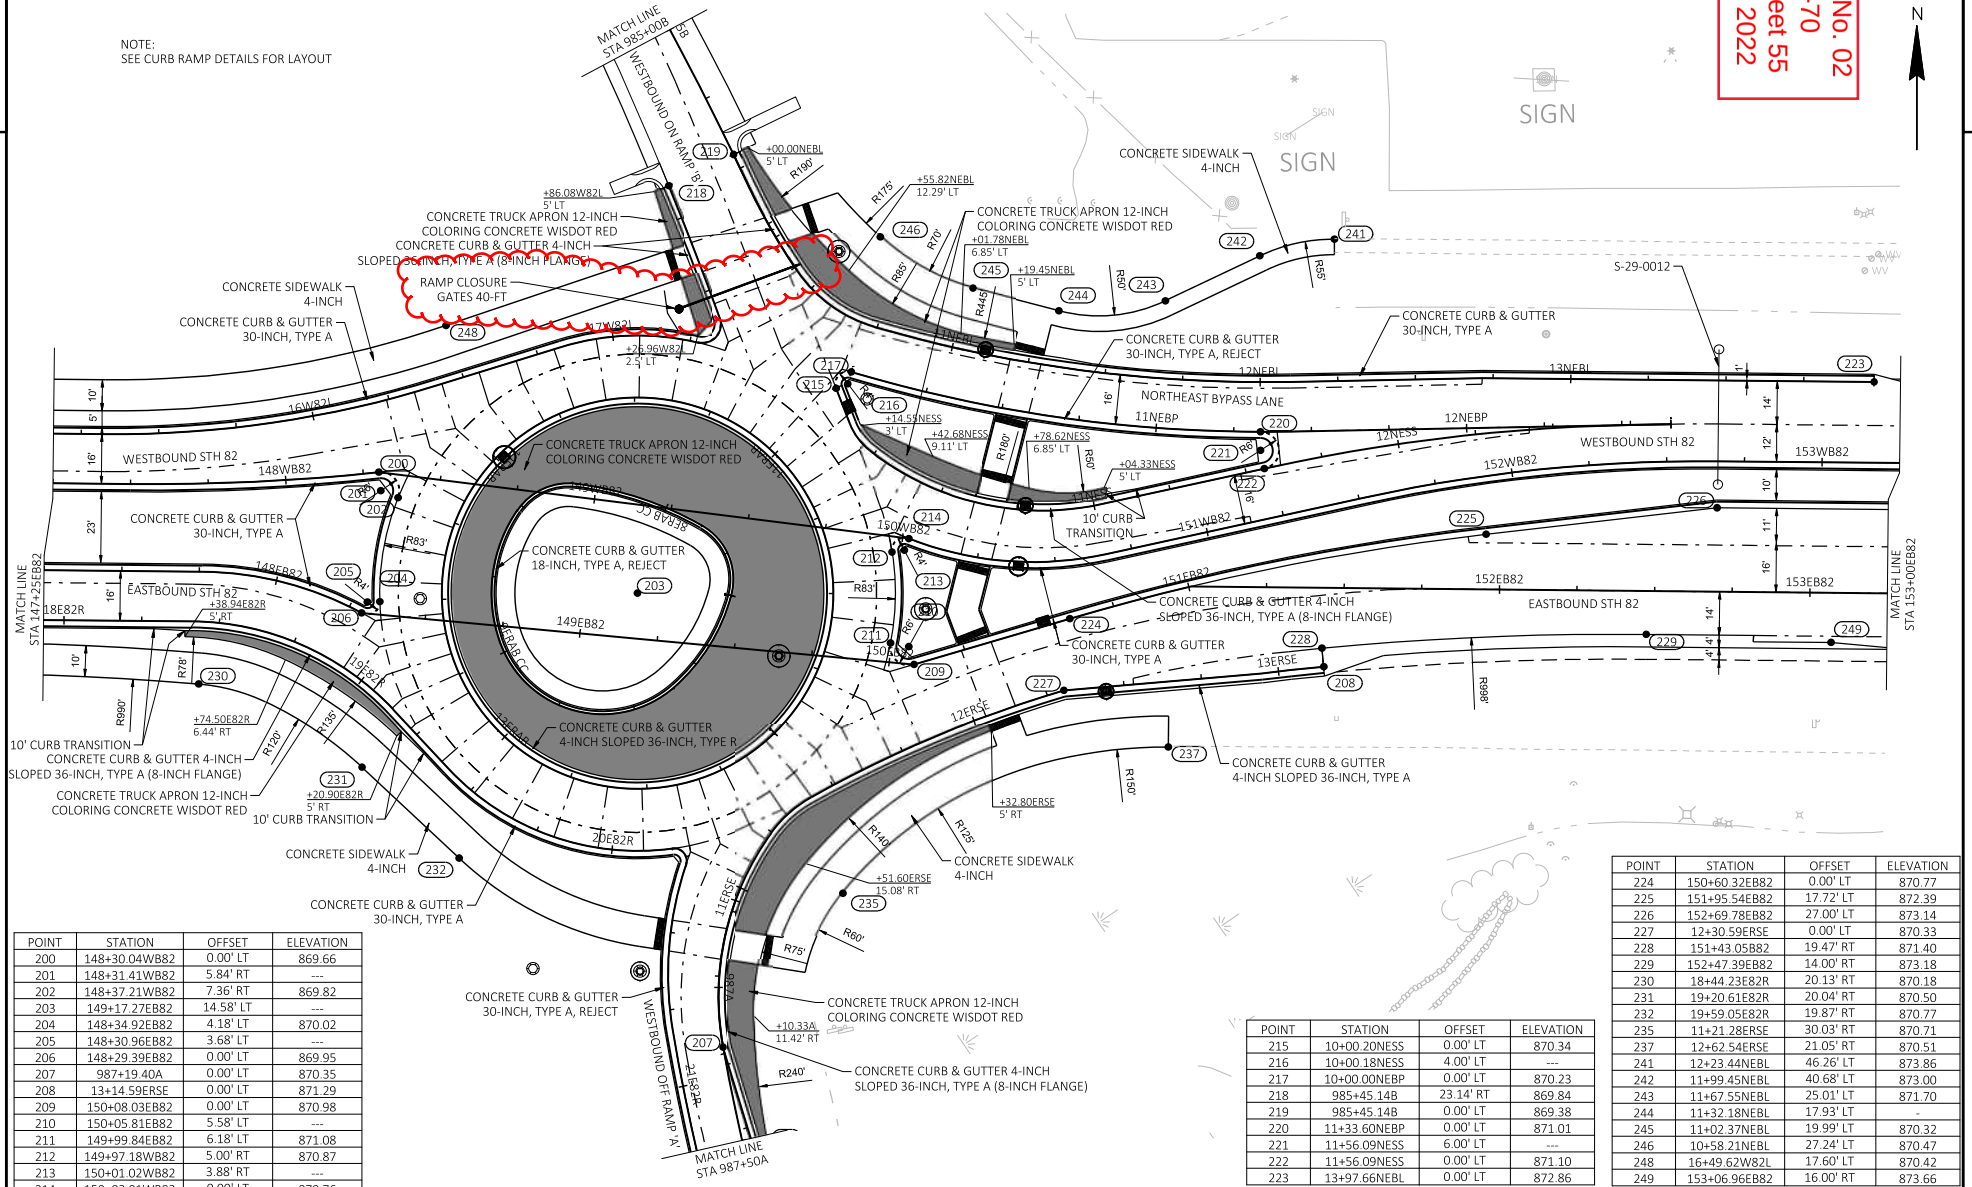

POINT	STATION	OFFSET	ELEVATION
200	148+30.04WB82	0.00' LT	869.66
201	148+31.41WB82	5.84' RT	---
202	148+37.21WB82	7.36' RT	869.82
203	149+17.27EB82	14.58' LT	---
204	148+34.92EB82	4.18' LT	870.02
205	148+30.96EB82	3.68' LT	---
206	148+29.39EB82	0.00' LT	869.95
207	987+19.40A	0.00' LT	870.35
208	13+14.59ERSE	0.00' LT	871.29
209	150+08.03EB82	0.00' LT	870.98
210	150+05.81EB82	5.58' LT	---
211	149+99.84EB82	6.18' LT	871.08
212	149+97.18WB82	5.00' RT	870.87
213	150+01.02WB82	3.88' RT	---
214	150+02.01WB82	0.00' LT	870.76


POINT	STATION	OFFSET	ELEVATION
215	10+00.20NESS	0.00' LT	870.34
216	10+00.18NESS	4.00' LT	---
217	10+00.00NEBP	0.00' LT	870.23
218	985+45.14B	23.14' RT	869.84
219	985+45.14B	0.00' LT	869.38
220	11+33.60NEBP	0.00' LT	871.01
221	11+56.09NESS	6.00' LT	---
222	11+56.09NESS	0.00' LT	871.10
223	13+97.66NEBL	0.00' LT	872.86

POINT	STATION	OFFSET	ELEVATION
224	150+60.32EB82	0.00' LT	870.77
225	151+95.54EB82	17.72' LT	872.39
226	152+69.78EB82	27.00' LT	873.14
227	12+30.59ERSE	0.00' LT	870.33
228	151+43.05B82	19.47' RT	871.40
229	152+47.39EB82	14.00' RT	873.18
230	18+44.23E82R	20.13' RT	870.18
231	19+20.61E82R	20.04' RT	870.50
232	19+59.05E82R	19.87' RT	870.77
235	11+21.28ERSE	30.03' RT	870.71
237	12+62.54ERSE	21.05' RT	870.51
241	12+23.44NEBL	46.26' LT	873.86
242	11+99.45NEBL	40.68' LT	873.00
243	11+67.55NEBL	25.01' LT	871.70
244	11+32.18NEBL	17.93' LT	---
245	11+02.37NEBL	19.99' LT	870.32
246	10+58.21NEBL	27.24' LT	870.47
248	16+49.62W82L	17.60' LT	870.42
249	153+06.96EB82	16.00' RT	873.66

PROJECT NO: 1016-05-70	HWY: IH 90/94	COUNTY: JUNEAU	PAVING DETAILS	SHEET 55	E

FILE NAME : P:\90S\93\00093367\CADD\SHEETSPLAN\1016-05-70 PLAN SHEETS\DETAILS\021201-PD.DWG
LAYOUT NAME - 021215-pd
PLOT DATE : 2/3/2022 12:52 PM
PLOT BY : CONNOR GIRTEN
PLOT NAME :
PLOT SCALE : 1 IN:40 FT
WISDOT/CADDS SHEET 42


Addendum No. 02
ID 1016-05-70
Revised Sheet 56
February 4, 2022

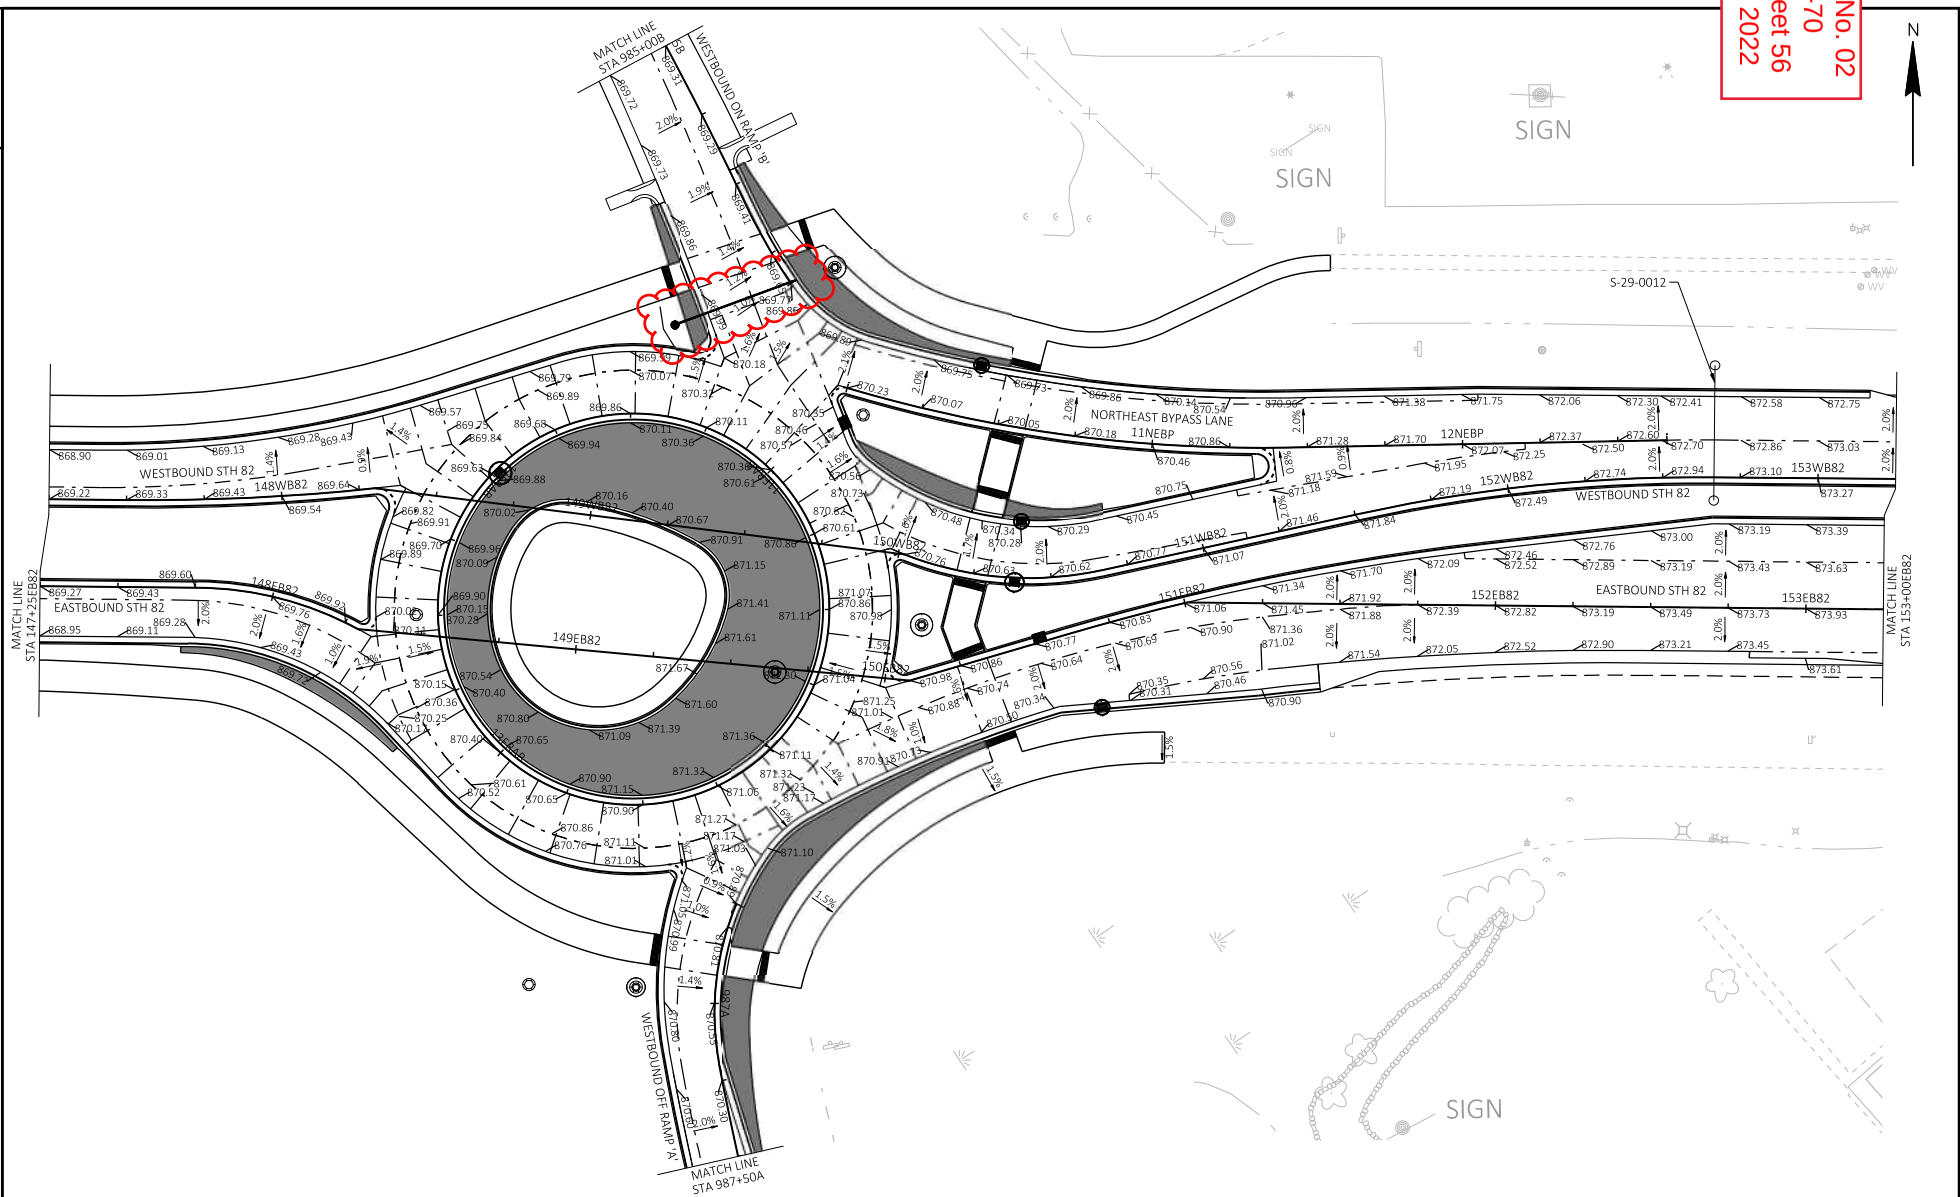

PROJECT NO: 1016-05-70	HWY: IH 90/94	COUNTY: JUNEAU	PAVING DETAILS	SHEET 56	E


FILE NAME : P:\90S\93\00093367\CADD\SHEETSPLAN\1016-05-70 PLAN SHEETS\DETAILS\021201-PD.DWG
LAYOUT NAME - 021216-pd
PLOT DATE : 2/3/2022 12:53 PM
PLOT BY : CONNOR GIRTEN
PLOT NAME :
PLOT SCALE : 1 IN:40 FT

Addendum No. 02
ID 1016-05-70
Revised Sheet 145
February 4, 2022

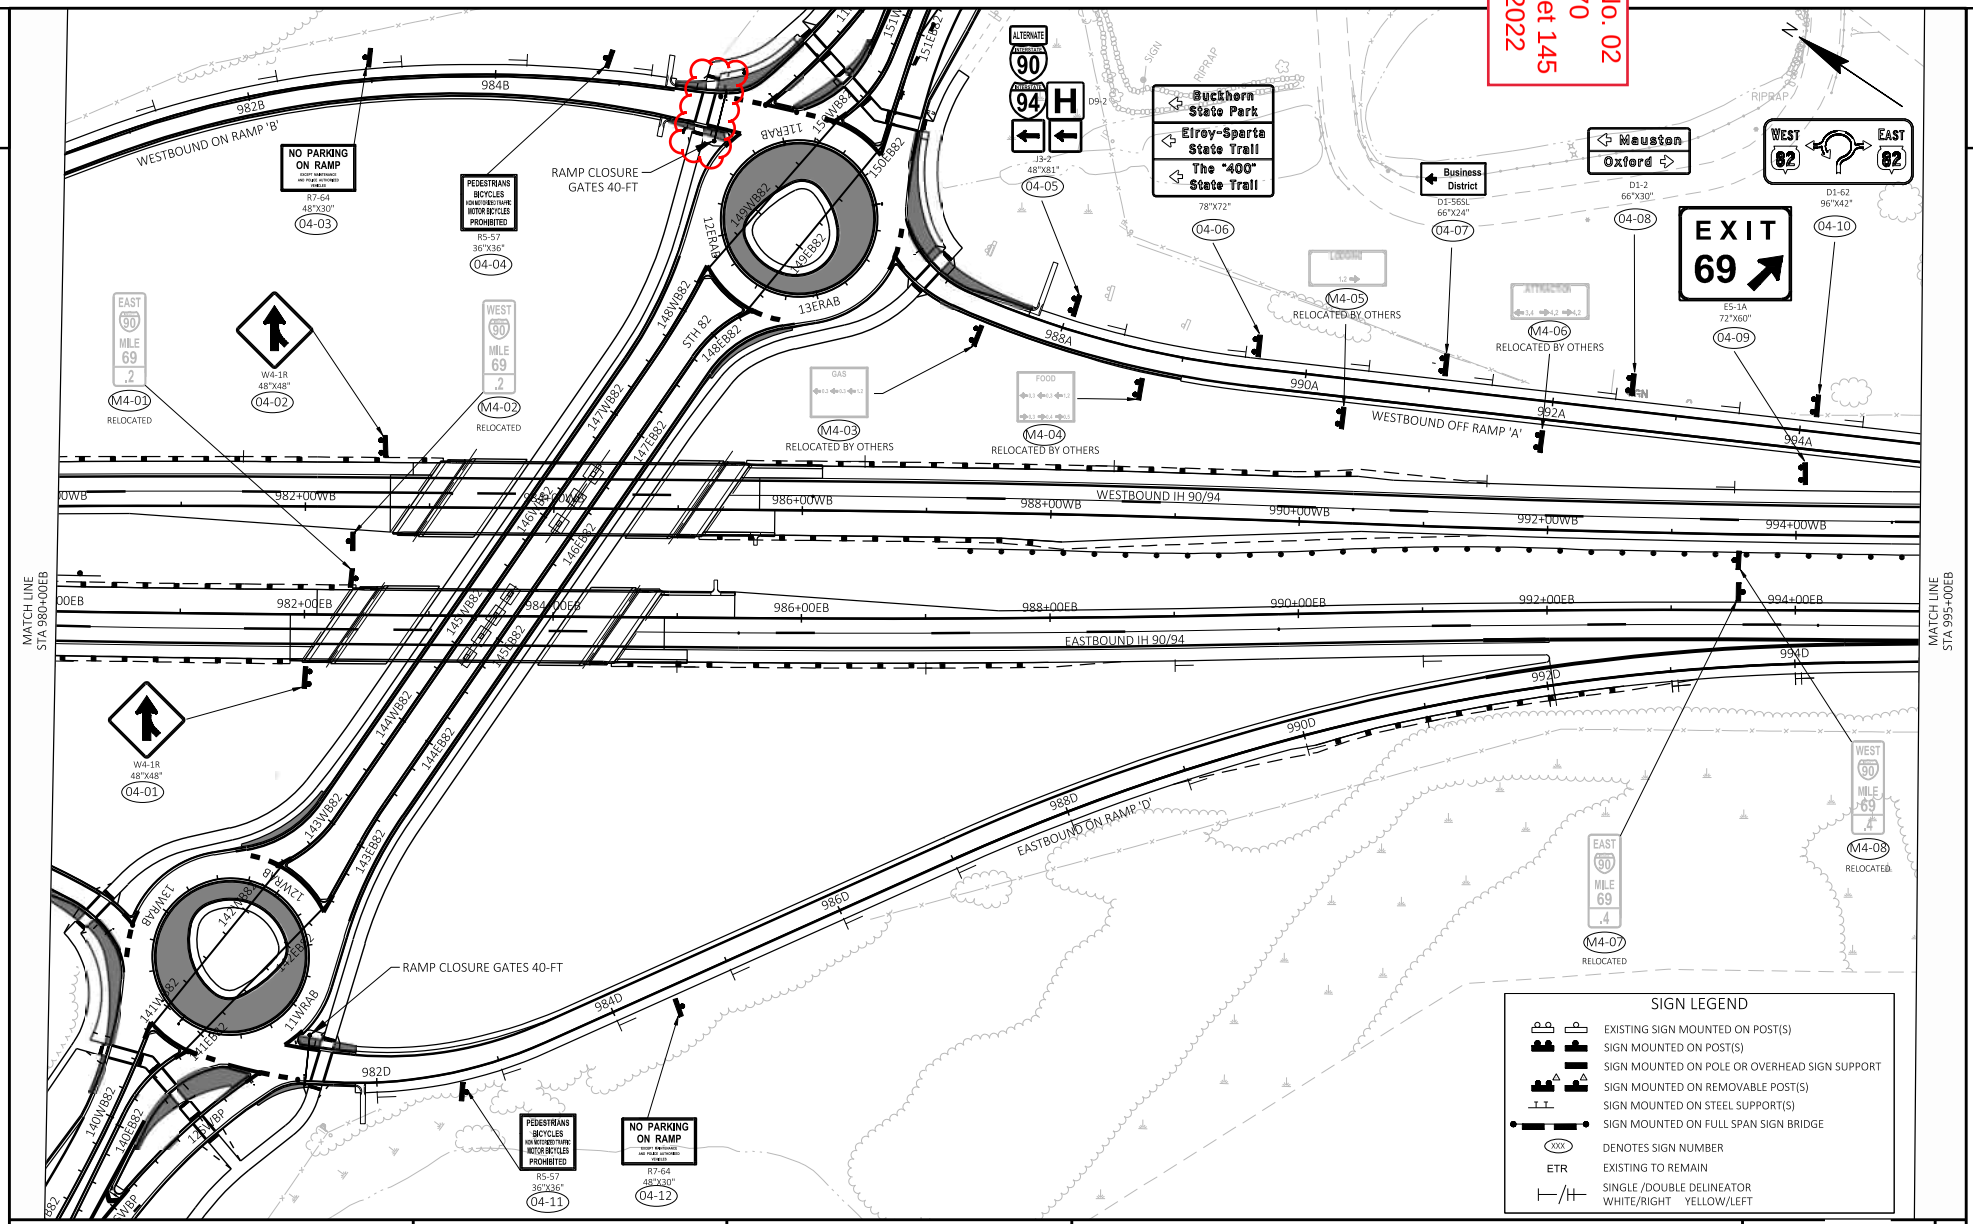

PROJECT NO: 1016-05-70	HWY: IH 90/94	COUNTY: JUNEAU	PERMANENT SIGNING	SHEET 145	E


FILE NAME : P:\90S\93\00093367\CADD\SHEETSPLAN\1016-05-70 PLAN SHEETS\DETAILS\023202-PS.DWG
LAYOUT NAME - 023204-ps
PLOT DATE : 2/3/2022 1:06 PM
PLOT BY : CONNOR GIRTEN
PLOT NAME :
PLOT SCALE : 1 IN:100 FT
WISDOT/CADDS SHEET 42

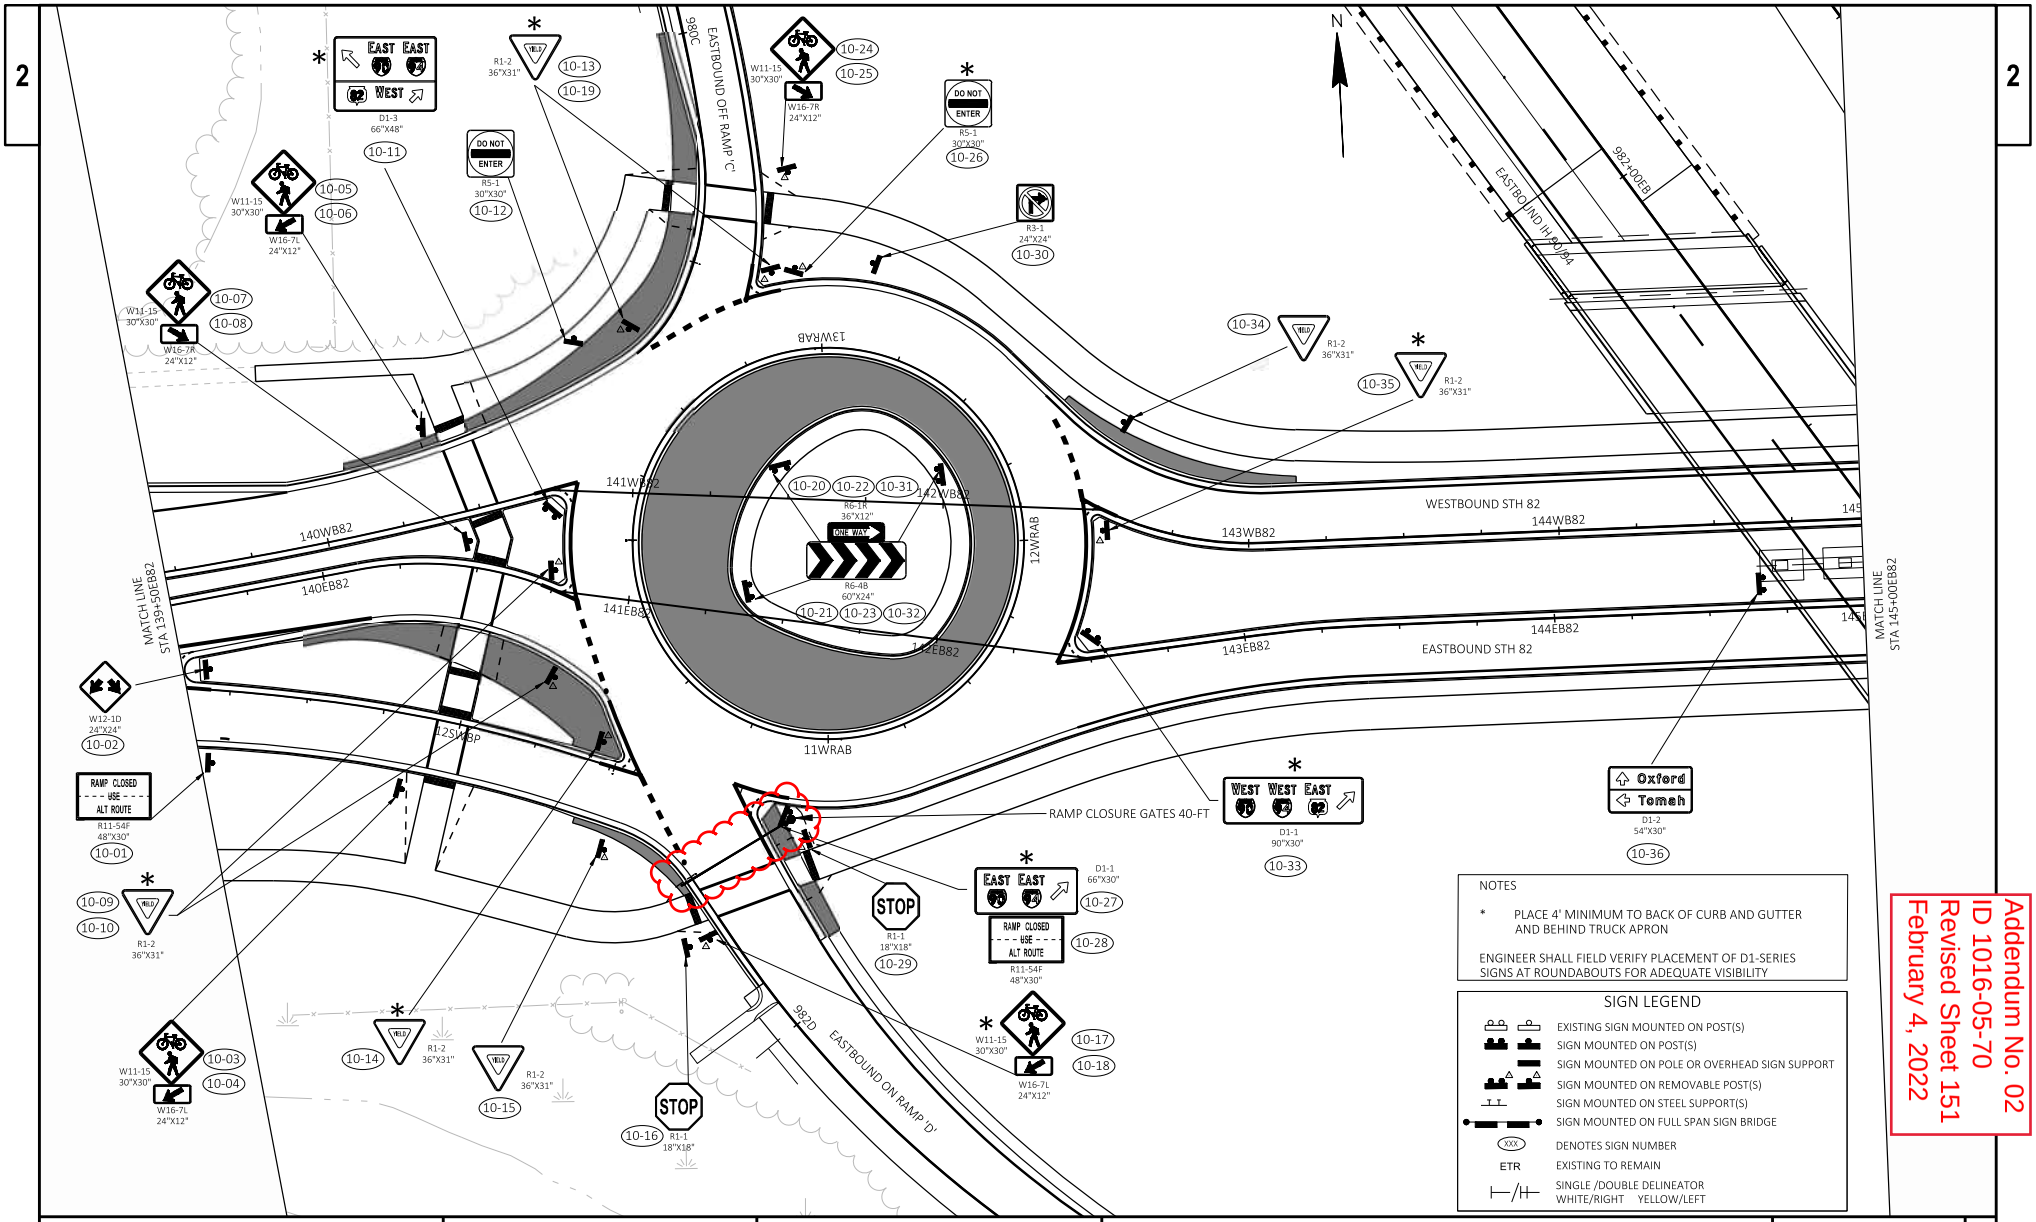

Addendum No. 02
ID 1016-05-70
Revised Sheet 151
February 4, 2022

PROJECT NO: 1016-05-70	HWY: IH 90/94	COUNTY: JUNEAU	PERMANENT SIGNING	SHEET 151 E

FILE NAME : P:\90S\93\00093367\CADD\SHEETSPLAN\1016-05-70 PLAN SHEETS\DETAILS\023202-PS.DWG
LAYOUT NAME - 023210-ps
PLOT DATE : 2/3/2022 1:07 PM
PLOT BY : CONNOR GIRTEN
PLOT NAME :
PLOT SCALE : 1 IN:40 FT
WISDOT/CADDS SHEET 42

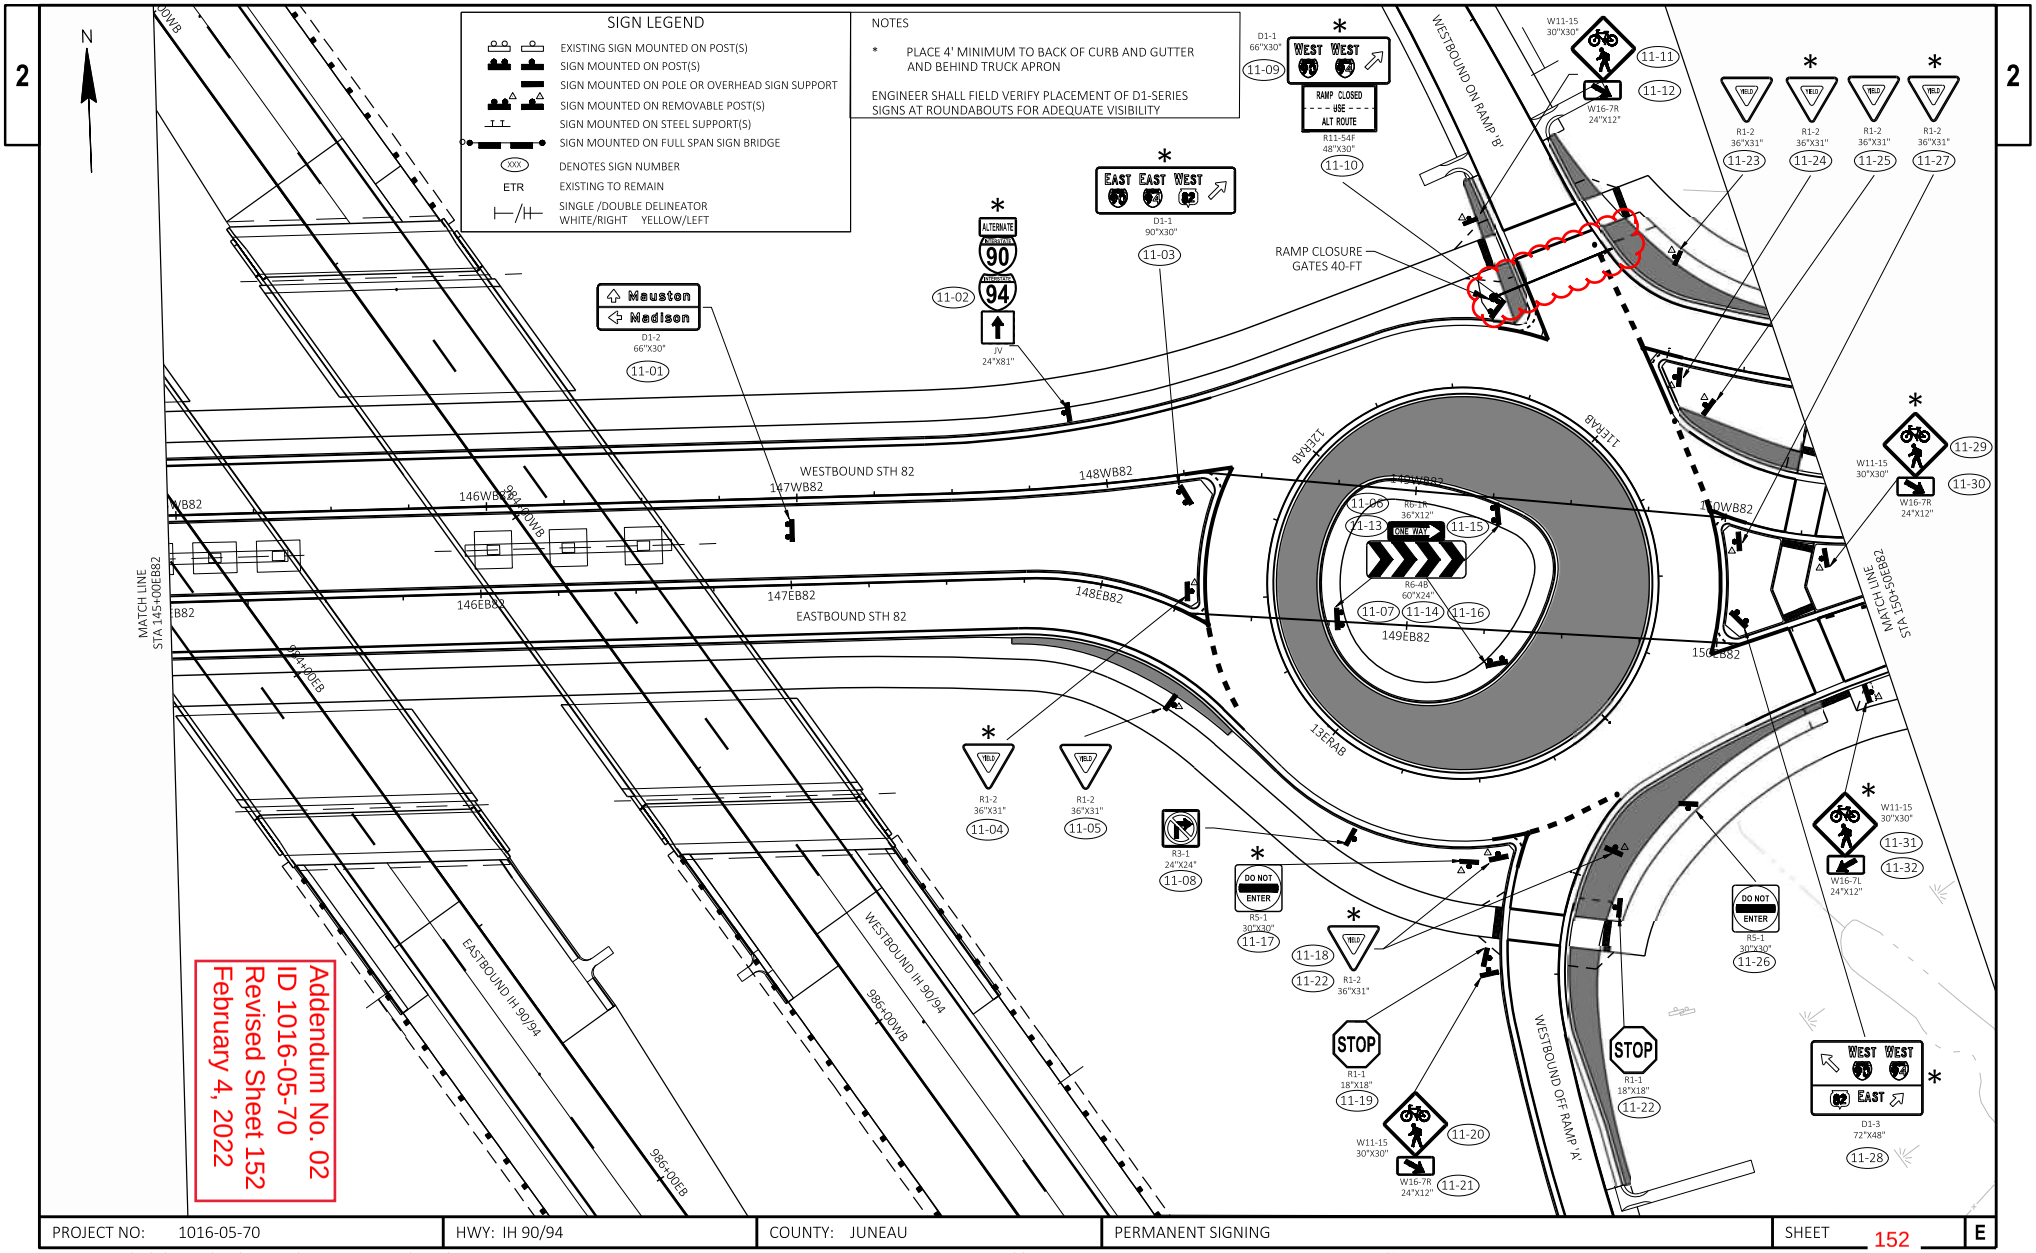

PROJECT NO: 1016-05-70	HWY: IH 90/94	COUNTY: JUNEAU	PERMANENT SIGNING	SHEET 152 E

FILE NAME : P:\90S\93\00093367\CADD\SHEETSPLAN\1016-05-70 PLAN SHEETS\DETAILS\023202-PS.DWG
LAYOUT NAME - 023211-ps
PLOT DATE : 2/3/2022 1:07 PM
PLOT BY : CONNOR GIRTEN
PLOT NAME :
PLOT SCALE : 1 IN:40 FT

Addendum No. 02
ID 1016-05-70
Revised Sheet 445
February 4, 2022

DIVISION	FROM/TO STATION	LOCATION	205.0100 EXCAVATION COMMON (1) CUT (2)	205.0100 EXCAVATION COMMON (1) EXCAVATION (3)	SALVAGED/UNUSABLE PAVEMENT MATERIAL (4)	AVAILABLE MATERIAL (5)	205.0400 EXCAVATION MARSH (6)	208.1100 SELECT BORROW (7)	UNEXPANDED FILL	EXPANDED FILL (13) FACTOR 1.25	MASS ORDINATE +/- (14)	WASTE	208.0100 BORROW
STAGE 2A - CAT 010													
EB IH 90/94	947+02.97'EB' - 1030+01.05'EB'	EB MAINLINE	12,247	0	6,132	6,115	0	9,037	16,628	20,785	-14,670	0	0
EB OFF RAMP XOVER X3	20+25'X3' - 25+50'X3'	EB OFF RAMP XOVER	310	0	0	310	0	0	85	106	306	0	0
EB OFF RAMP C	964+00'C' - 980+50'C'	EB OFF RAMP	4,984	0	249	4,735	0	2,190	1,314	1,643	3,093	0	0
EB OFF RAMP XOVER X9	21+45'X9' - 23+93'X9'	EB OFF RAMP XOVER	181	0	0	181	0	12	53	66	115	0	0
EB ON RAMP D	981+83'D'- 994+40'D'	EB ON RAMP	914	0	139	775	0	6,293	1,500	1,875	-1,100	0	0
EB ON RAMP XOVER X10	33+81.517/36+90.615	EB ON RAMP XOVER	95	0	0	95	0	738	164	205	-110	0	0
EB ON RAMP XOVER X5	35+70.667/47+25	EB ON RAMP XOVER	753	0	170	583	0	0	34	43	541	0	0
EXISTING EB STH 82	142+36'EXEB82' - 144+17'EXEB82'	TEMP PAVT	103	0	0	103	0	0	0	0	103	0	0
EXISTING WB STH 82	145+06'EXWB82' - 152+25'EXWB82'	TEMP PAVT	338	0	0	338	0	0	0	0	338	0	0
UNDISTRIBUTED EBS				996				996					
UNDISTRIBUTED EXCAVATION MARSH							200	200					
STAGE 2A - CAT 010 SUBTOTAL			19,925	996	6,690	13,235	200	19,466	19,696	24,620	-11,385	0	11,385
STAGE 2B - CAT 010													
EB ON RAMP D	981+41.35'D' - 981+82.808'D'	EB ON RAMP	7	0	0	7	0	69	160	200	-193	0	0
EB STH 82	138+43'EB82' - 152+70'EB82'	EB STH 82	2,970	0	0	2,970	0	0	199	249	2,721	0	0
SOUTHWEST RIGHT TURN BYPASS	10+00'SWBP' - 12+51'SWBP'	SOUTHWEST RT BYPASS	1,501	0	0	1,501	0	0	191	239	1,262	0	0
WEST ROUNDABOUT	10+05'WRAB' - 11+89'WRAB'	WEST ROUNDABOUT	543	0	47	496	0	39	64	80	416	0	0
EAST ROUNDABOUT	12+36'ERAB' - 13+49'ERAB'	EAST ROUNDABOUT	257	0	0	257	0	176	218	273	-16	0	0
WB OFF RAMP XOVER X6	23+61'X6' - 25+00'X6'	WB OFF RAMP XOVER	95	0	0	95	0	567	306	383	-288	0	0
UNDISTRIBUTED EBS				269				269					
UNDISTRIBUTED EXCAVATION MARSH							20	20					
STAGE 2B - CAT 010 SUBTOTAL			5,373	269	47	5,326	20	1,140	1,138	1,423	3,904	3,904	0
STAGE 2C - CAT 010													
EB IH 90/94	969+63.99/975+00	EB MAINLINE	1,379	0	635	744	0	0	0	0	744	0	0
EB IH 90/94	989+00/994+40	EB MAINLINE	973	0	581	392	0	144	20	25	367	0	0
WB OFF RAMP A	986+67/992+25	WB OFF RAMP	1,504	0	304	1,200	0	561	402	503	698	0	0
WB OFF RAMP XOVER X12	30+00.823/33+47.43	WB OFF RAMP XOVER	572	0	89	483	0	0	9	11	472	0	0
EB STH 82	143+00/151+00.694	EB STH 82	366	0	8	358	0	0	65	81	277	0	0
EAST ROUNDABOUT	10+00/13+87.815	EAST ROUNDABOUT	381	0	67	314	0	168	193	241	73	0	0
SOUTHEAST DITCH	20+50/21+50	SOUTHEAST DITCH	245	0	0	245	0	0	16	20	225	0	0
UNDISTRIBUTED EBS				271				271					
STAGE 2C -CAT 010 SUBTOTAL				271	1,684	3,736	0	1,144	705	881	2,855	2,855	0
STAGE 2D - CAT 010													
EB OFF RAMP C	980+50'C' - 980+75'C'	EB OFF RAMP		0	0	2	0	44	58	73	-71	0	0
WB ON RAMP B	976+00'B' - 985+87'B'	WB ON RAMP		0	0	2,249	0	3,930	1,073	1,341	908	0	0
WB STH 82	138+41'WB82' - 152+66'WB82'	WB STH 82		0	0	3,249	0	10	556	695	2,554	0	0
NORTHEAST RIGHT TURN BYPASS	10+00'NEBP' - 12+66NEBP'	NORTHEAST RT BYPA		0	0	904	0	0	72	90	814	0	0
WEST ROUNDABOUT	10+00'WRAB' - 13+75'WRAB'	WEST ROUNDABOU		0	0	175	0	380	560	700	-525	0	0
EAST ROUNDABOUT	10+71'ERAB' - 11+31'ERAB'	EAST ROUNDABOUT		0	0	168	0	0	3	4	164	0	0
UNDISTRIBUTED EBS				337				337					
STAGE 2D - CAT 010 SUBTOTAL				337	0	6,747	0	4,701	2,322	2,903	3,845	3,845	0
STAGE 2E - CAT 010													
EB OFF RAMP C	969+61'C' -980+75'C'	EB OFF RAMP	4,857	0	413	4,444	0	0	439	549	3,895	0	0
EB ON RAMP D	985+15'D' - 992+05'D'	EB ON RAMP	2,994	0	316	2,678	0	0	464	580	2,098	0	0
WB STH 82	142+51'WB82' - 143+25'WB82'	WB STH 82	442	0	0	442	0	0	35	44	398	0	0
WEST ROUNDABOUT	11+89'WRAB' - 13+13'WRAB'	WEST ROUNDABOUT	238	0	49	189	0	0	210	263	-74	0	0
EAST ROUNDABOUT	10+71'ERAB' - 12+36'ERAB'	EAST ROUNDABOUT	585	0	46	539	0	0	57	71	468	0	0
STAGE 2E - CAT 010 SUBTOTAL			9,116	0	824	8,292	0	0	1,205	1,506	6,786	6,786	0

CONTINUED ON NEXT PAGE

Addendum No. 02
ID 1016-05-70
Revised Sheet 52
February 4, 2022

Addendum No. 02
ID 1016-05-70
Revised Sheet 446
February 4, 2022

CONTINUED FROM PREVIOUS PAGE

DIVISION	FROM/TO STATION	LOCATION	205.0100 EXCAVATION COMMON (1) CUT (2)	205.0100 EXCAVATION COMMON (1) EXCAVATION (3)	SALVAGED/UNUSABLE PAVEMENT MATERIAL (4)	AVAILABLE MATERIAL (5)	205.0400 EXCAVATION MARSH (6)	208.1100 SELECT BORROW (7)	UNEXPANDED FILL	EXPANDED FILL (13) FACTOR 1.25	MASS ORDINATE +/- (14)	WASTE	208.0100 BORROW
STAGE 2F - CAT 010													
WEST ROUNDABOUT	10+00'WRAB' - 13+95.84'WRAB'	WEST ROUNDABOUT	315	0	0	315	0	0	1,346	1,683	-1,368	0	0
EAST ROUNDABOUT	10+00'ERAB' - 13+95.84'ERAB'	EAST ROUNDABOUT	395	0	0	395	0	0	1,338	1,673	-1,278	0	0
STAGE 2F - CAT 010 SUBTOTAL			710	0	0	710	0	0	2,684	3,355	-2,645	0	2,645
STAGE 2G - CAT 010													
EB ON RAMP D	981+41'D' - 985+41'D'	EB ON RAMP	1,629	0	280	1,349	0	0	390	488	862	0	0
WB OFF RAMP A	986+67'A' - 987+15'A'	WB OFF RAMP	47	0	0	47	0	0	33	41	6	0	0
WB OFF RAMP XOVER X12	30+05.14'X12' - 33+47.43'X12'	WB OFF RAMP XOVER	402	0	0	402	0	0	12	15	387	0	0
EB STH 82	142+50'EB82' - 148+29'EB82'	EB STH 82	550	0	69	481	0	0	1,072	1,340	-859	0	0
WEST ROUNDABOUT	10+87'WRAB' - 11+62'WRAB'	WEST ROUNDABOUT	24	0	0	24	0	0	54	68	-44	0	0
EAST ROUNDABOUT	12+62'ERAB' - 13+56'ERAB'	EAST ROUNDABOUT	42	0	0	42	0	0	46	58	-16	0	0
STAGE 2G CAT 010 SUBTOTAL			2,694	0	349	2,345	0	0	1,607	2,009	336	336	0
STAGE 3A - CAT 010													
WB IH 90/94 TRANSITION	947+75'WBT' - 948+93'WBT'	B-29-157 NORTH	695	0	114	81	0	116	160	200	-119	0	0
WB IH 90/94	948+93'WB' - 955+90'WB'	WB MAINLINE B-29-157	805	0	485	320	0	1,846	3,058	3,823	-3,503	0	0
WB IH 90/94 TRANSITION	1006+10.6/1008+81.596	B-29-157 SOUTH	455	0	157	298	0	102	588	735	-437	0	0
WB IH 90/94 TRANSITION	975+50'WBT' - 982+25'WBT'	B-29-155 NORTH	765	0	648	117	0	3,072	4,233	5,291	-5,174	0	0
WB IH 90/94	982+25'WB' - 989+53'WB'	WB MAINLINE B-29-155	1,000	0	461	539	0	2,536	2,745	3,431	-3,403	0	0
WB IH 90/94 TRANSITION	989+53'WBT' - 992+24'WBT'	B-29-155 SOUTH	535	0	260	275	0	86	45	56	219	0	0
WB IH 90/94 TRANSITION	1006+10'WBT' - 1008+82'WBT'	B-29-153 NORTH	342	0	260	82	0	82	82	103	122	0	0
WB IH 90/94	1008+82'WB' - 1017+17'WB'	WB MAINLINE B-29-153	998	0	545	453	0	1,717	1,307	1,634	-1,181	0	0
WB IH 90/94 TRANSITION	1017+17'WBT' - 1021+53'WBT'	B-29-153 SOUTH	647	0	419	228	0	409	350	438	-210	0	0
CTH G	21+19'G' - 23+00'G'	CTH G	783	0	0	783	0	0	584	730	53	0	0
UNDISTRIBUTED EBS				308				308					
STAGE 3A - CAT 010 SUBTOTAL			6,156	308	3,349	2,807	0	10,274	13,152	16,440	-13,633	0	13,633
STAGE 3B - CAT 010													
WB IH 90/94	944+01.9'WB' - 1029+89.38'WB'	WB MAINLINE	13,558	0	4,471	9,087	0	1,109	3,355	4,194	4,893	0	0
WB ON RAMP XOVER X7	20+34'X7' - 31+89'X7'	WB ON RAMP XOVER	510	0	0	510	0	0	26	33	478	0	0
WB ON RAMP B	971+00'B' - 976+00'B'	WB ON RAMP	3,010	0	136	2,874	0	109	17	21	2,853	0	0
WB OFF RAMP A	992+00'A' - 1000+00'A'	WB OFF RAMP	1561	0	71	1,490	0	1,425	331	414	1,176	0	0
WB OFF RAMP XOVER X8	37+00'X8' - 43+78.962'X8'	WB OFF RAMP XOVER	487	0	0	487	0	0	3	4	483	0	0
UNDISTRIBUTED EBS				961				961					
STAGE 3B - CAT 010 SUBTOTAL			19,226	961	4,678	14,548	0	3,604	3,732	4,665	9,883	9,883	0
STAGE 3C - CAT 010													
WB IH 90/94	967+00'WB' - 982+25'WB'	WB MAI		0	771	1,875	0	89	561	701	1,174	0	0
WB ON RAMP B	973+02.914/985+86.598	WB ON		0	433	7,641	0	0	389	486	7,155	0	0
WB IH 90/94	986+25'WB' - 1003+00'WB'	WB MAI		0	1,118	2,630	0	16	70	88	2,543	0	0
WB OFF RAMP A	987+00'A' - 992+00'A'	WB OFF		0	0	1,531	0	0	2	3	1,529	0	0
UNDISTRIBUTED EBS				800				800					
STAGE 3C - CAT 010 SUBTOTAL				800	2,322	13,677	0	905	1,022	1,278	12,400	12,400	0
STAGE 4 - CAT 010													
IH 90/94 MEDIAN	935+36'EB' - 1036+31'EB'	MAINLINE		0	0	30,745	0	0	2,272	2,840	27,905	0	0
STAGE 4 - CAT 010 SUBTOTAL				0	0	30,745	0	0	2,272	2,840	27,905	27,905	0
CATEGORY 0010			122,111	3,942	19,943	102,168	220	41,234	49,535	61,919		67,912	27,663
CATEGORY 0010 TOTAL COMMON EX			126,053										

Addendum No. 02
ID 1016-05-70
Revised Sheet 52
February 4, 2022

CONTINUED ON NEXT PAGE

CONTINUED FROM PREVIOUS PAGE

DIVISION	FROM/TO STATION	LOCATION	205.0100 EXCAVATION COMMON (1) CUT (2)	205.0100 EXCAVATION COMMON (1) EXCAVATION (3)	SALVAGED/UNUSABLE PAVEMENT MATERIAL (4)	AVAILABLE MATERIAL (5)	205.0400 EXCAVATION MARSH (6)	208.1100 SELECT BORROW (7)	UNEXPANDED FILL	EXPANDED FILL (13) FACTOR 1.25	MASS ORDINATE +/- (14)	WASTE	208.0100 BORROW
STAGE 2A - CAT 080													
EXISTING EB STH 82	130+24'EXEB82' - 136+97'EXEB82'	TEMP PAVT	481	0	0	481	0	0	0	0	481	0	0
UNDISTRIBUTED EBS				24				24					
STAGE 2A - CAT 080 SUBTOTAL			481	24	0	481	0	24	0	0	481	481	0
STAGE 2B - CAT 080													
EB STH 82	132+96'EB82' - 138+43'EB82'	EB STH 82	2,160	0	0	2,160	0	0	2	3	2,158	0	0
EB STH 82	152+70'EB82' - 162+35'EB82'	EB STH 82	2,290	0	0	2,290	0	0	0	0	2,290	0	0
UNDISTRIBUTED EBS				223				223					
STAGE 2B - CAT 080 SUBTOTAL			4,450	223	0	4,450	0	223	2	3	4,448	4,448	0
STAGE 2D - CAT 080													
WB STH 82	131+85'WB82' - 138+41'WB82'	WB STH 82	2,452	0	0	2,452	0	0	0	0	2,452	0	0
WB STH 82	152+66'WB82' - 162+30'WB82'	WB STH 82	2,410	0	0	2,410	0	0	7	9	2,401	0	0
COMMERICAL ST	5+24'CS' - 6+05'CS'	COMMERICAL ST	402	0	0	402	0	0	4	5	397	0	0
UNDISTRIBUTED EBS				263		0		263					
STAGE 2D - CAT 080 SUBTOTAL			5,264	263	0	5,264	0	263	11	14	5,250	5,250	0
STAGE 2F - CAT 080													
EB STH 82	131+84'EB82' - 133+00'EB82'	EB STH 82	226	0	0	226	0	0	8	10	216	0	0
UNDISTRIBUTED EBS				11				11					
STAGE 2F - CAT 080 SUBTOTAL			226	11	0	226	0	11	8	10	216	216	0
CATEGORY 0080			10,421	521	0	10,421	0	521	21	26	10,395	10,395	0
CATEGORY 0080 TOTAL COMMON EXC			10,942										
GRAND TOTAL			132,532	4,463	19,943	112,589	220	41,755	49,556	61,945		78,307	27,663
TOTAL COMMON EXC			136,995										

NOTES:

(1) COMMON EXCAVATION IS THE SUM OF THE CUT AND EBS EXCAVATION COLUMNS. ITEM NUMBER 205.0100

(2) SALVAGED/UNSUABLE PAVEMENT MATERIAL IS INCLUDED IN CUT.

(3) EBS EXCAVATION TO BE BACKFILLED WITH SELECT BORROW MATERIAL. NOTE: THIS IS DESIGNERS CHOICE, CAN BE BACKFILLED WITH CUT AS WELL.

(4) SALVAGED/UNUSABLE PAVEMENT MATERIAL INCLUDES EXISTING CONCRETE PAVEMENT

(5) AVAILABLE MATERIAL = CUT - SALVAGED/UNUSUABLE PAVEMENT MATERIAL

(6) MARSH EXCAVATION TO BE BACKFILLED WITH SELECT BORROW MATERIAL. NOTE: THIS IS DESIGNERS CHOICE, CAN BE BACKFILLED WITH CUT AS WELL. ITEM NUMBER 205.0500

(7) SELECT BORROW MATERIAL TO BE USED INSIDE 1:1 SLOPES

(13) EXPANDED FILL FACTOR = 1.25

(14) THE MASS ORDINATE + OR - QTY CALCULATED FOR THE DIVISION. PLUS QUANTITY INDICATES AN EXCESS OF MATERIAL WITHIN THE DIVISION. MINUS INDICATES A SHORTAGE OF MATERIAL WITHIN THE DIVISION.

(15) FACTORS USED TO COMPUTE ANTICIPATED WASTE AND THE COMPUTED WASTE VOLUME IDENTIFIED ARE FOR GENERAL INFORMATION ONLY.

Addendum No. 02
ID 1016-05-70
Revised Sheet 447
February 4, 2022

PULLBOXES

CATEGORY	PULLBOX NUMBER	STATION	ALIGNMENT	OFFSET	LOCATION	STAGE	653.0164 PULL BOXES NON-CONDUCTIVE 24X42-INCH EACH
STAGE 2							
0010	PB-44	980+21	'C'	13.2	RT	2A	1
0010	PB-45	978+92	'C'	23.9	RT	2A	1
0010	PB-46	977+63	'C'	34.4	RT	2A	1
0010	PB-5	147+97	'EB82'	0+16	LT	2B	1
0010	PB-6	147+35	'EB82'	0+13	LT	2B	1
0010	PB-7	146+35	'EB82'	5.0	LT	2B	1
0010	PB-8	145+09	'EB82'	5.4	LT	2B	1
0010	PB-9	143+74	'EB82'	7.1	LT	2B	1
0010	PB-12	11+15	'WRAB'	0+51	RT	2B	1
0010	PB-13	981+67	'D'	0+15	RT	2B	1
0010	PB-14	10+53	'WRAB'	64.9	RT	2B	1
0010	PB-20	148+01	'EB82'	44.5	RT	2B	1
0010	PB-21	12+91	'ERAB'	51.2	RT	2B	1
0010	PB-39	982+83	'D'	0+17	RT	2B	1
0010	PB-40	984+12	'D'	0+21	RT	2B	1
0010	PB-23	987+01	'A'	25.1	LT	2C	1
0010	PB-24	10+00	'ERAB'	61.9	RT	2C	1
0010	PB-25	150+70	'EB82'	50.6	RT	2C	1
0010	PB-48	988+33	'A'	0+21	LT	2C	1
0010	PB-49	989+67	'A'	0+19	LT	2C	1
0010	PB-1	985+50	'B'	21.3	LT	2D	1
0010	PB-4	148+24	'WB82'	26.6	LT	2D	1
0010	PB-15	140+31	'EB82'	6.6	LT	2D	1
0010	PB-16	138+98	'EB82'	0+08	LT	2D	1
0010	PB-27	152+03	'WB82'	0+06	RT	2D	1
0010	PB-33	150+67	'WB82'	31.2	LT	2D	1
0010	PB-34	150+73	'WB82'	67.3	LT	2D	1
0010	PB-35	11+08	'ERAB'	82.9	RT	2D	1
0010	PB-36	985+59	'B'	0+22	LT	2D	1
0010	PB-37	984+28	'B'	0+18	LT	2D	1
0010	PB-38	982+96	'B'	17.0	LT	2D	1
0010	PB-43	980+37	'C'	21.9	LT	2D	1
0010	PB-47	13+59	'WRAB'	67.2	RT	2D	1
0010	PB-2	985+47	'B'	0+45	RT	2E	1
0010	PB-3	11+86	'ERAB'	0+52	RT	2E	1
0010	PB-10	142+89	'EB82'	18.6	LT	2E	1
0010	PB-11	142+55	'EB82'	49.6	RT	2E	1
0010	PB-22	13+44	'ERAB'	36.6	RT	2E	1
0010	PB-41	142+53	'WB82'	0+28	LT	2E	1
0010	PB-42	12+51	'WRAB'	0+50	RT	2E	1
0010	PB-26	150+61	'WB82'	0+08	RT	2G	1
						STAGE 2 SUBTOTAL	41
						TOTAL 0010	41

CONTINUED IN NEXT COLUMN

CONTINUED FROM PREVIOUS COLUMN

PULLBOXES

CATEGORY	PULLBOX NUMBER	STATION	ALIGNMENT	OFFSET	LOCATION	STAGE	653.0164 PULL BOXES NON-CONDUCTIVE 24X42-INCH EACH
STAGE 2							
0080	PB-17	137+00	'EB82'	0+06	LT	2D	1
0080	PB-18	135+00	'EB82'	0+08	LT	2D	1
0080	PB-28	153+68	'WB82'	0+07	RT	2D	1
0080	PB-30	156+51	'WB82'	0+11	RT	2D	1
0080	PB-31	157+73	'WB82'	0+10	RT	2D	1
0080	PB-19	133+09	'EB82'	0+16	LT	2F	1
0080	PB-29	155+08	'WB82'	0+18	RT	2G	1
0080	PB-32	159+10	'EB82'	0+11	LT	2G	1
						STAGE 2 SUBTOTAL	8
						TOTAL 0080	8
						PROJECT TOTAL	49

RAMP CLOSURE GATES

CATEGORY	STATION	ALIGNMENT	LOCATION	* 654.0105 CONCRETE BASES TYPE 5 EACH	662.1040.S RAMP CLOSURE GATES 40-FT EACH
STAGE 2					
0010	981+44	'D'	LT	1	1
			STAGE 2 SUBTOTAL	1	1
STAGE 3					
0010	985+78	'B'	RT	1	1
			STAGE 3 SUBTOTAL	1	1
			TOTAL 0010	2	2

*ADDITIONAL QUANTITIES LISTED ELSEWHERE

Addendum No. 02
ID 1016-05-70
Revised Sheet 501
February 4, 2022

STREET LIGHT POLE ITEMS


CATEGORY	LIGHT NUMBER	STATION	ALIGNMENT	OFFSET	LOCATION	STAGE	* 634.0163 CONCRETE BASES TYPE 5 EACH	* 655.0610 ELECTRICAL WIRE LIGHTING 12 AWG LF	657.0255 TRANSFORMER BASES BREAKAWAY 11 1/2-INCH BOLT CIRCLE EACH	657.0322 POLES TYPE 5-ALUMINUM EACH	657.0610 LUMINAIRE ARMS SINGLE MEMBER 4 1/2-INCH CLAMP 6-FT EACH	657.0710 LUMINAIRE ARMS TRUSS TYPE 4 1/2-INCH CLAMP 12-FT EACH	659.0600.01 UNDERDECK LIGHTING (LOCATION) (01. 145+09EB82) LS	659.0600.02 UNDERDECK LIGHTING (LOCATION) (02. 146+35EB82) LS	659.1115 LUMINAIRES UTILITY LED A EACH	659.1125 LUMINAIRES UTILITY LED C EACH	659.1210 LUMINAIRES UNDERDECK LED B EACH
STAGE 2																	
0010	LP-29	980+21	'C'	13.2	RT	2A	1	135	1	1	---	1	---	---	1	---	---
0010	LP-30	978+92	'C'	18.8	RT	2A	1	135	1	1	---	1	---	---	1	---	---
0010	LP-31	977+62	'C'	29.2	RT	2A	1	135	1	1	---	1	---	---	1	---	---
0010	LP-6&7	148+09	'EB82'	19	LT	2B	1	270	1	1	---	2	---	---	---	2	---
0010	LP-8&9	147+17	'EB82'	13.1	LT	2B	1	270	1	1	---	2	---	---	---	2	---
0010	LP-10&11	143+85	'EB82'	16.6	LT	2B	1	270	1	1	---	2	---	---	---	2	---
0010	LP-15	11+15	'WRAB'	43.7	RT	2B	1	135	1	1	---	1	---	---	---	1	---
0010	LP-16	982+84	'D'	9.8	RT	2B	1	135	1	1	---	1	---	---	1	---	---
0010	LP-17	984+11	'D'	13.4	RT	2B	1	135	1	1	---	1	---	---	1	---	---
0010	LP-18	981+60	'D'	9.7	RT	2B	1	135	1	1	---	1	---	---	1	---	---
0010	LP-19	10+57	'WRAB'	61	RT	2B	1	135	1	1	---	1	---	---	---	1	---
0010	UD-5-8	145+09	'EB82'	10	LT	2B	---	936	---	---	---	---	1	---	---	---	4
0010	LP-35	10+02	'ERAB'	53.7	RT	2C	1	135	1	1	---	1	---	---	---	1	---
0010	LP-38	987+01	'A'	14.7	LT	2C	1	135	1	1	---	1	---	---	1	---	---
0010	LP-39	988+32	'A'	14.5	LT	2C	1	135	1	1	---	1	---	---	1	---	---
0010	LP-40	989+67	'A'	11.3	LT	2C	1	135	1	1	---	1	---	---	1	---	---
0010	LP-1	985+51	'B'	14.1	LT	2D	1	135	1	1	---	1	---	---	1	---	---
0010	LP-2	984+28	'B'	10.2	LT	2D	1	135	1	1	---	1	---	---	1	---	---
0010	LP-3	982+97	'B'	9.6	LT	2D	1	135	1	1	---	1	---	---	1	---	---
0010	LP-20&21	140+41	'EB82'	7.8	LT	2D	1	270	1	1	---	2	---	---	---	2	---
0010	LP-22&23	138+85	'EB82'	6.8	LT	2D	1	270	1	1	---	2	---	---	2	---	---
0010	LP-27	13+07	'WRAB'	31.9	RT	2D	1	117	1	1	1	---	---	---	---	1	---
0010	LP-28	13+60	'WRAB'	61.2	RT	2D	1	135	1	1	---	1	---	---	---	1	---
0010	LP-32	11+08	'ERAB'	77.1	RT	2D	1	135	1	1	---	1	---	---	---	1	---
0010	LP-41&42	152+12	'WB82'	9.4	RT	2D	1	270	1	1	---	2	---	---	2	---	---
0010	LP-4	11+53	'ERAB'	44.4	RT	2E	1	135	1	1	---	1	---	---	---	1	---
0010	LP-5	11+88	'ERAB'	44.4	RT	2E	1	135	1	1	---	1	---	---	---	1	---
0010	LP-12&13	142+89	'EB82'	18.6	LT	2E	1	270	1	1	---	2	---	---	---	2	---
0010	LP-14	142+50	'EB82'	42.9	RT	2E	1	135	1	1	---	1	---	---	---	1	---
0010	LP-26	12+51	'WRAB'	40.1	RT	2E	1	135	1	1	---	1	---	---	---	1	---
0010	LP-36	13+45	'ERAB'	30.1	RT	2E	1	117	1	1	1	---	---	---	---	1	---
0010	LP-37	12+88	'ERAB'	42	RT	2E	1	135	1	1	---	1	---	---	---	1	---
0010	LP-33&34	150+35	'WB82'	12	RT	2G	1	270	1	1	---	2	---	---	---	2	---
						STAGE 2 SUBTOTAL	32	6,300	32	32	2	38	1	0	16	24	4
STAGE 3																	
0010	UD-1-4	146+35	'EB82'	0+10	LT	3		936	---	---	---	---	---	1	---	---	4
						STAGE 3 SUBTOTAL	0	936	0	0	0	0	0	1	0	0	4
						TOTAL 0010	32	7,236	32	32	2	38	1	1	16	24	8
STAGE 2																	
0080	LP-43&44	153+75	'WB82'	0+11	RT	2D	1	270	1	1	---	2	---	---	2	---	---
0080	LP-47&48	157+58	'WB82'	0+09	RT	2D	1	234	1	1	2	---	---	---	---	2	---
0080	LP-24&25	133+00	'EB82'	0+12	LT	2F	1	270	1	1	---	2	---	---	2	---	---
0080	LP-45&46	155+01	'WB82'	0+14	RT	2G	1	270	1	1	---	2	---	---	2	---	---
0080	LP-49&50	159+16	'EB82'	0+12	LT	2G	1	234	1	1	2	---	---	---	---	2	---
						STAGE 2 SUBTOTAL	5	1,278	5	5	4	6	0	0	6	4	0
						TOTAL 0080	5	1,278	5	5	4	6	0	0	6	4	0
						PROJECT TOTAL	37	8,514	37	37	6	44	1	1	22	28	8


*ADDITIONAL QUANTITIES LISTED ELSEWHERE

Addendum No. 02
ID 1016-05-70
Revised Sheet 502
February 4 2022

Addendum No. 02
ID 1016-05-70
Revised Sheet 513
February 4 2022

BENCH MARKS			
NO.	STATION	DESCRIPTION	ELEV.
1	954+32.9WB, 303.8' LT	REPLACED NUT ON HYD, 26' N OF CTH G ℄	888.93'
2	950+50.5EB, 146.2' RT	BURY NUT ON HYD, 25' N OF CTH G ℄	884.34'

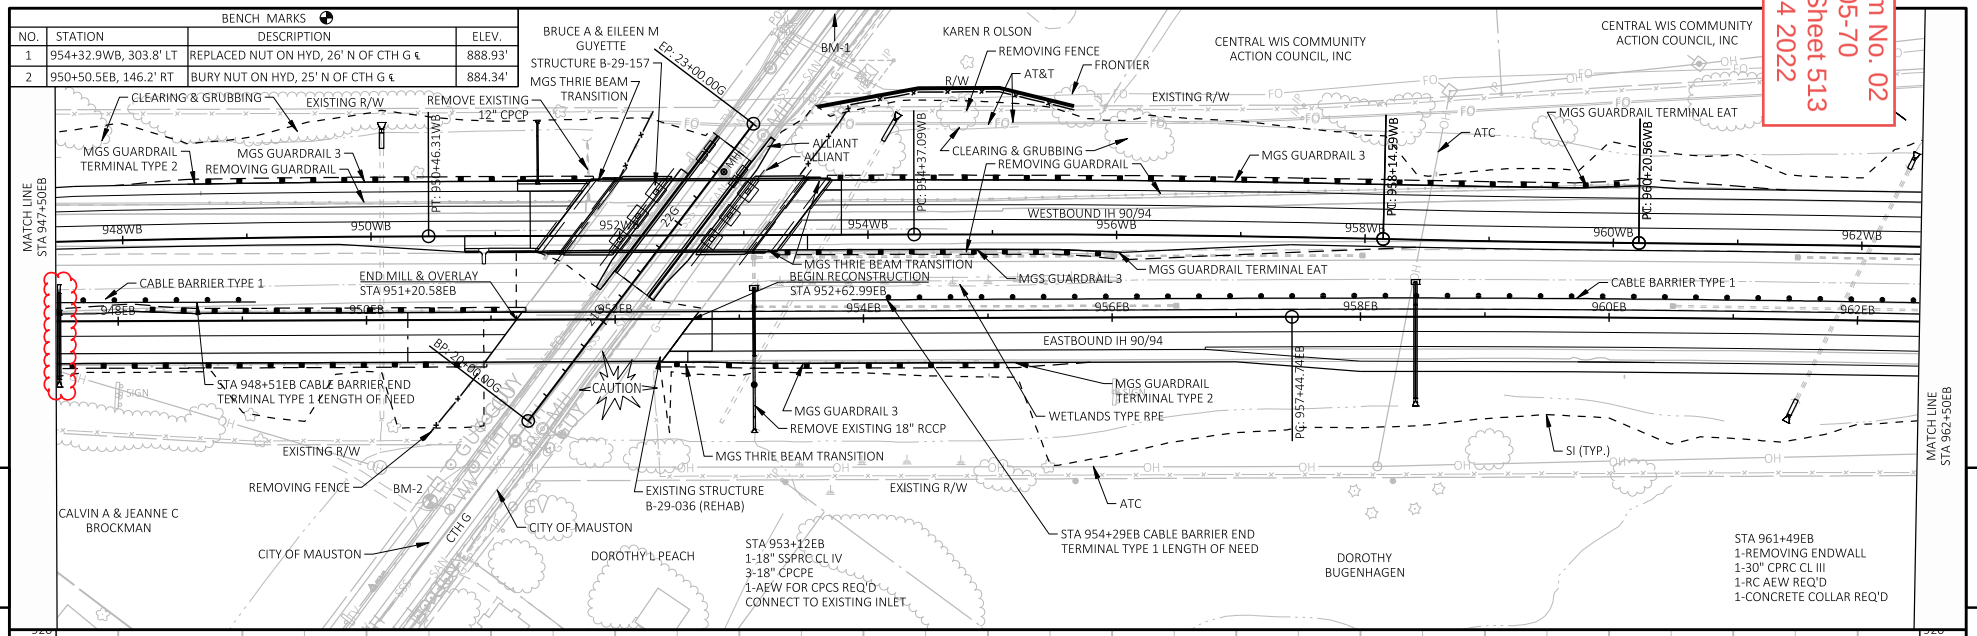

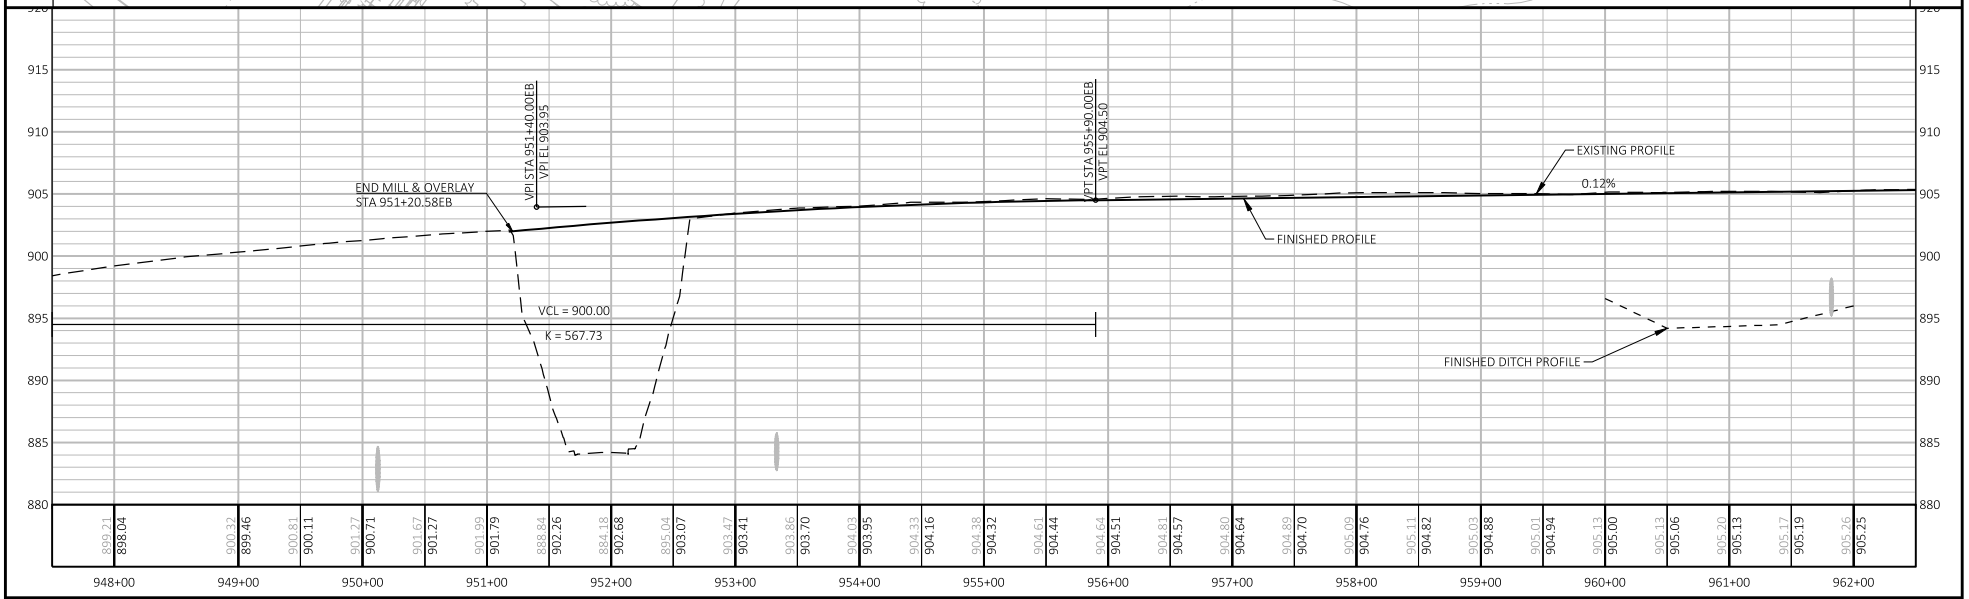



PROJECT NO: 1016-05-70	HWY: IH 90/94	COUNTY: JUNEAU	PLAN AND PROFILE: EB I90_94 'EB'	SHEET 513 E

FILE NAME : P:\90S\93\00093367\CADD\SHEETSPLAN\1016-05-70 PLAN SHEETS\050101_PP.DWG
LAYOUT NAME - 050102-pp
PLOT DATE : 2/3/2022 7:26 AM
PLOT BY : CONNOR GIRTEN
PLOT NAME :
PLOT SCALE : 1 IN:100 FT

Addendum No. 02
ID 1016-05-70
Revised Sheet 520
February 4, 2022

BENCH MARKS			
NO.	STATION	DESCRIPTION	ELEV.
1	954+32.9WB, 303.8' LT	REPLACED NUT ON HYD, 26' N OF CTH G ℄	888.93'
2	950+50.5EB, 146.2' RT	BURY NUT ON HYD, 25' N OF CTH G ℄	884.34'

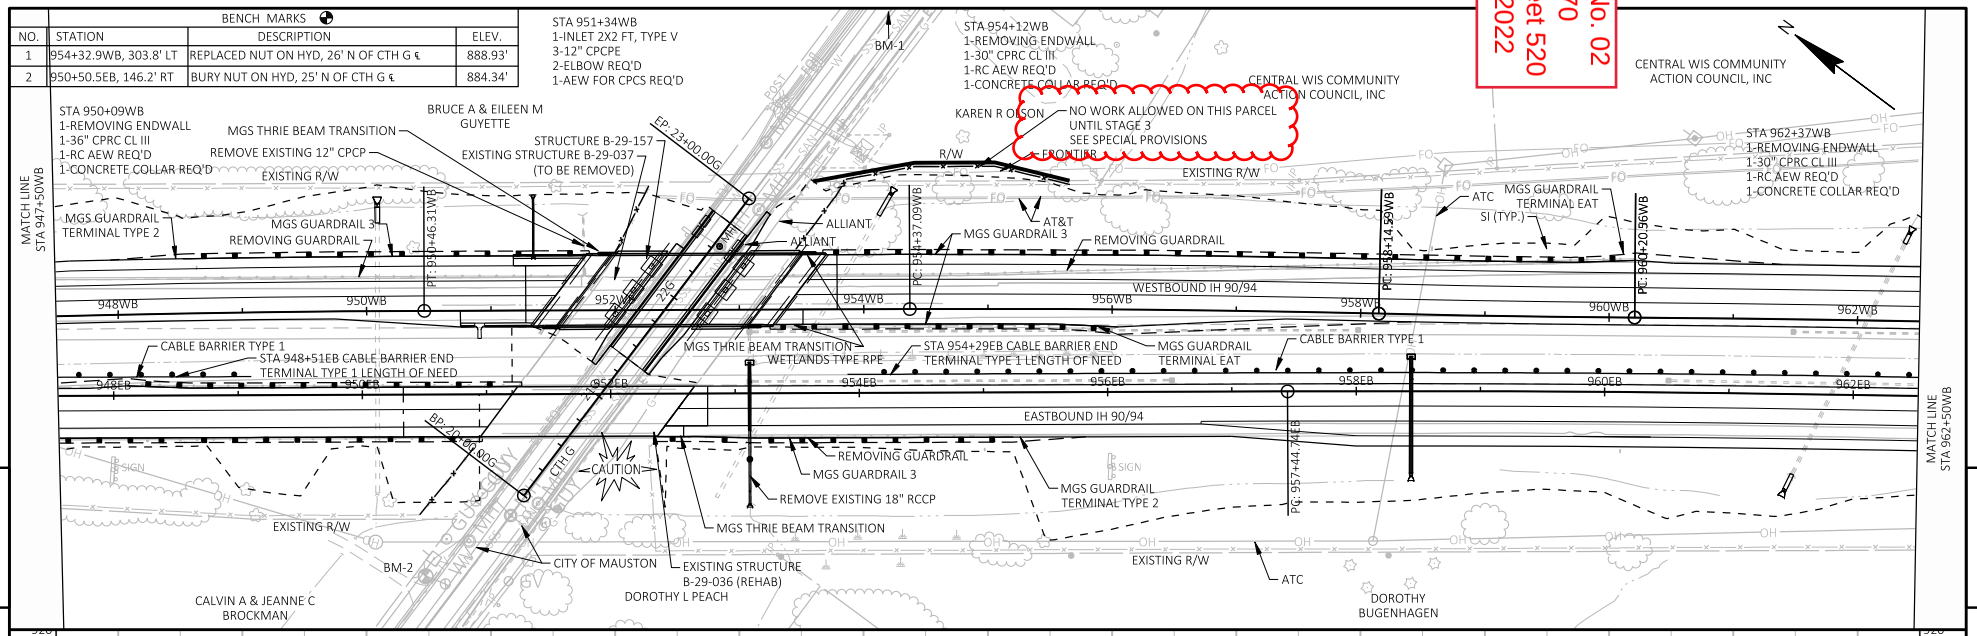


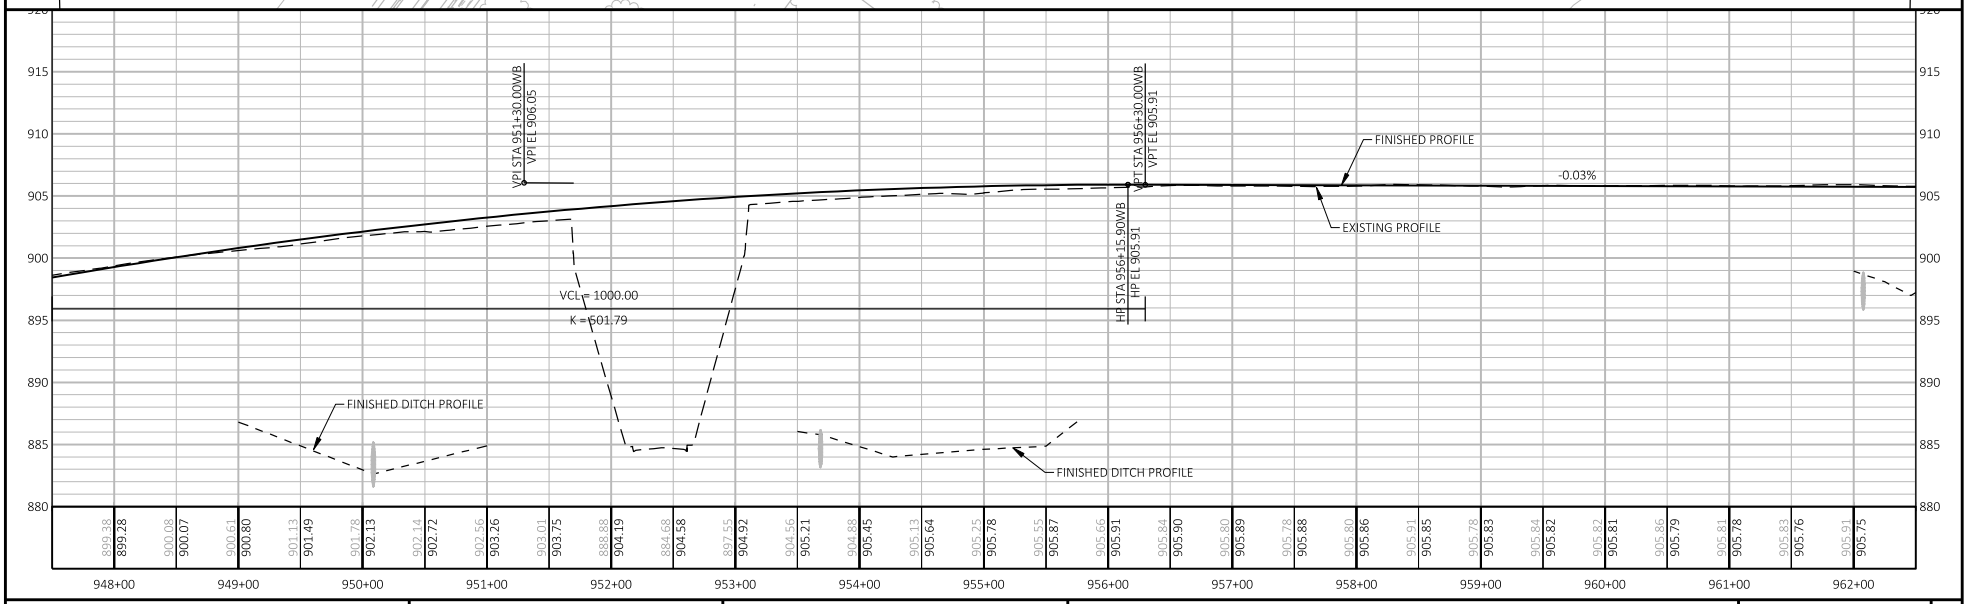


PROJECT NO: 1016-05-70	HWY: IH 90/94	COUNTY: JUNEAU	PLAN AND PROFILE: WB I90_94 'WB'	SHEET 520	E

FILE NAME : P:\90S\93\00093367\CADD\SHEETSPLAN\1016-05-70 PLAN SHEETS\050101_PP.DWG
LAYOUT NAME - 050109-pp
PLOT DATE : 2/3/2022 1:19 PM
PLOT BY : CONNOR GIRTEN
PLOT NAME :
PLOT SCALE : 1 IN:100 FT
WISDOT/CADDS SHEET 44

Addendum No. 02
ID 1016-05-70
Revised Sheet 521
February 4, 2022

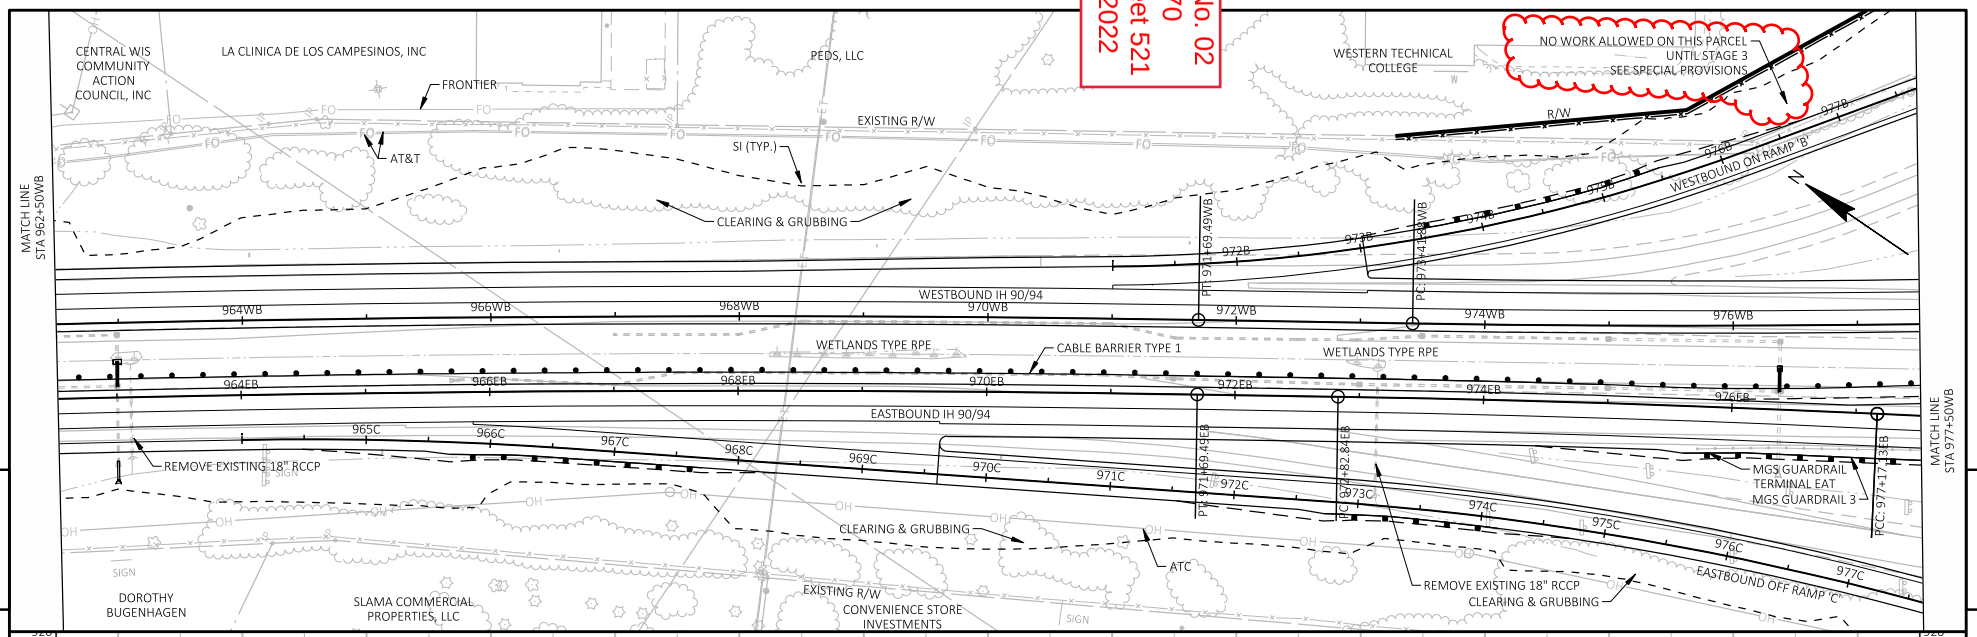


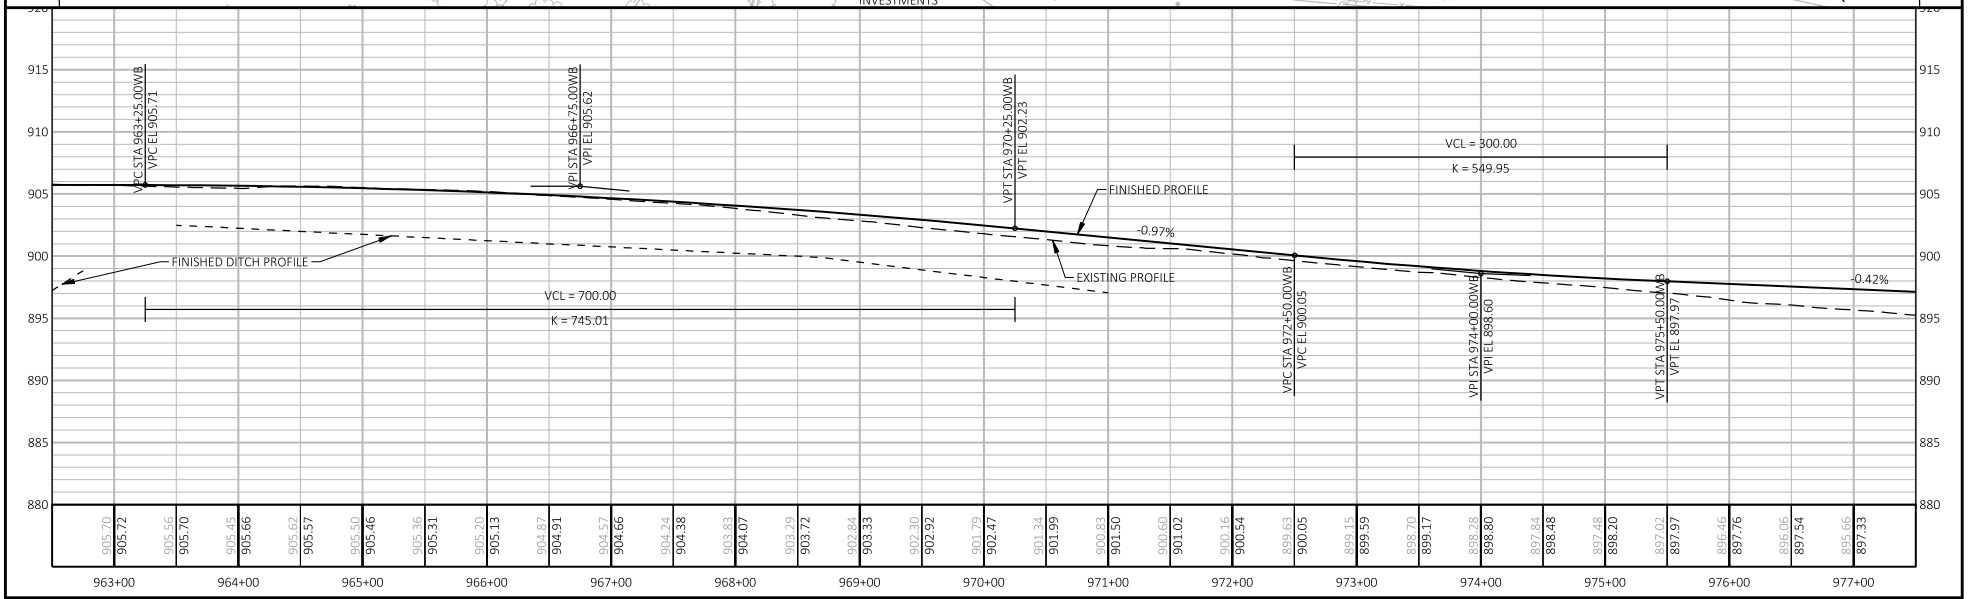


PROJECT NO: 1016-05-70	HWY: IH 90/94	COUNTY: JUNEAU	PLAN AND PROFILE: WB I90_94 'WB'	SHEET 521	E

FILE NAME : P:\90S\93\00093367\CADD\SHEETSPLAN\1016-05-70 PLAN SHEETS\050101_PP.DWG
LAYOUT NAME - 050110-pp
PLOT DATE : 2/3/2022 1:20 PM
PLOT BY : CONNOR GIRTEN
PLOT NAME :
PLOT SCALE : 1 IN:100 FT

Addendum No. 02
ID 1016-05-70
Revised Sheet 528
February 4, 2022

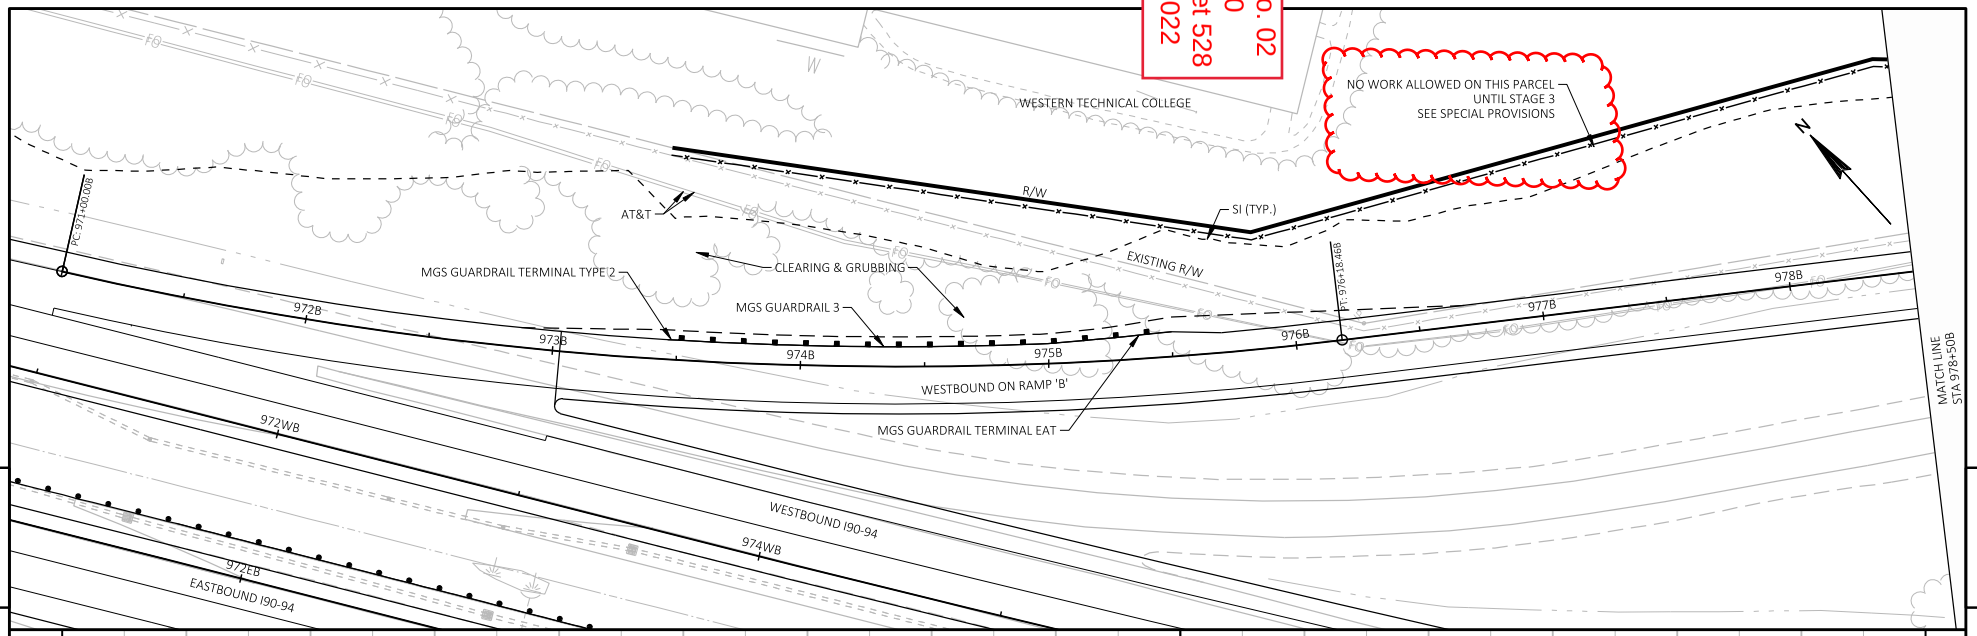


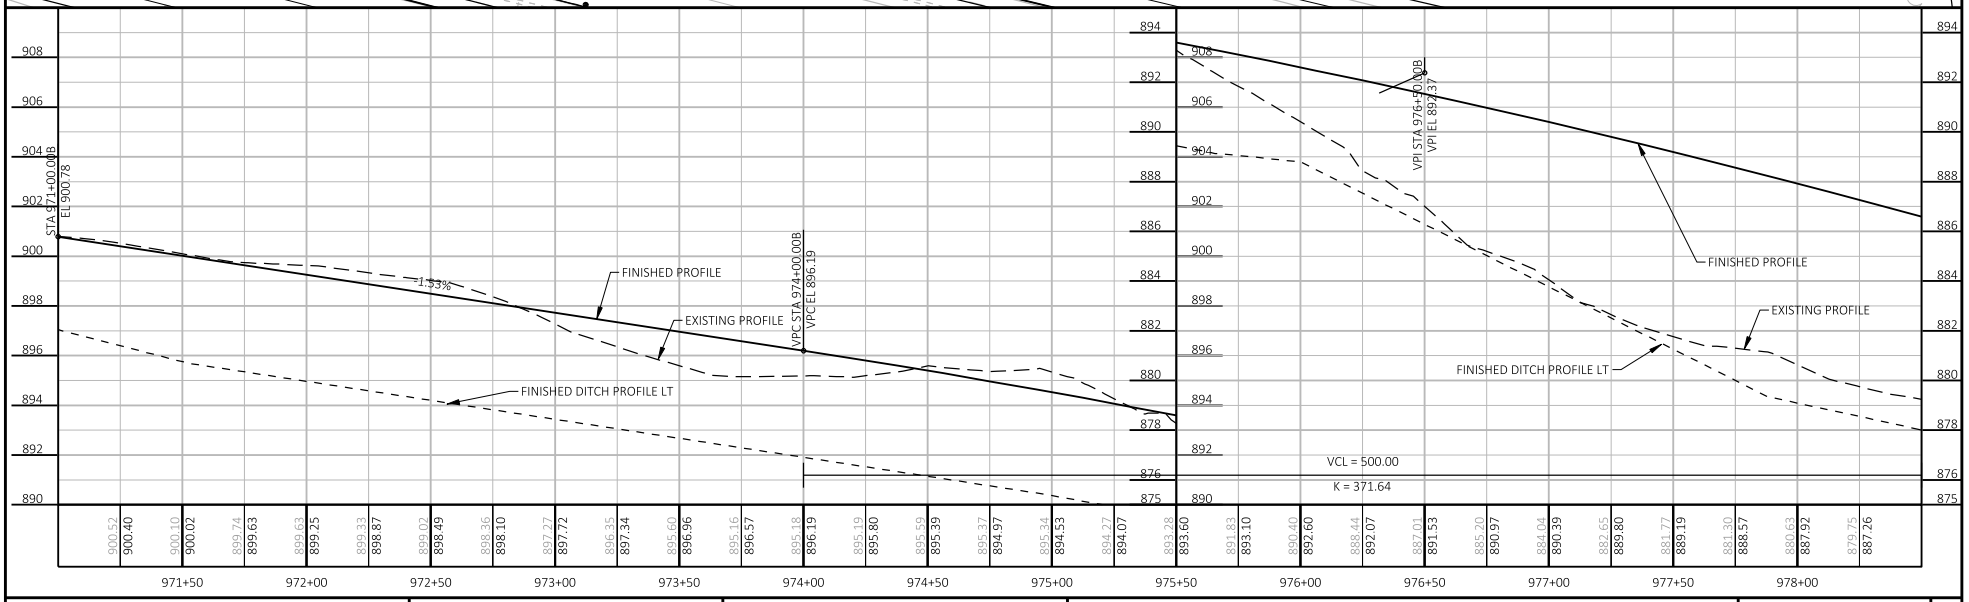


PROJECT NO: 1016-05-70	HWY: IH 90/94	COUNTY: JUNEAU	PLAN AND PROFILE: WB ON RAMP 'B'	SHEET 528	E


FILE NAME : P:\90S\93\00093367\CADD\SHEETSPLAN\1016-05-70 PLAN SHEETS\050101_PP.DWG
LAYOUT NAME - 050134_pp
PLOT DATE : 2/3/2022 1:49 PM
PLOT BY : CONNOR GIRTEN
PLOT NAME :
PLOT SCALE : 1 IN:50 FT
WISDOT/CADDS SHEET 44

Addendum No. 02
ID 1016-05-70
Revised Sheet 529
February 4, 2022

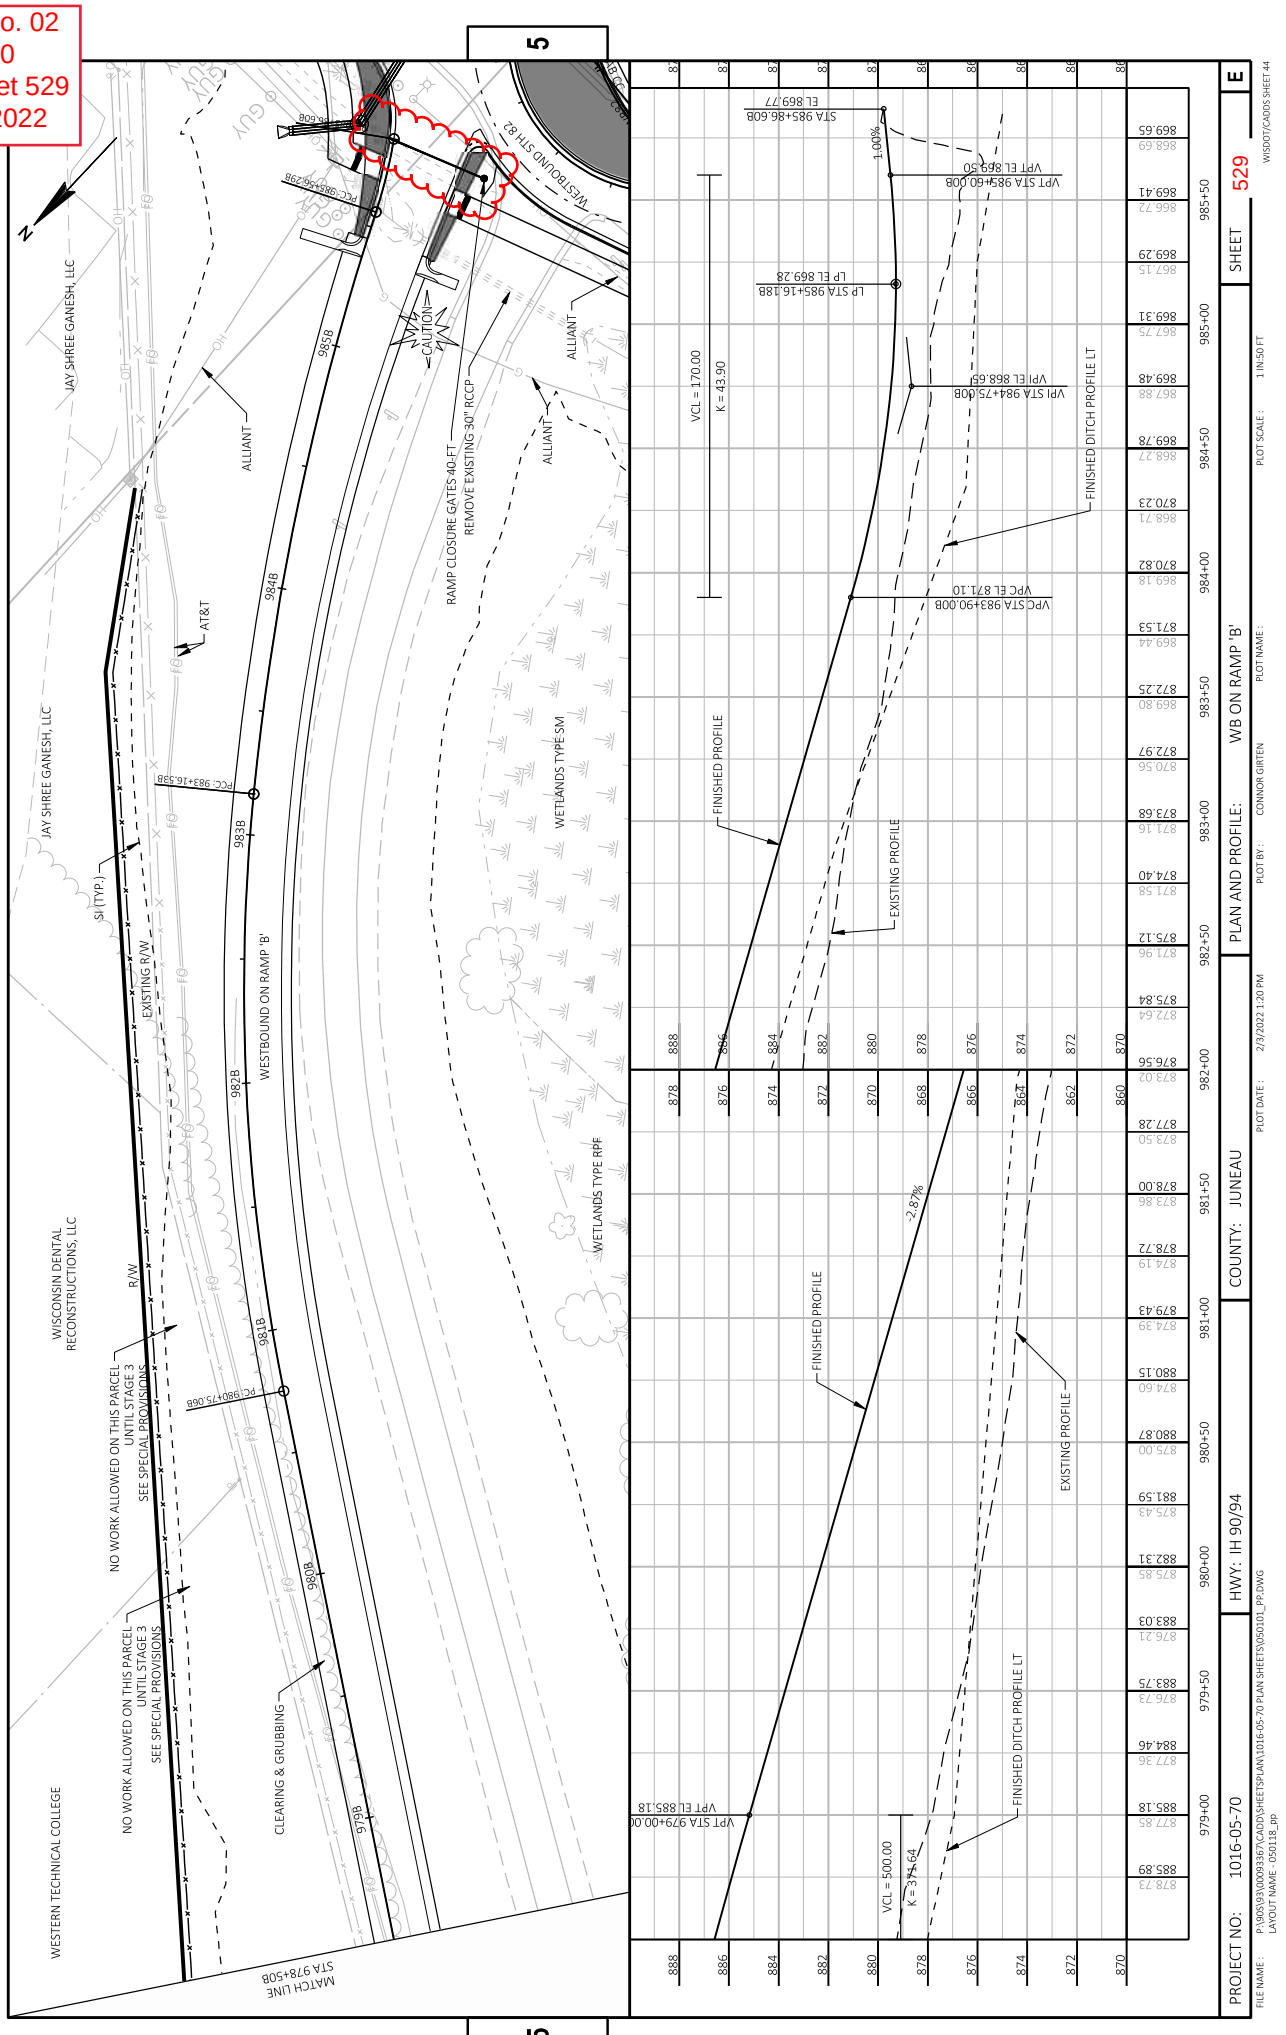

BENCH MARKS			
NO.	STATION	DESCRIPTION	ELEV.
5	983+31.3EB, 287.5' RT	BURY NUT ON HYD, SW QUAD I 90 & STH 82	868.69

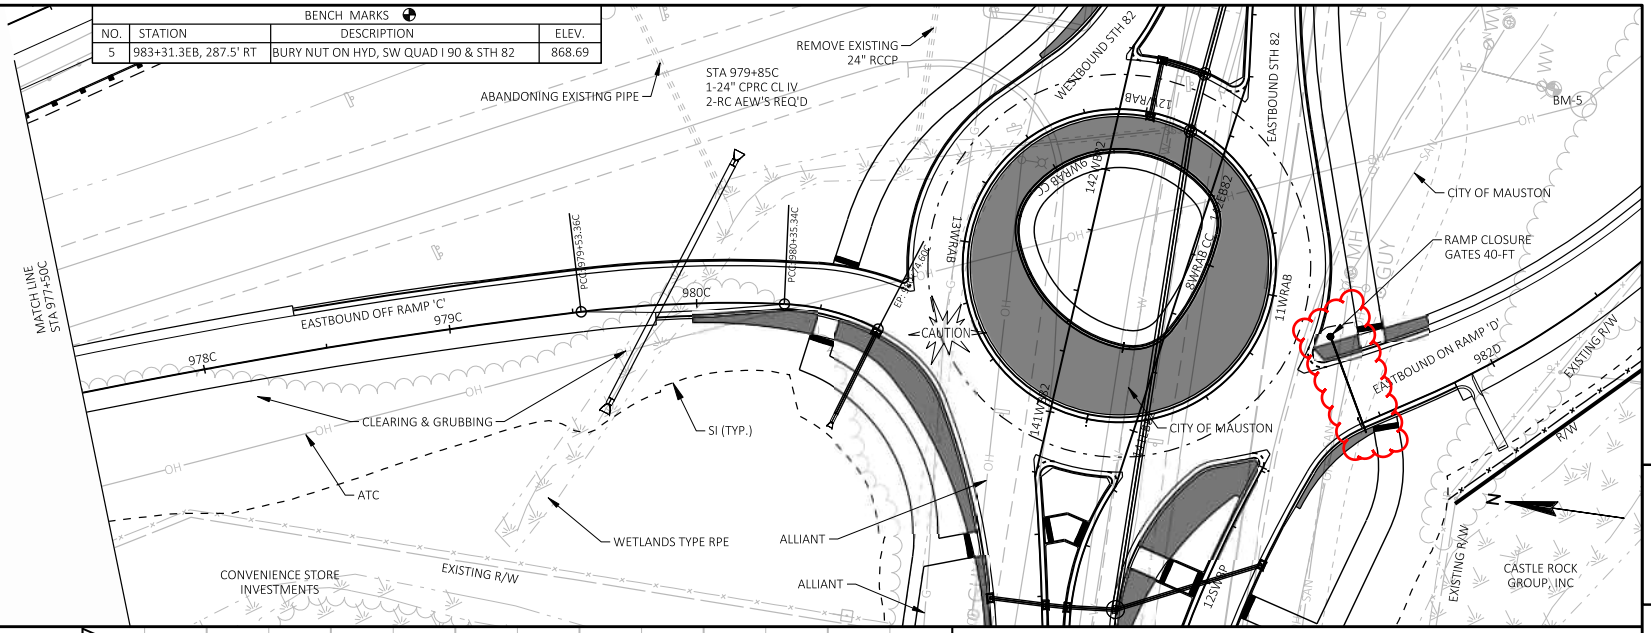

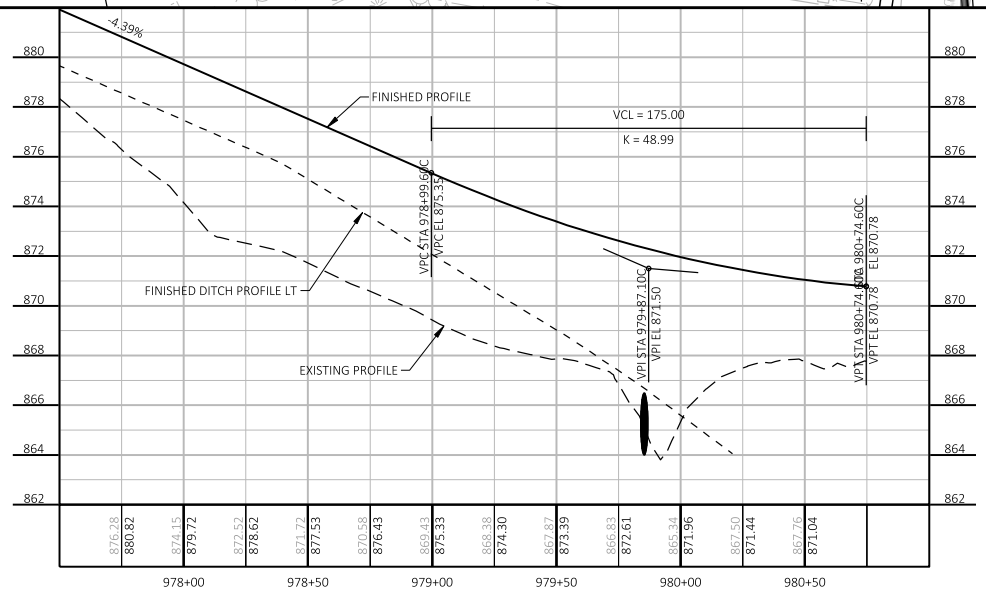


Addendum No. 02
ID 1016-05-70
Revised Sheet 532
February 4, 2022


PROJECT NO: 1016-05-70	HWY: IH 90/94	COUNTY: JUNEAU	PLAN AND PROFILE: EB OFF RAMP 'C'	SHEET 532	E

FILE NAME : P:\90S\93\00093367\CADD\SHEETSPLAN\1016-05-70 PLAN SHEETS\050101_PP.DWG
LAYOUT NAME - 050121_pp
PLOT DATE : 2/3/2022 1:21 PM
PLOT BY : CONNOR GIRTEN
PLOT NAME :
PLOT SCALE : 1 IN:50 FT

Addendum No. 02
ID 1016-05-70
Revised Sheet 533
February 4, 2022


BENCH MARKS			
NO.	STATION	DESCRIPTION	ELEV.
5	983+31.3EB, 287.5' RT	BURY NUT ON HYD, SW QUAD I 90 & STH 82	868.69

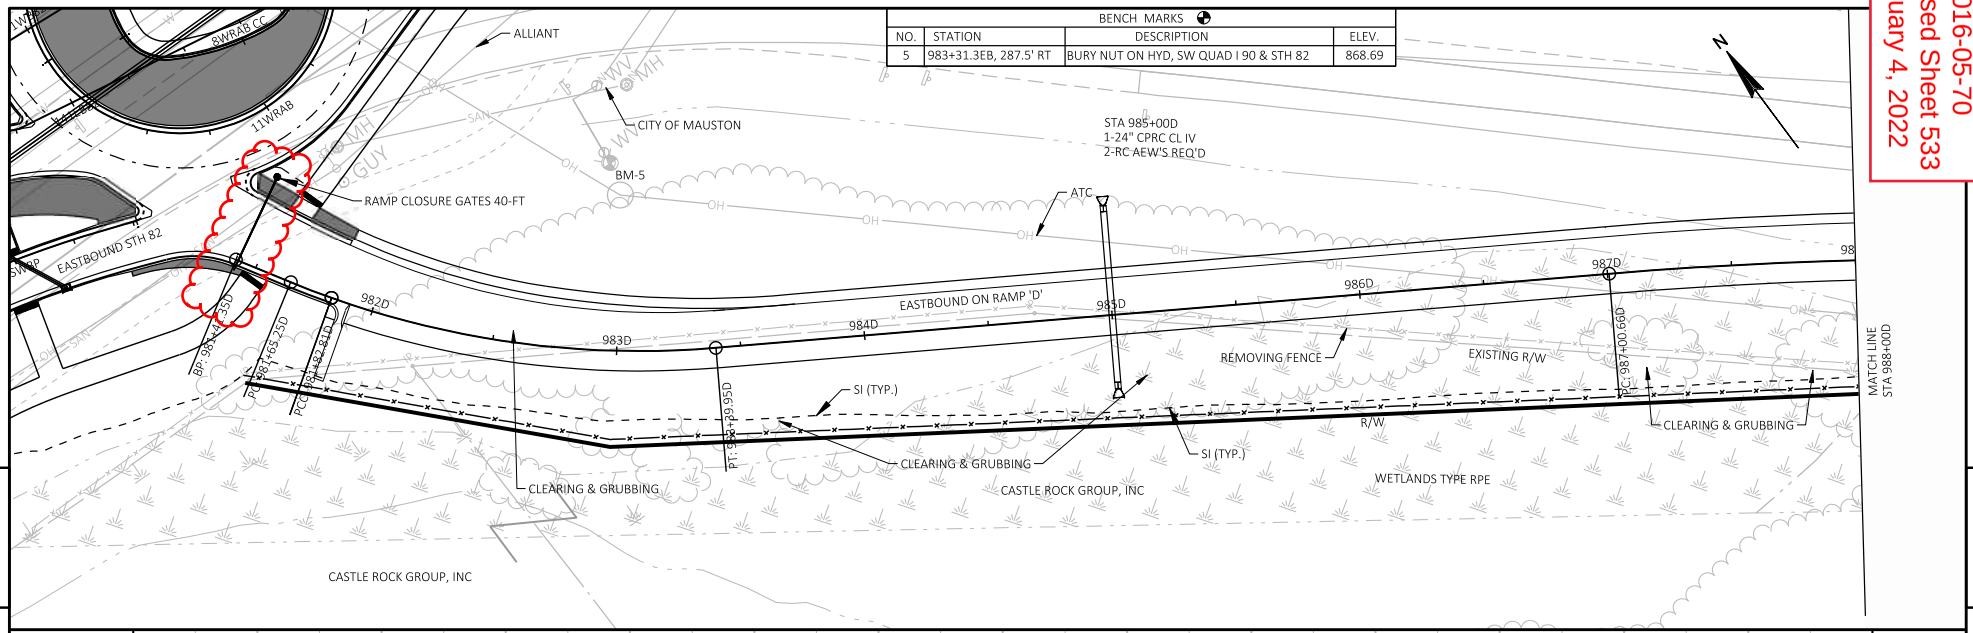


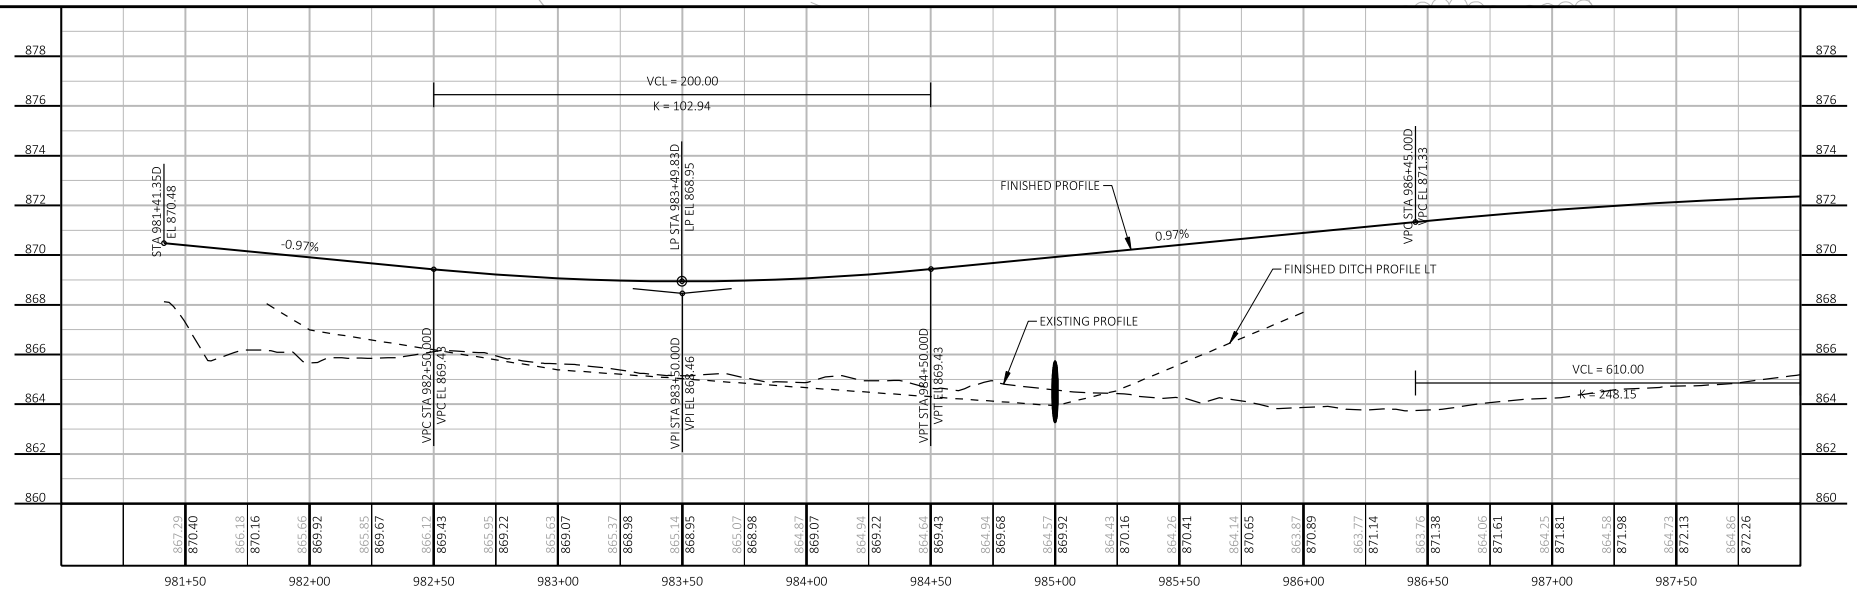

PROJECT NO: 1016-05-70	HWY: IH 90/94	COUNTY: JUNEAU	PLAN AND PROFILE: EB ON RAMP 'D'	SHEET 533	E

FILE NAME : P:\90S\93\00093367\CADD\SHEETSPLAN\1016-05-70 PLAN SHEETS\050101_PP.DWG
LAYOUT NAME - 050122_pp
PLOT DATE : 2/3/2022 1:22 PM
PLOT BY : CONNOR GIRTEN
PLOT NAME :
PLOT SCALE : 1 IN:50 FT
WISDOT/CADDS SHEET 44

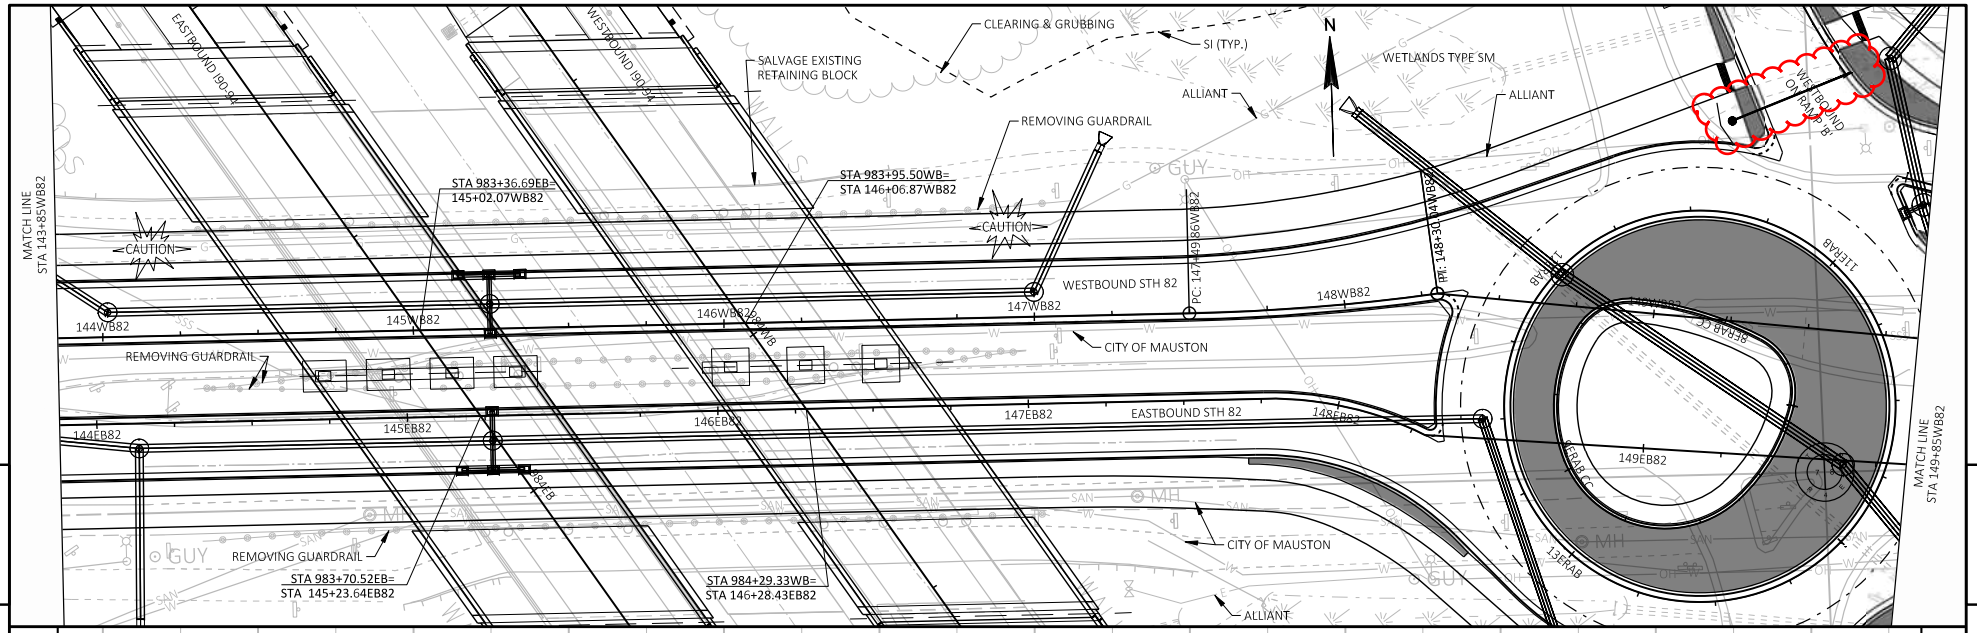


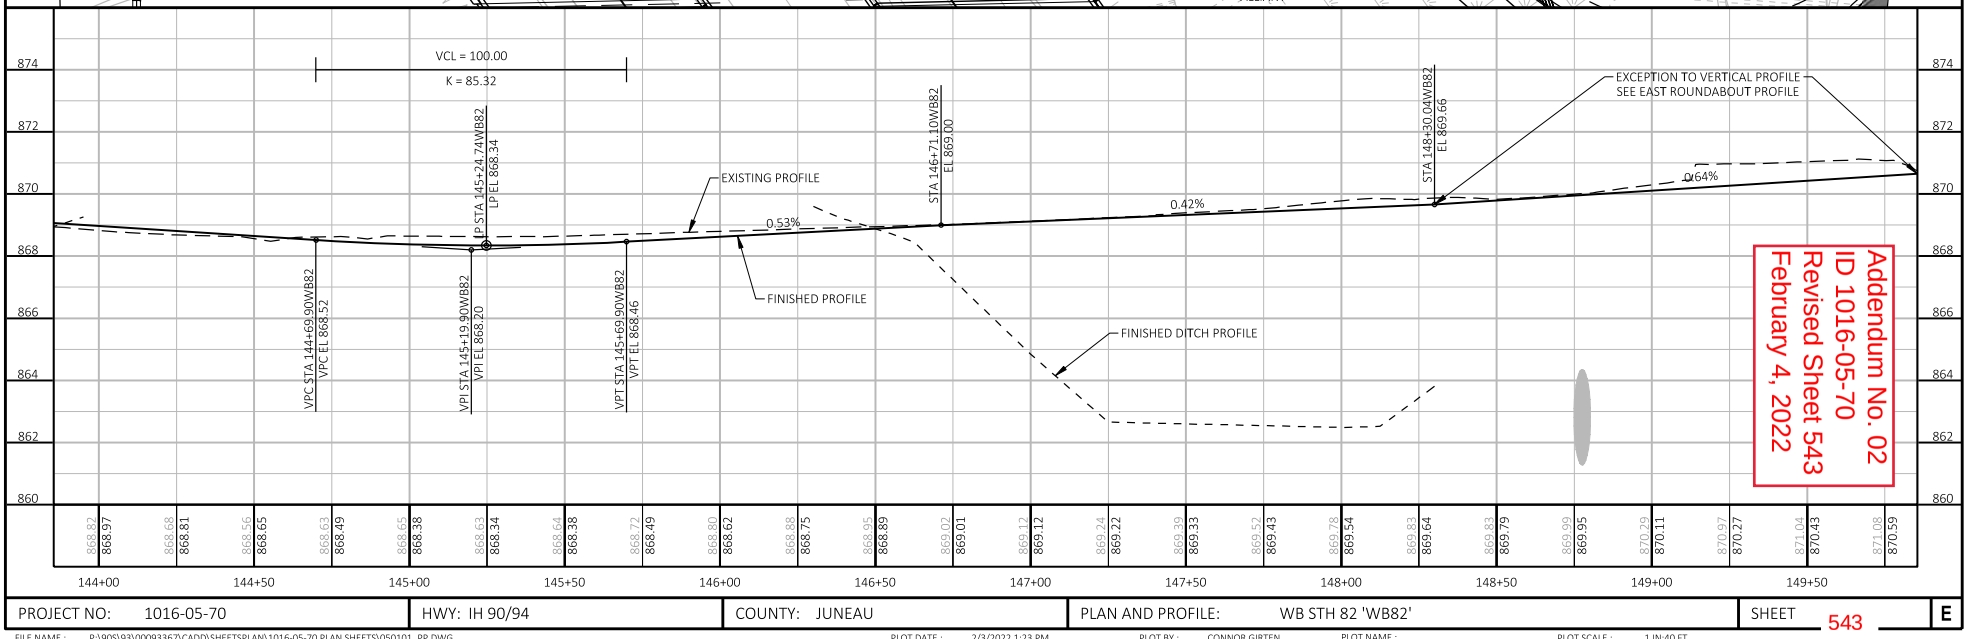


Addendum No. 02
ID 1016-05-70
Revised Sheet 543
February 4, 2022

PROJECT NO: 1016-05-70	HWY: IH 90/94	COUNTY: JUNEAU	PLAN AND PROFILE: WB STH 82 'WB82'	SHEET 543	E

FILE NAME : P:\90S\93\00093367\CADD\SHEETSPLAN\1016-05-70 PLAN SHEETS\050101_PP.DWG
LAYOUT NAME - 050132_pp
PLOT DATE : 2/3/2022 1:23 PM
PLOT BY : CONNOR GIRTEN
PLOT NAME :
PLOT SCALE : 1 IN:40 FT
WISDOT/CADDS SHEET 44

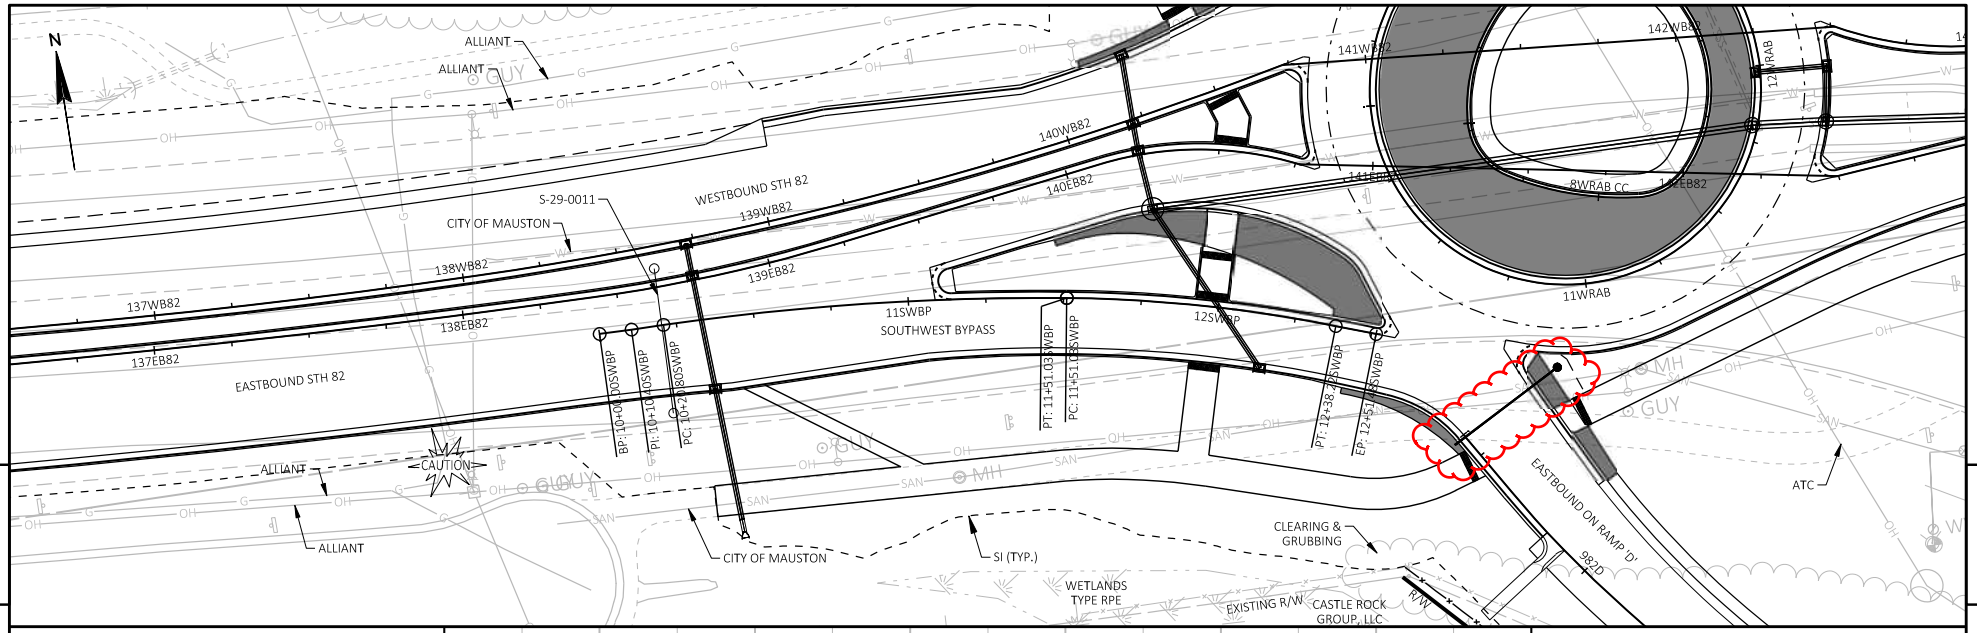


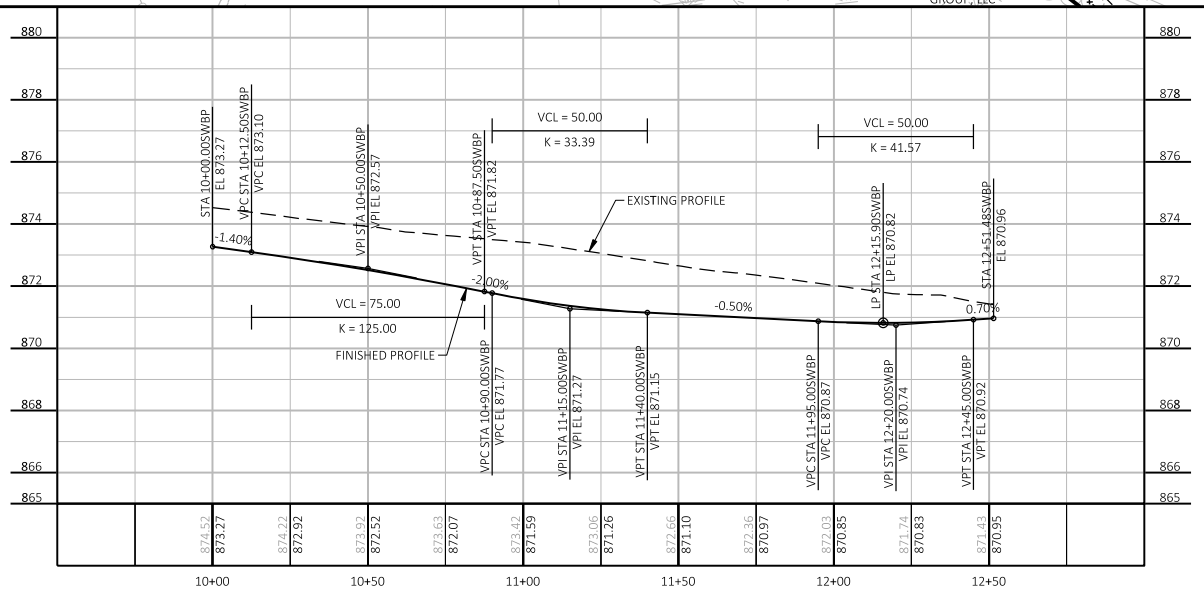


Addendum No. 02
ID 1016-05-70
Revised Sheet 548
February 4, 2022

PROJECT NO: 1016-05-70	HWY: IH 90/94	COUNTY: JUNEAU	PLAN AND PROFILE: SOUTHWEST BYPASS LANE 'SWBP'	SHEET 548	E

FILE NAME : P:\90S\93\00093367\CADD\SHEETSPLAN\1016-05-70 PLAN SHEETS\050101_PP.DWG
LAYOUT NAME - 050137_pp
PLOT DATE : 2/3/2022 1:25 PM
PLOT BY : CONNOR GIRTEN
PLOT NAME :
PLOT SCALE : 1 IN:40 FT
...JT/CADDS SHEET 44

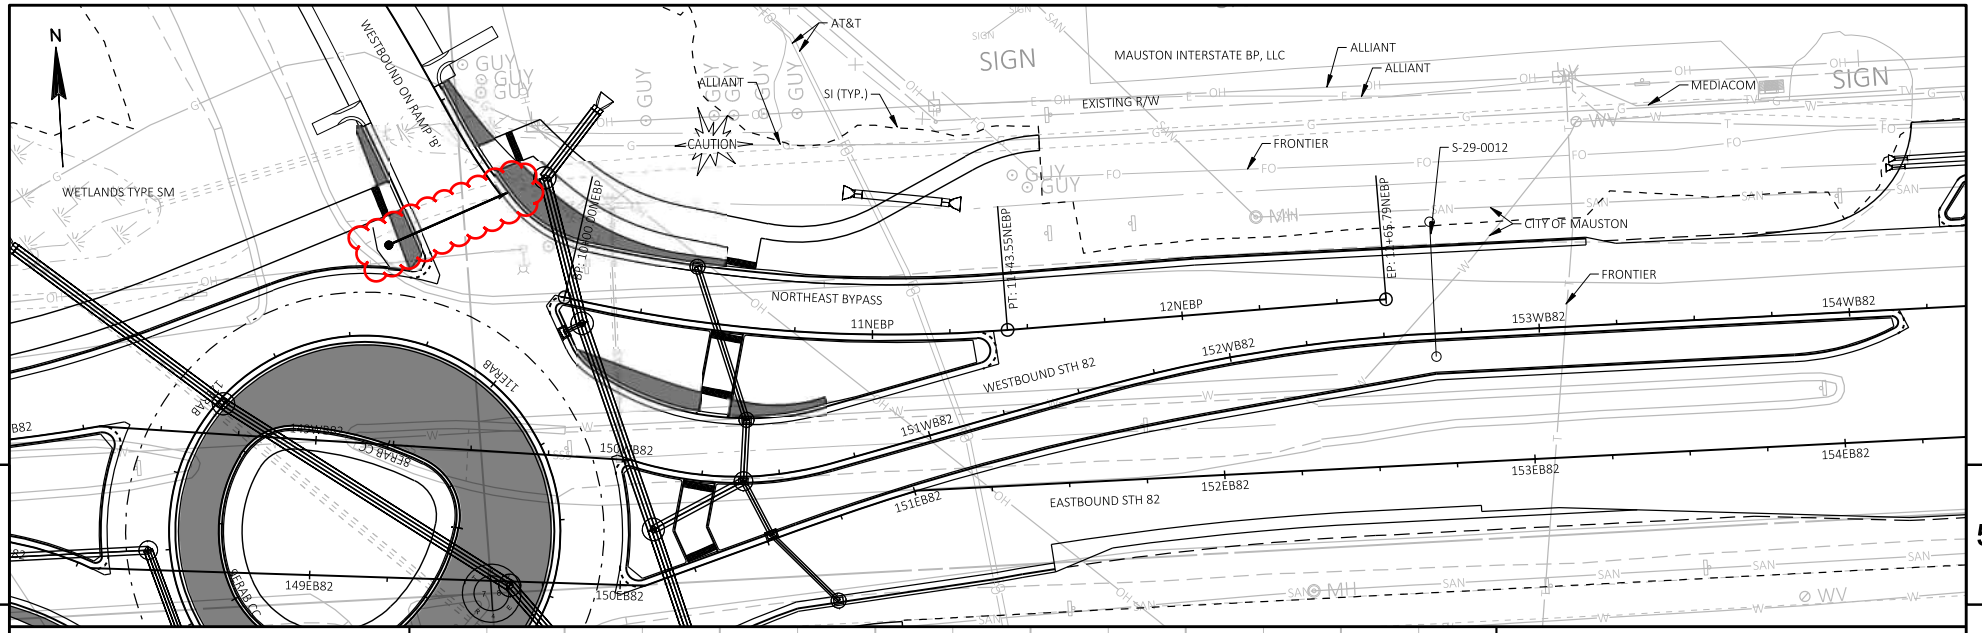


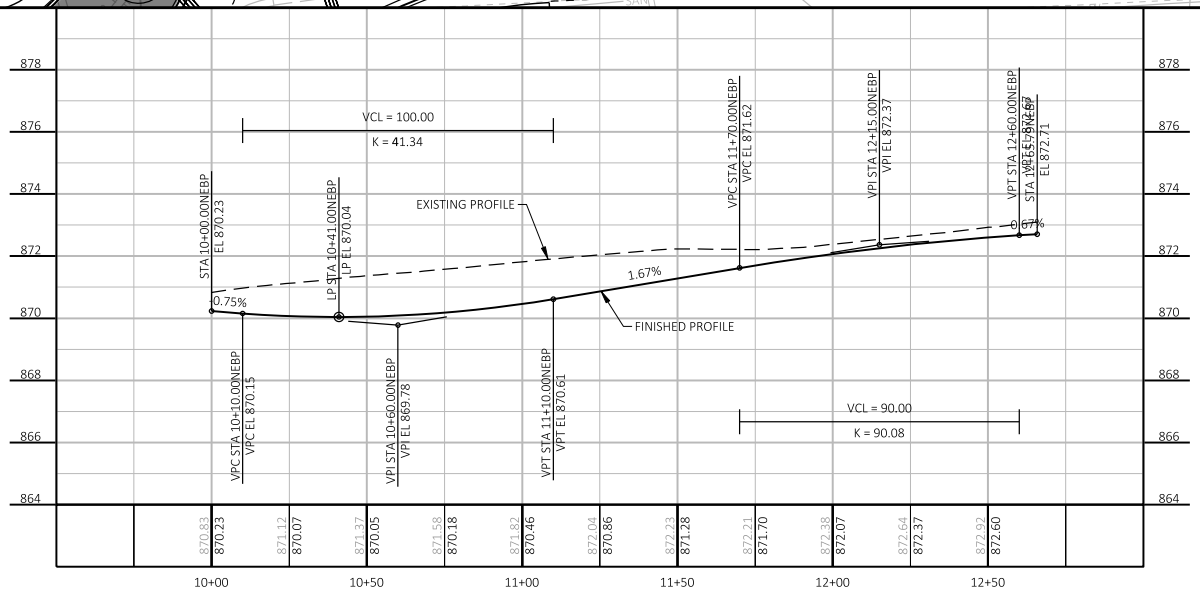


Addendum No. 02
ID 1016-05-70
Revised Sheet 549
February 4, 2022

PROJECT NO: 1016-05-70	HWY: IH 90/94	COUNTY: JUNEAU	PLAN AND PROFILE: NORTHEAST BYPASS LANE 'NEBP'	SHEET 549	E

FILE NAME : P:\90S\93\00093367\CADD\SHEETSPLAN\1016-05-70 PLAN SHEETS\050101_PP.DWG
LAYOUT NAME - 050138_pp
PLOT DATE : 2/3/2022 1:26 PM
PLOT BY : CONNOR GIRTEN
PLOT NAME :
PLOT SCALE : 1 IN:40 FT
WISDOT/CADDS SHEET 44

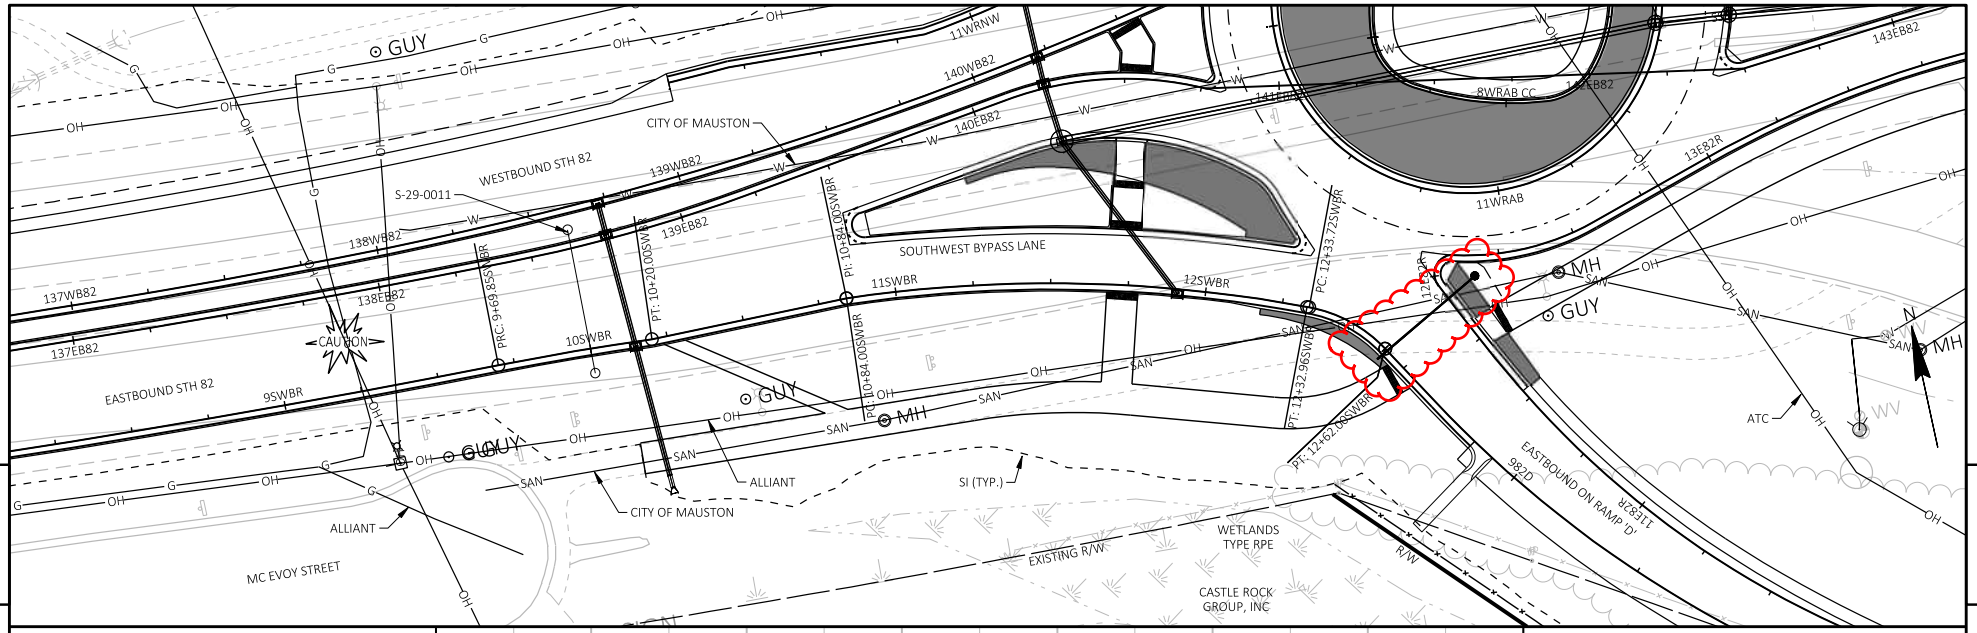


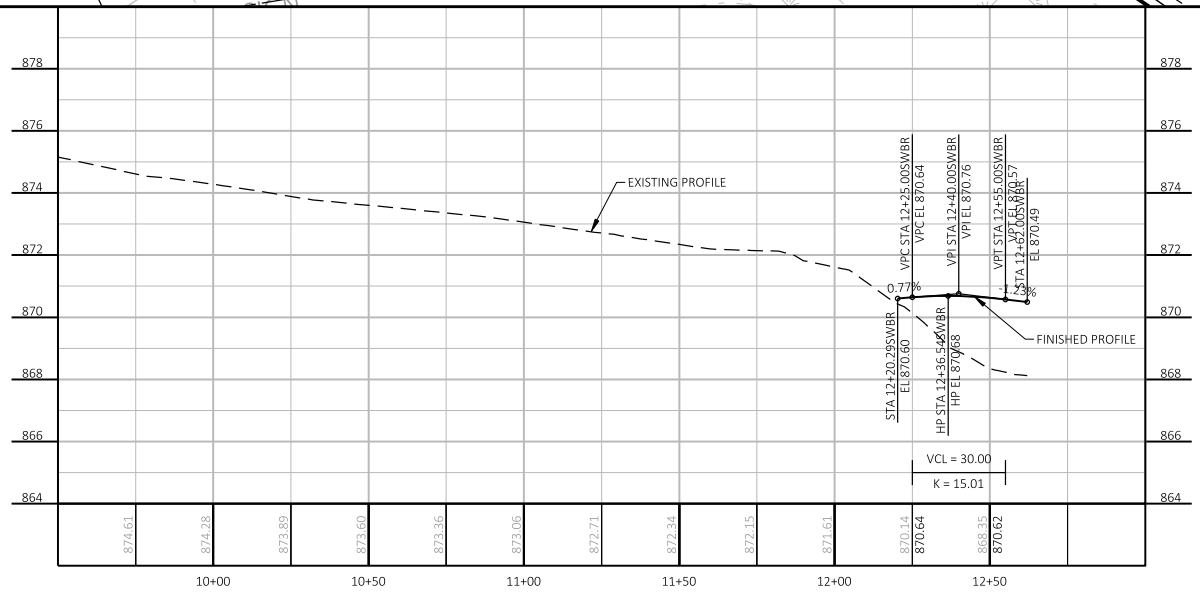


Addendum No. 02
ID 1016-05-70
Revised Sheet 575
February 4, 2022

PROJECT NO: 1016-05-70	HWY: IH 90/94	COUNTY: JUNEAU	PLAN AND PROFILE: WEST RAB SW QUAD BYPASS RT. EP 'SWBR'	SHEET 575	E

FILE NAME : P:\90S\93\00093367\CADD\SHEETSPLAN\1016-05-70 PLAN SHEETS\050143_PP-RAB CURBS.DWG
LAYOUT NAME - 050162-pp
PLOT DATE : 2/3/2022 1:36 PM
PLOT BY : CONNOR GIRTEN
PLOT NAME :
PLOT SCALE : 1 IN:40 FT

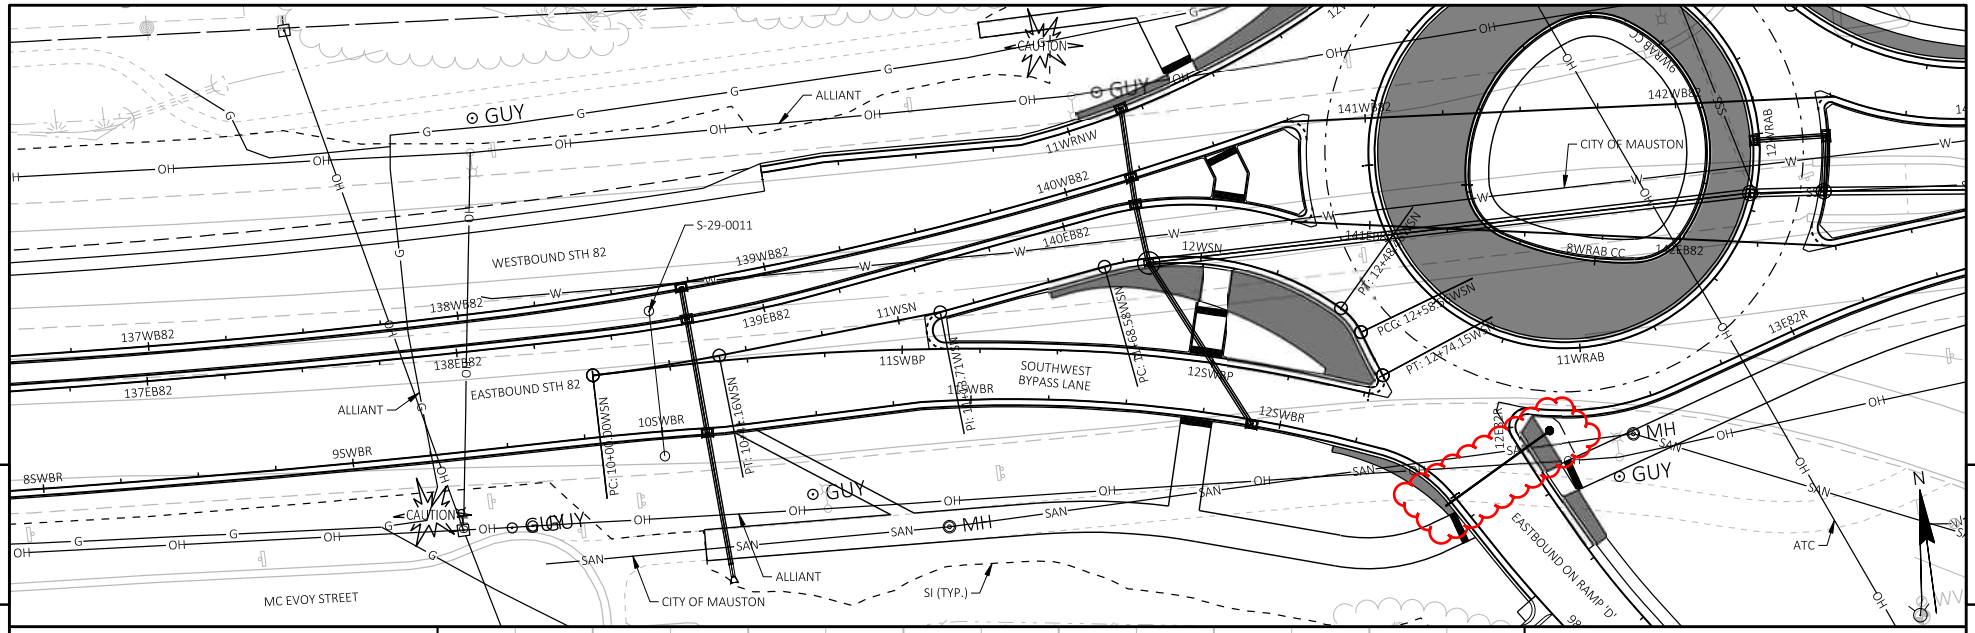


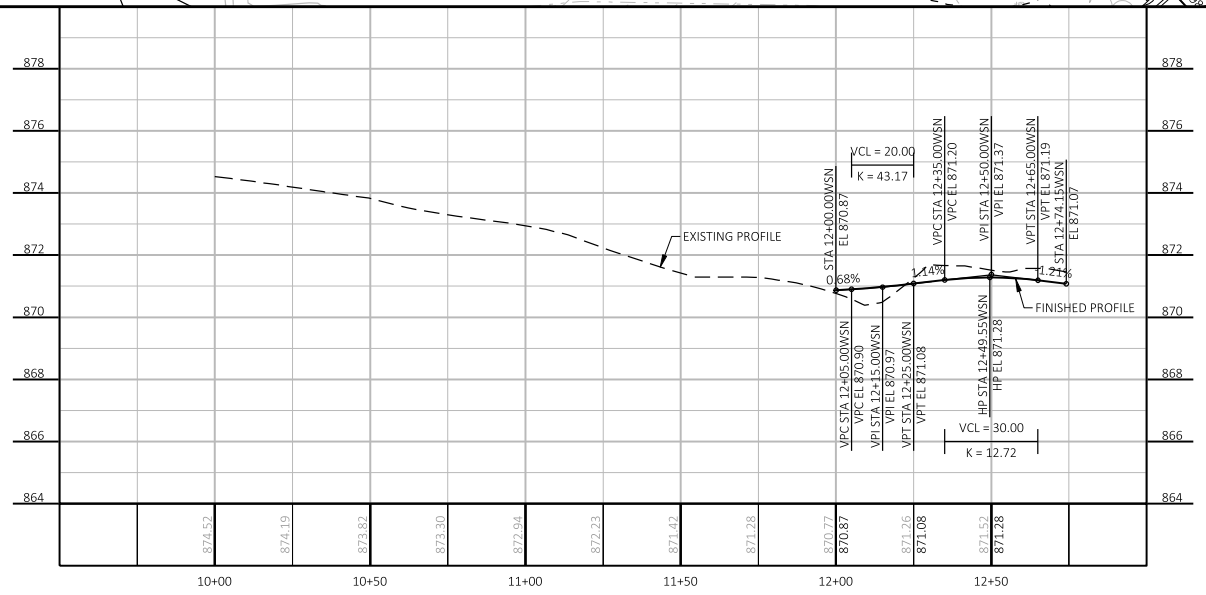


Addendum No. 02
ID 1016-05-70
Revised Sheet 576
February 4, 2022

PROJECT NO: 1016-05-70	HWY: IH 90/94	COUNTY: JUNEAU	PLAN AND PROFILE: WEST RAB SW QUAD BYPASS ISLAND NORTH 'WSN'	SHEET 576	E

FILE NAME : P:\90S\93\00093367\CADD\SHEETSPLAN\1016-05-70 PLAN SHEETS\050143_PP-RAB CURBS.DWG
LAYOUT NAME - 050163-pp
PLOT DATE : 2/3/2022 1:37 PM
PLOT BY : CONNOR GIRTEN
PLOT NAME :
PLOT SCALE : 1 IN:40 FT
WISDOT/CADDS SHEET 44

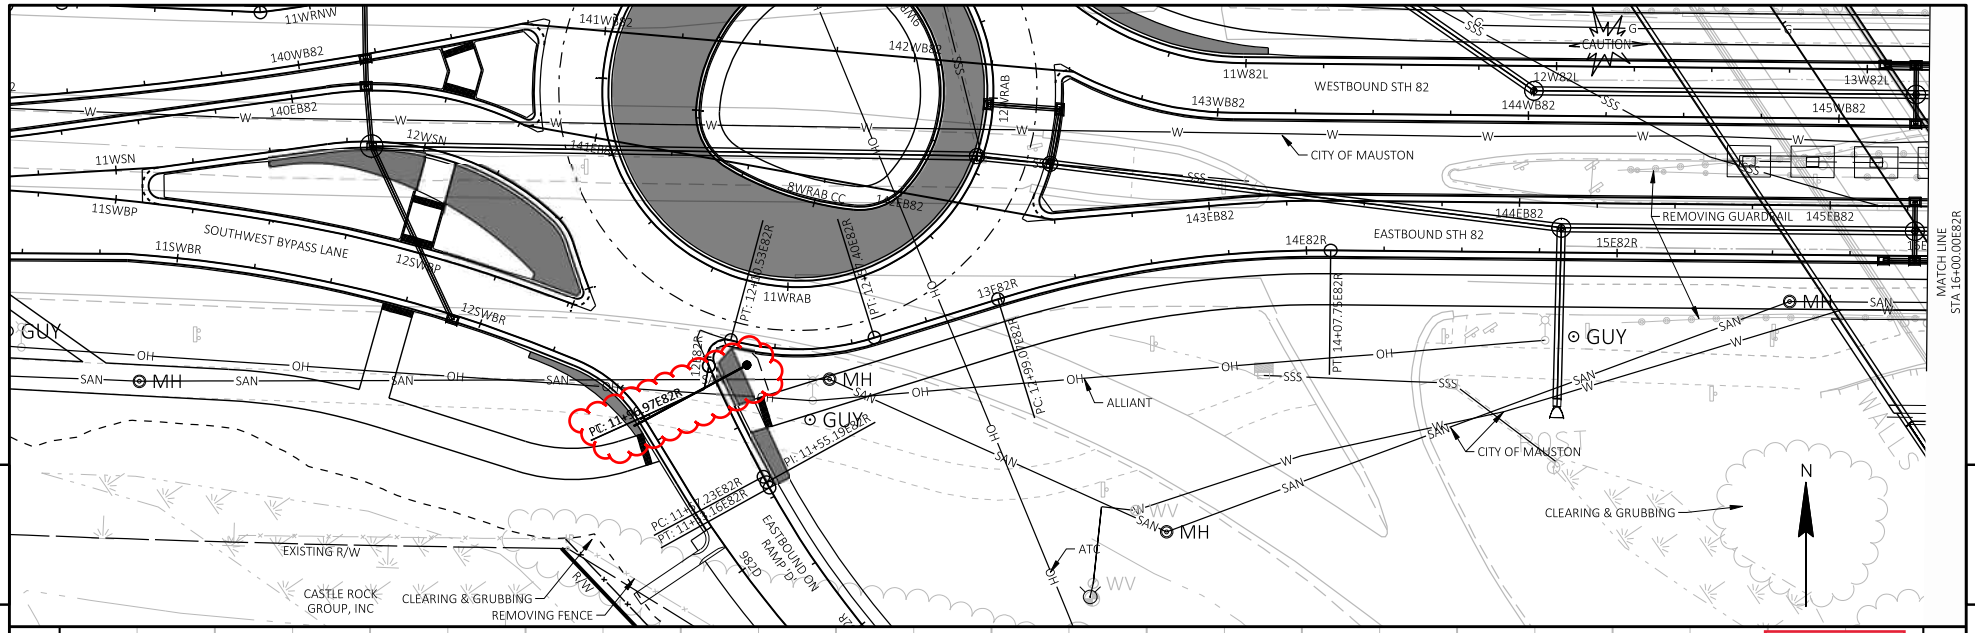


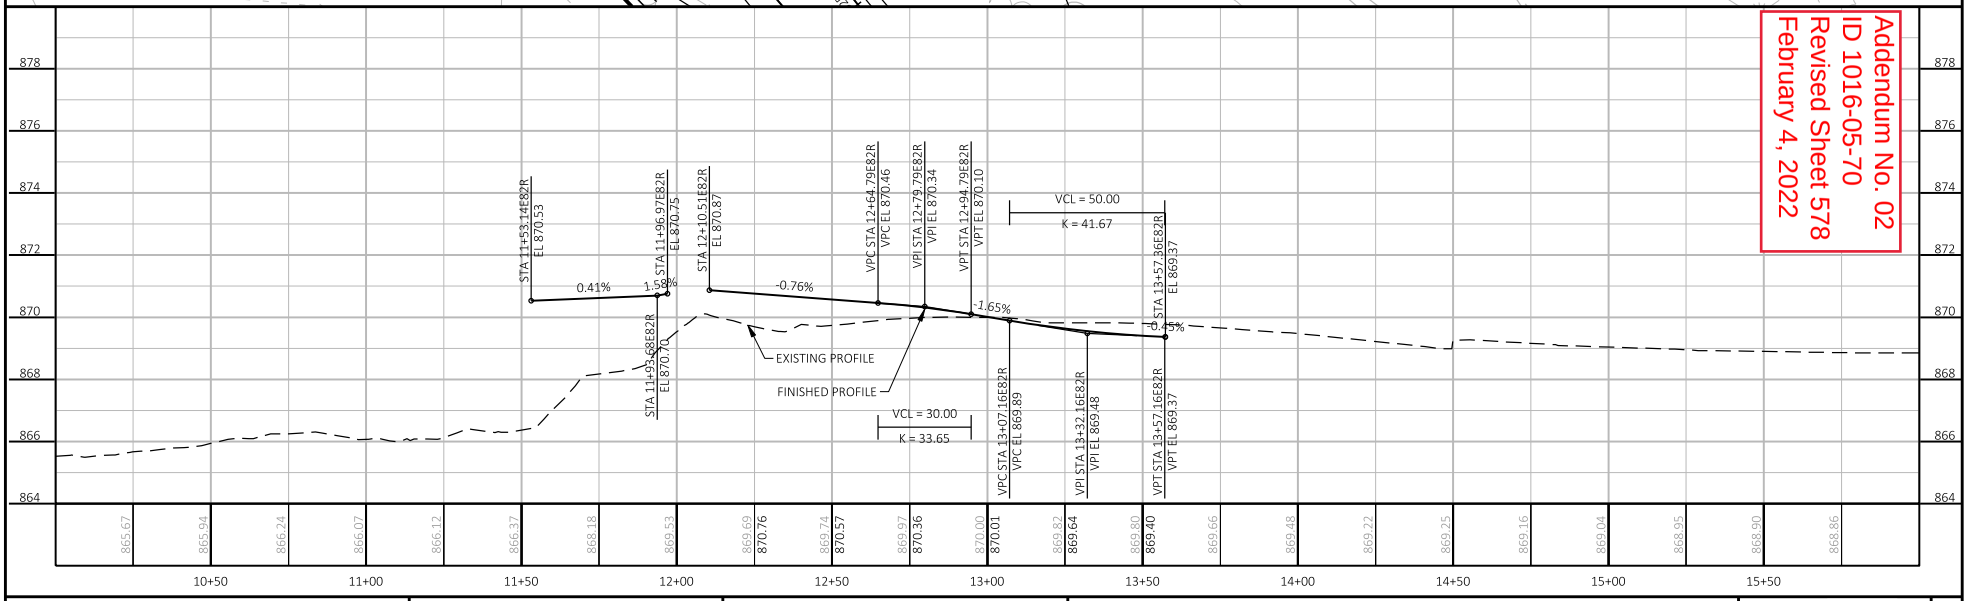


Addendum No. 02
ID 1016-05-70
Revised Sheet 578
February 4, 2022

PROJECT NO: 1016-05-70	HWY: IH 90/94	COUNTY: JUNEAU	PLAN AND PROFILE: STH 82 RIGHT FLAG UNDER BRIDGES 'E82R	SHEET 578	E

FILE NAME : P:\90S\93\00093367\CADD\SHEETSPLAN\1016-05-70 PLAN SHEETS\050143_PP-RAB CURBS.DWG
LAYOUT NAME - 050165-pp
PLOT DATE : 2/3/2022 1:38 PM
PLOT BY : CONNOR GIRTEN
PLOT NAME :
PLOT SCALE : 1 IN:40 FT
WISDOT/CADDS SHEET 44

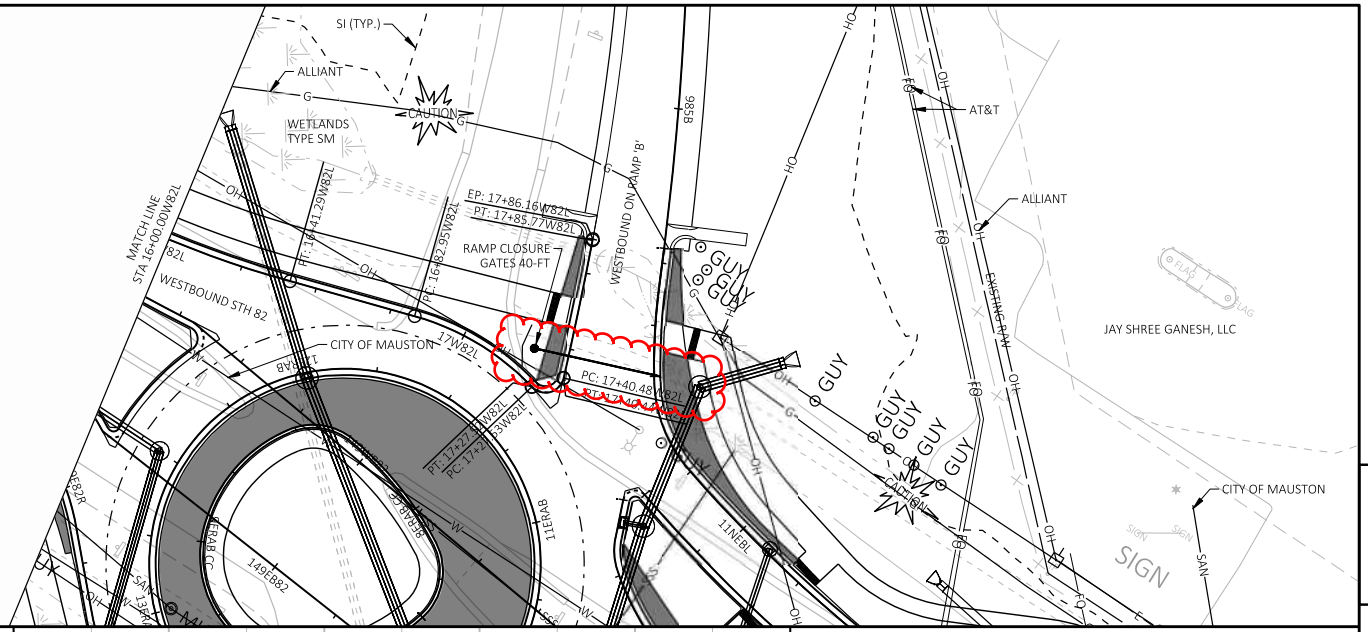


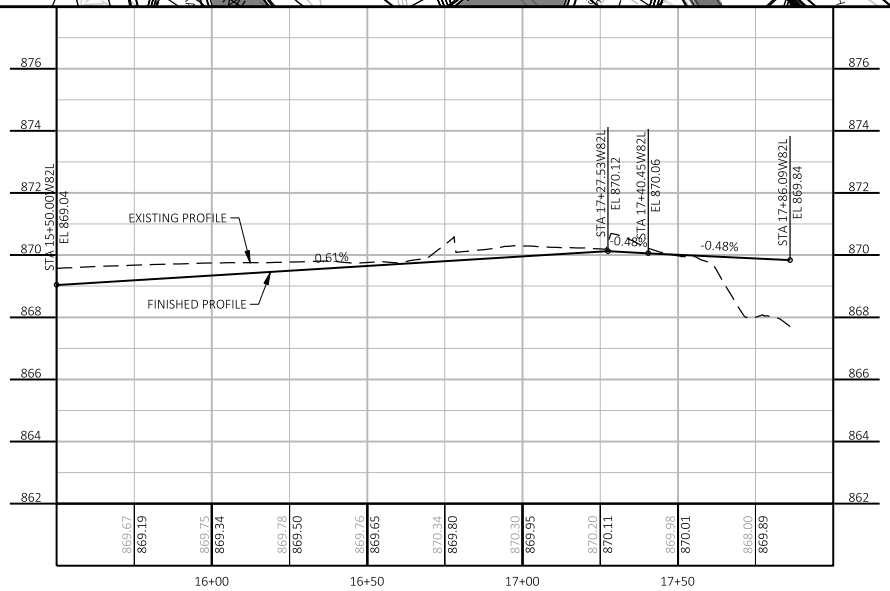


Addendum No. 02
ID 1016-05-70
Revised Sheet 581
February 4, 2022

PROJECT NO: 1016-05-70	HWY: IH 90/94	COUNTY: JUNEAU	PLAN AND PROFILE: STH 82 WB LEFT FLAG UNDER BRIDGES 'W82L'	SHEET 581	E

FILE NAME : P:\90S\93\00093367\CADD\SHEETSPLAN\1016-05-70 PLAN SHEETS\050143_PP-RAB CURBS.DWG
LAYOUT NAME - 050168-pp
PLOT DATE : 2/3/2022 1:39 PM
PLOT BY : CONNOR GIRTEN
PLOT NAME :
PLOT SCALE : 1 IN:40 FT
WISDOT/CADDS SHEET 44

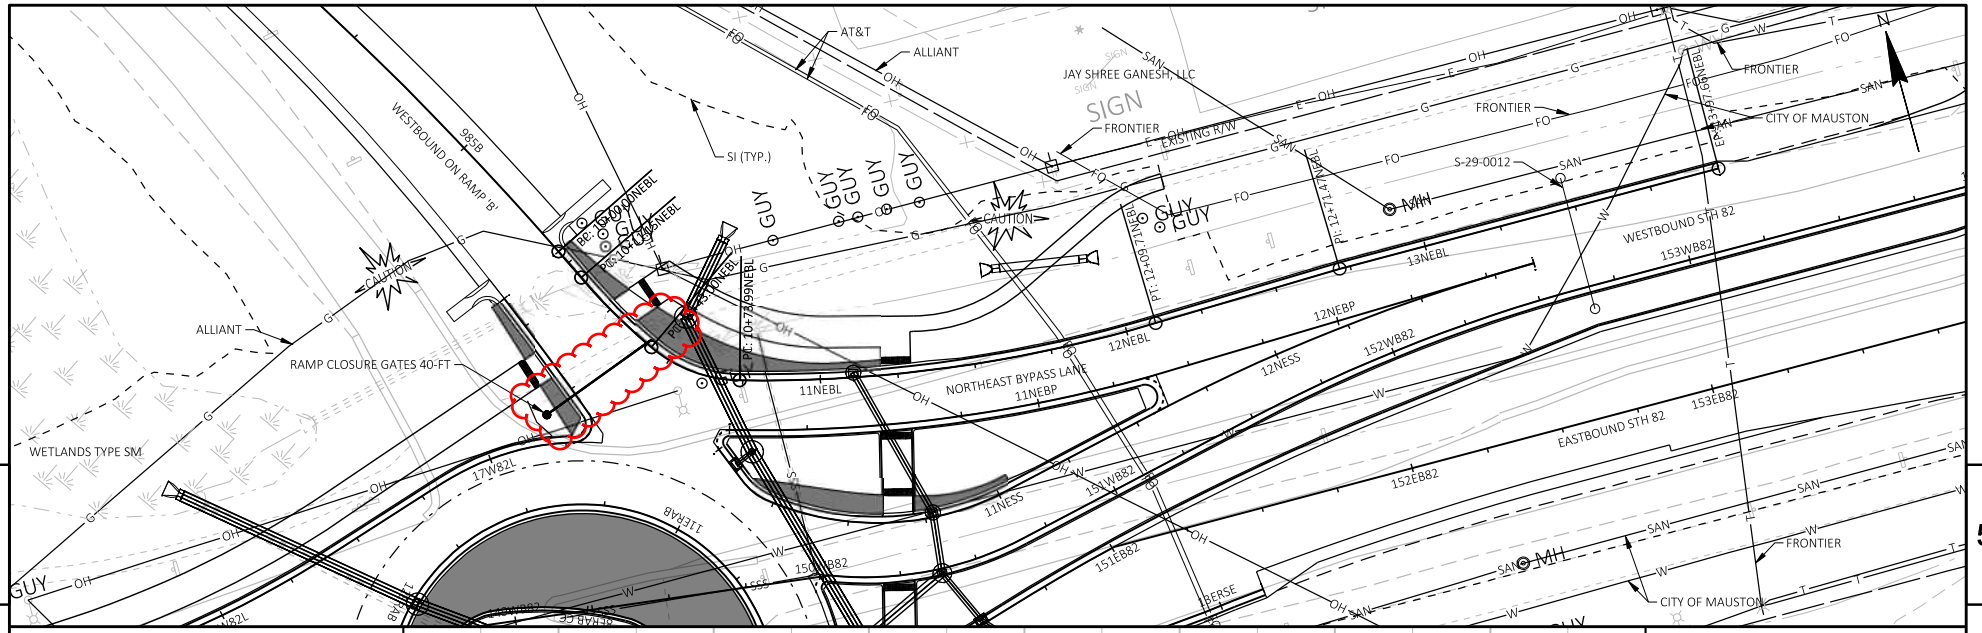

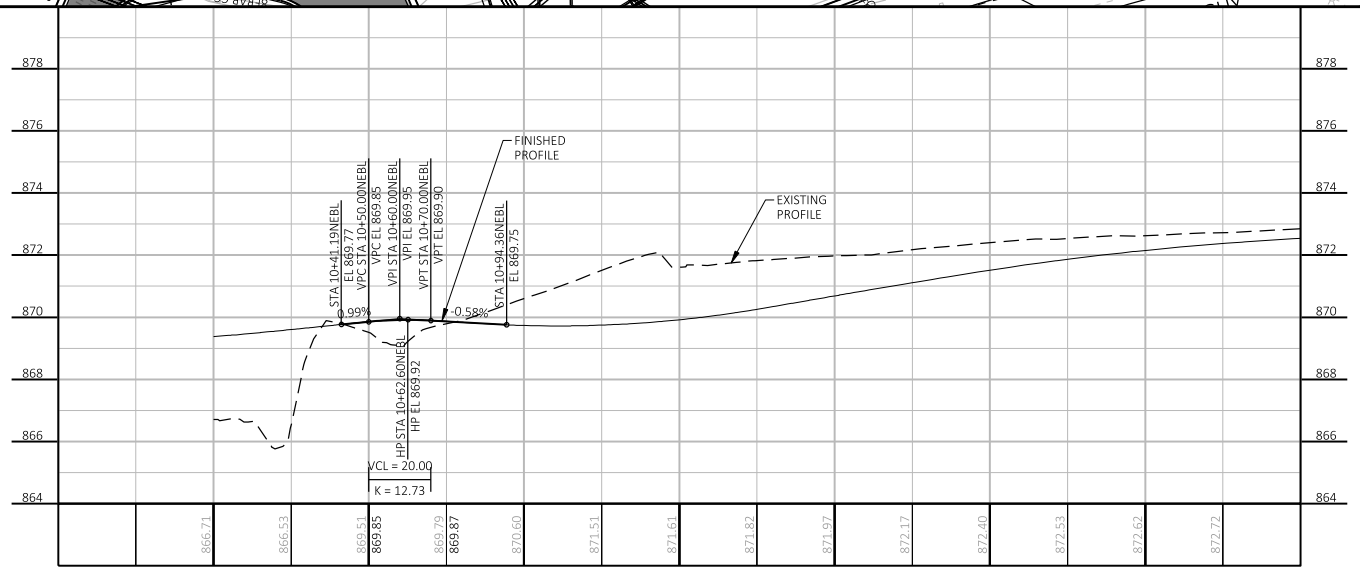

Addendum No. 02
ID 1016-05-70
Revised Sheet 583
February 4, 2022

PROJECT NO: 1016-05-70	HWY: IH 90/94	COUNTY: JUNEAU	PLAN AND PROFILE: STH 82 EB B RAMP LT EP AT RAB 'NEBL'	SHEET 583	E

FILE NAME : P:\90S\93\00093367\CADD\SHEETSPLAN\1016-05-70 PLAN SHEETS\050143_PP-RAB CURBS.DWG
LAYOUT NAME - 050170-pp
PLOT DATE : 2/3/2022 1:39 PM
PLOT BY : CONNOR GIRTEN
PLOT NAME :
PLOT SCALE : 1 IN:40 FT

STAGE 2A CATEGORY 0010

STAGE 2A - EB IH 90/94

STATION	REAL STATION	DISTANCE	AREA (SF)				INCREMENTAL VOL (CY) (UNADJUSTED)				CUMULATIVE VOL (CY)			
			CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT 1.00	EXPANDED FILL 1.25	SELECT BORROW 1.00	MASS ORDINATE
							NOTE 1	NOTE 2	NOTE 3		NOTE 1			NOTE 8
947+02.97	94702.97	0.00	0.00		1.60	0.00	0	0	0	0	0	0	0	0
948+00	94800.00	97.03	0.00	0.00	1.04	0.00	0	0	5	0	0	6	0	-6
948+10.794	94810.79	10.79	0.00	0.00	1.00	0.00	0	0	0	0	0	6	0	-6
948+35.794	94835.79	25.00	0.00	0.00	0.87	0.00	0	0	1	0	0	8	0	-8
948+60.794	94860.79	25.00	0.00	0.00	0.70	0.00	0	0	1	0	0	9	0	-9
949+00	94900.00	39.21	0.00	0.00	13.16	0.00	0	0	10	0	0	21	0	-21
949+50	94950.00	50.00	0.00	0.00	24.16	0.00	0	0	35	0	0	65	0	-65
950+00	95000.00	50.00	0.00	0.00	0.25	0.00	0	0	23	0	0	94	0	-94
950+94.209	95094.21	94.21	0.00	0.00	121.80	0.00	0	0	213	0	0	360	0	-360
952+63.04	95263.04	0.00	56.51	26.00	0.00	0.00	0	0	0	0	0	360	0	-360
953+00	95300.00	36.96	67.07	26.00	0.00	0.00	85	36	0	0	85	360	0	-311
953+11.813	95311.81	11.81	67.22	26.00	0.00	0.00	29	11	0	0	114	360	0	-293
954+00	95400.00	88.19	69.33	26.00	0.02	0.00	223	85	0	0	337	360	0	-155
955+00	95500.00	100.00	65.73	26.00	0.87	0.00	250	96	2	0	587	363	0	-4
955+23.729	95523.73	23.73	72.46	26.00	0.96	0.00	61	23	1	0	648	364	0	33
956+00	95600.00	76.27	77.11	26.00	243.94	1.62	211	73	346	2	859	796	2	-261
957+00	95700.00	100.00	79.26	26.00	132.42	2.07	290	96	697	7	1,149	1,668	9	-939
958+00	95800.00	100.00	83.67	26.00	108.80	23.12	302	96	447	47	1,451	2,226	56	-1,291
958+44.222	95844.22	44.22	81.89	26.00	90.60	21.74	136	43	163	37	1,587	2,430	93	-1,402
959+00	95900.00	55.78	77.59	26.00	55.74	14.97	165	54	151	38	1,752	2,619	131	-1,480
960+00	96000.00	100.00	76.97	26.00	48.86	11.61	286	96	194	49	2,038	2,861	180	-1,532
961+00	96100.00	100.00	73.99	26.00	82.36	11.84	280	96	243	43	2,318	3,165	223	-1,652
962+00	96200.00	100.00	67.61	26.00	70.60	17.71	262	96	283	55	2,580	3,519	278	-1,840
963+00	96300.00	100.00	57.68	26.00	35.49	22.84	232	96	196	75	2,812	3,764	353	-1,949
963+50	96350.00	50.00	74.60	26.00	14.09	13.23	122	48	46	33	2,934	3,821	386	-1,932
963+99.947	96399.95	49.95	95.83	26.00	1.69	8.30	158	48	15	20	3,092	3,840	406	-1,841
964+00	96400.00	0.05	32.07	26.00	0.00	0.00	0	0	0	0	3,092	3,840	406	-1,841
965+00	96500.00	100.00	33.74	26.00	0.00	0.00	122	96	0	0	3,214	3,840	406	-1,815
966+00	96600.00	100.00	32.29	26.00	0.00	0.00	122	96	0	0	3,336	3,840	406	-1,789
967+00	96700.00	100.00	33.64	26.00	0.00	0.00	122	96	0	0	3,458	3,840	406	-1,763
968+00	96800.00	100.00	34.28	26.00	0.00	0.00	126	96	0	0	3,584	3,840	406	-1,733
969+00	96900.00	100.00	38.32	26.00	0.00	0.00	134	96	0	0	3,718	3,840	406	-1,695
969+62.393	96962.39	62.39	43.14	26.00	0.00	0.00	94	60	0	0	3,812	3,840	406	-1,661
975+00	97500.00	0.00	49.42	26.00	0.00	5.14	0	0	0	0	3,812	3,840	406	-1,661
975+61.889	97561.89	61.89	41.45	26.00	0.00	20.55	104	60	0	29	3,916	3,840	435	-1,617
975+86.938	97586.94	25.05	42.15	26.00	16.86	21.83	39	24	8	20	3,955	3,850	455	-1,612
976+00	97600.00	13.06	40.47	26.00	13.89	8.20	20	13	7	7	3,975	3,859	462	-1,614
976+11.165	97611.16	11.16	39.20	26.00	2.22	4.89	16	11	3	3	3,991	3,863	465	-1,613
977+00	97700.00	88.84	30.96	26.00	40.84	38.54	115	86	71	71	4,106	3,951	536	-1,672
978+00	97800.00	100.00	27.75	26.00	113.30	70.73	109	96	285	202	4,215	4,308	738	-2,016
979+00	97900.00	100.00	27.79	26.00	199.37	122.31	103	96	579	357	4,318	5,031	1,095	-2,732
979+35.824	97935.82	35.82	26.33	26.00	244.26	141.59	36	34	294	175	4,354	5,399	1,270	-3,098
979+60.844	97960.84	25.02	26.00	26.00	253.82	153.49	24	24	231	137	4,378	5,688	1,407	-3,387
979+85.863	97985.86	25.02	26.00	26.00	277.26	169.52	24	24	246	150	4,402	5,995	1,557	-3,694
980+00	98000.00	14.14	26.00	26.00	288.42	173.05	14	14	148	90	4,416	6,180	1,647	-3,879
981+00	98100.00	100.00	26.00	26.00	336.52	210.41	96	96	1,157	710	4,512	7,626	2,357	-5,325
981+50	98150.00	50.00	26.00	26.00	314.64	219.92	48	48	603	398	4,560	8,380	2,755	-6,079
982+00	98200.00	50.00	26.00	26.00	297.78	215.98	48	48	567	404	4,608	9,089	3,159	-6,788
984+49.707	98449.71	0.00	26.13	26.00	277.58	135.82	0	0	0	0	4,608	9,089	3,159	-6,788
984+74.12	98474.12	24.41	12.46	12.46	373.23	197.23	17	17	294	151	4,625	9,456	3,310	-7,155
985+00	98500.00	25.88	32.37	26.00	387.51	244.87	21	18	365	212	4,646	9,913	3,522	-7,609
985+50	98550.00	50.00	32.85	26.00	363.87	229.07	60	48	696	439	4,706	10,783	3,961	-8,467
986+00	98600.00	50.00	26.00	26.00	308.24	211.63	54	48	622	408	4,760	11,560	4,369	-9,238
987+00	98700.00	100.00	26.00	26.00	195.82	194.85	96	96	933	753	4,856	12,726	5,122	-10,404
988+00	98800.00	100.00	26.00	26.00	97.53	212.50	96	96	543	754	4,952	13,405	5,876	-11,083
989+00	98900.00	100.00	28.49	26.00	2.57	93.67	101	96	185	567	5,053	13,636	6,443	-11,309
994+40.125	99440.12	0.00	139.84	43.91	0.00	0.00	0	0	0	0	5,053	13,636	6,443	-11,309
995+00	99500.00	59.88	116.10	42.80	0.00	0.00	284	96	0	0	5,337	13,636	6,443	-11,121
996+00	99600.00	100.00	92.25	40.96	0.00	0.00	386	155	0	0	5,723	13,636	6,443	-10,890
996+80.514	99680.51	80.51	80.44	39.30	23.59	0.00	257	120	35	0	5,980	13,680	6,443	-10,797
997+00	99700.00	19.49	86.07	38.88	5.19	0.00	60	28	10	0	6,040	13,693	6,443	-10,778
998+00	99800.00	100.00	67.01	37.00	13.36	0.78	283	141	34	1	6,323	13,735	6,444	-10,678
999+00	99900.00	100.00	77.74	34.95	4.57	1.28	268	133	33	4	6,591	13,776	6,448	-10,584
1000+00	100000.00	100.00	72.01	32.96	3.27	1.77	277	126	15	6	6,868	13,795	6,454	-10,452
1000+27.971	100027.97	27.97	65.62	32.52	3.36	1.55	71	34	3	2	6,939	13,799	6,456	-10,419
1001+00	100100.00	72.03	67.36	31.18	5.05	2.17	177	85	11	5	7,116	13,813	6,461	-10,341
1002+00	100200.00	100.00	102.84	29.31	11.08	2.64	315	112	30	9	7,431	13,850	6,470	-10,175
1002+28.654	100228.65	28.65	76.54	28.73	29.59	2.45	95	31	22	3	7,526	13,878	6,473	-10,139
1003+00	100300.00	71.35	58.34	27.10	11.17	0.77	178	74	54	4	7,704	13,945	6,477	-10,102
1004+00	100400.00	100.00	54.44	25.89	8.10	0.49	209	98	36	2	7,913	13,990	6,479	-10,036
1005+00	100500.00	100.00	45.31	25.15	10.83	1.65	185	95	35	4	8,098	14,034	6,483	-9,990
1006+00	100600.00	100.00	49.43	24.70	14.15	2.75	175	92	46	8	8,273	14,091	6,491	-9,964
1007+00	100700.00	100.00	44.59	21.54	87.85	21.58	174	86	189	45	8,447	14,328	6,536	-10,113
1007+07.947	100707.95	7.95	43.57	21.34	97.81	26.10	13	6	27	7	8,460	14,361	6,543	-10,139
1007+32.996	100733.00	25.05	36.94	20.68	104.04	29.56	37	19	94	26	8,497	14,479	6,569	-10,239
1007+58.043	100758.04	25.05	32.00	19.97	23.95	14.15	32	19	59	20	8,529	14,553	6,589	-10,300
1008+00	100800.00	41.96	31.34	18.71	38.25	27.42	49	30	48	32	8,578	14,613	6,621	-10,341
1009+00	100900.00	100.00	60.59	21.09	69.90	39.82	170	74	200	125	8,748	14,863	6,746	-10,495
1010+00	101000.00	100.00	107.89	25.37	74.59	47.17	312	86	268	161	9,060	15,198	6,907	-10,604
1010+16.612	101016.61	16.61	104.69	26.00	75.70	46.65	65	16	46	29	9,125	15,255	6,936	-10,612
1010+41.632	101041.63	25.02	92.39	26.00	76.37	48.42	91	24	70	44	9,216	15,343	6,980	-10,633
1010+66.651	101066.65	25.02	77.90	26.00	81.59	52.44	79	24	73	47	9,295	15,434	7,027	-10,669
1011+00	101100.00	33.35	78.91	26.00	86.18	54.97	97	32	104	66	9,392	15,564	7,093	-10,734
1011+50	101150.00	50.00	117.64	26.00	82.34	61.45	182	48	156	108	9,574	15,759	7,201	-10,795
1011+97.09	101197.09	47.09	102.13	26.00	70.21	65.85	192	45	133	111	9,766	15,925	7,312	-10,814
1014+62.46	101462.46	0.00	35.19	26.00	96.55	63.82	0	0	0	0	9,766	15,925	7,312	-10,814
1015+00	101500.00	37.54	38.08	26.00	117.63	73.93	51	36	149	96	9,817	16,111	7,408	-10,985
1016+00	101600.00	100.00	29.47	26.00	123.26	125.87	125	96	446	370	9,942	16,669	7,778	-11,514
1017+00	101700.00	100.00	32.78	26.00	133.41	92.68	115	96	475	405	10,057	17,263	8,183	-12,089
1018+00	101800.00	100.00	37.19	26.00	84.05	51.40	130	96	403	267	10,187	17,766	8,450	-12,558
1019+00	101900.00	100.00	47.30	26.00	49.58	29.21	156	96	247	149	10,343	18,075	8,599	-12,807
1020+00	102000.00	100.00	51.23	26.00	64.72	20.68	182	96	212	92	10,525	18,340	8,691	-12,986
1021+00	102100.00	100.00	52.68	26.00	70.50	14.74	192	96	250	66	10,717	18,653	8,757	-13,203
1022+00	102200.00	100.00	51.80	26.00	79.03	12.30	193	96	277	50	10,910	18,999	8,807	-13,452
1023+00	102300.00	100.00	42.96	26.00	59.91	12.23	175	96	257	45	11,085	19,320	8,852	-13,694
1024+00	102400.00	100.00	49.68	26.00	127.42	14.32	172	96	347	49	11,257	19,754	8,901	-14,052
1025+00	102500.00	100.00	39.60	26.00	57.17	8.27	165	96	342	42	11,422	20,181	8,943	-14,410
1026+00	102600.00	100.00	42.10	26.00	43.17	9.50	151	96	186	33	11,573	20,414	8,976	-14,588

CONTINUED ON NEXT PAGE

PLOT DATE : OCT 2021
PLOT BY : MSA
PLOT NAME :
PLOT SCALE : 1:1

Addendum No. 02
ID 1016-05-70
Revised Sheet 998
February 4 2022

PLOT DATE: OCT 2021
PLOT BY: MSA
PLOT NAME:
PLOT SCALE: 1:1

STAGE 2A CATEGORY 0010 CONT.

STAGE 2A - EB IH 90/94

CONTINUED FROM PREVIOUS PAGE

STATION	REAL STATION	DISTANCE	AREA (SF)				INCREMENTAL VOL (CY) (UNADJUSTED)				CUMULATIVE VOL (CY)			
			CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	EXPANDED FILL	SELECT BORROW	MASS ORDINATE
							NOTE 1	NOTE 2	NOTE 3		1.00 NOTE 1	1.25	1.00	NOTE 8
1027+00	102700.00	100.00	46.60	26.00	9.31	5.34	164	96	97	27	11,737	20,535	9,003	-14,641
1027+08.5	102708.50	8.50	47.06	26.00	7.83	4.75	15	8	3	2	11,752	20,539	9,005	-14,638
1028+00	102800.00	91.50	44.94	26.00	21.79	2.47	156	88	50	12	11,908	20,601	9,017	-14,632
1028+29.44	102829.44	29.44	44.76	26.00	21.60	3.04	49	28	24	3	11,957	20,631	9,020	-14,641
1029+00	102900.00	70.56	46.80	26.00	19.68	2.63	120	68	54	7	12,077	20,699	9,027	-14,657
1030+00	103000.00	100.00	43.89	26.00	16.97	2.59	168	96	68	10	12,245	20,784	9,037	-14,670
1030+01.05	103001.05	1.05	43.92	26.00	16.89	2.59	2	1	1	0	12,247	20,785	9,037	-14,670
							12,247		16,628	9,037				

STAGE 2A - EB OFF RAMP XOVER X3

STATION	REAL STATION	DISTANCE	AREA (SF)				INCREMENTAL VOL (CY) (UNADJUSTED)				CUMULATIVE VOL (CY)			
			CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	EXPANDED FILL	SELECT BORROW	MASS ORDINATE
							NOTE 1	NOTE 2	NOTE 3		1.00 NOTE 1	1.25	1.00	NOTE 8
20+25.357	2025.36	0.00	0.68	0.00	0.00	0.00	0	0	0	0	0	0	0	0
20+50	2050.00	24.64	6.29	0.00	0.03	0.00	3	0	0	0	3	0	0	3
21+00	2100.00	50.00	7.87	0.00	0.00	0.00	13	0	0	0	16	0	0	16
21+50	2150.00	50.00	8.84	0.00	0.00	0.00	15	0	0	0	31	0	0	31
22+00	2200.00	50.00	15.74	0.00	0.00	0.00	23	0	0	0	54	0	0	54
22+50	2250.00	50.00	14.13	0.00	0.07	0.00	28	0	0	0	82	0	0	82
23+00	2300.00	50.00	13.11	0.00	0.36	0.00	25	0	0	0	107	0	0	107
23+50	2350.00	50.00	12.40	0.00	0.85	0.00	24	0	1	0	131	1	0	130
24+00	2400.00	50.00	12.98	0.00	0.54	0.00	24	0	1	0	155	3	0	153
24+50	2450.00	50.00	12.80	0.00	0.20	0.00	24	0	1	0	179	4	0	175
25+00	2500.00	50.00	13.61	0.00	0.01	0.00	24	0	0	0	203	4	0	199
25+50	2550.00	50.00	14.70	0.00	0.00	0.00	26	0	0	0	229	4	0	225
26+00	2600.00	50.00	22.57	0.00	0.00	0.00	35	0	0	0	264	4	0	260
26+50	2650.00	50.00	26.67	0.00	0.00	0.00	46	0	0	0	310	4	0	306
							310		3	0				

STAGE 2A- EB OFF RAMP 'C'

STATION	REAL STATION	DISTANCE	AREA (SF)				INCREMENTAL VOL (CY) (UNADJUSTED)				CUMULATIVE VOL (CY)			
			CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	EXPANDED FILL	SELECT BORROW	MASS ORDINATE
							NOTE 1	NOTE 2	NOTE 3		1.00 NOTE 1	1.25	1.00	NOTE 8
964+00	96400.00	0.00	63.80	2.00	1.79	8.18	0	0	0	0	0	0	0	0
965+00	96500.00	100.00	94.61	2.00	0.00	0.00	293	7	3	15	293	4	15	282
965+67.738	96567.74	67.74	96.11	3.89	0.00	0.63	239	7	0	1	532	4	16	514
965+92.8	96592.80	25.06	84.57	3.76	0.00	1.35	84	4	0	1	616	4	17	594
966+00	96600.00	7.20	52.70	3.70	0.00	1.58	18	1	0	0	634	4	17	611
966+17.854	96617.85	17.85	27.57	3.61	0.00	1.94	27	2	0	1	661	4	18	636
967+00	96700.00	82.15	29.87	4.77	0.00	6.27	87	13	0	12	748	4	30	710
967+46.586	96746.59	46.59	31.70	5.56	0.00	6.46	53	9	0	11	801	4	41	754
967+71.092	96771.09	24.51	41.06	5.91	0.00	6.54	33	5	0	6	834	4	47	782
968+00	96800.00	28.91	128.81	6.42	0.00	7.08	91	7	0	7	925	4	54	866
969+00	96900.00	100.00	211.47	8.09	0.00	10.76	630	27	0	33	1,555	4	87	1,469
969+59.504	96959.50	59.50	242.70	9.09	0.00	13.80	500	19	0	27	2,055	4	114	1,950
969+60.65	96960.65	1.15	215.86	0.19	0.00	15.48	10	0	0	1	2,065	4	115	1,960
970+00	97000.00	39.35	205.43	0.00	0.00	19.67	307	0	0	26	2,372	4	141	2,267
971+00	97100.00	100.00	100.11	0.00	0.00	25.49	566	0	0	84	2,938	4	225	2,833
972+00	97200.00	100.00	53.20	0.00	0.00	18.99	284	0	0	82	3,222	4	307	3,117
972+73.01	97273.01	73.01	40.71	0.00	0.00	7.88	127	0	0	36	3,349	4	343	3,244
972+98.086	97298.09	25.08	47.36	0.00	0.00	6.19	41	0	0	7	3,390	4	350	3,285
973+00	97300.00	1.91	45.50	0.00	0.00	6.05	3	0	0	0	3,393	4	350	3,288
973+23.155	97323.16	23.16	38.99	0.00	0.00	5.54	36	0	0	5	3,429	4	355	3,324
973+50	97350.00	26.84	49.97	13.36	0.00	3.09	44	7	0	4	3,473	4	359	3,361
973+93.28	97393.28	43.28	78.49	4.93	0.00	0.05	103	15	0	3	3,576	4	362	3,449
974+00	97400.00	6.72	81.78	5.45	0.00	0.00	20	1	0	0	3,596	4	362	3,468
974+14.075	97414.08	14.08	89.32	5.92	0.00	0.00	45	3	0	0	3,641	4	362	3,510
975+00	97500.00	85.92	115.61	13.33	0.00	0.03	326	31	0	0	3,967	4	362	3,805
976+00	97600.00	100.00	127.38	9.26	0.00	0.00	450	42	0	0	4,417	4	362	4,213
976+75	97675.00	75.00	90.07	6.85	0.00	1.45	302	22	0	2	4,719	4	364	4,493
977+00	97700.00	25.00	57.80	6.02	4.57	18.94	68	6	2	9	4,787	6	373	4,553
978+00	97800.00	100.00	34.22	3.73	165.06	167.43	170	18	314	345	4,957	399	718	4,312
978+39.148	97839.15	39.15	0.00	0.00	133.22	160.25	25	3	216	238	4,982	669	956	4,064
978+50	97850.00	10.85	0.00	0.00	121.27	161.96	0	0	51	65	4,982	733	1,021	4,001
979+00	97900.00	50.00	0.00	0.00	74.57	180.41	0	0	181	317	4,982	959	1,338	3,774
979+50	97950.00	50.00	0.00	0.00	110.23	165.25	0	0	171	320	4,982	1,173	1,658	3,561
980+00	98000.00	50.00	1.58	0.00	102.13	194.27	1	0	197	333	4,983	1,419	1,991	3,315
980+25	98025.00	25.00	0.03	0.00	112.23	82.88	1	0	99	128	4,984	1,543	2,119	3,193
980+50	98050.00	25.00	0.00	0.00	60.74	71.18	0	0	80	71	4,984	1,643	2,190	3,093
							4,984		1,314	2,190				

STAGE 2A - EB OFF RAMP XOVER X9

STATION	REAL STATION	DISTANCE	AREA (SF)				INCREMENTAL VOL (CY) (UNADJUSTED)				CUMULATIVE VOL (CY)			
			CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	EXPANDED FILL	SELECT BORROW	MASS ORDINATE
							NOTE 1	NOTE 2	NOTE 3		1.00 NOTE 1	1.25	1.00	NOTE 8
21+45.227	2145.23	0.00	29.76	0.00	0.00	1.06	0	0	0	0	0	0	0	0
21+50	2150.00	4.77	28.88	0.00	0.00	1.73	5	0	0	0	5	0	0	5
22+00	2200.00	50.00	16.59	0.00	2.84	5.67	42	0	3	7	47	4	7	43
22+50	2250.00	50.00	15.26	0.00	12.92	0.14	29	0	15	5	76	23	12	54
23+00	2300.00	50.00	16.57	0.00	8.93	0.00	29	0	20	0	105	48	12	58
23+50	2350.00	50.00	32.11	0.00	3.84	0.00	45	0	12	0	150	63	12	88
23+93.266	2393.27	43.27	6.01	0.00	0.00	0.00	31	0	3	0	181	66	12	115
							181		53	12				

Addendum No. 02
ID 1016-05-70
Revised Sheet 999
February 4, 2022

STAGE 2A - EB ON RAMP 'D'

STAGE 2A CATEGORY 0010 CONT.

STATION	REAL STATION	DISTANCE	AREA (SF)				INCREMENTAL VOL (CY) (UNADJUSTED)				CUMULATIVE VOL (CY)			
			CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT 1.00	EXPANDED FILL 1.25	SELECT BORROW 1.00	MASS ORDINATE
							NOTE 1	NOTE 2	NOTE 3		NOTE 1			NOTE 8
981+82.82	98182.82	0.00	0.00	0.00	27.78	124.28	0	0	0	0	0	0	0	0
982+00	98200.00	17.18	0.00	0.00	27.95	141.94	0	0	18	85	0	23	85	-23
982+50	98250.00	50.00	0.77	0.00	16.87	93.45	1	0	42	218	1	75	303	-74
983+00	98300.00	50.00	4.58	0.00	17.28	81.47	5	0	32	162	6	115	465	-109
983+50	98350.00	50.00	5.65	0.00	25.42	92.19	9	0	40	161	15	165	626	-150
984+00	98400.00	50.00	12.24	0.00	31.14	112.33	17	0	52	189	32	230	815	-198
984+50	98450.00	50.00	17.62	0.00	46.12	149.69	28	0	72	243	60	320	1,058	-260
985+00	98500.00	50.00	9.24	0.00	62.87	173.33	25	0	101	299	85	446	1,357	-361
985+50	98550.00	50.00	0.00	0.00	87.14	221.68	9	0	139	366	94	620	1,723	-526
986+00	98600.00	50.00	0.00	0.00	63.07	270.11	0	0	139	455	94	794	2,178	-700
987+00	98700.00	100.00	0.00	0.00	81.28	361.49	0	0	267	1,170	94	1,128	3,348	-1,034
988+00	98800.00	100.00	0.00	0.00	65.26	252.58	0	0	271	1,137	94	1,466	4,485	-1,372
989+00	98900.00	100.00	0.00	0.00	27.67	155.47	0	0	172	756	94	1,681	5,241	-1,587
990+00	99000.00	100.00	1.35	0.00	8.91	109.81	3	0	68	491	97	1,766	5,732	-1,669
990+06.885	99006.89	6.89	1.36	0.00	8.60	108.69	0	0	2	28	97	1,769	5,760	-1,672
990+32.009	99032.01	25.12	1.26	0.00	11.32	103.74	1	0	9	99	98	1,780	5,859	-1,682
990+57.103	99057.10	25.09	0.54	0.00	8.86	78.60	1	0	9	85	99	1,791	5,944	-1,692
990+75	99075.00	17.90	0.56	0.00	11.37	79.46	0	0	7	52	99	1,800	5,996	-1,701
991+00	99100.00	25.00	1.55	0.00	14.54	88.01	1	0	12	78	100	1,815	6,074	-1,715
991+15.588	99115.59	15.59	2.65	0.00	23.58	89.19	1	0	11	51	101	1,829	6,125	-1,728
991+50	99150.00	34.41	9.43	0.00	10.20	52.56	8	0	22	90	109	1,856	6,215	-1,747
992+04.57	99204.57	54.57	34.47	6.47	2.60	14.01	44	7	13	67	153	1,873	6,282	-1,727
992+06.524	99206.52	1.95	64.12	13.78	2.18	12.23	4	1	0	1	157	1,873	6,283	-1,724
992+50	99250.00	43.48	70.12	14.31	0.28	0.00	108	23	2	10	265	1,875	6,293	-1,641
992+61.132	99261.13	11.13	74.08	14.42	0.00	0.00	30	6	0	0	295	1,875	6,293	-1,617
993+00	99300.00	38.87	93.21	14.74	0.00	0.00	120	21	0	0	415	1,875	6,293	-1,518
994+00	99400.00	100.00	101.40	15.17	0.00	0.00	360	55	0	0	775	1,875	6,293	-1,213
994+39.518	99439.52	39.52	88.57	19.91	0.00	0.00	139	26	0	0	914	1,875	6,293	-1,100
							914		1,500	6,293				

STAGE 2A - EB ON RAMP XOVER X10

STATION	REAL STATION	DISTANCE	AREA (SF)				INCREMENTAL VOL (CY) (UNADJUSTED)				CUMULATIVE VOL (CY)			
			CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT 1.00	EXPANDED FILL 1.25	SELECT BORROW 1.00	MASS ORDINATE
							NOTE 1	NOTE 2	NOTE 3		NOTE 1			NOTE 8
33+81.517	3381.52	0.00	0.00	0.00	0.00	0.00	0	0	0	0	0	0	0	0
33+96.612	3396.61	15.09	15.34	0.00	0.06	0.00	4	0	0	0	4	0	0	4
34+00	3400.00	3.39	15.50	0.00	2.62	0.00	2	0	0	0	6	0	0	6
34+25	3425.00	25.00	15.99	0.00	101.68	0.00	15	0	48	0	21	60	0	-39
34+50	3450.00	25.00	16.72	0.00	3.37	1.67	15	0	49	1	36	121	1	-85
35+00	3500.00	50.00	22.52	0.00	5.64	23.32	36	0	8	23	72	131	24	-59
35+50	3550.00	50.00	1.00	0.00	4.65	57.73	22	0	10	75	94	144	99	-50
36+00	3600.00	50.00	0.20	0.00	14.77	111.45	1	0	18	157	95	166	256	-71
36+50	3650.00	50.00	0.25	0.00	5.78	158.24	0	0	19	250	95	190	506	-95
36+90.615	3690.62	40.62	0.00	0.00	10.32	149.71	0	0	12	232	95	205	738	-110
							95		164	738				

STAGE 2A - EB ON-RAMP XOVER X5

STATION	REAL STATION	DISTANCE	AREA (SF)				INCREMENTAL VOL (CY) (UNADJUSTED)				CUMULATIVE VOL (CY)			
			CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT 1.00	EXPANDED FILL 1.25	SELECT BORROW 1.00	MASS ORDINATE
							NOTE 1	NOTE 2	NOTE 3		NOTE 1			NOTE 8
35+70.667	3570.67	0.00	27.96	0.00	0.00	0.00	0	0	0	0	0	0	0	0
36+00	3600.00	29.33	29.38	0.00	0.00	0.00	31	0	0	0	31	0	0	31
36+50	3650.00	50.00	27.97	0.00	0.00	0.00	53	0	0	0	84	0	0	84
37+00	3700.00	50.00	23.94	0.00	0.02	0.00	48	0	0	0	132	0	0	132
37+50	3750.00	50.00	18.88	0.00	0.32	0.00	40	0	0	0	172	0	0	172
38+00	3800.00	50.00	14.19	0.00	1.01	0.00	31	0	1	0	203	1	0	202
38+23.065	3823.07	23.07	11.80	1.39	1.20	0.00	11	1	1	0	214	3	0	211
38+50	3850.00	26.93	10.23	0.50	1.34	0.00	11	1	1	0	225	4	0	219
39+00	3900.00	50.00	9.94	0.01	1.21	0.00	19	0	2	0	244	6	0	236
39+50	3950.00	50.00	9.34	0.14	1.11	0.00	18	0	2	0	262	9	0	251
40+00	4000.00	50.00	8.81	0.55	1.15	0.00	17	1	2	0	279	11	0	265
40+50	4050.00	50.00	8.64	1.29	0.97	0.00	16	2	2	0	295	14	0	276
41+00	4100.00	50.00	13.29	2.36	0.41	0.00	20	3	1	0	315	15	0	292
41+50	4150.00	50.00	15.02	3.76	0.43	0.00	26	6	1	0	341	16	0	311
42+00	4200.00	50.00	16.86	5.48	0.61	0.00	30	9	1	0	371	18	0	331
42+50	4250.00	50.00	19.25	7.54	0.87	0.00	33	12	1	0	404	19	0	350
43+00	4300.00	50.00	21.38	9.92	0.90	0.00	38	16	2	0	442	21	0	370
43+50	4350.00	50.00	26.12	12.58	0.98	0.00	44	21	2	0	486	24	0	390
44+00	4400.00	50.00	26.92	15.22	0.95	0.00	49	26	2	0	535	26	0	411
44+50	4450.00	50.00	31.15	17.57	0.78	0.00	54	30	2	0	589	29	0	432
45+00	4500.00	50.00	21.39	11.09	0.92	0.00	49	27	2	0	638	31	0	452
45+50	4550.00	50.00	18.47	2.24	1.41	0.00	37	12	2	0	675	34	0	474
46+00	4600.00	50.00	14.01	0.48	2.01	0.00	30	3	3	0	705	38	0	498
46+50	4650.00	50.00	10.71	0.00	1.60	0.00	23	0	3	0	728	41	0	517
46+75	4675.00	25.00	10.54	0.00	0.42	0.00	10	0	1	0	738	43	0	526
47+00	4700.00	25.00	7.24	0.00	0.00	0.00	8	0	0	0	746	43	0	534
47+25	4725.00	25.00	8.77	0.00	0.00	0.00	7	0	0	0	753	43	0	541
							753		34	0				

Addendum No. 02
ID 1016-05-70
Revised Sheet 1000
February 4, 2022

PLOT DATE: OCT 2021
PLOT BY: MSA
PLOT NAME:
PLOT SCALE: 1:1

STAGE 2A CATEGORY 0010 CONT.

STAGE 2A - EXISTING EB STH 82 - CAT 010

STATION	REAL STATION	DISTANCE	AREA (SF)				INCREMENTAL VOL (CY) (UNADJUSTED)				CUMULATIVE VOL (CY)			
			CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	EXPANDED FILL	SELECT BORROW	MASS ORDINATE
							NOTE 1	NOTE 2	NOTE 3		1.00 NOTE 1	1.25	1.00	NOTE 8
142+35.853	14235.85	0.00	22.87	0.00	0.00	0.00	0	0	0	0	0	0	0	0
142+50	14250.00	14.15	28.19	0.00	0.00	0.00	13	0	0	0	13	0	0	13
142+75	14275.00	25.00	31.73	0.00	0.00	0.00	28	0	0	0	41	0	0	41
143+00	14300.00	25.00	21.10	0.00	0.00	0.00	24	0	0	0	65	0	0	65
143+11.178	14311.18	11.18	7.78	0.00	0.00	0.00	6	0	0	0	71	0	0	71
143+68.653	14368.65	0.00	0.00	0.00	0.00	0.00	0	0	0	0	71	0	0	71
143+75	14375.00	6.35	11.81	0.00	0.00	0.00	1	0	0	0	72	0	0	72
144+00	14400.00	25.00	21.82	0.00	0.00	0.00	16	0	0	0	88	0	0	88
144+17.269	14417.27	17.27	26.03	0.00	0.00	0.00	15	0	0	0	103	0	0	103
							103		0	0				

STAGE 2A - EXISTING WB STH 82 - CAT 010

STATION	REAL STATION	DISTANCE	AREA (SF)				INCREMENTAL VOL (CY) (UNADJUSTED)				CUMULATIVE VOL (CY)			
			CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	EXPANDED FILL	SELECT BORROW	MASS ORDINATE
							NOTE 1	NOTE 2	NOTE 3		1.00 NOTE 1	1.25	1.00	NOTE 8
145+05.989	14505.99	0.00	0.02	0.00	0.00	0.00	0	0	0	0	0	0	0	0
145+50	14550.00	44.01	11.86	0.00	0.00	0.00	10	0	0	0	10	0	0	10
146+00	14600.00	50.00	11.52	0.00	0.00	0.00	22	0	0	0	32	0	0	32
146+50	14650.00	50.00	13.43	0.00	0.00	0.00	23	0	0	0	55	0	0	55
147+00	14700.00	50.00	18.39	0.00	0.00	0.00	29	0	0	0	84	0	0	84
147+50	14750.00	50.00	23.97	0.00	0.00	0.00	39	0	0	0	123	0	0	123
148+00	14800.00	50.00	26.16	0.00	0.00	0.00	46	0	0	0	169	0	0	169
148+50	14850.00	50.00	14.34	0.00	0.00	0.00	38	0	0	0	207	0	0	207
148+55	14855.00	5.00	10.58	0.00	0.00	0.00	2	0	0	0	209	0	0	209
149+09.006	14909.01	0.00	12.39	0.00	0.00	0.00	0	0	0	0	209	0	0	209
149+50	14950.00	40.99	36.36	0.00	0.00	0.00	37	0	0	0	246	0	0	246
150+00	15000.00	50.00	9.24	0.00	0.00	0.00	42	0	0	0	288	0	0	288
150+50	15050.00	50.00	6.73	0.00	0.00	0.00	15	0	0	0	303	0	0	303
151+00	15100.00	50.00	6.88	0.00	0.00	0.00	13	0	0	0	316	0	0	316
151+50	15150.00	50.00	6.73	0.00	0.00	0.00	13	0	0	0	329	0	0	329
152+00	15200.00	50.00	2.31	0.00	0.00	0.00	8	0	0	0	337	0	0	337
152+25.141	15225.14	25.14	0.00	0.00	0.00	0.00	1	0	0	0	338	0	0	338
							338		0	0				

STAGE 2B CATEGORY 0010

STAGE 2B - EB ON RAMP 'D'

STATION	REAL STATION	DISTANCE	AREA (SF)				INCREMENTAL VOL (CY) (UNADJUSTED)				CUMULATIVE VOL (CY)			
			CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	EXPANDED FILL	SELECT BORROW	MASS ORDINATE
							NOTE 1	NOTE 2	NOTE 3		1.00 NOTE 1	1.25	1.00	NOTE 8
981+41.35	98141.35	0.00	8.91	0.00	171.45	26.01	0	0	0	0	0	0	0	0
981+50	98150.00	8.65	0.00	0.00	169.65	52.10	1	0	55	13	1	69	13	-68
981+75	98175.00	25.00	0.00	0.00	42.68	52.31	0	0	98	48	1	191	61	-190
981+82.808	98182.81	7.81	44.07	0.00	3.71	0.00	6	0	7	8	7	200	69	-193
							7		160	69				

STAGE 2B - EB STH 82 - CAT 010

STATION	REAL STATION	DISTANCE	AREA (SF)				INCREMENTAL VOL (CY) (UNADJUSTED)				CUMULATIVE VOL (CY)			
			CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	EXPANDED FILL	SELECT BORROW	MASS ORDINATE
							NOTE 1	NOTE 2	NOTE 3		1.00 NOTE 1	1.25	1.00	NOTE 8
138+42.712	13842.71	0.00	31.80	0.00	0.00	0.00	0	0	0	0	0	0	0	0
138+50	13850.00	7.29	31.62	0.00	0.00	0.00	9	0	0	0	9	0	0	9
139+00	13900.00	50.00	37.54	0.00	0.00	0.00	64	0	0	0	73	0	0	73
139+25	13925.00	25.00	50.68	0.00	0.00	0.00	41	0	0	0	114	0	0	114
139+50	13950.00	25.00	72.48	0.00	0.00	0.00	57	0	0	0	171	0	0	171
139+75	13975.00	25.00	60.00	0.00	0.00	0.00	61	0	0	0	232	0	0	232
140+00	14000.00	25.00	68.37	0.00	0.00	0.00	59	0	0	0	291	0	0	291
140+25	14025.00	25.00	79.27	0.00	0.00	0.00	68	0	0	0	359	0	0	359
140+50	14050.00	25.00	73.35	0.00	0.00	0.00	71	0	0	0	430	0	0	430
140+75	14075.00	25.00	74.57	0.00	0.00	0.00	68	0	0	0	498	0	0	498
142+50	14250.00	0.00	76.44	0.00	0.00	0.00	0	0	0	0	498	0	0	498
142+75	14275.00	25.00	114.27	0.00	0.00	0.00	88	0	0	0	586	0	0	586
143+00	14300.00	25.00	121.99	0.00	0.00	0.00	109	0	0	0	695	0	0	695
143+57.135	14357.13	0.00	53.34	0.00	0.00	0.00	0	0	0	0	695	0	0	695
144+00	14400.00	42.87	79.75	0.00	0.00	0.00	106	0	0	0	801	0	0	801
144+50	14450.00	50.00	90.09	0.00	0.00	0.00	157	0	0	0	958	0	0	958
145+00	14500.00	50.00	101.18	0.00	0.00	0.00	177	0	0	0	1,135	0	0	1,135
145+50	14550.00	50.00	98.65	0.00	0.00	0.00	185	0	0	0	1,320	0	0	1,320
146+00	14600.00	50.00	89.64	0.00	0.00	0.00	174	0	0	0	1,494	0	0	1,494
146+50	14650.00	50.00	75.24	0.00	0.00	0.00	153	0	0	0	1,647	0	0	1,647
147+00	14700.00	50.00	77.41	0.00	0.00	0.00	141	0	0	0	1,788	0	0	1,788
147+50	14750.00	50.00	84.98	0.00	0.00	0.00	150	0	0	0	1,938	0	0	1,938
147+75	14775.00	25.00	100.50	0.00	93.39	0.00	86	0	43	0	2,024	54	0	1,970
148+00	14800.00	25.00	101.06	0.00	66.34	0.00	93	0	74	0	2,117	146	0	1,971
148+25	14825.00	25.00	71.48	0.00	57.37	0.00	80	0	57	0	2,197	218	0	1,980
148+29.384	14829.38	4.38	60.58	0.00	60.28	0.00	11	0	10	0	2,208	230	0	1,978
150+33.937	15033.94	0.00	57.34	0.00	0.00	0.00	0	0	0	0	2,208	230	0	1,978
150+50	15050.00	16.06	74.18	0.00	17.77	0.00	39	0	5	0	2,247	236	0	2,011
150+75	15075.00	25.00	99.61	0.00	1.67	0.00	80	0	9	0	2,327	248	0	2,080
151+00	15100.00	25.00	114.56	0.00	0.00	0.00	99	0	1	0	2,426	249	0	2,177
151+50	15150.00	50.00	97.50	0.00	0.00	0.00	196	0	0	0	2,622	249	0	2,373
152+00	15200.00	50.00	73.35	0.00	0.00	0.00	158	0	0	0	2,780	249	0	2,531
152+50	15250.00	50.00	73.57	0.00	0.00	0.00	136	0	0	0	2,916	249	0	2,667
152+69.974	15269.97	19.97	72.62	0.00	0.00	0.00	54	0	0	0	2,970	249	0	2,721
							2970		509	0				

Addendum No. 02
ID 1016-05-70
Revised Sheet 1001
February 4, 2022

STAGE 2B CATEGORY 0010 CONT.

STAGE 2B - SOUTHWEST BYPASS LANE

STATION	REAL STATION	DISTANCE	AREA (SF)				INCREMENTAL VOL (CY) (UNADJUSTED)				CUMULATIVE VOL (CY)			
			CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	EXPANDED FILL	SELECT BORROW	MASS ORDINATE
							NOTE 1	NOTE 2	NOTE 3		1.00 NOTE 1	1.25	1.00	NOTE 8
10+00	1000.00	0.00	128.28	0.00	0.00	0.00	0	0	0	0	0	0	0	0
10+25	1025.00	25.00	131.76	0.00	0.00	0.00	120	0	0	0	120	0	0	120
10+50	1050.00	25.00	183.13	0.00	4.81	0.00	146	0	2	0	266	3	0	264
10+75	1075.00	25.00	184.34	0.00	5.64	0.00	170	0	5	0	436	9	0	427
11+00	1100.00	25.00	185.42	0.00	2.88	0.00	171	0	4	0	607	14	0	593
11+25	1125.00	25.00	204.53	0.00	1.25	0.00	181	0	2	0	788	16	0	772
11+50	1150.00	25.00	196.62	0.00	1.57	0.00	186	0	1	0	974	18	0	957
11+75	1175.00	25.00	174.21	0.00	8.42	0.00	172	0	5	0	1,146	24	0	1,122
12+00	1200.00	25.00	137.55	0.00	28.89	0.00	144	0	17	0	1,290	45	0	1,245
12+25	1225.00	25.00	129.55	0.00	80.15	0.00	124	0	50	0	1,414	108	0	1,307
12+50	1250.00	25.00	52.59	0.00	132.04	0.00	84	0	98	0	1,498	230	0	1,268
12+51.478	1251.48	1.48	40.38	0.00	134.55	0.00	3	0	7	0	1,501	239	0	1,262
							1,501		191	0				

STAGE 2B - WEST ROUNDABOUT

STATION	REAL STATION	DISTANCE	AREA (SF)				INCREMENTAL VOL (CY) (UNADJUSTED)				CUMULATIVE VOL (CY)			
			CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	EXPANDED FILL	SELECT BORROW	MASS ORDINATE
							NOTE 1	NOTE 2	NOTE 3		1.00 NOTE 1	1.25	1.00	NOTE 8
10+04.945	1004.94	0.00	35.61	0.00	0.00	0.00	0	0	0	0	0	0	0	0
10+25	1025.00	20.06	70.08	0.00	0.00	3.73	39	0	0	1	39	0	1	39
10+50	1050.00	25.00	80.52	0.00	0.00	9.18	70	0	0	6	109	0	7	109
10+63.752	1063.75	13.75	97.45	0.00	138.61	15.38	45	0	35	6	154	44	13	110
10+75	1075.00	11.25	75.02	0.00	0.00	21.57	36	0	29	8	190	80	21	110
11+00	1100.00	25.00	68.80	5.10	0.00	5.81	67	2	0	13	257	80	34	175
11+25	1125.00	25.00	88.22	27.10	0.00	1.18	73	15	0	3	330	80	37	233
11+50	1150.00	25.00	123.46	19.18	0.00	0.86	98	21	0	1	428	80	38	310
11+74.997	1175.00	25.00	64.67	0.00	0.00	0.22	87	9	0	1	515	80	39	388
11+89.321	1189.32	14.32	41.39	0.00	0.00	0.00	28	0	0	0	543	80	39	416
							543		64	39				

STAGE 2B - EAST ROUNDABOUT

STATION	REAL STATION	DISTANCE	AREA (SF)				INCREMENTAL VOL (CY) (UNADJUSTED)				CUMULATIVE VOL (CY)			
			CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	EXPANDED FILL	SELECT BORROW	MASS ORDINATE
							NOTE 1	NOTE 2	NOTE 3		1.00 NOTE 1	1.25	1.00	NOTE 8
12+35.636	1235.64	0.00	34.99	0.00	0.00	0.00	0	0	0	0	0	0	0	0
12+50	1250.00	14.36	107.48	0.00	0.00	0.00	38	0	0	0	38	0	0	38
12+75	1275.00	25.00	85.36	0.00	8.72	0.00	89	0	4	0	127	5	0	122
12+82.194	1282.19	7.19	62.08	0.00	83.09	0.00	20	0	12	0	147	20	0	127
13+00	1300.00	17.81	69.23	0.00	147.48	72.22	43	0	76	24	190	115	24	75
13+15	1315.00	15.00	78.84	0.00	183.50	133.37	41	0	92	57	231	230	81	1
13+25	1325.00	10.00	13.53	0.00	0.00	113.46	17	0	34	46	248	273	127	-25
13+48.457	1348.46	23.46	7.79	0.00	0.00	0.00	9	0	0	49	257	273	176	-16
							257		218	176				

STAGE 2B - WB OFF RAMP XOVER X6

STATION	REAL STATION	DISTANCE	AREA (SF)				INCREMENTAL VOL (CY) (UNADJUSTED)				CUMULATIVE VOL (CY)			
			CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	:LECT BORRO	CUT	EXPANDED FILL	SELECT BORROW	MASS ORDINATE
							NOTE 1	NOTE 2	NOTE 3		1.00 NOTE 1	1.25	1.00	NOTE 8
23+60.69	2360.69	0.00	0.00	0.00	0.00	134.57	0	0	0	0	0	0	0	0
23+66.011	2366.01	5.32	0.00	0.00	80.82	118.70	0	0	8	25	0	10	25	-10
23+75	2375.00	8.99	0.12	0.00	126.01	103.32	0	0	34	37	0	53	62	-53
24+00	2400.00	25.00	51.43	0.00	62.00	143.94	24	0	87	114	24	161	176	-137
24+25	2425.00	25.00	9.29	0.00	80.40	141.94	28	0	66	132	52	244	308	-192
24+50	2450.00	25.00	0.00	0.00	52.93	139.31	4	0	62	130	56	321	438	-265
25+00	2500.00	50.00	42.55	0.00	0.00	0.00	39	0	49	129	95	383	567	-288
							95		306	567				

STAGE 2C CATEGORY 0010

STAGE 2C - EB IH 90/94 - EB OFF RAMP

STATION	REAL STATION	DISTANCE	AREA (SF)				INCREMENTAL VOL (CY) (UNADJUSTED)				CUMULATIVE VOL (CY)			
			CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	EXPANDED FILL	SELECT BORROW	MASS ORDINATE
							NOTE 1	NOTE 2	NOTE 3		1.00 NOTE 1	1.25	1.00	NOTE 8
969+63.99	96963.99	0.00	59.58	33.11	0.00	0.00	0	0	0	0	0	0	0	0
970+00	97000.00	36.01	64.10	33.60	0.00	0.00	82	44	0	0	82	0	0	38
971+00	97100.00	100.00	67.21	39.35	0.00	0.00	243	135	0	0	325	0	0	146
972+00	97200.00	100.00	74.11	38.04	0.00	0.00	262	143	0	0	587	0	0	265
973+00	97300.00	100.00	73.97	26.56	0.00	0.00	274	120	0	0	861	0	0	419
974+00	97400.00	100.00	68.39	26.00	0.00	0.00	264	97	0	0	1,125	0	0	586
975+00	97500.00	100.00	68.64	26.00	0.00	0.00	254	96	0	0	1,379	0	0	744
							1,379		0	0				

Addendum No. 02
ID 1016-05-70
Revised Sheet 1002
February 4, 2022

STAGE 2C - EB IH 90/94 - EB ON RAMP

STATION	REAL STATION	DISTANCE	AREA (SF)				INCREMENTAL VOL (CY) (UNADJUSTED)				CUMULATIVE VOL (CY)			
			CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	EXPANDED FILL	SELECT BORROW	MASS ORDINATE
							NOTE 1	NOTE 2	NOTE 3		1.00 NOTE 1	1.25	1.00	NOTE 8
989+00	98900.00	0.00	57.25	26.01	6.61	27.19	0	0	0	0	0	0	0	0
990+00	99000.00	100.00	35.95	30.50	2.10	21.52	173	105	16	90	173	20	90	48
991+00	99100.00	100.00	44.64	33.54	0.00	5.15	149	119	4	49	322	25	139	73
991+13.151	99113.15	13.15	45.21	34.59	0.00	1.88	22	17	0	2	344	25	141	78
992+00	99200.00	86.85	63.63	32.75	0.00	0.00	175	108	0	3	519	25	144	145
993+00	99300.00	100.00	46.23	24.50	0.00	0.00	203	106	0	0	722	25	144	242
994+00	99400.00	100.00	51.30	24.00	0.00	0.00	181	90	0	0	903	25	144	333
994+40	99440.00	40.00	43.30	24.00	0.00	0.00	70	36	0	0	973	25	144	367
							973		20	144				

STAGE 2C - WB OFF RAMP 'A'

STATION	REAL STATION	DISTANCE	AREA (SF)				INCREMENTAL VOL (CY) (UNADJUSTED)				CUMULATIVE VOL (CY)			
			CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	EXPANDED FILL	SELECT BORROW	MASS ORDINATE
							NOTE 1	NOTE 2	NOTE 3		1.00 NOTE 1	1.25	1.00	NOTE 8
986+67	98667.00	0.00	28.34	23.74	137.03	0.00	0	0	0	0	0	0	0	0
986+75	98675.00	8.00	26.82	29.92	108.42	0.00	8	8	36	0	8	45	0	-45
987+00	98700.00	25.00	37.40	26.53	38.42	0.00	30	26	68	0	38	130	0	-126
987+25	98725.00	25.00	44.73	25.61	32.24	0.00	38	24	33	0	76	171	0	-153
987+50	98750.00	25.00	47.32	25.56	2.55	0.00	43	24	16	0	119	191	0	-154
988+00	98800.00	50.00	152.28	25.52	0.06	0.00	185	47	2	0	304	194	0	-19
988+25	98825.00	25.00	154.28	25.54	0.00	0.00	142	24	0	0	446	194	0	99
988+50	98850.00	25.00	162.29	25.58	0.00	0.00	147	24	0	0	593	194	0	222
989+00	98900.00	50.00	145.18	25.76	0.00	0.00	285	48	0	0	878	194	0	459
989+50	98950.00	50.00	110.37	14.71	0.00	0.00	237	37	0	0	1,115	194	0	659
990+00	99000.00	50.00	59.24	0.69	17.37	9.34	157	14	16	9	1,272	214	9	782
990+50	99050.00	50.00	20.78	0.00	34.44	38.73	74	1	48	45	1,346	274	54	795
991+00	99100.00	50.00	44.77	9.71	36.96	77.57	61	9	66	108	1,407	356	162	765
992+00	99200.00	100.00	6.23	0.00	21.00	110.51	94	18	107	348	1,501	490	510	707
992+25	99225.00	25.00	0.00	0.00	0.00	0.00	3	0	10	51	1,504	503	561	698
							1,504		402	561				

STAGE 2C - WB OFF RAMP XOVER X12

STATION	REAL STATION	DISTANCE	AREA (SF)				INCREMENTAL VOL (CY) (UNADJUSTED)				CUMULATIVE VOL (CY)			
			CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	EXPANDED FILL	SELECT BORROW	MASS ORDINATE
							NOTE 1	NOTE 2	NOTE 3		1.00 NOTE 1	1.25	1.00	NOTE 8
30+00.823	3000.82	0.00	13.65	2.52	5.57	0.00	0	0	0	0	0	0	0	0
30+50	3050.00	49.18	15.98	0.00	1.78	0.00	27	2	7	0	27	9	0	16
31+00	3100.00	50.00	19.64	0.00	0.00	0.00	33	0	2	0	60	11	0	47
31+17.086	3117.09	17.09	26.92	0.00	0.00	0.00	15	0	0	0	75	11	0	62
31+50	3150.00	32.91	36.30	0.00	0.00	0.00	39	0	0	0	114	11	0	101
32+00	3200.00	50.00	39.49	1.15	0.00	0.00	70	1	0	0	184	11	0	170
32+50	3250.00	50.00	77.10	13.25	0.00	0.00	108	13	0	0	292	11	0	265
33+00	3300.00	50.00	84.38	23.86	0.00	0.00	150	34	0	0	442	11	0	381
33+47.43	3347.43	47.43	63.62	21.02	0.00	0.00	130	39	0	0	572	11	0	472
							572		9	0				

STAGE 2C - EB STH 82 - CAT 010

STATION	REAL STATION	DISTANCE	AREA (SF)				INCREMENTAL VOL (CY) (UNADJUSTED)				CUMULATIVE VOL (CY)			
			CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	EXPANDED FILL	SELECT BORROW	MASS ORDINATE
							NOTE 1	NOTE 2	NOTE 3		1.00 NOTE 1	1.25	1.00	NOTE 8
143+00	14300.00	0.00	46.80	0.13	0.00	0.00	0	0	0	0	0	0	0	0
143+25	14325.00	25.00	86.43	8.54	0.00	0.00	62	4	0	0	62	0	0	58
143+50	14350.00	25.00	81.80	0.00	0.00	0.00	78	4	0	0	140	0	0	132
143+57.135	14357.13	7.13	77.18	0.00	0.00	0.00	21	0	0	0	161	0	0	153
150+08.032	15008.03	0.00	50.52	0.00	121.30	0.00	0	0	0	0	161	0	0	153
150+25	15025.00	16.97	117.65	0.00	53.93	0.00	53	0	55	0	214	69	0	137
150+33.937	15033.94	8.94	112.01	0.00	1.79	0.00	38	0	9	0	252	80	0	164
150+50	15050.00	16.06	45.80	0.00	0.00	0.00	47	0	1	0	299	81	0	210
150+75	15075.00	25.00	34.99	0.00	0.00	0.00	37	0	0	0	336	81	0	247
151+00	15100.00	25.00	27.87	0.00	0.00	0.00	29	0	0	0	365	81	0	276
151+00.694	15100.69	0.69	27.55	0.00	0.00	0.00	1	0	0	0	366	81	0	277
							366		65	0				

STAGE 2C - EAST ROUNDABOUT

STATION	REAL STATION	DISTANCE	AREA (SF)				INCREMENTAL VOL (CY) (UNADJUSTED)				CUMULATIVE VOL (CY)			
			CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	EXPANDED FILL	SELECT BORROW	MASS ORDINATE
							NOTE 1	NOTE 2	NOTE 3		1.00 NOTE 1	1.25	1.00	NOTE 8
10+00	1000.00	0.00	51.35	20.64	199.43	131.18	0	0	0	0	0	0	0	0
10+04.376	1004.38	4.38	50.73	20.60	193.25	124.43	8	3	32	21	8	40	21	-35
10+25	1025.00	20.62	121.38	0.00	0.00	0.00	66	8	74	48	74	133	69	-70
10+42.341	1042.34	17.34	110.21	0.00	0.00	0.00	74	0	0	0	148	133	69	5
10+50	1050.00	7.66	114.78	0.00	0.00	0.00	32	0	0	0	180	133	69	37
10+71.091	1071.09	21.09	137.60	0.00	0.00	0.00	99	0	0	0	279	133	69	136
13+48.256	1348.26	0.00	78.36	14.41	0.00	8.60	0	0	0	0	279	133	69	136
13+50	1350.00	1.74	62.42	17.39	0.00	11.42	5	1	0	1	284	133	70	140
13+58.108	1358.11	8.11	65.07	50.40	0.00	36.50	19	10	0	7	303	133	77	149
13+75	1375.00	16.89	54.84	32.10	0.00	38.28	38	26	0	23	341	133	100	161
13+87.815	1387.82	12.82	52.16	22.01	147.83	101.40	25	13	35	33	366	176	133	129
13+95.84	1395.84	8.02	51.35	20.64	199.43	131.18	15	6	52	35	381	241	168	73

Addendum No. 02
ID 1016-05-70
Revised Sheet 1003
February 4, 2022

PROJECT NO: 1016-05-70
HWY: IH 90/94
COUNTY: JUNEAU
EARTHWORK
SHEET: 1003
PLOT DATE: OCT 2021
PLOT BY: MSA
PLOT NAME:
PLOT SCALE: 1:1

PLOT DATE: OCT 2021
PLOT BY: MSA
PLOT NAME:
PLOT SCALE: 1:1

STAGE 2C CATEGORY 0010 CONT.

STAGE 2C - SOUTHEAST DITCH

STATION	REAL STATION	DISTANCE	AREA (SF) CUT	AREA (SF) SALVAGED/ UNUSABLE PAVEMENT MATERIAL	AREA (SF) FILL	AREA (SF) SELECT BORROW	INCREMENTAL VOL (CY) (UNADJUSTED) CUT NOTE 1	INCREMENTAL VOL (CY) (UNADJUSTED) SALVAGED/ UNUSABLE PAVEMENT MATERIAL NOTE 2	INCREMENTAL VOL (CY) (UNADJUSTED) FILL NOTE 3	INCREMENTAL VOL (CY) (UNADJUSTED) SELECT BORROW	CUMULATIVE VOL (CY) CUT 1.00 NOTE 1	CUMULATIVE VOL (CY) EXPANDED FILL 1.25	CUMULATIVE VOL (CY) SELECT BORROW 1.00	CUMULATIVE VOL (CY) MASS ORDINATE NOTE 8
20+50	2050.00	0.00	9.78	0.00	25.75	0.00	0	0	0	0	0	0	0	0
20+75	2075.00	25.00	79.43	0.00	3.82	0.00	41	0	14	0	41	18	0	24
21+00	2100.00	25.00	75.65	0.00	0.00	0.00	72	0	2	0	113	20	0	93
21+25	2125.00	25.00	70.03	0.00	0.00	0.00	67	0	0	0	180	20	0	160
21+50	2150.00	25.00	70.92	0.00	0.00	0.00	65	0	0	0	245	20	0	225
							245		16	0				

STAGE 2D CATEGORY 0010

STAGE 2D - EB OFF RAMP 'C'

STATION	REAL STATION	DISTANCE	AREA (SF) CUT	AREA (SF) SALVAGED/ UNUSABLE PAVEMENT MATERIAL	AREA (SF) FILL	AREA (SF) SELECT BORROW	INCREMENTAL VOL (CY) (UNADJUSTED) CUT NOTE 1	INCREMENTAL VOL (CY) (UNADJUSTED) SALVAGED/ UNUSABLE PAVEMENT MATERIAL NOTE 2	INCREMENTAL VOL (CY) (UNADJUSTED) FILL NOTE 3	INCREMENTAL VOL (CY) (UNADJUSTED) SELECT BORROW	CUMULATIVE VOL (CY) CUT 1.00 NOTE 1	CUMULATIVE VOL (CY) EXPANDED FILL 1.25	CUMULATIVE VOL (CY) SELECT BORROW 1.00	CUMULATIVE VOL (CY) MASS ORDINATE NOTE 8
980+50	98050.00	0.00	10.64	0.00	91.60	22.89	0	0	0	0	0	0	0	0
980+60	98060.00	10.00	0.00	0.00	91.64	69.06	2	0	13	17	2	16	1	-14
980+74.596	98074.60	14.60	0.00	0.00	73.56	60.53	0	0	45	27	2	73	27	-71
							2		58	44				

STAGE 2D - WB ON RAMP 'B'

STATION	REAL STATION	DISTANCE	AREA (SF) CUT	AREA (SF) SALVAGED/ UNUSABLE PAVEMENT MATERIAL	AREA (SF) FILL	AREA (SF) SELECT BORROW	INCREMENTAL VOL (CY) (UNADJUSTED) CUT NOTE 1	INCREMENTAL VOL (CY) (UNADJUSTED) SALVAGED/ UNUSABLE PAVEMENT MATERIAL NOTE 2	INCREMENTAL VOL (CY) (UNADJUSTED) FILL NOTE 3	INCREMENTAL VOL (CY) (UNADJUSTED) SELECT BORROW	CUMULATIVE VOL (CY) CUT 1.00 NOTE 1	CUMULATIVE VOL (CY) EXPANDED FILL 1.25	CUMULATIVE VOL (CY) SELECT BORROW 1.00	CUMULATIVE VOL (CY) MASS ORDINATE NOTE 8
976+00	97600.00	0.00	20.56	0.00	13.34	51.40	0	0	0	0	0	0	0	0
977+00	97700.00	100.00	0.87	0.00	74.16	234.36	40	0	162	529	40	203	529	-163
978+00	97800.00	100.00	14.38	0.00	95.16	255.96	28	0	314	908	68	595	1,437	-527
979+00	97900.00	100.00	0.53	0.00	70.66	213.17	28	0	307	869	96	979	2,306	-883
980+00	98000.00	100.00	27.01	0.00	20.55	161.94	51	0	169	695	147	1,190	3,001	-1,043
981+00	98100.00	100.00	25.72	0.00	14.14	82.09	98	0	64	452	245	1,270	3,453	-1,025
982+00	98200.00	100.00	21.80	0.00	1.19	41.07	88	0	28	228	333	1,305	3,681	-972
983+00	98300.00	100.00	68.54	0.00	0.00	21.54	167	0	2	116	500	1,308	3,797	-808
983+25	98325.00	25.00	101.97	0.00	0.00	18.75	79	0	0	19	579	1,308	3,816	-729
983+50	98350.00	25.00	123.19	0.00	0.00	13.16	104	0	0	15	683	1,308	3,831	-625
984+00	98400.00	50.00	175.75	0.00	0.00	2.65	277	0	0	15	960	1,308	3,846	-348
984+50	98450.00	50.00	219.44	0.00	0.00	0.67	366	0	0	3	1,326	1,308	3,849	19
984+75	98475.00	25.00	204.55	0.00	0.00	2.67	196	0	0	2	1,522	1,308	3,851	215
985+00	98500.00	25.00	179.36	0.00	0.00	7.94	178	0	0	5	1,700	1,308	3,856	393
985+25	98525.00	25.00	152.61	0.00	0.00	21.78	154	0	0	14	1,854	1,308	3,870	547
985+50	98550.00	25.00	184.69	0.00	10.32	52.94	156	0	5	35	2,010	1,314	3,905	696
985+75	98575.00	25.00	205.17	0.00	20.36	0.00	180	0	14	25	2,190	1,331	3,930	859
985+86.597	98586.60	11.60	71.68	0.00	14.85	0.00	59	0	8	0	2,249	1,341	3,930	908
							2,249		1,073	3,930				

STAGE 2D - WB STH 82 - CAT 010

STATION	REAL STATION	DISTANCE	AREA (SF) CUT	AREA (SF) SALVAGED/ UNUSABLE PAVEMENT MATERIAL	AREA (SF) FILL	AREA (SF) SELECT BORROW	INCREMENTAL VOL (CY) (UNADJUSTED) CUT NOTE 1	INCREMENTAL VOL (CY) (UNADJUSTED) SALVAGED/ UNUSABLE PAVEMENT MATERIAL NOTE 2	INCREMENTAL VOL (CY) (UNADJUSTED) FILL NOTE 3	INCREMENTAL VOL (CY) (UNADJUSTED) SELECT BORROW	CUMULATIVE VOL (CY) CUT 1.00 NOTE 1	CUMULATIVE VOL (CY) EXPANDED FILL 1.25	CUMULATIVE VOL (CY) SELECT BORROW 1.00	CUMULATIVE VOL (CY) MASS ORDINATE NOTE 8
138+41.031	13841.03	0.00	104.79	0.00	0.00	0.00	0	0	0	0	0	0	0	0
138+50	13850.00	8.97	104.32	0.00	0.00	0.00	35	0	0	0	35	0	0	35
139+00	13900.00	50.00	114.30	0.00	0.00	0.00	202	0	0	0	237	0	0	237
139+50	13950.00	50.00	93.76	0.00	0.00	0.00	193	0	0	0	430	0	0	430
140+00	14000.00	50.00	76.80	0.00	1.27	0.00	158	0	1	0	588	1	0	587
140+25	14025.00	25.00	79.58	0.00	24.32	0.00	72	0	12	0	660	16	0	644
140+50	14050.00	25.00	64.31	0.00	50.11	1.15	67	0	34	1	727	59	1	668
140+65.242	14065.24	15.24	62.02	0.00	60.75	11.42	36	0	31	4	763	98	5	666
140+73.082	14073.08	7.84	22.09	0.00	63.94	22.08	12	0	18	5	775	120	10	655
143+25	14325.00	0.00	56.26	0.00	13.56	0.00	0	0	0	0	775	120	10	655
143+50	14350.00	25.00	49.03	0.00	29.44	0.00	49	0	20	0	824	145	10	679
143+75	14375.00	25.00	51.69	0.00	108.25	0.00	47	0	64	0	871	225	10	646
144+00	14400.00	25.00	67.02	0.00	29.13	0.00	55	0	64	0	926	305	10	621
144+50	14450.00	50.00	114.26	0.00	20.81	0.00	168	0	46	0	1,094	363	10	732
145+00	14500.00	50.00	97.29	0.00	9.16	0.00	196	0	28	0	1,290	398	10	893
145+50	14550.00	50.00	95.97	0.00	31.07	0.00	179	0	37	0	1,469	444	10	1,025
146+00	14600.00	50.00	65.79	0.00	48.93	0.00	150	0	74	0	1,619	536	10	1,083
146+50	14650.00	50.00	96.31	0.00	1.67	0.00	150	0	47	0	1,769	595	10	1,174
147+00	14700.00	50.00	122.72	0.00	3.07	0.00	203	0	4	0	1,972	600	10	1,372
147+50	14750.00	50.00	163.05	0.00	3.03	0.00	265	0	6	0	2,237	608	10	1,630
148+00	14800.00	50.00	130.76	0.00	20.81	0.00	272	0	22	0	2,509	635	10	1,874
148+25	14825.00	25.00	99.13	0.00	57.91	0.00	106	0	36	0	2,615	680	10	1,935
148+30	14830.00	5.00	84.11	0.00	58.75	0.00	17	0	11	0	2,632	694	10	1,938
150+02.02	15002.02	0.00	64.70	0.00	0.00	0.00	0	0	0	0	2,632	694	10	1,938
150+25	15025.00	22.98	66.66	0.00	0.00	0.00	56	0	0	0	2,688	694	10	1,994
150+50	15050.00	25.00	67.94	0.00	0.00	0.00	62	0	0	0	2,750	694	10	2,056
150+75	15075.00	25.00	63.77	0.00	0.00	0.00	61	0	0	0	2,811	694	10	2,117
151+00	15100.00	25.00	58.07	0.00	0.00	0.00	56	0	0	0	2,867	694	10	2,173
151+25	15125.00	25.00	70.38	0.00	0.00	0.00	59	0	0	0	2,926	694	10	2,232
151+50	15150.00	25.00	71.30	0.00	0.00	0.00	66	0	0	0	2,992	694	10	2,298
152+00	15200.00	50.00	52.63	0.00	0.00	0.00	115	0	0	0	3,107	694	10	2,413
152+50	15250.00	50.00	47.30	0.00	0.00	0.00	93	0	0	0	3,200	694	10	2,506
152+51.556	15251.56	1.56	82.14	0.00	1.44	0.00	4	0	0	0	3,204	694	10	2,510
152+66.481	15266.48	14.93	81.26	0.00	1.45	0.00	45	0	1	0	3,249	695	10	2,554
							3,249		556	10				

Addendum No. 02
ID 1016-05-70
Revised Sheet 1004
February 4, 2022

STAGE 2D CATEGORY 0010 CONT.

STAGE 2D - NORTHEAST BYPASS LANE

STATION	REAL STATION	DISTANCE	AREA (SF)				INCREMENTAL VOL (CY) (UNADJUSTED)				CUMULATIVE VOL (CY)			
			CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	EXPANDED FILL	SELECT BORROW	MASS ORDINATE
							NOTE 1	NOTE 2	NOTE 3		1.00 NOTE 1	1.25	1.00	NOTE 8
10+00	1000.00	0.00	117.44	0.00	17.92	0.00	0	0	0	0	0	0	0	0
10+25	1025.00	25.00	169.49	0.00	17.77	0.00	133	0	17	0	133	21	0	112
10+50	1050.00	25.00	150.49	0.00	9.22	0.00	148	0	12	0	281	36	0	245
10+75	1075.00	25.00	129.54	0.00	8.92	0.00	130	0	8	0	411	46	0	365
11+00	1100.00	25.00	127.71	0.00	21.42	0.00	119	0	14	0	530	64	0	466
11+25	1125.00	25.00	94.98	0.00	7.77	0.00	103	0	14	0	633	81	0	552
11+50	1150.00	25.00	77.96	0.00	0.00	0.00	80	0	4	0	713	86	0	627
11+75	1175.00	25.00	44.57	0.00	0.04	0.00	57	0	0	0	770	86	0	684
12+00	1200.00	25.00	42.03	0.00	0.47	0.00	40	0	0	0	810	86	0	724
12+25	1225.00	25.00	39.54	0.00	0.65	0.00	38	0	1	0	848	88	0	761
12+50	1250.00	25.00	36.35	0.00	1.13	0.00	35	0	1	0	883	89	0	794
12+65.788	1265.79	15.79	34.79	0.00	1.44	0.00	21	0	1	0	904	90	0	814
							904		72	0				

STAGE 2D - WEST ROUNDABOUT

STATION	REAL STATION	DISTANCE	AREA (SF)				INCREMENTAL VOL (CY) (UNADJUSTED)				CUMULATIVE VOL (CY)			
			CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	EXPANDED FILL	SELECT BORROW	MASS ORDINATE
							NOTE 1	NOTE 2	NOTE 3		1.00 NOTE 1	1.25	1.00	NOTE 8
10+00	1000.00	0.00	79.61	0.00	33.43	0.00	0	0	0	0	0	0	0	0
10+04.945	1004.94	4.94	86.99	0.00	30.75	0.00	15	0	6	0	15	8	0	8
11+89.32	1189.32	0.00	43.47	0.00	54.34	0.00	0	0	0	0	15	8	0	8
12+00	1200.00	10.68	43.04	0.00	54.69	0.00	17	0	22	0	32	35	0	-3
12+22.136	1222.14	22.14	45.41	0.00	57.87	0.00	36	0	46	0	68	93	0	-25
12+25	1225.00	2.86	41.33	0.00	59.01	0.00	5	0	6	0	73	100	0	-27
12+50	1250.00	25.00	13.70	0.00	70.72	2.80	25	0	60	1	98	175	1	-77
12+75	1275.00	25.00	0.00	0.00	92.64	97.60	6	0	76	46	104	270	47	-166
13+00	1300.00	25.00	0.00	0.00	72.82	77.23	0	0	77	81	104	366	128	-262
13+16.025	1316.02	16.02	0.59	0.00	63.52	95.65	0	0	40	51	104	416	179	-312
13+25	1325.00	8.98	1.81	0.00	59.76	114.37	0	0	20	35	104	441	214	-337
13+42.205	1342.21	17.21	4.76	0.00	123.18	122.46	2	0	58	75	106	514	289	-408
13+50	1350.00	7.79	7.07	0.00	116.27	110.32	2	0	35	34	108	558	323	-450
13+55.966	1355.97	5.97	10.31	0.00	117.82	96.56	2	0	26	23	110	590	346	-480
13+75	1375.00	19.03	40.14	0.00	45.21	0.00	18	0	57	34	128	661	380	-533
13+95	1395.00	20.00	86.78	0.00	37.18	0.00	47	0	31	0	175	700	380	-525
							175		560	380				

STAGE 2D - EAST ROUNDABOUT

STATION	REAL STATION	DISTANCE	AREA (SF)				INCREMENTAL VOL (CY) (UNADJUSTED)				CUMULATIVE VOL (CY)			
			CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	EXPANDED FILL	SELECT BORROW	MASS ORDINATE
							NOTE 1	NOTE 2	NOTE 3		1.00 NOTE 1	1.25	1.00	NOTE 8
10+71.091	1071.09	0.00	47.07	0.00	0.00	0.00	0	0	0	0	0	0	0	0
10+75	1075.00	3.91	80.90	0.00	0.00	0.00	9	0	0	0	9	0	0	9
11+00	1100.00	25.00	67.12	0.00	0.00	0.00	69	0	0	0	78	0	0	78
11+11.966	1111.97	11.97	98.03	0.00	6.48	0.00	37	0	1	0	115	1	0	114
11+25	1125.00	13.03	67.42	0.00	0.00	0.00	40	0	2	0	155	4	0	151
11+30.775	1130.77	5.77	50.62	0.00	0.00	0.00	13	0	0	0	168	4	0	164
							168		3	0				

STAGE 2E CATEGORY 0010

STAGE 2E - EB OFF RAMP 'C'

STATION	REAL STATION	DISTANCE	AREA (SF)				INCREMENTAL VOL (CY) (UNADJUSTED)				CUMULATIVE VOL (CY)			
			CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	EXPANDED FILL	SELECT BORROW	MASS ORDINATE
							NOTE 1	NOTE 2	NOTE 3		1.00 NOTE 1	1.25	1.00	NOTE 8
969+60.65	96960.65	0.00	4.94	0.00	0.00	0.00	0	0	0	0	0	0	0	0
970+00	97000.00	39.35	5.94	0.00	0.00	0.00	8	0	0	0	8	0	0	8
971+00	97100.00	100.00	2.41	0.00	1.13	0.00	15	0	2	0	23	3	0	21
972+00	97200.00	100.00	12.41	0.00	0.00	0.00	27	0	2	0	50	5	0	45
973+00	97300.00	100.00	32.06	13.38	0.00	0.00	82	25	0	0	132	5	0	102
974+00	97400.00	100.00	78.56	7.90	0.00	0.00	205	39	0	0	337	5	0	268
975+00	97500.00	100.00	110.13	0.00	9.65	0.00	349	15	18	0	686	28	0	580
976+00	97600.00	100.00	164.49	4.08	0.00	0.00	509	8	18	0	1,195	50	0	1,058
977+00	97700.00	100.00	172.52	7.35	0.00	0.00	624	21	0	0	1,819	50	0	1,661
978+00	97800.00	100.00	154.81	20.83	0.00	0.00	606	52	0	0	2,425	50	0	2,215
978+39.148	97839.15	39.15	159.33	25.13	0.57	0.00	228	33	0	0	2,653	50	0	2,410
978+50	97850.00	10.85	159.67	25.21	0.80	0.00	64	10	0	0	2,717	50	0	2,464
979+00	97900.00	50.00	202.49	25.54	0.00	0.00	335	47	1	0	3,052	51	0	2,751
979+50	97950.00	50.00	234.84	25.89	9.50	0.00	405	48	9	0	3,457	63	0	3,097
980+00	98000.00	50.00	301.47	26.81	63.62	0.00	497	49	68	0	3,954	148	0	3,460
980+25	98025.00	25.00	466.39	27.41	83.16	0.00	355	25	68	0	4,309	233	0	3,705
980+50	98050.00	25.00	361.79	30.10	233.36	0.00	383	27	147	0	4,692	416	0	3,877
980+74.596	98074.60	24.60	0.00	0.00	0.00	0.00	165	14	106	0	4,857	549	0	3,895
							4,857		439	0				

Addendum No. 02
ID 1016-05-70
Revised Sheet 1005
February 4, 2022

PROJECT NO: 1016-05-70
HWY: IH 90/94
COUNTY: JUNEAU
EARTHWORK
SHEET: 1005
E

PLOT DATE: OCT 2021
PLOT BY: MSA
PLOT NAME:
PLOT SCALE: 1:1

STAGE 2E CATEGORY 0010 CONT.

STAGE 2E- EB ON RAMP 'D'

STATION	REAL STATION	DISTANCE	AREA (SF)				INCREMENTAL VOL (CY) (UNADJUSTED)				CUMULATIVE VOL (CY)			
			CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	EXPANDED FILL	SELECT BORROW	MASS ORDINATE
							NOTE 1	NOTE 2	NOTE 3		1.00 NOTE 1	1.25	1.00	NOTE 8
985+14.546	98514.55	0.00	306.94	17.65	1.38	0.00	0	0	0	0	0	0	0	0
985+50	98550.00	35.45	286.11	13.58	2.22	0.00	389	21	2	0	389	3	0	366
986+00	98600.00	50.00	283.08	13.58	24.33	0.00	527	25	25	0	916	34	0	836
987+00	98700.00	100.00	217.71	13.58	0.55	0.00	927	50	46	0	1,843	91	0	1,656
988+00	98800.00	100.00	105.01	13.46	95.10	0.00	598	50	177	0	2,441	313	0	1,983
989+00	98900.00	100.00	61.07	13.38	10.51	0.00	308	50	196	0	2,749	558	0	1,996
989+05.182	98905.18	5.18	58.99	13.37	9.03	0.00	12	3	2	0	2,761	560	0	2,002
990+00	99000.00	94.82	29.10	13.34	0.00	0.00	155	47	16	0	2,916	580	0	2,090
990+06.885	99006.89	6.89	27.70	13.34	0.00	0.00	7	3	0	0	2,923	580	0	2,094
990+32.009	99032.01	25.12	22.42	13.34	0.29	0.00	23	12	0	0	2,946	580	0	2,105
990+50	99050.00	17.99	7.36	13.34	0.00	0.00	10	9	0	0	2,956	580	0	2,106
990+57.103	99057.10	7.10	9.23	13.35	0.00	0.00	2	4	0	0	2,958	580	0	2,104
991+00	99100.00	42.90	8.11	6.28	0.00	0.00	14	16	0	0	2,972	580	0	2,102
991+15.581	99115.58	15.58	7.57	11.17	0.00	0.00	5	5	0	0	2,977	580	0	2,102
991+50	99150.00	34.42	4.74	3.81	0.00	0.00	8	10	0	0	2,985	580	0	2,100
992+00	99200.00	50.00	4.95	6.52	0.00	0.00	9	10	0	0	2,994	580	0	2,099
992+04.93	99204.93	4.93	0.00	9.14	0.00	0.00	0	1	0	0	2,994	580	0	2,098
							2,994		464	0				

STAGE 2E - WB STH 82 - CAT 010

STATION	REAL STATION	DISTANCE	AREA (SF)				INCREMENTAL VOL (CY) (UNADJUSTED)				CUMULATIVE VOL (CY)			
			CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	EXPANDED FILL	SELECT BORROW	MASS ORDINATE
							NOTE 1	NOTE 2	NOTE 3		1.00 NOTE 1	1.25	1.00	NOTE 8
142+51.468	14251.47	0.00	199.79	0.00	13.94	0.00	0	0	0	0	0	0	0	0
142+75	14275.00	23.53	199.97	0.00	14.59	0.00	174	0	12	0	174	15	0	159
143+00	14300.00	25.00	161.19	0.00	10.73	0.00	167	0	12	0	341	30	0	311
143+25	14325.00	25.00	56.26	0.00	13.56	0.00	101	0	11	0	442	44	0	398
							442		35	0				

STAGE 2E - WEST ROUNDABOUT

STATION	REAL STATION	DISTANCE	AREA (SF)				INCREMENTAL VOL (CY) (UNADJUSTED)				CUMULATIVE VOL (CY)			
			CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	EXPANDED FILL	SELECT BORROW	MASS ORDINATE
							NOTE 1	NOTE 2	NOTE 3		1.00 NOTE 1	1.25	1.00	NOTE 8
11+89.32	1189.32	0.00	38.32	0.00	0.00	0.00	0	0	0	0	0	0	0	0
12+00	1200.00	10.68	15.22	0.00	0.00	0.00	11	0	0	0	11	0	0	11
12+22.136	1222.14	22.14	36.75	2.12	3.06	0.00	21	1	1	0	32	1	0	30
12+25	1225.00	2.86	11.94	11.27	6.88	0.00	3	1	1	0	35	3	0	31
12+40.806	1240.81	15.81	179.65	49.04	29.61	0.00	56	18	11	0	91	16	0	55
12+44.304	1244.30	3.50	196.56	40.77	31.92	0.00	24	6	4	0	115	21	0	68
12+50	1250.00	5.70	170.18	32.00	27.29	0.00	39	8	6	0	154	29	0	91
12+75	1275.00	25.00	2.42	0.00	110.21	0.00	80	15	64	0	234	109	0	76
13+00	1300.00	25.00	1.44	0.00	101.52	0.00	2	0	98	0	236	231	0	-44
13+13.45	1313.45	13.45	6.99	0.00	0.17	0.00	2	0	25	0	238	263	0	-74
							238		210	0				

STAGE 2E - EAST ROUNDABOUT

STATION	REAL STATION	DISTANCE	AREA (SF)				INCREMENTAL VOL (CY) (UNADJUSTED)				CUMULATIVE VOL (CY)			
			CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	EXPANDED FILL	SELECT BORROW	MASS ORDINATE
							NOTE 1	NOTE 2	NOTE 3		1.00 NOTE 1	1.25	1.00	NOTE 8
10+71.091	1071.09	0.00	0.00	0.00	0.00	0.00	0	0	0	0	0	0	0	0
10+75	1075.00	3.91	51.42	0.00	0.00	0.00	4	0	0	0	4	0	0	4
11+00	1100.00	25.00	59.52	0.00	0.56	0.00	51	0	0	0	55	0	0	55
11+11.966	1111.97	11.97	63.57	0.00	0.33	0.00	27	0	0	0	82	0	0	82
11+25	1125.00	13.03	69.99	0.00	0.11	0.00	32	0	0	0	114	0	0	114
11+30.775	1130.77	5.77	116.06	0.00	1.50	0.00	20	0	0	0	134	0	0	134
11+37.895	1137.89	7.12	118.40	3.85	2.95	0.00	31	1	1	0	165	1	0	163
11+50	1150.00	12.11	142.50	25.38	4.05	0.00	58	7	2	0	223	4	0	211
11+60	1160.00	10.00	166.15	70.42	3.93	0.00	57	18	1	0	280	5	0	249
11+75	1175.00	15.00	138.68	0.00	10.77	0.00	85	20	4	0	365	10	0	309
11+80	1180.00	5.00	115.42	0.00	41.35	0.00	24	0	5	0	389	16	0	327
11+87.594	1187.59	7.59	125.33	0.00	69.60	0.00	34	0	16	0	423	36	0	341
12+00	1200.00	12.41	106.21	0.00	13.97	0.00	53	0	19	0	476	60	0	370
12+25	1225.00	25.00	67.16	0.00	2.86	0.00	80	0	8	0	556	70	0	440
12+35.785	1235.79	10.79	79.23	0.00	3.23	0.00	29	0	1	0	585	71	0	468
							585		57	0				

Addendum No. 02
ID 1016-05-70
Revised Sheet 1006
February 4, 2022

1006

PROJECT NO: 1016-05-70
HWY: IH 90/94
COUNTY: JUNEAU
EARTHWORK
SHEET:
E

PLOT DATE: OCT 2021
PLOT BY: MSA
PLOT NAME:
PLOT SCALE: 1:1

STAGE 2F CATEGORY 0010

STAGE 2F - WEST ROUNDABOUT

STATION	REAL STATION	DISTANCE	AREA (SF)				INCREMENTAL VOL (CY) (UNADJUSTED)				CUMULATIVE VOL (CY)			
			CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	EXPANDED FILL	SELECT BORROW	MASS ORDINATE
							NOTE 1	NOTE 2	NOTE 3		1.00 NOTE 1	1.25	1.00	NOTE 8
10+00	1000.00	0.00	0.00	0.00	55.97	0.00	0	0	0	0	0	0	0	0
10+04.945	1004.94	4.94	61.08	0.00	56.78	0.00	6	0	10	0	6	13	0	-7
10+25	1025.00	20.06	48.96	0.00	71.04	0.00	41	0	47	0	47	71	0	-24
10+50	1050.00	25.00	50.13	0.00	79.12	0.00	46	0	70	0	93	159	0	-66
10+63.752	1063.75	13.75	53.55	0.00	84.02	0.00	26	0	42	0	119	211	0	-92
10+75	1075.00	11.25	55.21	0.00	84.88	0.00	23	0	35	0	142	255	0	-113
11+00	1100.00	25.00	49.53	0.00	97.98	0.00	48	0	85	0	190	361	0	-171
11+25	1125.00	25.00	38.49	0.00	124.53	0.00	41	0	103	0	231	490	0	-259
11+50	1150.00	25.00	29.62	0.00	145.61	0.00	32	0	125	0	263	646	0	-383
11+75	1175.00	25.00	30.31	0.00	140.63	0.00	28	0	133	0	291	813	0	-522
11+89.321	1189.32	14.32	34.83	0.00	106.21	0.00	17	0	65	0	308	894	0	-586
12+00	1200.00	10.68	0.00	0.00	106.47	0.00	7	0	42	0	315	946	0	-631
12+25	1225.00	25.00	0.00	0.00	105.74	0.00	0	0	98	0	315	1,069	0	-754
12+50	1250.00	25.00	0.00	0.00	103.75	0.00	0	0	97	0	315	1,190	0	-875
12+75	1275.00	25.00	0.00	0.00	97.96	0.00	0	0	93	0	315	1,306	0	-991
13+00	1300.00	25.00	0.00	0.00	80.02	0.00	0	0	82	0	315	1,409	0	-1,094
13+25	1325.00	25.00	0.00	0.00	65.22	0.00	0	0	67	0	315	1,493	0	-1,178
13+50	1350.00	25.00	0.00	0.00	57.32	0.00	0	0	57	0	315	1,564	0	-1,249
13+75	1375.00	25.00	0.00	0.00	54.60	0.00	0	0	52	0	315	1,629	0	-1,314
13+95.838	1395.84	20.84	0.00	0.00	55.97	0.00	0	0	43	0	315	1,683	0	-1,368
							315		1,346	0				

STAGE 2F - EAST ROUNDABOUT

STATION	REAL STATION	DISTANCE	AREA (SF)				INCREMENTAL VOL (CY) (UNADJUSTED)				CUMULATIVE VOL (CY)			
			CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	EXPANDED FILL	SELECT BORROW	MASS ORDINATE
							NOTE 1	NOTE 2	NOTE 3		1.00 NOTE 1	1.25	1.00	NOTE 8
10+00	1000.00	0.00	54.86	0.00	67.49	0.00	0	0	0	0	0	0	0	0
10+04.376	1004.38	4.38	55.28	0.00	66.78	0.00	9	0	11	0	9	14	0	-5
10+25	1025.00	20.62	56.63	0.00	65.54	0.00	43	0	51	0	52	78	0	-26
10+42.341	1042.34	17.34	56.76	0.00	67.28	0.00	36	0	43	0	88	131	0	-43
10+50	1050.00	7.66	56.33	0.00	68.91	0.00	16	0	19	0	104	155	0	-51
10+71.091	1071.09	21.09	64.49	0.00	71.06	0.00	47	0	55	0	151	224	0	-73
10+75	1075.00	3.91	0.00	0.00	64.78	0.00	5	0	10	0	156	236	0	-80
11+00	1100.00	25.00	0.00	0.00	63.63	0.00	0	0	59	0	156	310	0	-154
11+25	1125.00	25.00	0.00	0.00	65.15	0.00	0	0	60	0	156	385	0	-229
11+50	1150.00	25.00	0.00	0.00	76.12	0.00	0	0	65	0	156	466	0	-310
11+75	1175.00	25.00	0.00	0.00	95.32	0.00	0	0	79	0	156	565	0	-409
12+00	1200.00	25.00	0.00	0.00	116.64	0.00	0	0	98	0	156	688	0	-532
12+25	1225.00	25.00	0.00	0.00	128.45	0.00	0	0	113	0	156	829	0	-673
12+35.785	1235.79	10.79	34.83	0.00	132.14	0.00	7	0	52	0	163	894	0	-731
12+50	1250.00	14.21	29.47	0.00	136.66	0.00	17	0	71	0	180	983	0	-803
12+75	1275.00	25.00	28.86	0.00	131.42	0.00	27	0	124	0	207	1,138	0	-931
13+00	1300.00	25.00	33.38	0.00	117.08	0.00	29	0	115	0	236	1,281	0	-1,045
13+15	1315.00	15.00	36.44	0.00	107.47	0.00	19	0	62	0	255	1,359	0	-1,104
13+25	1325.00	10.00	38.93	0.00	100.96	0.00	14	0	39	0	269	1,408	0	-1,139
13+50	1350.00	25.00	45.79	0.00	86.05	0.00	39	0	87	0	308	1,516	0	-1,208
13+75	1375.00	25.00	53.37	0.00	69.89	0.00	46	0	72	0	354	1,606	0	-1,252
13+87.815	1387.82	12.82	53.89	0.00	69.00	0.00	25	0	33	0	379	1,648	0	-1,269
13+95.842	1395.84	8.03	54.86	0.00	67.49	0.00	16	0	20	0	395	1,673	0	-1,278
							395		1,338	0				

STAGE 2G CATEGORY 0010

STAGE 2G - EB ON RAMP 'D'

STATION	REAL STATION	DISTANCE	AREA (SF)				INCREMENTAL VOL (CY) (UNADJUSTED)				CUMULATIVE VOL (CY)			
			CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	EXPANDED FILL	SELECT BORROW	MASS ORDINATE
							NOTE 1	NOTE 2	NOTE 3		1.00 NOTE 1	1.25	1.00	NOTE 8
981+41.35	98141.35	0.00	5.20	0.00	0.00	0.00	0	0	0	0	0	0	0	0
981+50	98150.00	8.65	21.12	0.00	1.41	0.00	4	0	0	0	4	0	0	4
981+75	98175.00	25.00	8.47	0.00	79.83	0.00	14	0	38	0	18	48	0	-30
981+82.808	98182.81	7.81	15.86	0.00	33.61	0.00	4	0	16	0	22	68	0	-46
982+00	98200.00	17.19	22.44	3.63	32.43	0.00	12	1	21	0	34	94	0	-61
982+50	98250.00	50.00	63.43	16.72	0.48	0.00	80	19	30	0	114	131	0	-37
983+00	98300.00	50.00	80.12	22.81	30.86	0.00	133	37	29	0	247	168	0	23
983+50	98350.00	50.00	126.35	26.01	46.52	0.00	191	45	72	0	438	258	0	79
984+00	98400.00	50.00	167.74	40.97	35.90	0.00	272	62	76	0	710	353	0	194
984+08.885	98408.88	8.88	158.05	37.03	32.14	0.00	54	13	11	0	764	366	0	221
984+40.258	98440.26	31.37	134.86	27.88	32.92	0.00	170	38	38	0	934	414	0	305
984+50	98450.00	9.74	136.09	25.76	30.65	0.00	49	10	11	0	983	428	0	331
985+00	98500.00	50.00	308.12	18.66	8.62	0.00	411	41	36	0	1,394	473	0	656
985+40.704	98540.70	40.70	3.16	0.00	7.57	0.00	235	14	12	0	1,629	488	0	862
							1,629		390	0				

STAGE 2G - WB OFF RAMP 'A'

STATION	REAL STATION	DISTANCE	AREA (SF)				INCREMENTAL VOL (CY) (UNADJUSTED)				CUMULATIVE VOL (CY)			
			CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	EXPANDED FILL	SELECT BORROW	MASS ORDINATE
							NOTE 1	NOTE 2	NOTE 3		1.00 NOTE 1	1.25	1.00	NOTE 8
986+67	98667.00	0.00	5.89	0.00	0.00	0.00	0	0	0	0	0	0	0	0
986+75	98675.00	8.00	6.38	0.00	0.96	0.00	2	0	0	0	2	0	0	2
987+00	98700.00	25.00	32.96	0.00	41.18	0.00	18	0	20	0	20	25	0	-5
987+15	98715.00	15.00	63.81	0.00	6.83	0.00	27	0	13	0	47	41	0	6
							47		33	0				

Addendum No. 02
ID 1016-05-70
Revised Sheet 1007
February 4, 2022

STAGE 2G CATEGORY 0010 CONT.

STAGE 2G - WB OFF RAMP XOVER X12

STATION	REAL STATION	DISTANCE	AREA (SF)				INCREMENTAL VOL (CY) (UNADJUSTED)				CUMULATIVE VOL (CY)			
			CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	EXPANDED FILL	SELECT BORROW	MASS ORDINATE
							NOTE 1	NOTE 2	NOTE 3		1.00 NOTE 1	1.25	1.25	NOTE 8
30+05.14	3005.14	0.00	59.42	0.00	6.62	0.00	0	0	0	0	0	0	0	0
30+50	3050.00	44.86	57.98	0.00	1.67	0.00	98	0	7	0	98	9	0	89
31+00	3100.00	50.00	68.15	0.00	0.00	0.00	117	0	2	0	215	11	0	204
31+50	3150.00	50.00	37.61	0.00	0.10	0.00	98	0	0	0	313	11	0	302
32+00	3200.00	50.00	20.64	0.00	0.01	0.00	54	0	0	0	367	11	0	356
32+50	3250.00	50.00	7.46	0.00	0.08	0.00	26	0	0	0	393	11	0	382
33+00	3300.00	50.00	1.00	0.00	0.76	0.00	8	0	1	0	401	13	0	389
33+47.43	3347.43	47.43	0.11	0.00	1.81	0.00	1	0	2	0	402	15	0	387
							402		12	0				

STAGE 2G - EB STH 82 - CAT 010

STATION	REAL STATION	DISTANCE	AREA (SF)				INCREMENTAL VOL (CY) (UNADJUSTED)				CUMULATIVE VOL (CY)			
			CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	EXPANDED FILL	SELECT BORROW	MASS ORDINATE
							NOTE 1	NOTE 2	NOTE 3		1.00 NOTE 1	1.25	1.00	NOTE 8
142+49.644	14249.64	0.00	20.92	14.22	26.19	0.00	0	0	0	0	0	0	0	0
142+50	14250.00	0.36	20.88	14.11	25.42	0.00	0	0	0	0	0	0	0	0
142+75	14275.00	25.00	15.69	5.45	5.58	0.00	17	9	14	0	17	18	0	-10
143+00	14300.00	25.00	28.95	0.00	5.55	0.00	21	3	5	0	38	24	0	2
143+25	14325.00	25.00	42.03	7.95	4.71	0.00	33	4	5	0	71	30	0	25
143+50	14350.00	25.00	56.54	36.15	3.84	0.00	46	20	4	0	117	35	0	46
144+00	14400.00	50.00	49.89	0.00	6.23	0.00	99	33	9	0	216	46	0	101
144+12.345	14412.34	12.34	38.72	0.00	5.92	0.00	20	0	3	0	236	50	0	117
144+50	14450.00	37.66	19.89	0.00	2.35	0.00	41	0	6	0	277	58	0	151
145+00	14500.00	50.00	9.86	0.00	113.36	0.00	28	0	107	0	305	191	0	45
145+50	14550.00	50.00	30.17	0.00	73.68	0.00	37	0	173	0	342	408	0	-135
146+00	14600.00	50.00	34.09	0.00	65.99	0.00	59	0	129	0	401	569	0	-237
146+50	14650.00	50.00	22.42	0.00	75.83	0.00	52	0	131	0	453	733	0	-349
147+00	14700.00	50.00	17.73	0.00	77.42	0.00	37	0	142	0	490	910	0	-489
147+25	14725.00	25.00	7.14	0.00	122.45	0.00	12	0	93	0	502	1,026	0	-593
147+50	14750.00	25.00	6.68	0.00	173.17	0.00	6	0	137	0	508	1,198	0	-759
147+75	14775.00	25.00	10.80	0.00	18.50	0.00	8	0	89	0	516	1,309	0	-862
148+00	14800.00	25.00	18.73	0.00	12.37	0.00	14	0	14	0	530	1,326	0	-865
148+29.387	14829.39	29.39	17.16	0.00	7.07	0.00	20	0	11	0	550	1,340	0	-859
							550		1,072	0				

STAGE 2G - WEST ROUNDABOUT

STATION	REAL STATION	DISTANCE	AREA (SF)				INCREMENTAL VOL (CY) (UNADJUSTED)				CUMULATIVE VOL (CY)			
			CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	EXPANDED FILL	SELECT BORROW	MASS ORDINATE
							NOTE 1	NOTE 2	NOTE 3		1.00 NOTE 1	1.25	1.00	NOTE 8
10+86.602	1086.60	0.00	13.82	0.00	0.00	0.00	0	0	0	0	0	0	0	0
11+00	1100.00	13.40	13.56	0.00	34.32	0.00	7	0	9	0	7	11	0	-4
11+25	1125.00	25.00	6.49	0.00	16.56	0.00	9	0	24	0	16	41	0	-25
11+48.588	1148.59	23.59	7.00	0.00	19.47	0.00	6	0	16	0	22	61	0	-39
11+50	1150.00	1.41	7.10	0.00	16.29	0.00	0	0	1	0	22	63	0	-41
11+62.378	1162.38	12.38	0.00	0.00	0.00	0.00	2	0	4	0	24	68	0	-44
							24		54	0				

STAGE 2G - EAST ROUNDABOUT

STATION	REAL STATION	DISTANCE	AREA (SF)				INCREMENTAL VOL (CY) (UNADJUSTED)				CUMULATIVE VOL (CY)			
			CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	EXPANDED FILL	SELECT BORROW	MASS ORDINATE
							NOTE 1	NOTE 2	NOTE 3		1.00 NOTE 1	1.25	1.00	NOTE 8
12+62.133	1262.13	0.00	0.23	0.00	0.00	0.00	0	0	0	0	0	0	0	0
12+75	1275.00	12.87	14.72	0.00	5.57	0.00	4	0	1	0	4	1	0	3
12+82.244	1282.24	7.24	12.83	0.00	10.10	0.00	4	0	2	0	8	4	0	4
13+00	1300.00	17.76	11.02	0.00	10.14	0.00	8	0	7	0	16	13	0	4
13+15	1315.00	15.00	13.04	0.00	23.49	0.00	7	0	9	0	23	24	0	-1
13+25	1325.00	10.00	14.67	0.00	18.58	0.00	5	0	8	0	28	34	0	-6
13+50	1350.00	25.00	11.84	0.00	18.72	0.00	12	0	17	0	40	55	0	-15
13+55.537	1355.54	5.54	5.03	0.00	0.00	0.00	2	0	2	0	42	58	0	-16
							42		46	0				

Addendum No. 02
ID 1016-05-70
Revised Sheet 1008
February 4, 2022

1008

PROJECT NO: 1016-05-70
HWY: IH 90/94
COUNTY: JUNEAU
EARTHWORK
SHEET:
E

PLOT DATE: OCT 2021
PLOT BY: MSA
PLOT NAME:
PLOT SCALE: 1:1

PROJECT NO: 1016-05-70
HWY: IH 90/94
COUNTY: JUNEAU
EARTHWORK
SHEET: E

PLOT DATE : OCT 2021
PLOT BY : MSA
PLOT NAME :
PLOT SCALE : 1:1

1009

STAGE 3A CATEGORY 0010

STAGE 3A - WB IH 90/94 TRANSITION STAGE 3 - B-29-157 NORTH

STATION	REAL STATION	DISTANCE	AREA (SF)				INCREMENTAL VOL (CY) (UNADJUSTED)				CUMULATIVE VOL (CY)			
			CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	EXPANDED FILL	SELECT BORROW	MASS ORDINATE
							NOTE 1	NOTE 2	NOTE 3		1.00 NOTE 1	1.25	1.00	NOTE 8
947+75	94775.00	0.00	44.71	26.00	1.48	1.29	0	0	0	0	0	0	0	0
948+00	94800.00	25.00	45.57	26.00	9.52	4.91	42	24	5	3	42	6	3	12
948+50	94850.00	50.00	44.58	26.00	45.65	30.62	83	48	51	33	125	70	36	-17
948+93.135	94893.13	43.13	42.44	26.00	84.71	69.57	70	42	104	80	195	200	116	-119
							195		160	116				

STAGE 3A - WB IH 90/94 - B-29-157

STATION	REAL STATION	DISTANCE	AREA (SF)				INCREMENTAL VOL (CY) (UNADJUSTED)				CUMULATIVE VOL (CY)			
			CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	EXPANDED FILL	SELECT BORROW	MASS ORDINATE
							NOTE 1	NOTE 2	NOTE 3		1.00 NOTE 1	1.25	1.00	NOTE 8
948+93.1	94893.10	0.00	42.44	26.00	84.73	69.55	0	0	0	0	0	0	0	0
949+00	94900.00	6.90	43.48	26.00	86.23	64.70	11	7	22	17	11	28	17	-24
950+00	95000.00	100.00	48.57	26.00	168.67	111.03	170	96	472	325	181	618	342	-540
950+08.729	95008.73	8.73	51.99	26.00	187.49	113.05	16	8	58	36	197	690	378	-604
951+00	95100.00	91.27	35.78	26.00	169.85	131.04	148	88	604	413	345	1,445	791	-1,299
951+33.9	95133.90	33.90	36.34	26.00	172.53	130.26	45	33	215	164	390	1,714	955	-1,556
951+43.067	95143.07	9.17	25.24	18.63	171.02	131.49	10	8	58	44	400	1,786	999	-1,626
953+37.5	95337.50	0.00	12.60	7.86	0.00	0.00	0	0	0	0	400	1,786	999	-1,626
953+69.824	95369.82	32.32	36.25	26.00	199.89	128.30	29	20	120	77	429	1,936	1,076	-1,767
954+00	95400.00	30.18	43.50	29.06	215.49	114.04	45	31	232	135	474	2,226	1,211	-2,043
955+00	95500.00	100.00	51.41	26.00	209.60	83.09	176	102	787	365	650	3,210	1,576	-2,953
955+54.702	95554.70	54.70	45.65	27.92	105.63	100.45	98	55	319	186	748	3,609	1,762	-3,309
955+79.707	95579.71	25.00	42.10	27.76	143.83	44.56	41	26	116	67	789	3,754	1,829	-3,439
955+90.299	95590.30	10.59	39.98	27.70	134.76	41.95	16	11	55	17	805	3,823	1,846	-3,503
							805		3,058	1,846				

STAGE 3A - WB IH 90/94 TRANSITION STAGE 3 - B-29-157 SOUTH

STATION	REAL STATION	DISTANCE	AREA (SF)				INCREMENTAL VOL (CY) (UNADJUSTED)				CUMULATIVE VOL (CY)			
			CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	EXPANDED FILL	SELECT BORROW	MASS ORDINATE
							NOTE 1	NOTE 2	NOTE 3		1.00 NOTE 1	1.25	1.00	NOTE 8
955+90.357	95590.36	0.00	39.24	27.70	134.61	41.38	0	0	0	0	0	0	0	0
956+00	95600.00	9.64	42.44	27.64	128.74	35.96	15	10	47	14	15	59	14	-54
956+50	95650.00	50.00	54.29	30.14	128.39	19.50	90	54	238	51	105	356	65	-315
957+00	95700.00	50.00	62.59	31.21	73.59	8.18	108	57	187	26	213	590	91	-498
957+10.948	95710.95	10.95	66.85	32.27	58.98	6.00	26	13	27	3	239	624	94	-519
957+50	95750.00	39.05	21.23	0.00	26.86	2.26	64	23	62	6	303	701	100	-555
958+00	95800.00	50.00	19.58	0.00	1.28	0.00	38	0	26	2	341	734	102	-550
958+50	95850.00	50.00	20.14	0.00	0.00	0.00	37	0	1	0	378	735	102	-514
959+00	95900.00	50.00	23.40	0.00	0.00	0.00	40	0	0	0	418	735	102	-474
959+43.174	95943.17	43.17	22.90	0.00	0.00	0.00	37	0	0	0	455	735	102	-437
							455		588	102				

STAGE 3A - WB IH 90/94 TRANSITION STAGE 3 - B-29-155 NORTH

STATION	REAL STATION	DISTANCE	AREA (SF)				INCREMENTAL VOL (CY) (UNADJUSTED)				CUMULATIVE VOL (CY)			
			CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	EXPANDED FILL	SELECT BORROW	MASS ORDINATE
							NOTE 1	NOTE 2	NOTE 3		1.00 NOTE 1	1.25	1.00	NOTE 8
975+50.326	97550.33	0.00	56.70	26.00	0.00	0.00	0	0	0	0	0	0	0	0
976+00	97600.00	49.67	48.16	26.00	0.00	0.00	96	48	0	0	96	0	0	48
977+00	97700.00	100.00	32.30	26.00	14.82	11.88	149	96	27	22	245	34	22	67
978+00	97800.00	100.00	27.14	26.00	159.43	56.30	110	96	323	126	355	438	148	-323
979+00	97900.00	100.00	26.00	26.00	317.31	151.53	98	96	883	385	453	1,541	533	-1,424
980+00	98000.00	100.00	26.00	26.00	403.03	207.18	96	96	1,334	664	549	3,209	1,197	-3,092
981+00	98100.00	100.00	26.00	26.00	126.19	218.72	96	96	980	789	645	4,434	1,986	-4,317
982+00	98200.00	100.00	26.00	26.00	165.49	245.55	96	96	540	860	741	5,109	2,846	-4,992
982+10.252	98210.25	10.25	26.00	26.00	155.75	242.17	10	10	61	93	751	5,185	2,939	-5,068
982+25	98225.00	14.75	26.00	26.00	153.97	245.09	14	14	85	133	765	5,291	3,072	-5,174
							765		4,233	3,072				

STAGE 3A - WB IH 90/94 - B-29-155

STATION	REAL STATION	DISTANCE	AREA (SF)				INCREMENTAL VOL (CY) (UNADJUSTED)				CUMULATIVE VOL (CY)			
			CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	EXPANDED FILL	SELECT BORROW	MASS ORDINATE
							NOTE 1	NOTE 2	NOTE 3		1.00 NOTE 1	1.25	1.00	NOTE 8
982+24.75	98224.75	0.00	26.00	26.00	154.72	246.48	0	0	0	0	0	0	0	0
982+50	98250.00	25.25	26.00	26.00	143.22	247.76	24	24	139	231	24	174	231	-174
982+83.901	98283.90	33.90	26.40	26.00	135.37	214.74	33	33	175	290	57	393	521	-393
985+32.924	98532.92	0.00	26.00	26.00	0.00	50.96	0	0	0	0	57	393	521	-393
985+57.33	98557.33	24.41	29.61	26.00	0.00	136.16	25	24	0	85	82	393	606	-392
986+00	98600.00	42.67	26.00	26.00	285.36	215.14	44	41	225	278	126	674	884	-670
987+00	98700.00	100.00	26.43	26.00	209.69	162.74	97	96	917	700	223	1,820	1,584	-1,815
987+59.631	98759.63	59.63	29.77	26.00	176.57	138.58	62	57	427	333	285	2,354	1,917	-2,344
987+84.65	98784.65	25.02	31.74	26.00	193.44	132.03	28	24	171	125	313	2,568	2,042	-2,554
988+00	98800.00	15.35	32.70	26.00	196.34	127.51	18	15	111	74	331	2,706	2,116	-2,689
988+09.671	98809.67	9.67	34.08	26.00	198.64	123.52	12	9	71	45	343	2,795	2,161	-2,775
989+00	98900.00	90.33	20.65	26.00	57.58	53.20	92	87	429	296	435	3,331	2,457	-3,306
989+52.74	98952.74	52.74	34.26	26.00	23.92	27.81	54	51	80	79	489	3,431	2,536	-3,403
							489		2,745	2,536				

Addendum No. 02
ID 1016-05-70
Revised Sheet 1009
February 4, 2022

STAGE 3A CATEGORY 0610 CONT'

STAGE 3A - WB IH 90/94 TRANSITION STAGE 3 - B-29-155 SOUTH

STATION	REAL STATION	DISTANCE	AREA (SF)				INCREMENTAL VOL (CY) (UNADJUSTED)				CUMULATIVE VOL (CY)			
			CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	EXPANDED FILL	SELECT BORROW	MASS ORDINATE
							NOTE 1	NOTE 2	NOTE 3		1.00 NOTE 1	1.25	1.00	NOTE 8
989+53.046	98953.05	0.00	35.07	26.00	24.20	29.94	0	0	0	0	0	0	0	0
990+00	99000.00	46.95	45.04	26.00	8.75	22.28	70	45	29	45	70	36	45	-11
991+00	99100.00	100.00	64.83	26.00	0.00	0.00	203	96	16	41	273	56	86	76
992+00	99200.00	100.00	52.37	26.00	0.00	0.00	217	96	0	0	490	56	86	197
992+23.825	99223.83	23.83	49.14	26.00	0.00	0.00	45	23	0	0	535	56	86	219
							535		45	86				

STAGE 3A - WB IH 90/94 TRANSITION STAGE 3 - B-29-153 NORTH

STATION	REAL STATION	DISTANCE	AREA (SF)				INCREMENTAL VOL (CY) (UNADJUSTED)				CUMULATIVE VOL (CY)			
			CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	EXPANDED FILL	SELECT BORROW	MASS ORDINATE
							NOTE 1	NOTE 2	NOTE 3		1.00 NOTE 1	1.25	1.00	NOTE 8
1006+10.6	100610.60	0.00	61.22	26.00	0.00	0.00	0	0	0	0	0	0	0	0
1007+00	100700.00	89.40	47.15	26.00	3.45	4.08	179	86	6	7	179	8	7	86
1008+00	100800.00	100.00	43.16	26.00	13.41	12.27	167	96	31	30	346	46	37	118
1008+50	100850.00	50.00	47.15	26.00	15.76	15.92	84	48	27	26	430	80	63	120
1008+81.596	100881.60	31.60	45.43	26.00	15.37	17.19	54	30	18	19	484	103	82	122
							484		82	82				

STAGE 3A - WB IH 90/94 - B-29-153 NORTH

STATION	REAL STATION	DISTANCE	AREA (SF)				INCREMENTAL VOL (CY) (UNADJUSTED)				CUMULATIVE VOL (CY)			
			CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	EXPANDED FILL	SELECT BORROW	MASS ORDINATE
							NOTE 1	NOTE 2	NOTE 3		1.00 NOTE 1	1.25	1.00	NOTE 8
1008+81.499	100881.50	0.00	45.43	26.00	15.33	17.23	0	0	0	0	0	0	0	0
1009+00	100900.00	18.50	49.84	26.00	13.23	16.39	33	18	10	12	33	13	12	3
1010+00	101000.00	100.00	54.90	26.00	14.12	26.96	194	96	51	80	227	76	92	37
1010+41.656	101041.66	41.66	59.51	26.00	19.43	31.11	88	40	26	45	315	109	137	52
1011+00	101100.00	58.34	68.20	26.00	31.18	40.15	138	56	55	77	453	178	214	66
1012+00	101200.00	100.00	64.85	26.00	42.42	56.58	246	96	136	179	699	348	393	46
1012+15.19	101215.19	15.19	64.34	26.00	43.77	57.99	36	15	24	32	735	378	425	37
1014+80.617	101480.62	0.00	36.97	26.00	144.87	157.03	0	0	0	0	735	378	425	37
1015+00	101500.00	19.38	35.74	26.00	142.88	153.88	26	19	103	112	761	506	537	-85
1015+25	101525.00	25.00	34.48	26.00	135.62	155.08	33	24	129	143	794	668	680	-238
1015+93.519	101593.52	68.52	27.84	26.00	140.74	174.56	79	66	351	418	873	1,106	1,098	-663
1016+00	101600.00	6.48	27.59	26.00	140.60	173.83	7	6	34	42	880	1,149	1,140	-705
1017+00	101700.00	100.00	28.59	26.00	54.82	109.91	104	96	362	525	984	1,601	1,665	-1,149
1017+13.253	101713.25	13.25	29.77	26.00	51.09	101.20	14	13	26	52	998	1,634	1,717	-1,181
							998		1,307	1,717				

STAGE 3A - WB IH 90/94 TRANSITION STAGE 3 - B-29-153 SOUTH

STATION	REAL STATION	DISTANCE	AREA (SF)				INCREMENTAL VOL (CY) (UNADJUSTED)				CUMULATIVE VOL (CY)			
			CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	EXPANDED FILL	SELECT BORROW	MASS ORDINATE
							NOTE 1	NOTE 2	NOTE 3		1.00 NOTE 1	1.25	1.00	NOTE 8
1017+17.354	101717.35	0.00	29.33	26.00	50.44	99.19	0	0	0	0	0	0	0	0
1018+00	101800.00	82.65	31.94	26.00	44.83	59.76	94	80	146	243	94	183	243	-169
1019+00	101900.00	100.00	32.90	26.00	31.51	16.04	120	96	141	140	214	359	383	-321
1019+07.657	101907.66	7.66	33.00	26.00	31.64	13.08	9	7	9	4	223	370	387	-330
1020+00	102000.00	92.34	44.36	26.00	0.00	0.00	132	89	54	22	355	438	409	-355
1021+00	102100.00	100.00	54.24	26.00	0.00	0.00	183	96	0	0	538	438	409	-268
1021+13.31	102113.31	13.31	54.96	26.00	0.00	0.00	27	13	0	0	565	438	409	-254
1021+53.006	102153.01	39.70	56.61	26.00	0.00	0.00	82	38	0	0	647	438	409	-210
							647		350	409				

STAGE 3A - CTH G

STATION	REAL STATION	DISTANCE	AREA (SF)				INCREMENTAL VOL (CY) (UNADJUSTED)				CUMULATIVE VOL (CY)			
			CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	EXPANDED FILL	SELECT BORROW	MASS ORDINATE
							NOTE 1	NOTE 2	NOTE 3		1.00 NOTE 1	1.25	1.00	NOTE 8
21+18.97	2118.97	0.00	64.00	0.00	0.08	0.00	0	0	0	0	0	0	0	0
21+25	2125.00	6.03	64.69	0.00	0.00	0.00	14	0	0	0	14	0	0	14
21+38.281	2138.28	13.28	117.55	0.00	0.00	0.00	45	0	0	0	59	0	0	59
21+50	2150.00	11.72	121.93	0.00	3.38	0.00	52	0	1	0	111	1	0	110
21+75	2175.00	25.00	148.91	0.00	0.00	0.00	125	0	2	0	236	4	0	232
22+00	2200.00	25.00	124.53	0.00	398.42	0.00	127	0	184	0	363	234	0	129
22+25	2225.00	25.00	139.25	0.00	187.84	0.00	122	0	271	0	485	573	0	-88
22+50	2250.00	25.00	139.38	0.00	20.58	0.00	129	0	96	0	614	693	0	-79
22+75	2275.00	25.00	121.53	0.00	0.00	0.00	121	0	10	0	735	705	0	30
22+91.534	2291.53	16.53	20.47	0.00	13.40	0.00	43	0	4	0	778	710	0	68
22+99.998	2300.00	8.46	8.51	0.00	89.09	0.00	5	0	16	0	783	730	0	53
							783		584	0				

Addendum No. 02
ID 1016-05-70
Revised Sheet 1010
February 4, 2022

STAGE 3B CATEGORY 0010

STAGE 3B - WB IH 90/94

STATION	REAL STATION	DISTANCE	AREA (SF)				INCREMENTAL VOL (CY) (UNADJUSTED)				CUMULATIVE VOL (CY)			
			CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	EXPANDED FILL	SELECT BORROW	MASS ORDINATE
							NOTE 1	NOTE 2	NOTE 3		1.00 NOTE 1	1.25	1.00	NOTE 8
944+01.9	94401.90	0.00	69.49	26.00	0.00	0.00	0	0	0	0	0	0	0	0
945+00	94500.00	98.10	56.40	26.00	41.03	2.32	229	94	75	4	229	94	4	41
946+00	94600.00	100.00	47.79	26.00	70.19	13.98	193	96	206	30	422	351	34	-119
947+00	94700.00	100.00	50.97	26.00	87.70	40.81	183	96	292	101	605	716	135	-397
947+72.497	94772.50	72.50	62.30	26.00	124.67	68.53	152	70	285	147	757	1,073	282	-672
948+00	94800.00	27.50	67.82	26.00	141.63	59.19	66	26	136	65	823	1,243	347	-802
948+52.887	94852.89	52.89	77.38	26.00	38.37	6.69	142	51	176	65	965	1,463	412	-931
948+93.1	94893.10	40.21	86.72	26.00	0.00	0.00	122	39	29	5	1,087	1,499	417	-884
955+90.279	95590.28	0.00	74.67	27.70	0.00	0.00	0	0	0	0	1,087	1,499	417	-884
956+00	95600.00	9.72	83.39	27.64	4.43	0.00	28	10	1	0	1,115	1,500	417	-867
957+00	95700.00	100.00	67.10	29.14	36.71	1.88	279	105	76	3	1,394	1,595	420	-788
957+10.902	95710.90	10.90	65.29	29.36	39.25	2.25	27	12	15	1	1,421	1,614	421	-792
958+00	95800.00	89.10	70.77	31.24	21.79	1.28	224	100	101	6	1,645	1,740	427	-794
959+00	95900.00	100.00	79.16	33.30	0.00	0.00	278	120	40	2	1,923	1,790	429	-686
959+71.694	95971.69	71.69	85.25	34.66	0.00	0.00	218	90	0	0	2,141	1,790	429	-558
959+96.754	95996.75	25.06	89.77	35.07	24.82	1.86	81	32	12	1	2,222	1,805	430	-524
960+00	96000.00	3.25	90.29	35.12	23.40	2.01	11	4	3	0	2,233	1,809	430	-521
960+21.812	96021.81	21.81	91.44	35.30	16.39	3.77	73	28	16	2	2,306	1,829	432	-496
961+00	96100.00	78.19	95.80	35.63	6.93	0.00	271	103	34	5	2,577	1,871	437	-370
961+50	96150.00	50.00	95.15	35.68	0.00	0.00	177	66	6	0	2,754	1,879	437	-267
962+00	96200.00	50.00	93.83	35.72	0.00	0.00	175	66	0	0	2,929	1,879	437	-158
962+50	96250.00	50.00	88.72	35.56	21.95	0.00	169	66	20	0	3,098	1,904	437	-80
963+00	96300.00	50.00	84.27	35.58	0.00	0.00	160	66	20	0	3,258	1,929	437	-11
964+00	96400.00	100.00	103.01	35.56	0.00	0.00	347	132	0	0	3,605	1,929	437	204
964+50	96450.00	50.00	135.17	35.51	0.00	0.00	221	66	0	0	3,826	1,929	437	359
965+00	96500.00	50.00	134.52	35.63	0.00	0.00	250	66	0	0	4,076	1,929	437	543
966+00	96600.00	100.00	233.00	35.61	0.08	0.00	681	132	0	0	4,757	1,929	437	1,092
967+00	96700.00	100.00	293.65	23.70	1.12	0.00	975	110	2	0	5,732	1,931	437	1,955
968+00	96800.00	100.00	120.18	24.41	0.56	0.00	766	89	3	0	6,498	1,935	437	2,628
969+00	96900.00	100.00	73.57	26.31	1.60	0.00	359	94	4	0	6,857	1,940	437	2,888
970+00	97000.00	100.00	75.29	28.20	0.77	0.00	276	101	4	0	7,133	1,945	437	3,058
971+00	97100.00	100.00	75.05	30.31	0.00	0.00	278	108	1	0	7,411	1,946	437	3,227
997+20.439	99720.44	0.00	17.81	12.00	0.00	0.00	0	0	0	0	7,411	1,946	437	3,227
998+00	99800.00	79.56	22.90	12.00	0.00	0.00	60	35	0	0	7,471	1,946	437	3,252
999+00	99900.00	100.00	17.88	12.00	0.00	0.00	76	44	0	0	7,547	1,946	437	3,284
999+25	99925.00	25.00	36.81	24.00	0.00	0.00	25	17	0	0	7,572	1,946	437	3,292
1000+00	100000.00	75.00	61.01	26.00	0.00	0.00	136	69	0	0	7,708	1,946	437	3,359
1000+00.01	100000.01	0.01	67.39	26.00	10.31	8.20	0	0	0	0	7,708	1,946	437	3,359
1001+00	100100.00	99.99	60.00	26.00	11.51	7.64	236	96	40	29	7,944	1,996	466	3,449
1002+00	100200.00	100.00	98.55	26.00	20.48	13.05	294	96	59	38	8,238	2,070	504	3,573
1002+13.8	100213.80	13.80	102.54	26.00	32.54	21.32	51	13	14	9	8,289	2,088	513	3,594
1002+27.672	100227.67	13.87	95.60	26.00	40.33	15.62	51	13	19	9	8,340	2,111	522	3,608
1003+00	100300.00	72.33	75.48	26.00	32.09	11.69	229	70	97	37	8,569	2,233	559	3,646
1004+00	100400.00	100.00	61.36	26.00	19.86	10.82	253	96	96	42	8,822	2,353	601	3,683
1005+00	100500.00	100.00	54.21	26.00	27.65	15.01	214	96	88	48	9,036	2,463	649	3,691
1005+75	100575.00	75.00	49.46	26.00	29.73	19.56	144	72	80	48	9,180	2,563	697	3,663
1006+00	100600.00	25.00	50.64	26.00	20.80	24.29	46	24	23	20	9,226	2,591	717	3,656
1006+10.427	100610.43	10.43	47.63	26.00	21.63	24.20	19	10	8	9	9,245	2,601	726	3,655
1006+75	100675.00	64.57	61.03	26.00	13.51	9.82	130	62	42	41	9,375	2,654	767	3,670
1007+00	100700.00	25.00	63.72	26.00	8.65	2.24	58	24	10	6	9,433	2,666	773	3,692
1008+00	100800.00	100.00	76.90	26.00	1.85	0.03	260	96	19	4	9,693	2,690	777	3,832
1008+81.499	100881.50	81.50	81.13	26.00	0.54	0.00	239	78	4	0	9,932	2,695	777	3,988
1017+17.256	101717.26	0.00	78.69	26.00	0.56	0.00	0	0	0	0	9,932	2,695	777	3,988
1018+00	101800.00	82.74	84.21	26.00	12.15	0.90	250	80	19	1	10,182	2,719	778	4,134
1019+00	101900.00	100.00	86.30	26.00	28.74	8.37	316	96	76	17	10,498	2,814	795	4,259
1019+06.602	101906.60	6.60	86.08	26.00	30.53	9.34	21	6	7	2	10,519	2,823	797	4,266
1020+00	102000.00	93.40	78.72	26.00	76.45	38.21	285	90	185	82	10,804	3,054	879	4,229
1021+00	102100.00	100.00	75.56	26.00	68.83	23.41	286	96	269	114	11,090	3,390	993	4,083
1021+12.71	102112.71	12.71	75.18	26.00	59.13	20.57	35	12	30	10	11,125	3,428	1,003	4,069
1021+52.862	102152.86	40.15	73.80	26.00	46.64	13.88	111	39	79	26	11,236	3,526	1,029	4,042
1022+00	102200.00	47.14	73.59	26.00	36.74	10.38	129	45	73	21	11,365	3,618	1,050	4,035
1023+00	102300.00	100.00	72.85	26.00	19.27	3.87	271	96	104	26	11,636	3,748	1,076	4,080
1024+00	102400.00	100.00	71.45	26.00	37.98	3.23	267	96	106	13	11,903	3,880	1,089	4,118
1024+25	102425.00	25.00	65.89	26.00	32.97	0.92	64	24	33	2	11,967	3,921	1,091	4,117
1025+00	102500.00	75.00	72.94	26.00	40.65	0.22	193	72	102	2	12,160	4,049	1,093	4,110
1026+00	102600.00	100.00	73.20	26.00	5.83	0.00	271	96	86	0	12,431	4,156	1,093	4,178
1027+00	102700.00	100.00	75.02	26.00	0.12	0.08	274	96	11	0	12,705	4,170	1,093	4,342
1027+66.246	102766.25	66.25	76.16	26.00	0.00	0.00	185	64	0	0	12,890	4,170	1,093	4,463
1027+76.827	102776.83	10.58	78.18	26.00	0.00	0.00	30	10	0	0	12,920	4,170	1,093	4,483
1028+00	102800.00	23.17	86.38	26.00	5.75	1.90	71	22	2	1	12,991	4,173	1,094	4,530
1028+01.958	102801.96	1.96	88.05	26.00	5.63	3.01	6	2	0	0	12,997	4,173	1,094	4,534
1028+27.092	102827.09	25.13	92.51	26.00	2.72	4.79	84	24	4	4	13,081	4,178	1,098	4,589
1029+00	102900.00	72.91	80.19	26.00	1.93	1.26	233	70	6	8	13,314	4,185	1,106	4,744
1029+89.38	102989.38	89.38	67.12	26.00	2.23	0.44	244	86	7	3	13,558	4,194	1,109	4,893
							13,558		3,355	1,109				

Addendum No. 02
ID 1016-05-70
Revised Sheet 1011
February 4, 2022

1011

PROJECT NO: 1016-05-70
HWY: IH 90/94
COUNTY: JUNEAU
EARTHWORK
SHEET:
E

PLOT DATE: OCT 2021
PLOT BY: MSA
PLOT NAME:
PLOT SCALE: 1:1

STAGE 3B - WB ON RAMP XOVER X7

STATION	REAL STATION	DISTANCE	AREA (SF)				INCREMENTAL VOL (CY) (UNADJUSTED)				CUMULATIVE VOL (CY)			
			CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	EXPANDED FILL	SELECT BORROW	MASS ORDINATE
							NOTE 1	NOTE 2	NOTE 3		1.00 NOTE 1	1.25	1.00	NOTE 8
20+34.533	2034.53	0.00	0.00	0.00	0.77	0.00	0	0	0	0	0	0	0	0
20+50	2050.00	15.47	0.70	0.00	1.37	0.00	0	0	1	0	0	1	0	-1
21+00	2100.00	50.00	2.42	0.00	2.33	0.00	3	0	3	0	3	5	0	-2
21+50	2150.00	50.00	2.77	0.00	1.52	0.00	5	0	4	0	8	10	0	-2
22+00	2200.00	50.00	3.71	0.00	0.44	0.00	6	0	2	0	14	13	0	2
22+50	2250.00	50.00	15.69	0.00	0.00	0.00	18	0	0	0	32	13	0	20
23+00	2300.00	50.00	10.43	0.00	0.00	0.00	24	0	0	0	56	13	0	44
23+27.084	2327.08	27.08	11.09	0.00	0.00	0.00	11	0	0	0	67	13	0	55
23+50	2350.00	22.92	11.31	0.00	0.00	0.00	10	0	0	0	77	13	0	65
24+00	2400.00	50.00	12.06	0.00	0.00	0.00	22	0	0	0	99	13	0	87
24+50	2450.00	50.00	13.39	0.00	0.00	0.00	24	0	0	0	123	13	0	111
25+00	2500.00	50.00	14.87	0.00	0.00	0.00	26	0	0	0	149	13	0	137
25+50	2550.00	50.00	13.93	0.00	0.00	0.00	27	0	0	0	176	13	0	164
26+00	2600.00	50.00	12.10	0.00	0.00	0.00	24	0	0	0	200	13	0	188
26+50	2650.00	50.00	9.45	0.00	0.00	0.00	20	0	0	0	220	13	0	208
26+77.433	2677.43	27.43	8.54	0.00	0.01	0.00	9	0	0	0	229	13	0	217
27+00	2700.00	22.57	8.00	0.00	0.14	0.00	7	0	0	0	236	13	0	224
27+50	2750.00	50.00	6.57	0.00	0.84	0.00	13	0	1	0	249	14	0	235
28+00	2800.00	50.00	6.38	0.00	1.92	0.00	12	0	3	0	261	18	0	244
28+27.488	2827.49	27.49	8.31	0.00	2.66	0.00	7	0	2	0	268	20	0	248
28+50	2850.00	22.51	10.37	0.00	2.64	0.00	8	0	2	0	276	23	0	254
29+00	2900.00	50.00	9.86	0.00	2.00	0.00	19	0	4	0	295	28	0	268
29+50	2950.00	50.00	10.65	0.00	0.89	0.00	19	0	3	0	314	31	0	283
30+00	3000.00	50.00	15.16	0.00	0.18	0.00	24	0	1	0	338	33	0	306
30+50	3050.00	50.00	20.39	0.00	0.00	0.00	33	0	0	0	371	33	0	339
31+00	3100.00	50.00	26.55	0.00	0.00	0.00	43	0	0	0	414	33	0	382
31+50	3150.00	50.00	30.04	0.00	0.00	0.00	52	0	0	0	466	33	0	434
31+76.235	3176.24	26.24	30.95	0.00	0.00	0.00	30	0	0	0	496	33	0	464
31+88.775	3188.77	12.54	31.40	0.00	0.00	0.00	14	0	0	0	510	33	0	478
							510		26	0				

STAGE 3B - WB ON RAMP 'B'

STATION	REAL STATION	DISTANCE	AREA (SF)				INCREMENTAL VOL (CY) (UNADJUSTED)				CUMULATIVE VOL (CY)			
			CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	EXPANDED FILL	SELECT BORROW	MASS ORDINATE
							NOTE 1	NOTE 2	NOTE 3		1.00 NOTE 1	1.25	1.00	NOTE 8
971+00	97100.00	0.00	65.34	18.32	0.00	0.00	0	0	0	0	0	0	0	0
972+00	97200.00	100.00	134.19	20.36	0.00	0.00	369	72	0	0	369	0	0	297
972+25	97225.00	25.00	162.96	13.71	0.00	0.00	138	16	0	0	507	0	0	419
973+00	97300.00	75.00	286.08	13.91	0.00	0.00	624	38	0	0	1,131	0	0	1,005
973+02.914	97302.91	2.91	261.33	3.98	0.00	0.00	30	1	0	0	1,161	0	0	1,034
973+46.052	97346.05	43.14	148.24	3.09	0.00	0.00	327	6	0	0	1,488	0	0	1,355
974+00	97400.00	53.95	210.21	0.00	0.00	4.45	358	3	0	4	1,846	0	4	1,710
974+50	97450.00	50.00	206.58	0.00	0.23	13.40	386	0	0	17	2,232	0	21	2,096
975+00	97500.00	50.00	154.00	0.00	1.86	16.58	334	0	2	28	2,566	3	49	2,428
975+25.124	97525.12	25.12	147.44	0.00	3.68	19.11	140	0	3	17	2,706	6	66	2,564
975+50.266	97550.27	25.14	131.08	0.00	6.05	24.56	130	0	5	20	2,836	13	86	2,688
976+00	97600.00	49.73	57.21	0.00	1.76	0.00	173	0	7	23	3,009	21	109	2,852
976+00.562	97600.56	0.56	0.00	0.00	0.00	0.00	1	0	0	0	3,010	21	109	2,853
							3,010		17	109				

STAGE 3B - WB OFF RAMP 'A'

STATION	REAL STATION	DISTANCE	AREA (SF)				INCREMENTAL VOL (CY) (UNADJUSTED)				CUMULATIVE VOL (CY)			
			CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	EXPANDED FILL	SELECT BORROW	MASS ORDINATE
							NOTE 1	NOTE 2	NOTE 3		1.00 NOTE 1	1.25	1.00	NOTE 8
992+00	99200.00	0.00	110.00	0.00	0.00	0.00	0	0	0	0	0	0	0	0
993+00	99300.00	100.00	14.41	0.00	19.75	106.32	230	0	37	197	230	46	197	184
993+50	99350.00	50.00	41.52	0.00	15.93	99.36	52	0	33	190	282	88	387	195
994+00	99400.00	50.00	37.51	0.00	12.33	88.14	73	0	26	174	355	120	561	235
995+00	99500.00	100.00	80.67	0.00	0.48	34.67	219	0	24	227	574	150	788	424
995+79.915	99579.92	79.92	108.58	0.00	0.31	36.51	280	0	1	105	854	151	893	703
995+81.764	99581.76	1.85	135.76	7.59	0.20	34.42	8	0	0	2	862	151	895	711
996+00	99600.00	18.24	111.28	7.30	3.74	51.93	83	5	1	29	945	153	924	788
996+85.51	99685.51	85.51	45.91	5.97	49.93	102.45	249	21	85	244	1,194	259	1,168	909
997+00	99700.00	14.49	39.59	5.72	36.79	84.09	23	3	23	50	1,217	288	1,218	901
998+00	99800.00	100.00	50.41	3.92	0.62	8.09	167	18	69	171	1,384	374	1,389	963
999+00	99900.00	100.00	34.65	4.03	3.63	3.14	158	15	8	21	1,542	384	1,410	1,096
999+25	99925.00	25.00	33.79	2.00	5.19	2.99	32	3	4	3	1,574	389	1,413	1,120
999+50	99950.00	25.00	33.77	2.00	5.99	2.19	31	2	5	2	1,605	395	1,415	1,143
999+99.777	99999.78	49.78	27.42	2.00	10.29	8.20	56	4	15	10	1,661	414	1,425	1,176
							1,661		331	1,425				

Addendum No. 02
ID 1016-05-70
Revised Sheet 1012
February 4, 2022

1012

PROJECT NO: 1016-05-70
HWY: IH 90/94
COUNTY: JUNEAU
EARTHWORK
SHEET:
E

PLOT DATE: OCT 2021
PLOT BY: MSA
PLOT NAME:
PLOT SCALE: 1:1

STAGE 3B CATEGORY 0010 CONT.

STAGE 3B - WB OFF RAMP XOVER X8

STATION	REAL STATION	DISTANCE	AREA (SF)				INCREMENTAL VOL (CY) (UNADJUSTED)				CUMULATIVE VOL (CY)			
			CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	EXPANDED FILL	SELECT BORROW	MASS ORDINATE
							NOTE 1	NOTE 2	NOTE 3		1.00 NOTE 1	1.25	1.00	NOTE 8
34+00	3400.00	0.00	31.20	0.00	0.00	0.00	0	0	0	0	0	0	0	0
34+50	3450.00	50.00	31.29	0.00	0.00	0.00	58	0	0	0	58	0	0	58
35+00	3500.00	50.00	29.65	0.00	0.38	0.00	56	0	0	0	114	0	0	114
35+50	3550.00	50.00	24.76	0.00	0.41	0.00	50	0	1	0	164	1	0	163
36+00	3600.00	50.00	23.26	0.00	0.04	0.00	44	0	0	0	208	1	0	207
36+50	3650.00	50.00	17.51	0.00	0.07	0.00	38	0	0	0	246	1	0	245
37+00	3700.00	50.00	12.49	0.00	0.53	0.00	28	0	1	0	274	3	0	272
37+50	3750.00	50.00	13.30	0.00	0.39	0.00	24	0	1	0	298	4	0	294
38+00	3800.00	50.00	11.03	0.00	0.12	0.00	23	0	0	0	321	4	0	317
38+50	3850.00	50.00	9.93	0.00	0.01	0.00	19	0	0	0	340	4	0	336
39+00	3900.00	50.00	8.95	0.00	0.00	0.00	17	0	0	0	357	4	0	353
39+50	3950.00	50.00	8.43	0.00	0.00	0.00	16	0	0	0	373	4	0	369
40+00	4000.00	50.00	8.66	0.00	0.00	0.00	16	0	0	0	389	4	0	385
40+50	4050.00	50.00	9.21	0.00	0.00	0.00	17	0	0	0	406	4	0	402
41+00	4100.00	50.00	9.48	0.00	0.00	0.00	17	0	0	0	423	4	0	419
41+50	4150.00	50.00	9.78	0.00	0.00	0.00	18	0	0	0	441	4	0	437
42+00	4200.00	50.00	8.76	0.00	0.00	0.00	17	0	0	0	458	4	0	454
42+50	4250.00	50.00	6.71	0.00	0.00	0.00	14	0	0	0	472	4	0	468
43+00	4300.00	50.00	4.64	0.00	0.00	0.00	11	0	0	0	483	4	0	479
43+10	4310.00	10.00	3.42	0.00	0.61	0.00	1	0	0	0	484	4	0	480
43+50	4350.00	40.00	0.52	0.00	0.01	0.00	3	0	0	0	487	4	0	483
43+55.91	4355.91	5.91	0.00	0.00	0.00	0.00	0	0	0	0	487	4	0	483
							487		3	0				

STAGE 3C CATEGORY 0010

STAGE 3C - WB I H 90/94 - WB ON RAMP

STATION	REAL STATION	DISTANCE	AREA (SF)				INCREMENTAL VOL (CY) (UNADJUSTED)				CUMULATIVE VOL (CY)			
			CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	EXPANDED FILL	SELECT BORROW	MASS ORDINATE
							NOTE 1	NOTE 2	NOTE 3		1.00 NOTE 1	1.25	1.00	NOTE 8
967+00	96700.00	0.00	5.53	12.00	0.00	0.00	0	0	0	0	0	0	0	0
968+00	96800.00	100.00	5.08	12.00	0.00	0.00	20	44	0	0	20	0	0	-24
968+50	96850.00	50.00	23.86	12.00	0.00	0.00	27	22	0	0	47	0	0	-19
969+00	96900.00	50.00	17.39	12.00	0.00	0.00	38	22	0	0	85	0	0	-3
970+00	97000.00	100.00	14.70	12.00	0.00	0.00	59	44	0	0	144	0	0	12
970+50	97050.00	50.00	13.43	12.00	0.00	0.00	26	22	0	0	170	0	0	16
971+00.36	97100.36	50.36	29.15	27.03	0.00	0.00	40	36	0	0	210	0	0	20
972+00	97200.00	99.64	31.73	24.00	0.00	0.00	112	94	0	0	322	0	0	38
973+00	97300.00	100.00	44.10	36.65	0.00	0.00	140	112	0	0	462	0	0	66
974+00	97400.00	100.00	56.91	37.37	0.00	0.00	187	137	0	0	649	0	0	116
974+50	97450.00	50.00	54.45	37.46	0.00	0.00	103	69	0	0	752	0	0	150
975+00	97500.00	50.00	53.67	37.65	0.00	0.00	100	70	0	0	852	0	0	180
975+50	97550.00	50.00	57.89	11.84	0.00	0.00	103	46	0	0	955	0	0	237
976+00	97600.00	50.00	63.84	12.05	0.00	2.49	113	22	0	2	1,068	0	2	328
977+00	97700.00	100.00	116.58	2.31	21.32	12.44	334	27	39	28	1,402	49	30	586
978+00	97800.00	100.00	43.50	0.00	65.81	8.76	296	4	161	39	1,698	250	69	677
979+00	97900.00	100.00	51.99	0.00	33.64	0.74	177	0	184	18	1,875	480	87	624
979+09.679	97909.68	9.68	53.38	0.00	25.11	0.46	19	0	11	0	1,894	494	87	629
980+00	98000.00	90.32	61.22	0.00	24.12	0.24	192	0	82	1	2,086	596	88	719
981+00	98100.00	100.00	69.20	0.00	8.27	0.08	242	0	60	1	2,328	671	89	886
982+00	98200.00	100.00	76.28	0.00	3.46	0.00	269	0	22	0	2,597	699	89	1,127
982+09.463	98209.46	9.46	76.90	0.00	2.82	0.00	27	0	1	0	2,624	700	89	1,153
982+25	98225.00	15.54	0.00	0.00	0.00	0.00	22	0	1	0	2,646	701	89	1,174
							2,646		561	89				

STAGE 3C- WB ON RAMP 'B'

STATION	REAL STATION	DISTANCE	AREA (SF)				INCREMENTAL VOL (CY) (UNADJUSTED)				CUMULATIVE VOL (CY)			
			CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	EXPANDED FILL	SELECT BORROW	MASS ORDINATE
							NOTE 1	NOTE 2	NOTE 3		1.00 NOTE 1	1.25	1.00	NOTE 8
973+02.914	97302.91	0.00	4.33	6.30	0.00	0.00	0	0	0	0	0	0	0	0
973+42.986	97342.99	40.07	8.90	3.54	0.00	0.00	10	7	0	0	10	0	0	3
973+68.094	97368.09	25.11	11.88	1.53	0.00	0.00	10	2	0	0	20	0	0	11
973+93.18	97393.18	25.09	13.48	0.00	0.00	0.00	12	1	0	0	32	0	0	22
974+00	97400.00	6.82	13.58	0.00	0.00	0.00	3	0	0	0	35	0	0	25
975+00	97500.00	100.00	6.52	0.00	4.34	0.00	37	0	8	0	72	10	0	52
975+25.124	97525.12	25.12	6.83	0.00	8.89	0.00	6	0	6	0	78	18	0	51
975+50.266	97550.27	25.14	7.88	0.00	14.01	0.00	7	0	11	0	85	31	0	44
976+00	97600.00	49.73	22.10	0.00	31.58	0.00	28	0	42	0	113	84	0	19
977+00	97700.00	100.00	174.67	11.75	30.03	0.00	364	22	114	0	477	226	0	219
978+00	97800.00	100.00	347.90	11.72	19.63	0.00	968	43	92	0	1,445	341	0	1,029
979+00	97900.00	100.00	413.51	11.70	6.88	0.00	1,410	43	49	0	2,855	403	0	2,335
980+00	98000.00	100.00	335.76	11.68	1.28	0.00	1,388	43	15	0	4,243	421	0	3,661
981+00	98100.00	100.00	331.33	11.57	0.00	0.00	1,235	43	2	0	5,478	424	0	4,850
982+00	98200.00	100.00	195.67	11.74	0.00	0.00	976	43	0	0	6,454	424	0	5,783
983+00	98300.00	100.00	146.18	12.76	0.00	0.00	633	45	0	0	7,087	424	0	6,371
983+50	98350.00	50.00	126.84	13.56	0.00	0.00	253	24	0	0	7,340	424	0	6,600
984+00	98400.00	50.00	115.00	14.55	0.05	0.00	224	26	0	0	7,564	424	0	6,798
984+50	98450.00	50.00	113.51	20.47	0.00	0.00	212	32	0	0	7,776	424	0	6,978
985+00	98500.00	50.00	99.12	22.26	0.00	0.00	197	40	0	0	7,973	424	0	7,135
985+45.13	98545.13	45.13	11.54	0.00	30.69	0.00	92	19	26	0	8,065	456	0	7,176
985+86.598	98586.60	41.47	0.00	0.00	0.00	0.00	9	0	24	0	8,074	486	0	7,155
							8,074		389	0				

Addendum No. 02
ID 1016-05-70
Revised Sheet 1013
February 4, 2022

STAGE 3C - WB IH 90/94 - WB OFF RAMP

STATION	REAL STATION	DISTANCE	AREA (SF)				INCREMENTAL VOL (CY) (UNADJUSTED)				CUMULATIVE VOL (CY)			
			CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	EXPANDED FILL	SELECT BORROW	MASS ORDINATE
							NOTE 1	NOTE 2	NOTE 3		1.00 NOTE 1	1.25	1.00	NOTE 8
986+25	98625.00	0.00	4.87	0.00	0.00	0.00	0	0	0	0	0	0	0	0
987+00	98700.00	75.00	0.22	0.00	0.00	0.00	7	0	0	0	7	0	0	7
988+00	98800.00	100.00	2.44	0.00	10.66	0.00	5	0	20	0	12	25	0	-13
989+00	98900.00	100.00	42.87	0.00	6.21	0.00	84	0	31	0	96	64	0	32
989+50	98950.00	50.00	50.16	0.00	3.07	0.00	86	0	9	0	182	75	0	107
989+96.603	98996.60	46.60	118.45	26.00	2.45	0.00	146	22	5	0	328	81	0	225
990+00	99000.00	3.40	117.23	26.00	3.28	0.15	15	3	0	0	343	81	0	237
990+21.535	99021.53	21.53	143.56	33.45	4.76	9.35	104	24	3	4	447	85	4	313
990+46.45	99046.45	24.91	140.71	38.74	0.33	4.90	131	33	2	7	578	88	11	409
991+00	99100.00	53.55	183.66	45.17	0.00	0.00	322	83	0	5	900	88	16	648
992+00	99200.00	100.00	165.29	39.73	0.00	0.00	646	157	0	0	1,546	88	16	1,137
992+23.573	99223.57	23.57	167.30	40.00	0.00	0.00	145	35	0	0	1,691	88	16	1,247
993+00	99300.00	76.43	143.22	39.49	0.00	0.00	439	113	0	0	2,130	88	16	1,573
994+00	99400.00	100.00	122.12	34.45	0.00	0.00	491	137	0	0	2,621	88	16	1,927
995+00	99500.00	100.00	101.31	32.81	0.00	0.00	414	125	0	0	3,035	88	16	2,216
995+50	99550.00	50.00	90.65	31.95	0.00	0.00	178	60	0	0	3,213	88	16	2,334
996+00	99600.00	50.00	50.61	31.22	0.00	0.00	131	58	0	0	3,344	88	16	2,407
997+00	99700.00	100.00	40.92	29.66	0.00	0.00	169	113	0	0	3,513	88	16	2,463
997+25	99725.00	25.00	19.68	29.24	0.00	0.00	28	27	0	0	3,541	88	16	2,464
998+00	99800.00	75.00	18.87	12.00	0.00	0.00	54	57	0	0	3,595	88	16	2,461
999+00	99900.00	100.00	19.93	12.00	0.00	0.00	72	44	0	0	3,667	88	16	2,489
999+21.579	99921.58	21.58	21.57	12.00	0.00	0.00	17	10	0	0	3,684	88	16	2,496
1000+00	100000.00	78.42	3.08	0.00	0.00	0.00	36	17	0	0	3,720	88	16	2,515
1001+00	100100.00	100.00	3.04	0.00	0.00	0.00	11	0	0	0	3,731	88	16	2,526
1002+00	100200.00	100.00	3.08	0.00	0.00	0.00	11	0	0	0	3,742	88	16	2,537
1002+05	100205.00	5.00	3.05	0.00	0.00	0.00	1	0	0	0	3,743	88	16	2,538
1003+00	100300.00	95.00	0.00	0.00	0.00	0.00	5	0	0	0	3,748	88	16	2,543
							3,748		70	16				

STAGE 3C - WB OFF RAMP 'A'

STATION	REAL STATION	DISTANCE	AREA (SF)				INCREMENTAL VOL (CY) (UNADJUSTED)				CUMULATIVE VOL (CY)			
			CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	EXPANDED FILL	SELECT BORROW	MASS ORDINATE
							NOTE 1	NOTE 2	NOTE 3		1.00 NOTE 1	1.25	1.00	NOTE 8
987+00	98700.00	0.00	99.97	0.00	0.00	0.00	0	0	0	0	0	0	0	0
987+50	98750.00	50.00	16.58	0.00	0.02	0.00	108	0	0	0	108	0	0	108
988+00	98800.00	50.00	44.06	0.00	1.50	0.00	56	0	1	0	164	1	0	163
988+50	98850.00	50.00	107.66	0.00	0.00	0.00	140	0	1	0	304	3	0	302
989+00	98900.00	50.00	139.87	0.00	0.00	0.00	229	0	0	0	533	3	0	531
989+50	98950.00	50.00	160.61	0.00	0.00	0.00	278	0	0	0	811	3	0	809
990+00	99000.00	50.00	154.82	0.00	0.00	0.00	292	0	0	0	1,103	3	0	1,101
990+50	99050.00	50.00	51.37	0.00	0.00	0.00	191	0	0	0	1,294	3	0	1,292
991+00	99100.00	50.00	44.21	0.00	0.00	0.00	89	0	0	0	1,383	3	0	1,381
991+50	99150.00	50.00	53.25	0.00	0.00	0.00	90	0	0	0	1,473	3	0	1,471
992+00	99200.00	50.00	9.32	0.00	0.00	0.00	58	0	0	0	1,531	3	0	1,529
							1,531		2	0				

Addendum No. 02
ID 1016-05-70
Revised Sheet 1014
February 4, 2022

STAGE 4 - IH 90/94 MEDIAN

STAGE 4 CATEGORY 0010

STATION	REAL STATION	DISTANCE	AREA (SF)				INCREMENTAL VOL (CY) (UNADJUSTED)				CUMULATIVE VOL (CY)			
			CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	EXPANDED FILL	SELECT BORROW	MASS ORDINATE
							NOTE 1	NOTE 2	NOTE 3		1.00 NOTE 1	1.25	1.00	NOTE 8
935+35.821	93535.82	0.00	45.13	0.00	0.00	0.00	0	0	0	0	0	0	0	0
936+00	93600.00	64.18	63.55	0.00	0.00	0.00	129	0	0	0	129	0	0	129
937+00	93700.00	100.00	42.63	0.00	5.67	0.00	197	0	10	0	326	13	0	314
938+00	93800.00	100.00	61.27	0.00	14.05	0.00	192	0	37	0	518	59	0	459
938+12.675	93812.67	12.67	67.59	0.00	16.06	0.00	30	0	7	0	548	68	0	481
939+00	93900.00	87.33	78.89	0.00	7.24	0.00	237	0	38	0	785	115	0	670
940+00	94000.00	100.00	89.77	0.00	1.31	0.00	312	0	16	0	1,097	135	0	962
941+00	94100.00	100.00	115.97	0.00	0.25	0.00	381	0	3	0	1,478	139	0	1,339
942+00	94200.00	100.00	109.41	0.00	0.02	0.00	417	0	1	0	1,895	140	0	1,755
943+00	94300.00	100.00	112.79	0.00	0.01	0.00	411	0	0	0	2,306	140	0	2,166
944+00	94400.00	100.00	99.45	0.00	0.61	0.00	393	0	1	0	2,699	141	0	2,558
944+05.765	94405.77	5.77	99.54	0.00	0.66	0.00	21	0	0	0	2,720	141	0	2,579
945+00	94500.00	94.23	100.12	0.00	0.33	0.00	348	0	2	0	3,068	144	0	2,924
945+13.124	94513.12	13.12	98.95	0.00	0.34	0.00	48	0	0	0	3,116	144	0	2,972
946+00	94600.00	86.88	103.20	0.00	0.97	0.00	325	0	2	0	3,441	146	0	3,295
947+00	94700.00	100.00	88.07	0.00	2.47	0.00	354	0	6	0	3,795	154	0	3,641
947+02.97	94702.97	2.97	87.75	0.00	2.47	0.00	10	0	0	0	3,805	154	0	3,651
948+00	94800.00	97.03	64.97	0.00	3.14	0.00	274	0	10	0	4,079	166	0	3,913
948+10.794	94810.79	10.79	63.91	0.00	3.36	0.00	26	0	1	0	4,105	168	0	3,938
948+35.794	94835.79	25.00	69.90	0.00	3.62	0.00	62	0	3	0	4,167	171	0	3,996
948+60.794	94860.79	25.00	74.08	0.00	3.60	0.00	67	0	3	0	4,234	175	0	4,059
949+00	94900.00	39.21	74.01	0.00	5.07	0.00	108	0	6	0	4,342	183	0	4,160
950+00	95000.00	100.00	70.53	0.00	7.70	0.00	268	0	24	0	4,610	213	0	4,398
951+00	95100.00	100.00	61.84	0.00	5.68	0.00	245	0	25	0	4,855	244	0	4,611
951+20.579	95120.58	20.58	66.24	0.00	7.01	0.00	49	0	5	0	4,904	250	0	4,654
952+79	95279.00	0.00	16.57	0.00	15.30	0.00	0	0	0	0	4,904	250	0	4,654
953+00	95300.00	21.00	46.63	0.00	8.01	0.00	25	0	9	0	4,929	261	0	4,668
953+11.759	95311.76	11.76	62.46	0.00	5.81	0.00	24	0	3	0	4,953	265	0	4,688
954+00	95400.00	88.24	68.38	0.00	6.81	0.00	214	0	21	0	5,167	291	0	4,876
954+76.854	95476.85	76.85	69.54	0.00	6.36	0.00	196	0	19	0	5,363	315	0	5,048
955+00	95500.00	23.15	69.96	0.00	5.93	0.00	60	0	5	0	5,423	321	0	5,102
955+01.854	95501.85	1.85	70.05	0.00	5.88	0.00	5	0	0	0	5,428	321	0	5,107
955+26.854	95526.85	25.00	73.09	0.00	4.20	0.00	66	0	5	0	5,494	328	0	5,167
955+58.307	95558.31	31.45	74.50	0.00	2.71	0.00	86	0	4	0	5,580	333	0	5,248
955+83.256	95583.26	24.95	72.30	0.00	2.21	0.00	68	0	2	0	5,648	335	0	5,313
956+00	95600.00	16.74	69.46	0.00	1.63	0.00	44	0	1	0	5,692	336	0	5,356
956+08.189	95608.19	8.19	68.12	0.00	1.38	0.00	21	0	0	0	5,713	336	0	5,377
957+00	95700.00	91.81	82.99	0.00	0.06	0.00	257	0	2	0	5,970	339	0	5,631
958+00	95800.00	100.00	95.71	0.00	0.00	0.00	331	0	0	0	6,301	339	0	5,962
958+44.222	95844.22	44.22	101.82	0.00	0.00	0.00	162	0	0	0	6,463	339	0	6,124
959+00	95900.00	55.78	93.98	0.00	0.00	0.00	202	0	0	0	6,665	339	0	6,326
960+00	96000.00	100.00	81.40	0.00	0.00	0.00	325	0	0	0	6,990	339	0	6,651
961+00	96100.00	100.00	86.28	0.00	0.00	0.00	311	0	0	0	7,301	339	0	6,962
962+00	96200.00	100.00	91.77	0.00	0.00	0.00	330	0	0	0	7,631	339	0	7,292
963+00	96300.00	100.00	98.12	0.00	0.00	0.00	352	0	0	0	7,983	339	0	7,644
963+00.987	96300.99	0.99	98.12	0.00	0.00	0.00	4	0	0	0	7,987	339	0	7,648
964+00	96400.00	99.01	83.35	0.00	0.00	0.00	333	0	0	0	8,320	339	0	7,981
965+00	96500.00	100.00	92.33	0.00	0.72	0.00	325	0	1	0	8,645	340	0	8,305
966+00	96600.00	100.00	103.44	0.00	0.00	0.00	363	0	1	0	9,008	341	0	8,667
967+00	96700.00	100.00	103.18	0.00	0.00	0.00	383	0	0	0	9,391	341	0	9,050
968+00	96800.00	100.00	102.13	0.00	0.00	0.00	380	0	0	0	9,771	341	0	9,430
969+00	96900.00	100.00	102.13	0.00	0.00	0.00	378	0	0	0	10,149	341	0	9,808
970+00	97000.00	100.00	103.55	0.00	0.00	0.00	381	0	0	0	10,530	341	0	10,189
971+00	97100.00	100.00	98.99	0.00	0.00	0.00	375	0	0	0	10,905	341	0	10,564
972+00	97200.00	100.00	87.19	0.00	1.43	0.00	345	0	3	0	11,250	345	0	10,905
973+00	97300.00	100.00	81.48	0.00	1.95	0.00	312	0	6	0	11,562	353	0	11,210
974+00	97400.00	100.00	66.78	0.00	7.59	0.00	275	0	18	0	11,837	375	0	11,462
975+00	97500.00	100.00	59.70	0.00	11.90	0.00	234	0	36	0	12,071	420	0	11,651
975+86.938	97586.94	86.94	59.08	0.00	16.91	0.00	191	0	46	0	12,262	478	0	11,785
976+00	97600.00	13.06	58.12	0.00	17.88	0.00	28	0	8	0	12,290	488	0	11,803
976+37.326	97637.33	37.33	55.20	0.00	20.41	0.00	78	0	26	0	12,368	520	0	11,848
976+74.914	97674.91	37.59	52.57	0.00	22.03	0.00	75	0	30	0	12,443	558	0	11,886
977+00	97700.00	25.09	51.17	0.00	22.95	0.00	48	0	21	0	12,491	584	0	11,907
978+00	97800.00	100.00	46.65	0.00	27.45	0.00	181	0	93	0	12,672	700	0	11,972
979+00	97900.00	100.00	36.17	0.00	35.45	0.00	153	0	116	0	12,825	845	0	11,980
979+35.824	97935.82	35.82	32.70	0.00	37.72	0.00	46	0	49	0	12,871	906	0	11,965
979+60.844	97960.84	25.02	36.66	0.00	39.03	0.00	32	0	36	0	12,903	951	0	11,952
979+85.863	97985.86	25.02	39.04	0.00	39.82	0.00	35	0	37	0	12,938	998	0	11,941
980+00	98000.00	14.14	39.37	0.00	40.16	0.00	21	0	21	0	12,959	1,024	0	11,935
981+00	98100.00	100.00	34.49	0.00	46.05	0.00	137	0	160	0	13,096	1,224	0	11,872
981+50	98150.00	50.00	28.84	0.00	50.57	0.00	59	0	89	0	13,155	1,335	0	11,820
982+00	98200.00	50.00	22.57	0.00	51.87	0.00	48	0	95	0	13,203	1,454	0	11,749
982+10.001	98210.00	10.00	19.65	0.00	53.44	0.00	8	0	20	0	13,211	1,479	0	11,732
982+25.094	98225.09	15.09	16.72	0.00	35.27	0.00	10	0	25	0	13,221	1,510	0	11,711
982+58.381	98258.38	33.29	0.00	0.00	0.00	0.00	10	0	22	0	13,231	1,538	0	11,694
984+90	98490.00	0.00	0.00	0.00	141.69	0.00	0	0	0	0	13,231	1,538	0	11,694
985+00	98500.00	10.00	0.00	0.00	116.95	0.00	0	0	48	0	13,231	1,598	0	11,634
985+50	98550.00	50.00	6.78	0.00	38.93	0.00	6	0	144	0	13,237	1,778	0	11,460
986+00	98600.00	50.00	19.09	0.00	53.15	0.00	24	0	85	0	13,261	1,884	0	11,377
987+00	98700.00	100.00	32.76	0.00	39.02	0.00	96	0	171	0	13,357	2,098	0	11,260
987+60.021	98760.02	60.02	36.51	0.00	31.70	0.00	77	0	79	0	13,434	2,196	0	11,238
987+85.108	98785.11	25.09	35.43	0.00	29.83	0.00	33	0	29	0	13,467	2,233	0	11,235
988+00	98800.00	14.89	33.78	0.00	28.80	0.00	19	0	16	0	13,486	2,253	0	11,234
988+10.079	98810.08	10.08	32.45	0.00	28.20	0.00	12	0	11	0	13,498	2,266	0	11,232
989+00	98900.00	89.92	44.66	0.00	19.36	0.00	128	0	79	0	13,626	2,365	0	11,261
990+00	99000.00	100.00	55.45	0.00	8.94	0.00	185	0	52	0	13,811	2,430	0	11,381
991+00	99100.00	100.00	73.48	0.00	3.34	0.00	239	0	23	0	14,050	2,459	0	11,591
991+12.904	99112.90	12.90	73.81	0.00	3.29	0.00	35	0	2	0	14,085	2,461	0	11,624
992+00	99200.00	87.10	72.55	0.00	3.60	0.00	236	0	11	0	14,321	2,475	0	11,846
993+00	99300.00	100.00	69.63	0.00	3.57	0.00	263	0	13	0	14,584	2,491	0	12,093
994+00	99400.00	100.00	72.30	0.00	2.71	0.00	263	0	12	0	14,847	2,506	0	12,341
995+00	99500.00	100.00	93.63	0.00	0.10	0.00	307	0	5	0	15,154	2,513	0	12,642
996+00	99600.00	100.00	123.98	0.00	0.00	0.00	403	0	0	0	15,557	2,513	0	13,045
997+00	99700.00	100.00	122.67	0.00	0.00	0.00	457	0	0	0	16,014	2,513	0	13,502
997+11.712	99711.71	11.71	122.31	0.00	0.00	0.00	53	0	0	0	16,067	2,513	0	13,555
998+00	99800.00	88.29	117.52	0.00	0.00	0.00	392	0	0	0	16,459	2,513	0	13,947
999+00	99900.00	100.00	119.13	0.00	0.00	0.00	438	0	0	0	16,897	2,513	0	14,385
999+25	99925.00	25.00	120.41	0.00	0.00	0.00	111	0	0	0	17,008	2,513	0	14,496
1000+00	100000.00	75.00	119.92	0.00	0.00	0.00	334	0	0	0	17,342	2,513	0	14,830

CONTINUED ON NEXT PAGE

PLOT DATE: OCT 2021
PLOT BY: MSA
PLOT NAME:
PLOT SCALE: 1:1

Addendum No. 02
ID 1016-05-70
Revised Sheet 1015
February 4, 2022

STAGE 4 CATEGORY 0010 CONT.

CONTINUED FROM PREVIOUS PAGE

STAGE 4 - IH 90/94 MEDIAN

STATION	REAL STATION	DISTANCE	AREA (SF)				INCREMENTAL VOL (CY) (UNADJUSTED)				CUMULATIVE VOL (CY)			
			CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	EXPANDED FILL	SELECT BORROW	MASS ORDINATE
							NOTE 1	NOTE 2	NOTE 3		1.00 NOTE 1	1.25	1.00	NOTE 8
1001+00	100100.00	100.00	112.35	0.00	0.00	0.00	430	0	0	0	17,772	2,513	0	15,260
1002+00	100200.00	100.00	105.80	0.00	0.67	0.00	404	0	1	0	18,176	2,514	0	15,662
1002+13.8	100213.80	13.80	105.74	0.00	1.02	0.00	54	0	0	0	18,230	2,514	0	15,716
1002+28.891	100228.89	15.09	106.11	0.00	0.96	0.00	59	0	1	0	18,289	2,515	0	15,774
1003+00	100300.00	71.11	110.02	0.00	0.10	0.00	285	0	1	0	18,574	2,516	0	16,058
1004+00	100400.00	100.00	116.18	0.00	0.00	0.00	419	0	0	0	18,993	2,516	0	16,477
1005+00	100500.00	100.00	95.78	0.00	0.00	0.00	393	0	0	0	19,386	2,516	0	16,870
1005+75	100575.00	75.00	104.29	0.00	0.00	0.00	278	0	0	0	19,664	2,516	0	17,148
1006+00	100600.00	25.00	108.25	0.00	0.00	0.00	98	0	0	0	19,762	2,516	0	17,246
1006+75	100675.00	75.00	127.07	0.00	0.00	0.00	327	0	0	0	20,089	2,516	0	17,573
1007+00	100700.00	25.00	128.77	0.00	0.07	0.00	118	0	0	0	20,207	2,516	0	17,691
1008+00	100800.00	100.00	138.79	0.00	1.97	0.00	495	0	4	0	20,702	2,521	0	18,181
1009+00	100900.00	100.00	150.91	0.00	0.94	0.00	536	0	5	0	21,238	2,528	0	18,711
1010+00	101000.00	100.00	144.94	0.00	0.23	0.00	548	0	2	0	21,786	2,530	0	19,256
1010+16.612	101016.61	16.61	142.23	0.00	0.12	0.00	88	0	0	0	21,874	2,530	0	19,344
1010+41.632	101041.63	25.02	144.11	0.00	0.03	0.00	133	0	0	0	22,007	2,530	0	19,477
1010+66.651	101066.65	25.02	143.97	0.00	0.00	0.00	133	0	0	0	22,140	2,530	0	19,610
1011+00	101100.00	33.35	140.20	0.00	0.00	0.00	175	0	0	0	22,315	2,530	0	19,785
1011+50	101150.00	50.00	103.26	0.00	0.00	0.00	225	0	0	0	22,540	2,530	0	20,010
1011+97.09	101197.09	47.09	99.89	0.00	0.00	0.00	177	0	0	0	22,717	2,530	0	20,187
1014+70.243	101470.24	0.00	63.63	0.00	1.81	0.00	0	0	0	0	22,717	2,530	0	20,187
1015+00	101500.00	29.76	90.01	0.00	3.23	0.00	85	0	3	0	22,802	2,534	0	20,268
1015+25	101525.00	25.00	94.74	0.00	2.73	0.00	86	0	3	0	22,888	2,538	0	20,351
1015+94.169	101594.17	69.17	106.32	0.00	8.01	0.00	258	0	14	0	23,146	2,555	0	20,591
1016+00	101600.00	5.83	105.58	0.00	8.17	0.00	23	0	2	0	23,169	2,558	0	20,612
1017+00	101700.00	100.00	86.23	0.00	12.53	0.00	355	0	38	0	23,524	2,605	0	20,919
1017+37.732	101737.73	37.73	75.86	0.00	15.33	0.00	113	0	19	0	23,637	2,629	0	21,008
1017+62.872	101762.87	25.14	67.17	0.00	16.15	0.00	67	0	15	0	23,704	2,648	0	21,057
1017+87.964	101787.96	25.09	57.53	0.00	14.76	0.00	58	0	14	0	23,762	2,665	0	21,097
1018+00	101800.00	12.04	60.71	0.00	13.50	0.00	26	0	6	0	23,788	2,673	0	21,116
1019+00	101900.00	100.00	90.12	0.00	7.66	0.00	279	0	39	0	24,067	2,721	0	21,346
1019+11.645	101911.64	11.64	93.34	0.00	7.33	0.00	40	0	3	0	24,107	2,725	0	21,382
1020+00	102000.00	88.36	116.89	0.00	4.72	0.00	344	0	20	0	24,451	2,750	0	21,701
1021+00	102100.00	100.00	137.87	0.00	2.33	0.00	472	0	13	0	24,923	2,766	0	22,157
1021+18.605	102118.60	18.60	140.33	0.00	1.68	0.00	96	0	1	0	25,019	2,768	0	22,252
1022+00	102200.00	81.40	133.14	0.00	1.62	0.00	412	0	5	0	25,431	2,774	0	22,657
1023+00	102300.00	100.00	124.20	0.00	1.46	0.00	477	0	6	0	25,908	2,781	0	23,127
1024+00	102400.00	100.00	118.22	0.00	0.96	0.00	449	0	4	0	26,357	2,786	0	23,571
1024+34.335	102434.34	34.34	115.91	0.00	0.79	0.00	149	0	1	0	26,506	2,788	0	23,719
1025+00	102500.00	65.66	113.08	0.00	0.48	0.00	278	0	2	0	26,784	2,790	0	23,994
1026+00	102600.00	100.00	109.12	0.00	0.33	0.00	411	0	2	0	27,195	2,793	0	24,403
1027+00	102700.00	100.00	104.40	0.00	2.67	0.00	395	0	6	0	27,590	2,800	0	24,790
1027+08.5	102708.50	8.50	106.48	0.00	2.98	0.00	33	0	1	0	27,623	2,801	0	24,822
1027+75	102775.00	66.50	101.91	0.00	5.29	0.00	257	0	10	0	27,880	2,814	0	25,066
1028+00	102800.00	25.00	104.21	0.00	4.98	0.00	95	0	5	0	27,975	2,820	0	25,155
1028+29.44	102829.44	29.44	106.67	0.00	4.26	0.00	115	0	5	0	28,090	2,826	0	25,264
1029+00	102900.00	70.56	116.06	0.00	1.84	0.00	291	0	8	0	28,381	2,836	0	25,545
1030+00	103000.00	100.00	136.88	0.00	0.00	0.00	468	0	3	0	28,849	2,840	0	26,009
1030+01.05	103001.05	1.05	140.99	0.00	0.00	0.00	5	0	0	0	28,854	2,840	0	26,014
1031+00	103100.00	98.95	115.07	0.00	0.00	0.00	469	0	0	0	29,323	2,840	0	26,483
1032+00	103200.00	100.00	94.09	0.00	0.00	0.00	387	0	0	0	29,710	2,840	0	26,870
1033+00	103300.00	100.00	85.56	0.00	0.00	0.00	333	0	0	0	30,043	2,840	0	27,203
1034+00	103400.00	100.00	65.93	0.00	0.00	0.00	281	0	0	0	30,324	2,840	0	27,484
1035+00	103500.00	100.00	49.39	0.00	0.00	0.00	214	0	0	0	30,538	2,840	0	27,698
1036+00	103600.00	100.00	40.58	0.00	0.00	0.00	167	0	0	0	30,705	2,840	0	27,865
1036+30.564	103630.56	30.56	30.89	0.00	0.00	0.00	40	0	0	0	30,745	2,840	0	27,905
							30,745		2,272	0				

Addendum No. 02
ID 1016-05-70
Revised Sheet 1016
February 4, 2022

1016

PLOT DATE: OCT 2021
PLOT BY: MSA
PLOT NAME:
PLOT SCALE: 1:1

STAGE 2A CATEGORY 0080

STAGE 2A - EXISTING EB STH 82 - CAT 080

STATION	REAL STATION	DISTANCE	AREA (SF)				INCREMENTAL VOL (CY) (UNADJUSTED)				CUMULATIVE VOL (CY)			
			CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	EXPANDED FILL	SELECT BORROW	MASS ORDINATE
							NOTE 1	NOTE 2	NOTE 3		1.00 NOTE 1	1.25	1.00	NOTE 8
130+23.65	13023.65	0.00	27.98	0.00	0.00	0.00	0	0	0	0	0	0	0	0
130+50	13050.00	26.35	31.91	0.00	0.00	0.00	29	0	0	0	29	0	0	29
131+00	13100.00	50.00	34.91	0.00	0.00	0.00	62	0	0	0	91	0	0	91
131+50	13150.00	50.00	41.90	0.00	0.00	0.00	71	0	0	0	162	0	0	162
131+81.034	13181.03	31.03	28.81	0.00	0.00	0.00	41	0	0	0	203	0	0	203
132+00	13200.00	18.97	18.42	0.00	0.00	0.00	17	0	0	0	220	0	0	220
132+50	13250.00	50.00	19.26	0.00	0.12	0.00	35	0	0	0	255	0	0	255
133+00	13300.00	50.00	20.81	0.00	0.03	0.00	37	0	0	0	292	0	0	292
133+50	13350.00	50.00	20.18	0.00	0.36	0.00	38	0	0	0	330	0	0	330
134+00	13400.00	50.00	24.27	0.00	0.00	0.00	41	0	0	0	371	0	0	371
134+50	13450.00	50.00	21.88	0.00	0.04	0.00	43	0	0	0	414	0	0	414
134+79.697	13479.70	29.70	9.07	0.00	0.00	0.00	17	0	0	0	431	0	0	431
135+00	13500.00	20.30	9.00	0.00	0.00	0.00	7	0	0	0	438	0	0	438
135+50	13550.00	50.00	8.84	0.00	0.00	0.00	17	0	0	0	455	0	0	455
136+00	13600.00	50.00	6.25	0.00	0.00	0.00	14	0	0	0	469	0	0	469
136+50	13650.00	50.00	3.83	0.00	0.00	0.00	9	0	0	0	478	0	0	478
136+96.886	13696.89	46.89	0.00	0.00	0.00	0.00	3	0	0	0	481	0	0	481
							481		0	0				

STAGE 2B CATEGORY 0080

STAGE 2B - EB STH 82 - CAT 080 - WEST

STATION	REAL STATION	DISTANCE	AREA (SF)				INCREMENTAL VOL (CY) (UNADJUSTED)				CUMULATIVE VOL (CY)			
			CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	EXPANDED FILL	SELECT BORROW	MASS ORDINATE
							NOTE 1	NOTE 2	NOTE 3		1.00 NOTE 1	1.25	1.00	NOTE 8
132+95.932	13295.93	0.00	55.26	0.00	2.58	0.00	0	0	0	0	0	0	0	0
133+00	13300.00	4.07	55.53	0.00	2.33	0.00	8	0	0	0	8	0	0	8
133+50	13350.00	50.00	63.60	0.00	0.17	0.00	110	0	2	0	118	3	0	116
134+00	13400.00	50.00	74.85	0.00	0.00	0.00	128	0	0	0	246	3	0	244
134+50	13450.00	50.00	88.95	0.00	0.00	0.00	152	0	0	0	398	3	0	396
135+00	13500.00	50.00	101.65	0.00	0.00	0.00	176	0	0	0	574	3	0	572
135+50	13550.00	50.00	110.47	0.00	0.00	0.00	196	0	0	0	770	3	0	768
136+00	13600.00	50.00	120.75	0.00	0.00	0.00	214	0	0	0	984	3	0	982
136+50	13650.00	50.00	131.79	0.00	0.00	0.00	234	0	0	0	1,218	3	0	1,216
137+00	13700.00	50.00	134.54	0.00	0.00	0.00	247	0	0	0	1,465	3	0	1,463
137+50	13750.00	50.00	129.78	0.00	0.00	0.00	245	0	0	0	1,710	3	0	1,708
138+00	13800.00	50.00	121.47	0.00	0.00	0.00	233	0	0	0	1,943	3	0	1,941
138+42.712	13842.71	42.71	152.78	0.00	0.00	0.00	217	0	0	0	2,160	3	0	2,158
							2,160		2	0				

STAGE 2B - EB STH 82 - CAT 080 - EAST

STATION	REAL STATION	DISTANCE	AREA (SF)				INCREMENTAL VOL (CY) (UNADJUSTED)				CUMULATIVE VOL (CY)			
			CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	EXPANDED FILL	SELECT BORROW	MASS ORDINATE
							NOTE 1	NOTE 2	NOTE 3		1.00 NOTE 1	1.25	1.00	NOTE 8
152+69.974	15269.97	0.00	72.62	0.00	0.00	0.00	0	0	0	0	0	0	0	0
153+00	15300.00	30.03	71.48	0.00	0.00	0.00	80	0	0	0	80	0	0	80
153+50	15350.00	50.00	75.55	0.00	0.00	0.00	136	0	0	0	216	0	0	216
154+00	15400.00	50.00	78.96	0.00	0.00	0.00	143	0	0	0	359	0	0	359
154+50	15450.00	50.00	77.56	0.00	0.00	0.00	145	0	0	0	504	0	0	504
155+00	15500.00	50.00	90.19	0.00	0.00	0.00	155	0	0	0	659	0	0	659
155+50	15550.00	50.00	95.25	0.00	0.00	0.00	172	0	0	0	831	0	0	831
156+00	15600.00	50.00	104.10	0.00	0.00	0.00	185	0	0	0	1,016	0	0	1,016
156+25	15625.00	25.00	103.26	0.00	0.00	0.00	96	0	0	0	1,112	0	0	1,112
156+50	15650.00	25.00	104.88	0.00	0.00	0.00	96	0	0	0	1,208	0	0	1,208
157+00	15700.00	50.00	116.73	0.00	0.00	0.00	205	0	0	0	1,413	0	0	1,413
157+50	15750.00	50.00	107.65	0.00	0.00	0.00	208	0	0	0	1,621	0	0	1,621
158+00	15800.00	50.00	79.17	0.00	0.00	0.00	173	0	0	0	1,794	0	0	1,794
158+50	15850.00	50.00	72.99	0.00	0.00	0.00	141	0	0	0	1,935	0	0	1,935
159+00	15900.00	50.00	70.51	0.00	0.00	0.00	133	0	0	0	2,068	0	0	2,068
159+21.984	15921.98	21.98	71.72	0.00	0.00	0.00	58	0	0	0	2,126	0	0	2,126
159+25	15925.00	3.02	13.77	0.00	0.00	0.00	5	0	0	0	2,131	0	0	2,131
159+50	15950.00	25.00	12.84	0.00	0.00	0.00	12	0	0	0	2,143	0	0	2,143
160+00	16000.00	50.00	13.07	0.00	0.00	0.00	24	0	0	0	2,167	0	0	2,167
160+50	16050.00	50.00	14.90	0.00	0.00	0.00	26	0	0	0	2,193	0	0	2,193
161+00	16100.00	50.00	13.36	0.00	0.00	0.00	26	0	0	0	2,219	0	0	2,219
161+50	16150.00	50.00	13.99	0.00	0.00	0.00	25	0	0	0	2,244	0	0	2,244
162+00	16200.00	50.00	16.20	0.00	0.00	0.00	28	0	0	0	2,272	0	0	2,272
162+25	16225.00	25.00	14.60	0.00	0.00	0.00	14	0	0	0	2,286	0	0	2,286
162+34.971	16234.97	9.97	9.43	0.00	0.00	0.00	4	0	0	0	2,290	0	0	2,290
							2,290		0	0				

Addendum No. 02
ID 1016-05-70
Revised Sheet 1017
February 4, 2022

PLOT DATE: OCT 2021
PLOT BY: MSA
PLOT NAME:
PLOT SCALE: 1:1

STAGE 2L CATEGORY 0080

STAGE 2E - WB STH 82 - CAT 080 - WEST

STATION	REAL STATION	DISTANCE	AREA (SF)				INCREMENTAL VOL (CY) (UNADJUSTED)				CUMULATIVE VOL (CY)			
			CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT 1.00	EXPANDED FILL 1.25	SELECT BORROW 1.00	MASS ORDINATE
							NOTE 1	NOTE 2	NOTE 3		NOTE 1			NOTE 8
131+85.454	13185.45	0.00	73.44	0.00	0.00	0.00	0	0	0	0	0	0	0	0
132+00	13200.00	14.55	69.65	0.00	0.00	0.00	39	0	0	0	39	0	0	39
132+50	13250.00	50.00	74.76	0.00	0.00	0.00	134	0	0	0	173	0	0	173
133+00	13300.00	50.00	72.67	0.00	0.00	0.00	137	0	0	0	310	0	0	310
133+50	13350.00	50.00	75.91	0.00	0.00	0.00	138	0	0	0	448	0	0	448
134+00	13400.00	50.00	70.82	0.00	0.00	0.00	136	0	0	0	584	0	0	584
134+50	13450.00	50.00	76.00	0.00	0.00	0.00	136	0	0	0	720	0	0	720
135+00	13500.00	50.00	99.47	0.00	0.00	0.00	162	0	0	0	882	0	0	882
135+50	13550.00	50.00	110.00	0.00	0.00	0.00	194	0	0	0	1,076	0	0	1,076
136+00	13600.00	50.00	135.59	0.00	0.00	0.00	227	0	0	0	1,303	0	0	1,303
136+50	13650.00	50.00	138.97	0.00	0.00	0.00	254	0	0	0	1,557	0	0	1,557
137+00	13700.00	50.00	143.75	0.00	0.00	0.00	262	0	0	0	1,819	0	0	1,819
137+50	13750.00	50.00	126.39	0.00	0.51	0.00	250	0	0	0	2,069	0	0	2,069
138+00	13800.00	50.00	110.57	0.00	0.00	0.00	219	0	0	0	2,288	0	0	2,288
138+41.031	13841.03	41.03	104.79	0.00	0.00	0.00	164	0	0	0	2,452	0	0	2,452
							2,452		0	0				

STAGE 2D - WB STH 82 - CAT 080 - EAST

STATION	REAL STATION	DISTANCE	AREA (SF)				INCREMENTAL VOL (CY) (UNADJUSTED)				CUMULATIVE VOL (CY)			
			CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT 1.00	EXPANDED FILL 1.25	SELECT BORROW 1.00	MASS ORDINATE
							NOTE 1	NOTE 2	NOTE 3		NOTE 1			NOTE 8
152+66.481	15266.48	0.00	81.26	0.00	1.45	0.00	0	0	0	0	0	0	0	0
153+00	15300.00	33.52	77.38	0.00	1.65	0.00	98	0	2	0	98	3	0	96
153+50	15350.00	50.00	79.29	0.00	0.00	0.00	145	0	2	0	243	5	0	238
154+00	15400.00	50.00	70.85	0.00	0.00	0.00	139	0	0	0	382	5	0	377
154+50	15450.00	50.00	120.81	0.00	0.00	0.00	177	0	0	0	559	5	0	554
155+00	15500.00	50.00	90.80	0.00	0.00	0.00	196	0	0	0	755	5	0	750
155+50	15550.00	50.00	97.95	0.00	0.00	0.00	175	0	0	0	930	5	0	925
156+00	15600.00	50.00	107.73	0.00	0.00	0.00	190	0	0	0	1,120	5	0	1,115
156+50	15650.00	50.00	103.53	0.00	0.00	0.00	196	0	0	0	1,316	5	0	1,311
157+00	15700.00	50.00	99.56	0.00	0.00	0.00	188	0	0	0	1,504	5	0	1,499
157+13.685	15713.68	13.68	101.86	0.00	0.06	0.00	51	0	0	0	1,555	5	0	1,550
157+49.315	15749.32	35.63	88.55	0.00	4.32	0.00	126	0	3	0	1,681	9	0	1,672
157+50	15750.00	0.68	76.89	0.00	0.00	0.00	2	0	0	0	1,683	9	0	1,674
158+00	15800.00	50.00	85.52	0.00	0.00	0.00	150	0	0	0	1,833	9	0	1,824
158+50	15850.00	50.00	79.19	0.00	0.00	0.00	153	0	0	0	1,986	9	0	1,977
159+00	15900.00	50.00	76.93	0.00	0.00	0.00	145	0	0	0	2,131	9	0	2,122
159+18.49	15918.49	18.49	95.27	0.00	0.24	0.00	59	0	0	0	2,190	9	0	2,181
159+50	15950.00	31.51	16.77	0.00	0.00	0.00	65	0	0	0	2,255	9	0	2,246
160+00	16000.00	50.00	15.37	0.00	0.00	0.00	30	0	0	0	2,285	9	0	2,276
160+50	16050.00	50.00	16.20	0.00	0.00	0.00	29	0	0	0	2,314	9	0	2,305
161+00	16100.00	50.00	15.08	0.00	0.00	0.00	29	0	0	0	2,343	9	0	2,334
161+50	16150.00	50.00	13.86	0.00	0.00	0.00	27	0	0	0	2,370	9	0	2,361
162+00	16200.00	50.00	12.96	0.00	0.00	0.00	25	0	0	0	2,395	9	0	2,386
162+30.44	16230.44	30.44	14.51	0.00	0.00	0.00	15	0	0	0	2,410	9	0	2,401
							2,410		7	0				

STAGE 2D - COMMERICAL ST - CAT 080

STATION	REAL STATION	DISTANCE	AREA (SF)				INCREMENTAL VOL (CY) (UNADJUSTED)				CUMULATIVE VOL (CY)			
			CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT 1.00	EXPANDED FILL 1.25	SELECT BORROW 1.00	MASS ORDINATE
							NOTE 1	NOTE 2	NOTE 3		NOTE 1			NOTE 8
05+24.001	524.00	0.00	273.72	0.00	0.00	0.00	0	0	0	0	0	0	0	0
05+25	525.00	1.00	250.12	0.00	0.00	0.00	10	0	0	0	10	0	0	10
05+50	550.00	25.00	131.39	0.00	5.23	0.00	177	0	2	0	187	3	0	185
05+75	575.00	25.00	92.95	0.00	0.00	0.00	104	0	2	0	291	5	0	286
06+00	600.00	25.00	114.94	0.00	0.00	0.00	96	0	0	0	387	5	0	382
06+05.027	605.03	5.03	44.22	0.00	0.00	0.00	15	0	0	0	402	5	0	397
							402		4	0				

STAGE 2F CATEGORY 0080

STAGE 2F - EB STH 82 - CAT 080

STATION	REAL STATION	DISTANCE	AREA (SF)				INCREMENTAL VOL (CY) (UNADJUSTED)				CUMULATIVE VOL (CY)			
			CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT	SALVAGED/ UNUSABLE PAVEMENT MATERIAL	FILL	SELECT BORROW	CUT 1.00	EXPANDED FILL 1.25	SELECT BORROW 1.00	MASS ORDINATE
							NOTE 1	NOTE 2	NOTE 3		NOTE 1			NOTE 8
131+84.349	13184.35	0.00	61.93	0.00	1.06	0.00	0	0	0	0	0	0	0	0
132+00	13200.00	15.65	48.73	0.00	1.90	0.00	32	0	1	0	32	1	0	31
132+25	13225.00	25.00	49.96	0.00	2.61	0.00	46	0	2	0	78	4	0	74
132+50	13250.00	25.00	53.11	0.00	2.85	0.00	48	0	3	0	126	8	0	119
132+75	13275.00	25.00	55.36	0.00	0.98	0.00	50	0	2	0	176	10	0	166
132+95.909	13295.91	20.91	60.21	0.00	0.00	0.00	45	0	0	0	221	10	0	211
133+00	13300.00	4.09	0.00	0.00	0.00	0.00	5	0	0	0	226	10	0	216
							226		8	0				

Addendum No. 02
ID 1016-05-70
Revised Sheet 1018
February 4, 2022

PROJECT NO: 1016-05-70
HWY: IH 90/94
COUNTY: JUNEAU
EARTHWORK
SHEET: 1018
E

PLOT DATE: OCT 2021
PLOT BY: MSA
PLOT NAME:
PLOT SCALE: 1:1

Proposal ID: 20220208002 Project(s): 1016-05-70

Federal ID(s): N/A

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0008	108.4400 CPM Progress Schedule	1.000 EACH	_____.____	_____.____
0010	201.0105 Clearing	95.000 STA	_____.____	_____.____
0012	201.0205 Grubbing	95.000 STA	_____.____	_____.____
0014	203.0100 Removing Small Pipe Culverts	10.000 EACH	_____.____	_____.____
0016	203.0220 Removing Structure (structure) 01. B-29-34	1.000 EACH	_____.____	_____.____
0018	203.0220 Removing Structure (structure) 02. B-29-35	1.000 EACH	_____.____	_____.____
0020	203.0220 Removing Structure (structure) 03. B-29-36	1.000 EACH	_____.____	_____.____
0022	203.0220 Removing Structure (structure) 04. B-29-37	1.000 EACH	_____.____	_____.____
0024	203.0260 Removing Structure Over Waterway Minimal Debris (structure) 01. B-29-32	1.000 EACH	_____.____	_____.____
0026	203.0260 Removing Structure Over Waterway Minimal Debris (structure) 02. Temporary Bridge 1013+00T	1.000 EACH	_____.____	_____.____
0028	203.0260 Removing Structure Over Waterway Minimal Debris (structure) 03. B-29-33	1.000 EACH	_____.____	_____.____
0030	204.0100 Removing Concrete Pavement	54,716.000 SY	_____.____	_____.____
0032	204.0110 Removing Asphaltic Surface	4,573.000 SY	_____.____	_____.____
0034	204.0115 Removing Asphaltic Surface Butt Joints	246.000 SY	_____.____	_____.____

Proposal ID: 20220208002 Project(s): 1016-05-70

Federal ID(s): N/A

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0036	204.0120 Removing Asphaltic Surface Milling	11,659.000 SY	_____.____	_____.____
0038	204.0150 Removing Curb & Gutter	4,657.000 LF	_____.____	_____.____
0040	204.0155 Removing Concrete Sidewalk	3,939.000 SY	_____.____	_____.____
0042	204.0165 Removing Guardrail	9,607.000 LF	_____.____	_____.____
0044	204.0170 Removing Fence	3,943.000 LF	_____.____	_____.____
0046	204.0180 Removing Delineators and Markers	69.000 EACH	_____.____	_____.____
0048	204.0210 Removing Manholes	1.000 EACH	_____.____	_____.____
0050	204.0220 Removing Inlets	69.000 EACH	_____.____	_____.____
0052	204.0245 Removing Storm Sewer (size) 01. 8-Inch	58.000 LF	_____.____	_____.____
0054	204.0245 Removing Storm Sewer (size) 02. 12-Inch	3,179.000 LF	_____.____	_____.____
0056	204.0245 Removing Storm Sewer (size) 03. 15-Inch	2,740.000 LF	_____.____	_____.____
0058	204.0245 Removing Storm Sewer (size) 04. 18-Inch	1,847.000 LF	_____.____	_____.____
0060	204.0245 Removing Storm Sewer (size) 05. 24-Inch	8.000 LF	_____.____	_____.____
0062	204.0270 Abandoning Culvert Pipes	5.000 EACH	_____.____	_____.____
0064	204.9060.S Removing (item description) 01. Removing Cover Plates Left In Place	1.000 EACH	_____.____	_____.____

Proposal ID: 20220208002 Project(s): 1016-05-70

Federal ID(s): N/A

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0066	204.9060.S Removing (item description) 02. Removing Endwall	14.000 EACH	_____._____	_____._____
0068	204.9060.S Removing (item description) 03. Temporary Structure Station 952+00T	1.000 EACH	_____._____	_____._____
0070	204.9060.S Removing (item description) 04. Temporary Structure Station 983+00T	1.000 EACH	_____._____	_____._____
0072	204.9090.S Removing (item description) 01. Drain Slotted Vane Longitudinal	4,216.000 LF	_____._____	_____._____
0074	205.0100 Excavation Common	136,995.000 CY	_____._____	_____._____
0076	205.0400 Excavation Marsh	220.000 CY	_____._____	_____._____
0078	206.1000 Excavation for Structures Bridges (structure) 01. B-29-152	LS	LUMP SUM	_____._____
0080	206.1000 Excavation for Structures Bridges (structure) 02. B-29-153	LS	LUMP SUM	_____._____
0082	206.1000 Excavation for Structures Bridges (structure) 03. B-29-154	LS	LUMP SUM	_____._____
0084	206.1000 Excavation for Structures Bridges (structure) 04. B-29-155	LS	LUMP SUM	_____._____
0086	206.1000 Excavation for Structures Bridges (structure) 05. B-29-157	LS	LUMP SUM	_____._____
0088	206.1000 Excavation for Structures Bridges (structure) 06. B-29-36	LS	LUMP SUM	_____._____
0090	206.5000 Cofferdams (structure) 01. B-29-152	LS	LUMP SUM	_____._____
0092	206.5000 Cofferdams (structure) 02. B-29-153	LS	LUMP SUM	_____._____

Proposal ID: 20220208002 Project(s): 1016-05-70

Federal ID(s): N/A

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0094	208.1100 Select Borrow	41,755.000 CY	_____.____	_____.____
0096	208.1500.S Temporary Lane Shift During Culvert Work	1.000 EACH	_____.____	_____.____
0098	210.1500 Backfill Structure Type A	2,584.000 TON	_____.____	_____.____
0100	211.0100 Prepare Foundation for Asphaltic Paving (project) 01. 1016-05-70	LS	LUMP SUM	_____.____
0102	211.0200 Prepare Foundation for Concrete Pavement (project) 01. 1016-05-70	LS	LUMP SUM	_____.____
0104	211.0400 Prepare Foundation for Asphaltic Shoulders	3,830.000 STA	_____.____	_____.____
0106	213.0100 Finishing Roadway (project) 01. 1016-05-70	1.000 EACH	_____.____	_____.____
0108	305.0110 Base Aggregate Dense 3/4-Inch	11,264.000 TON	_____.____	_____.____
0110	305.0120 Base Aggregate Dense 1 1/4-Inch	100,187.000 TON	_____.____	_____.____
0112	312.0110 Select Crushed Material	456.000 TON	_____.____	_____.____
0114	390.0203 Base Patching Asphaltic	2,656.000 SY	_____.____	_____.____
0116	405.0100 Coloring Concrete WisDOT Red	647.000 CY	_____.____	_____.____
0118	415.0115 Concrete Pavement 11 1/2-Inch	24,746.000 SY	_____.____	_____.____
0120	415.0125 Concrete Pavement 12 1/2-Inch	52,368.000 SY	_____.____	_____.____
0122	415.0210 Concrete Pavement Gaps	10.000 EACH	_____.____	_____.____

Proposal ID: 20220208002 Project(s): 1016-05-70

Federal ID(s): N/A

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0124	415.0410 Concrete Pavement Approach Slab	1,289.000 SY	_____.____	_____.____
0126	415.1115 Concrete Pavement HES 11 1/2-Inch	2,011.000 SY	_____.____	_____.____
0128	415.1125 Concrete Pavement HES 12 1/2-Inch	5,237.000 SY	_____.____	_____.____
0130	415.6000.S Rout and Seal	40,039.000 LF	_____.____	_____.____
0132	416.0512 Concrete Truck Apron 12-Inch	2,096.000 SY	_____.____	_____.____
0134	416.0610 Drilled Tie Bars	144.000 EACH	_____.____	_____.____
0136	416.0620 Drilled Dowel Bars	201.000 EACH	_____.____	_____.____
0138	416.1010 Concrete Surface Drains	12.000 CY	_____.____	_____.____
0140	416.1110 Concrete Shoulder Rumble Strips	14,119.000 LF	_____.____	_____.____
0142	450.4000 HMA Cold Weather Paving	341.000 TON	_____.____	_____.____
0144	455.0605 Tack Coat	1,424.000 GAL	_____.____	_____.____
0150	460.2000 Incentive Density HMA Pavement	10,670.000 DOL	1.00000	10,670.00
0152	460.5224 HMA Pavement 4 LT 58-28 S	4,048.000 TON	_____.____	_____.____
0158	460.7223 HMA Pavement 3 HT 58-28 S	7,739.000 TON	_____.____	_____.____
0160	460.7423 HMA Pavement 3 HT 58-28 H	4,970.000 TON	_____.____	_____.____
0162	460.7424 HMA Pavement 4 HT 58-28 H	1,269.000 TON	_____.____	_____.____
0168	465.0105 Asphaltic Surface	431.000 TON	_____.____	_____.____

Proposal ID: 20220208002 Project(s): 1016-05-70

Federal ID(s): N/A

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0170	465.0120 Asphaltic Surface Driveways and Field Entrances	169.000 TON	_____.____	_____.____
0172	465.0310 Asphaltic Curb	66.000 LF	_____.____	_____.____
0174	465.0315 Asphaltic Flumes	81.000 SY	_____.____	_____.____
0176	465.0400 Asphaltic Shoulder Rumble Strips	15,925.000 LF	_____.____	_____.____
0178	501.1000.S Ice Hot Weather Concreting 01. 1016-05-70	15,405.000 LB	_____.____	_____.____
0180	502.0100 Concrete Masonry Bridges	5,197.000 CY	_____.____	_____.____
0182	502.1100 Concrete Masonry Seal	180.000 CY	_____.____	_____.____
0184	502.3101 Expansion Device	108.000 LF	_____.____	_____.____
0186	502.3200 Protective Surface Treatment	8,329.000 SY	_____.____	_____.____
0188	502.3210 Pigmented Surface Sealer	1,317.000 SY	_____.____	_____.____
0190	502.4205 Adhesive Anchors No. 5 Bar	104.000 EACH	_____.____	_____.____
0192	503.0137 Prestressed Girder Type I 36W-Inch	3,465.000 LF	_____.____	_____.____
0194	503.0146 Prestressed Girder Type I 45W-Inch	2,896.000 LF	_____.____	_____.____
0196	505.0400 Bar Steel Reinforcement HS Structures	89,960.000 LB	_____.____	_____.____
0198	505.0600 Bar Steel Reinforcement HS Coated Structures	758,920.000 LB	_____.____	_____.____
0200	505.0800.S Bar Steel Reinforcement HS Stainless Structures	10,200.000 LB	_____.____	_____.____

Proposal ID: 20220208002 Project(s): 1016-05-70

Federal ID(s): N/A

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0202	506.2605 Bearing Pads Elastomeric Non-Laminated	164.000 EACH	_____.____	_____.____
0204	506.4000 Steel Diaphragms (structure) 01. B-29-152	15.000 EACH	_____.____	_____.____
0206	506.4000 Steel Diaphragms (structure) 02. B-29-153	15.000 EACH	_____.____	_____.____
0208	506.4000 Steel Diaphragms (structure) 03. B-29-154	24.000 EACH	_____.____	_____.____
0210	506.4000 Steel Diaphragms (structure) 04. B-29-155	24.000 EACH	_____.____	_____.____
0212	506.4000 Steel Diaphragms (structure) 05. B-29-157	15.000 EACH	_____.____	_____.____
0214	506.5000 Bearing Assemblies Fixed (structure) 01. B-29-36	2.000 EACH	_____.____	_____.____
0216	506.6000 Bearing Assemblies Expansion (structure) 01. B-29-36	5.000 EACH	_____.____	_____.____
0218	506.7050.S Removing Bearings (structure) 01. B-29-36	7.000 EACH	_____.____	_____.____
0220	509.0301 Preparation Decks Type 1	8.000 SY	_____.____	_____.____
0222	509.0302 Preparation Decks Type 2	4.000 SY	_____.____	_____.____
0224	509.0500 Cleaning Decks	603.000 SY	_____.____	_____.____
0226	509.1000 Joint Repair	59.000 SY	_____.____	_____.____
0228	509.1500 Concrete Surface Repair	214.000 SF	_____.____	_____.____

Proposal ID: 20220208002 Project(s): 1016-05-70

Federal ID(s): N/A

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0230	509.2000 Full-Depth Deck Repair	1.000 SY	_____.____	_____.____
0232	509.2500 Concrete Masonry Overlay Decks	36.000 CY	_____.____	_____.____
0234	511.1200 Temporary Shoring (structure) 01. B-29-152	750.000 SF	_____.____	_____.____
0236	511.1200 Temporary Shoring (structure) 02. B-29-153	750.000 SF	_____.____	_____.____
0238	511.1200 Temporary Shoring (structure) 03. B-29-154	815.000 SF	_____.____	_____.____
0240	511.1200 Temporary Shoring (structure) 04. B-29-155	815.000 SF	_____.____	_____.____
0242	511.1200 Temporary Shoring (structure) 05. B-29-157	480.000 SF	_____.____	_____.____
0244	516.0500 Rubberized Membrane Waterproofing	174.000 SY	_____.____	_____.____
0246	517.3001.S Structure Overcoating Cleaning and Priming (structure) 01. B-29-36	1.000 EACH	_____.____	_____.____
0248	520.2018 Culvert Pipe Temporary 18-Inch	116.000 LF	_____.____	_____.____
0250	520.8000 Concrete Collars for Pipe	39.000 EACH	_____.____	_____.____
0252	521.1012 Apron Endwalls for Culvert Pipe Steel 12-Inch	5.000 EACH	_____.____	_____.____
0254	521.1018 Apron Endwalls for Culvert Pipe Steel 18-Inch	3.000 EACH	_____.____	_____.____
0256	521.1518 Apron Endwalls for Culvert Pipe Sloped Side Drains Steel 18-Inch 6 to 1	8.000 EACH	_____.____	_____.____

Proposal ID: 20220208002 Project(s): 1016-05-70

Federal ID(s): N/A

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0258	521.1521 Apron Endwalls for Culvert Pipe Sloped Side Drains Steel 21-Inch 6 to 1	1.000 EACH	_____.____	_____.____
0260	521.1524 Apron Endwalls for Culvert Pipe Sloped Side Drains Steel 24-Inch 6 to 1	5.000 EACH	_____.____	_____.____
0262	521.3118 Culvert Pipe Corrugated Steel 18-Inch	16.000 LF	_____.____	_____.____
0264	522.0130 Culvert Pipe Reinforced Concrete Class III 30-Inch	54.000 LF	_____.____	_____.____
0266	522.0136 Culvert Pipe Reinforced Concrete Class III 36-Inch	14.000 LF	_____.____	_____.____
0268	522.0148 Culvert Pipe Reinforced Concrete Class III 48-Inch	10.000 LF	_____.____	_____.____
0270	522.0412 Culvert Pipe Reinforced Concrete Class IV 12-Inch	96.000 LF	_____.____	_____.____
0272	522.0418 Culvert Pipe Reinforced Concrete Class IV 18-Inch	10.000 LF	_____.____	_____.____
0274	522.0424 Culvert Pipe Reinforced Concrete Class IV 24-Inch	484.000 LF	_____.____	_____.____
0276	522.1012 Apron Endwalls for Culvert Pipe Reinforced Concrete 12-Inch	7.000 EACH	_____.____	_____.____
0278	522.1018 Apron Endwalls for Culvert Pipe Reinforced Concrete 18-Inch	4.000 EACH	_____.____	_____.____
0280	522.1024 Apron Endwalls for Culvert Pipe Reinforced Concrete 24-Inch	21.000 EACH	_____.____	_____.____
0282	522.1030 Apron Endwalls for Culvert Pipe Reinforced Concrete 30-Inch	7.000 EACH	_____.____	_____.____

Proposal ID: 20220208002 Project(s): 1016-05-70

Federal ID(s): N/A

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0284	522.1036 Apron Endwalls for Culvert Pipe Reinforced Concrete 36-Inch	1.000 EACH	_____.____	_____.____
0286	522.1048 Apron Endwalls for Culvert Pipe Reinforced Concrete 48-Inch	2.000 EACH	_____.____	_____.____
0288	522.2624 Apron Endwalls for Culvert Pipe Reinforced Concrete Horizontal Elliptical 24x38-Inch	4.000 EACH	_____.____	_____.____
0290	530.0112 Culvert Pipe Corrugated Polyethylene 12-Inch	243.000 LF	_____.____	_____.____
0292	530.0118 Culvert Pipe Corrugated Polyethylene 18-Inch	159.000 LF	_____.____	_____.____
0294	531.1100 Concrete Masonry Ancillary Structures Type NS	15.600 CY	_____.____	_____.____
0296	531.1140 Steel Reinforcement HS Ancillary Structures Type NS	2,100.000 LB	_____.____	_____.____
0298	531.2036 Drilling Shaft 36-Inch	90.000 LF	_____.____	_____.____
0300	531.4050 Foundation Camera Pole 50-FT	1.000 EACH	_____.____	_____.____
0302	531.5420 Foundation Single-Shaft Type TF-II (structure) 01. S-29-0011	2.000 EACH	_____.____	_____.____
0304	531.5420 Foundation Single-Shaft Type TF-II (structure) 02. S-29-0012	2.000 EACH	_____.____	_____.____
0306	532.5420 Truss Full Span 2-Chord Type II (structure) 01. S-29-0011	1.000 EACH	_____.____	_____.____
0308	532.5420 Truss Full Span 2-Chord Type II (structure) 02. S-29-0012	1.000 EACH	_____.____	_____.____

Proposal ID: 20220208002 Project(s): 1016-05-70

Federal ID(s): N/A

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0310	550.0010 Pre-Boring Unconsolidated Materials	960.000 LF	_____.____	_____.____
0312	550.0500 Pile Points	98.000 EACH	_____.____	_____.____
0314	550.1100 Piling Steel HP 10-Inch X 42 Lb	600.000 LF	_____.____	_____.____
0316	550.1120 Piling Steel HP 12-Inch X 53 Lb	13,825.000 LF	_____.____	_____.____
0318	601.0405 Concrete Curb & Gutter 18-Inch Type A	479.000 LF	_____.____	_____.____
0320	601.0409 Concrete Curb & Gutter 30-Inch Type A	7,826.000 LF	_____.____	_____.____
0322	601.0411 Concrete Curb & Gutter 30-Inch Type D	274.000 LF	_____.____	_____.____
0324	601.0551 Concrete Curb & Gutter 4-Inch Sloped 36-Inch Type A	2,306.000 LF	_____.____	_____.____
0326	601.0553 Concrete Curb & Gutter 4-Inch Sloped 36-Inch Type D	620.000 LF	_____.____	_____.____
0328	601.0580 Concrete Curb & Gutter 4-Inch Sloped 36-Inch Type R	767.000 LF	_____.____	_____.____
0330	601.0588 Concrete Curb & Gutter 4-Inch Sloped 36-Inch Type TBT	550.000 LF	_____.____	_____.____
0332	601.0600 Concrete Curb Pedestrian	187.000 LF	_____.____	_____.____
0334	602.0405 Concrete Sidewalk 4-Inch	72,621.000 SF	_____.____	_____.____
0336	602.0515 Curb Ramp Detectable Warning Field Natural Patina	470.000 SF	_____.____	_____.____
0338	602.0615 Curb Ramp Detectable Warning Field Radial Natural Patina	10.000 SF	_____.____	_____.____

Proposal ID: 20220208002 Project(s): 1016-05-70

Federal ID(s): N/A

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0340	603.8000 Concrete Barrier Temporary Precast Delivered	44,177.000 LF	_____.____	_____.____
0342	603.8125 Concrete Barrier Temporary Precast Installed	70,382.000 LF	_____.____	_____.____
0344	603.8500 Anchoring Concrete Barrier Temporary Precast	28,509.000 LF	_____.____	_____.____
0346	604.0400 Slope Paving Concrete	1,776.000 SY	_____.____	_____.____
0348	606.0200 Riprap Medium	104.000 CY	_____.____	_____.____
0350	606.0300 Riprap Heavy	1,361.000 CY	_____.____	_____.____
0352	608.0330 Storm Sewer Pipe Reinforced Concrete Class III 30-Inch	26.000 LF	_____.____	_____.____
0354	608.0412 Storm Sewer Pipe Reinforced Concrete Class IV 12-Inch	730.000 LF	_____.____	_____.____
0356	608.0415 Storm Sewer Pipe Reinforced Concrete Class IV 15-Inch	20.000 LF	_____.____	_____.____
0358	608.0418 Storm Sewer Pipe Reinforced Concrete Class IV 18-Inch	610.000 LF	_____.____	_____.____
0360	608.0424 Storm Sewer Pipe Reinforced Concrete Class IV 24-Inch	1,970.000 LF	_____.____	_____.____
0362	608.2319 Storm Sewer Pipe Reinforced Concrete Horizontal Elliptical Class HE-III 19x30-Inch	124.000 LF	_____.____	_____.____
0364	608.2324 Storm Sewer Pipe Reinforced Concrete Horizontal Elliptical Class HE-III 24x38-Inch	528.000 LF	_____.____	_____.____

Proposal ID: 20220208002 Project(s): 1016-05-70

Federal ID(s): N/A

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0366	608.3012 Storm Sewer Pipe Class III-A 12-Inch	288.000 LF	_____.____	_____.____
0368	608.3015 Storm Sewer Pipe Class III-A 15-Inch	536.000 LF	_____.____	_____.____
0370	608.6015 Storm Sewer Pipe Composite 15-Inch	222.000 LF	_____.____	_____.____
0372	611.0420 Reconstructing Manholes	2.000 EACH	_____.____	_____.____
0374	611.0530 Manhole Covers Type J	12.000 EACH	_____.____	_____.____
0376	611.0612 Inlet Covers Type C	1.000 EACH	_____.____	_____.____
0378	611.0624 Inlet Covers Type H	9.000 EACH	_____.____	_____.____
0380	611.0627 Inlet Covers Type HM	4.000 EACH	_____.____	_____.____
0382	611.0636 Inlet Covers Type HM-S	8.000 EACH	_____.____	_____.____
0384	611.0639 Inlet Covers Type H-S	14.000 EACH	_____.____	_____.____
0386	611.0642 Inlet Covers Type MS	27.000 EACH	_____.____	_____.____
0388	611.0652 Inlet Covers Type T	2.000 EACH	_____.____	_____.____
0390	611.0654 Inlet Covers Type V	5.000 EACH	_____.____	_____.____
0392	611.2005 Manholes 5-FT Diameter	9.000 EACH	_____.____	_____.____
0394	611.2006 Manholes 6-FT Diameter	7.000 EACH	_____.____	_____.____
0396	611.3004 Inlets 4-FT Diameter	6.000 EACH	_____.____	_____.____
0398	611.3220 Inlets 2x2-FT	5.000 EACH	_____.____	_____.____

Proposal ID: 20220208002 Project(s): 1016-05-70

Federal ID(s): N/A

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0400	611.3225 Inlets 2x2.5-FT	1.000 EACH	_____.____	_____.____
0402	611.3230 Inlets 2x3-FT	28.000 EACH	_____.____	_____.____
0404	611.3901 Inlets Median 1 Grate	16.000 EACH	_____.____	_____.____
0406	611.3902 Inlets Median 2 Grate	5.000 EACH	_____.____	_____.____
0408	611.8110 Adjusting Manhole Covers	11.000 EACH	_____.____	_____.____
0410	611.8115 Adjusting Inlet Covers	6.000 EACH	_____.____	_____.____
0412	611.8120.S Cover Plates Temporary	39.000 EACH	_____.____	_____.____
0414	611.9800.S Pipe Grates	5.000 EACH	_____.____	_____.____
0416	612.0406 Pipe Underdrain Wrapped 6-Inch	2,065.000 LF	_____.____	_____.____
0418	612.0902.S Insulation Board Polystyrene (inch) 01. 2-Inch	10.800 SY	_____.____	_____.____
0420	613.1100.S Cable Barrier Type 1	6,132.000 LF	_____.____	_____.____
0422	613.1200.S Cable Barrier End Terminal Type 1	6.000 EACH	_____.____	_____.____
0424	614.0150 Anchor Assemblies for Steel Plate Beam Guard	20.000 EACH	_____.____	_____.____
0426	614.0400 Adjusting Steel Plate Beam Guard	154.000 LF	_____.____	_____.____
0428	614.0905 Crash Cushions Temporary	22.000 EACH	_____.____	_____.____
0430	614.1000 MGS Guardrail Temporary	562.500 LF	_____.____	_____.____

Proposal ID: 20220208002 Project(s): 1016-05-70

Federal ID(s): N/A

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0432	614.1100 MGS Guardrail Temporary Thrie Beam Transition	118.200 LF	_____.____	_____.____
0434	614.2300 MGS Guardrail 3	7,825.000 LF	_____.____	_____.____
0436	614.2500 MGS Thrie Beam Transition	709.200 LF	_____.____	_____.____
0438	614.2610 MGS Guardrail Terminal EAT	17.000 EACH	_____.____	_____.____
0440	614.2620 MGS Guardrail Terminal Type 2	9.000 EACH	_____.____	_____.____
0442	616.0100 Fence Woven Wire (height) 01. 4-FT	4,931.000 LF	_____.____	_____.____
0444	618.0100 Maintenance And Repair of Haul Roads (project) 01. 1016-05-70	1.000 EACH	_____.____	_____.____
0446	619.1000 Mobilization	1.000 EACH	_____.____	_____.____
0448	620.0200 Concrete Median Blunt Nose	77.000 SF	_____.____	_____.____
0450	620.0300 Concrete Median Sloped Nose	985.000 SF	_____.____	_____.____
0452	624.0100 Water	1,658.900 MGAL	_____.____	_____.____
0454	625.0500 Salvaged Topsoil	213,428.000 SY	_____.____	_____.____
0456	627.0200 Mulching	50,901.000 SY	_____.____	_____.____
0458	628.1504 Silt Fence	15,765.000 LF	_____.____	_____.____
0460	628.1520 Silt Fence Maintenance	15,765.000 LF	_____.____	_____.____
0462	628.1905 Mobilizations Erosion Control	23.000 EACH	_____.____	_____.____

Proposal ID: 20220208002 Project(s): 1016-05-70

Federal ID(s): N/A

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0464	628.1910 Mobilizations Emergency Erosion Control	19.000 EACH	_____.____	_____.____
0466	628.2004 Erosion Mat Class I Type B	174,272.000 SY	_____.____	_____.____
0468	628.2008 Erosion Mat Urban Class I Type B	35,975.000 SY	_____.____	_____.____
0470	628.2031 Erosion Mat Class III Type A	3,185.000 SY	_____.____	_____.____
0472	628.6005 Turbidity Barriers	2,487.000 SY	_____.____	_____.____
0474	628.7005 Inlet Protection Type A	60.000 EACH	_____.____	_____.____
0476	628.7010 Inlet Protection Type B	102.000 EACH	_____.____	_____.____
0478	628.7015 Inlet Protection Type C	55.000 EACH	_____.____	_____.____
0480	628.7504 Temporary Ditch Checks	903.000 LF	_____.____	_____.____
0482	628.7515.S Stone Ditch Checks	449.000 CY	_____.____	_____.____
0484	628.7555 Culvert Pipe Checks	99.000 EACH	_____.____	_____.____
0486	628.7560 Tracking Pads	28.000 EACH	_____.____	_____.____
0488	628.7570 Rock Bags	388.000 EACH	_____.____	_____.____
0490	629.0210 Fertilizer Type B	141.500 CWT	_____.____	_____.____
0492	630.0120 Seeding Mixture No. 20	3,863.000 LB	_____.____	_____.____
0494	630.0200 Seeding Temporary	1,377.000 LB	_____.____	_____.____
0496	630.0500 Seed Water	4,871.800 MGAL	_____.____	_____.____

Proposal ID: 20220208002 Project(s): 1016-05-70

Federal ID(s): N/A

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0498	633.0200 Delineators Flexible	116.000 EACH	_____.____	_____.____
0500	633.5100 Markers ROW	20.000 EACH	_____.____	_____.____
0502	633.5200 Markers Culvert End	31.000 EACH	_____.____	_____.____
0504	634.0614 Posts Wood 4x6-Inch X 14-FT	58.000 EACH	_____.____	_____.____
0506	634.0616 Posts Wood 4x6-Inch X 16-FT	64.000 EACH	_____.____	_____.____
0508	634.0618 Posts Wood 4x6-Inch X 18-FT	22.000 EACH	_____.____	_____.____
0510	634.0814 Posts Tubular Steel 2x2-Inch X 14-FT	18.000 EACH	_____.____	_____.____
0512	634.0816 Posts Tubular Steel 2x2-Inch X 16-FT	5.000 EACH	_____.____	_____.____
0514	635.0200 Sign Supports Structural Steel HS	5,214.000 LB	_____.____	_____.____
0516	637.1220 Signs Type I Reflective SH	843.000 SF	_____.____	_____.____
0518	637.2210 Signs Type II Reflective H	1,244.150 SF	_____.____	_____.____
0520	637.2215 Signs Type II Reflective H Folding	40.000 SF	_____.____	_____.____
0522	637.2230 Signs Type II Reflective F	211.000 SF	_____.____	_____.____
0524	638.2101 Moving Signs Type I	4.000 EACH	_____.____	_____.____
0526	638.2102 Moving Signs Type II	57.000 EACH	_____.____	_____.____
0528	638.2601 Removing Signs Type I	6.000 EACH	_____.____	_____.____
0530	638.2602 Removing Signs Type II	110.000 EACH	_____.____	_____.____

Proposal ID: 20220208002 Project(s): 1016-05-70

Federal ID(s): N/A

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0532	638.3000 Removing Small Sign Supports	126.000 EACH	_____.____	_____.____
0534	638.3100 Removing Structural Steel Sign Supports	7.000 EACH	_____.____	_____.____
0536	638.4000 Moving Small Sign Supports	42.000 EACH	_____.____	_____.____
0538	638.4100 Moving Structural Steel Sign Supports	7.000 EACH	_____.____	_____.____
0540	642.5401 Field Office Type D	1.000 EACH	_____.____	_____.____
0542	643.0300 Traffic Control Drums	107,545.000 DAY	_____.____	_____.____
0544	643.0410 Traffic Control Barricades Type II	915.000 DAY	_____.____	_____.____
0546	643.0420 Traffic Control Barricades Type III	15,474.000 DAY	_____.____	_____.____
0548	643.0705 Traffic Control Warning Lights Type A	30,207.000 DAY	_____.____	_____.____
0550	643.0715 Traffic Control Warning Lights Type C	31,705.000 DAY	_____.____	_____.____
0552	643.0800 Traffic Control Arrow Boards	178.000 DAY	_____.____	_____.____
0554	643.0900 Traffic Control Signs	44,687.000 DAY	_____.____	_____.____
0556	643.1051 Traffic Control Signs PCMS with Cellular Communications	1,616.000 DAY	_____.____	_____.____
0558	643.1205.S Basic Traffic Queue Warning System	354.000 DAY	_____.____	_____.____
0560	643.5000 Traffic Control	1.000 EACH	_____.____	_____.____
0562	644.1601 Temporary Pedestrian Curb Ramp	272.000 DAY	_____.____	_____.____

Proposal ID: 20220208002 Project(s): 1016-05-70

Federal ID(s): N/A

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0564	644.1810 Temporary Pedestrian Barricade	1,113.000 LF	_____.____	_____.____
0566	645.0111 Geotextile Type DF Schedule A	656.000 SY	_____.____	_____.____
0568	645.0120 Geotextile Type HR	2,104.000 SY	_____.____	_____.____
0570	645.0130 Geotextile Type R	277.000 SY	_____.____	_____.____
0572	645.0140 Geotextile Type SAS	918.000 SY	_____.____	_____.____
0574	646.1005 Marking Line Paint 4-Inch	40,627.000 LF	_____.____	_____.____
0576	646.1020 Marking Line Epoxy 4-Inch	12,806.000 LF	_____.____	_____.____
0578	646.1040 Marking Line Grooved Wet Ref Epoxy 4-Inch	42,044.000 LF	_____.____	_____.____
0580	646.1555 Marking Line Grooved Contrast Permanent Tape 4-Inch	4,222.000 LF	_____.____	_____.____
0582	646.3005 Marking Line Paint 8-Inch	2,071.000 LF	_____.____	_____.____
0584	646.3020 Marking Line Epoxy 8-Inch	4,029.000 LF	_____.____	_____.____
0586	646.3555 Marking Line Grooved Contrast Permanent Tape 8-Inch	4,527.000 LF	_____.____	_____.____
0588	646.5020 Marking Arrow Epoxy	21.000 EACH	_____.____	_____.____
0590	646.5120 Marking Word Epoxy	5.000 EACH	_____.____	_____.____
0592	646.6120 Marking Stop Line Epoxy 18-Inch	18.000 LF	_____.____	_____.____
0594	646.6320 Marking Dotted Extension Epoxy 18-Inch	132.000 LF	_____.____	_____.____

Proposal ID: 20220208002 Project(s): 1016-05-70

Federal ID(s): N/A

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0596	646.6464 Cold Weather Marking Epoxy 4-Inch	45,199.000 LF	_____.____	_____.____
0598	646.6468 Cold Weather Marking Epoxy 8-Inch	4,527.000 LF	_____.____	_____.____
0600	646.7120 Marking Diagonal Epoxy 12-Inch	367.000 LF	_____.____	_____.____
0602	646.7220 Marking Chevron Epoxy 24-Inch	569.000 LF	_____.____	_____.____
0604	646.7405 Marking Crosswalk Paint Transverse Line 6-Inch	957.000 LF	_____.____	_____.____
0606	646.7420 Marking Crosswalk Epoxy Transverse Line 6-Inch	711.000 LF	_____.____	_____.____
0608	646.8120 Marking Curb Epoxy	196.000 LF	_____.____	_____.____
0610	646.8220 Marking Island Nose Epoxy	6.000 EACH	_____.____	_____.____
0612	646.9000 Marking Removal Line 4-Inch	17,970.000 LF	_____.____	_____.____
0614	646.9010 Marking Removal Line Water Blasting 4-Inch	22,966.000 LF	_____.____	_____.____
0616	646.9100 Marking Removal Line 8-Inch	1,214.000 LF	_____.____	_____.____
0618	646.9110 Marking Removal Line Water Blasting 8-Inch	1,169.000 LF	_____.____	_____.____
0620	649.0105 Temporary Marking Line Paint 4-Inch	86,963.000 LF	_____.____	_____.____
0622	649.0120 Temporary Marking Line Epoxy 4-Inch	10,631.000 LF	_____.____	_____.____
0624	649.0150 Temporary Marking Line Removable Tape 4-Inch	31,673.000 LF	_____.____	_____.____

Proposal ID: 20220208002 Project(s): 1016-05-70

Federal ID(s): N/A

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0626	649.0205 Temporary Marking Line Paint 8-Inch	5,726.000 LF	_____.____	_____.____
0628	649.0250 Temporary Marking Line Removable Tape 8-Inch	1,444.000 LF	_____.____	_____.____
0630	649.0805 Temporary Marking Stop Line Paint 18-Inch	512.000 LF	_____.____	_____.____
0632	649.0850 Temporary Marking Stop Line Removable Tape 18-Inch	32.000 LF	_____.____	_____.____
0634	650.4000 Construction Staking Storm Sewer	116.000 EACH	_____.____	_____.____
0636	650.4500 Construction Staking Subgrade	23,565.000 LF	_____.____	_____.____
0638	650.5000 Construction Staking Base	46,565.000 LF	_____.____	_____.____
0640	650.5500 Construction Staking Curb Gutter and Curb & Gutter	894.000 LF	_____.____	_____.____
0642	650.6000 Construction Staking Pipe Culverts	27.000 EACH	_____.____	_____.____
0644	650.6500 Construction Staking Structure Layout (structure) 01. S-29-0011	LS	LUMP SUM	_____.____
0646	650.6500 Construction Staking Structure Layout (structure) 02. S-29-0012	LS	LUMP SUM	_____.____
0648	650.7000 Construction Staking Concrete Pavement	23,045.000 LF	_____.____	_____.____
0650	650.8000 Construction Staking Resurfacing Reference	3,016.000 LF	_____.____	_____.____
0652	650.8500 Construction Staking Electrical Installations (project) 01. 1016-05-70	LS	LUMP SUM	_____.____

Proposal ID: 20220208002 Project(s): 1016-05-70

Federal ID(s): N/A

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0654	650.9000 Construction Staking Curb Ramps	4.000 EACH	_____.____	_____.____
0656	650.9910 Construction Staking Supplemental Control (project) 01. 1016-05-70	LS	LUMP SUM	_____.____
0658	650.9920 Construction Staking Slope Stakes	31,907.000 LF	_____.____	_____.____
0660	652.0125 Conduit Rigid Metallic 2-Inch	10.000 LF	_____.____	_____.____
0662	652.0225 Conduit Rigid Nonmetallic Schedule 40 2-Inch	7,950.000 LF	_____.____	_____.____
0664	652.0235 Conduit Rigid Nonmetallic Schedule 40 3-Inch	32.000 LF	_____.____	_____.____
0666	652.0325 Conduit Rigid Nonmetallic Schedule 80 2-Inch	465.000 LF	_____.____	_____.____
0668	652.0605 Conduit Special 2-Inch	846.000 LF	_____.____	_____.____
0670	652.0700.S Install Conduit into Existing Item	1.000 EACH	_____.____	_____.____
0672	653.0140 Pull Boxes Steel 24x42-Inch	4.000 EACH	_____.____	_____.____
0674	653.0164 Pull Boxes Non-Conductive 24x42-Inch	49.000 EACH	_____.____	_____.____
0676	654.0105 Concrete Bases Type 5	39.000 EACH	_____.____	_____.____
0678	654.0230 Concrete Control Cabinet Bases Type L30	1.000 EACH	_____.____	_____.____
0680	655.0515 Electrical Wire Traffic Signals 10 AWG	1,270.000 LF	_____.____	_____.____
0682	655.0525 Electrical Wire Traffic Signals 6 AWG	375.000 LF	_____.____	_____.____

Proposal ID: 20220208002 Project(s): 1016-05-70

Federal ID(s): N/A

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0684	655.0610 Electrical Wire Lighting 12 AWG	34,885.000 LF	_____._____	_____._____
0686	655.0615 Electrical Wire Lighting 10 AWG	9,702.000 LF	_____._____	_____._____
0688	655.0620 Electrical Wire Lighting 8 AWG	10,974.000 LF	_____._____	_____._____
0690	655.0625 Electrical Wire Lighting 6 AWG	7,290.000 LF	_____._____	_____._____
0692	656.0200 Electrical Service Meter Breaker Pedestal (location) 01. 985+51B	LS	LUMP SUM	_____._____
0694	656.0200 Electrical Service Meter Breaker Pedestal (location) 02. CCTV-29-0143	LS	LUMP SUM	_____._____
0696	656.0500 Electrical Service Breaker Disconnect Box (location) 01. CCTV-29-0143	LS	LUMP SUM	_____._____
0698	657.0255 Transformer Bases Breakaway 11 1/2-Inch Bolt Circle	37.000 EACH	_____._____	_____._____
0700	657.0322 Poles Type 5-Aluminum	37.000 EACH	_____._____	_____._____
0702	657.0610 Luminaire Arms Single Member 4 1/2-Inch Clamp 6-FT	6.000 EACH	_____._____	_____._____
0704	657.0710 Luminaire Arms Truss Type 4 1/2-Inch Clamp 12-FT	44.000 EACH	_____._____	_____._____
0706	659.0600 Underdeck Lighting (location) 01. 145+09EB82	LS	LUMP SUM	_____._____
0708	659.0600 Underdeck Lighting (location) 02. 146+35EB82	LS	LUMP SUM	_____._____
0710	659.1115 Luminaires Utility LED A	22.000 EACH	_____._____	_____._____
0712	659.1125 Luminaires Utility LED C	28.000 EACH	_____._____	_____._____

Proposal ID: 20220208002 Project(s): 1016-05-70

Federal ID(s): N/A

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0714	659.1210 Luminaires Underdeck LED B	8.000 EACH	_____.____	_____.____
0716	659.2130 Lighting Control Cabinets 120/240 30-Inch	1.000 EACH	_____.____	_____.____
0718	661.0100 Temporary Traffic Signals for Bridges (structure) 01. B-29-0037 Underneath on CTH G	LS	LUMP SUM	_____.____
0720	661.0200 Temporary Traffic Signals for Intersections (location) 01. Westbound Ramp	LS	LUMP SUM	_____.____
0722	661.0200 Temporary Traffic Signals for Intersections (location) 02. Eastbound Ramp	LS	LUMP SUM	_____.____
0726	662.1040.S Ramp Closure Gates 40-FT	2.000 EACH	_____.____	_____.____
0728	670.0100 Field System Integrator	LS	LUMP SUM	_____.____
0730	670.0200 ITS Documentation	LS	LUMP SUM	_____.____
0732	673.0200 Tracer Wire Marker Posts	1.000 EACH	_____.____	_____.____
0736	677.0150 Install Camera Pole 50-FT	1.000 EACH	_____.____	_____.____
0738	677.0200 Install Camera Assembly	1.000 EACH	_____.____	_____.____
0740	678.0006 Install Fiber Optic Cable Outdoor Plant 6-CT	1,470.000 LF	_____.____	_____.____
0742	678.0200 Fiber Optic Splice Enclosure	1.000 EACH	_____.____	_____.____
0744	678.0300 Fiber Optic Splice	4.000 EACH	_____.____	_____.____

Proposal ID: 20220208002 Project(s): 1016-05-70

Federal ID(s): N/A

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0746	678.0400 Fiber Optic Termination	6.000 EACH	_____.____	_____.____
0748	678.0500 Communication System Testing	 LS	 LUMP SUM	 _____.____
0750	678.0600 Install Ethernet Switches	1.000 EACH	_____.____	_____.____
0752	690.0150 Sawing Asphalt	9,641.000 LF	_____.____	_____.____
0754	690.0250 Sawing Concrete	735.000 LF	_____.____	_____.____
0756	715.0502 Incentive Strength Concrete Structures	31,364.000 DOL	1.00000	31,364.00
0758	715.0715 Incentive Flexural Strength Concrete Pavement	23,738.000 DOL	1.00000	23,738.00
0760	740.0440 Incentive IRI Ride	17,996.000 DOL	1.00000	17,996.00
0762	999.2000.S Installing and Maintaining Bird Deterrent System (station) 01. 952+00'T'	1.000 EACH	_____.____	_____.____
0764	999.2000.S Installing and Maintaining Bird Deterrent System (station) 02. 983+00'T'	1.000 EACH	_____.____	_____.____
0766	999.2000.S Installing and Maintaining Bird Deterrent System (station) 03. 1013+00'T'	1.000 EACH	_____.____	_____.____
0768	999.2005.S Maintaining Bird Deterrent System (station) 01. 1013+00'EB'	1.000 EACH	_____.____	_____.____
0770	999.2005.S Maintaining Bird Deterrent System (station) 02. 1013+00'WB'	1.000 EACH	_____.____	_____.____
0772	SPV.0045 Special 01. Temporary Detectable Warning Field	580.000 DAY	_____.____	_____.____
0774	SPV.0045 Special 02. Temporary Crosswalk	285.000 DAY	_____.____	_____.____

Proposal ID: 20220208002 Project(s): 1016-05-70

Federal ID(s): N/A

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0776	SPV.0045 Special 03. Combination Work Zone Digital Speed Limit-Speed Feedback Sign Trailer (WZDSL	830.000 DAY	_____.____	_____.____
0778	SPV.0060 Special 01. Emergency Response to Pavement Repairs	12.000 EACH	_____.____	_____.____
0780	SPV.0060 Special 02. Emergency Response to Traffic Incident Involving Conc Barrier Temp Precast	9.000 EACH	_____.____	_____.____
0782	SPV.0060 Special 03. Emergency Response to Traffic Incident Involving Crash Cushion	9.000 EACH	_____.____	_____.____
0784	SPV.0060 Special 04. Repair Crash Cushion	6.000 EACH	_____.____	_____.____
0786	SPV.0060 Special 05. Removing Sign and Foundation	1.000 EACH	_____.____	_____.____
0788	SPV.0060 Special 06. Maintenance for Temporary Bridge	3.000 EACH	_____.____	_____.____
0790	SPV.0060 Special 07. Concrete Pipe Support	1.000 EACH	_____.____	_____.____
0792	SPV.0060 Special 08. Maint and Removal of Crash Cushion Barrier Temp Precast L.I.P. By Others	22.000 EACH	_____.____	_____.____
0794	SPV.0060 Special 11. Cleaning and Painting Bearings	13.000 EACH	_____.____	_____.____
0796	SPV.0060 Special 12. Utility Line Opening (ULO)	8.000 EACH	_____.____	_____.____
0798	SPV.0060 Special 13. Landmark Reference Monuments Special	6.000 EACH	_____.____	_____.____
0800	SPV.0060 Special 14. Verify Landmark Reference Monuments	6.000 EACH	_____.____	_____.____

Proposal ID: 20220208002 Project(s): 1016-05-70

Federal ID(s): N/A

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0802	SPV.0060 Special 15. Temporary Pipe Connection	2.000 EACH	_____.____	_____.____
0804	SPV.0060 Special 16. Inlet Covers Flat Temporary	8.000 EACH	_____.____	_____.____
0806	SPV.0060 Special 17. Ground Rod	1.000 EACH	_____.____	_____.____
0808	SPV.0060 Special 18. Temporary Ditch and Storm Sewer Maintenance	1.000 EACH	_____.____	_____.____
0810	SPV.0060 Special 19. Construction Staking Roundabout - IH 90 WB Ramp	1.000 EACH	_____.____	_____.____
0812	SPV.0060 Special 20. Construction Staking Roundabout - IH 90 EB Ramp	1.000 EACH	_____.____	_____.____
0814	SPV.0090 Special 01. Maint and Removal of Conc Barrier Temp Precast L.I.P. by Others	24,208.000 LF	_____.____	_____.____
0816	SPV.0090 Special 03. Drain Slotted Vane Longitudinal	2,302.000 LF	_____.____	_____.____
0818	SPV.0090 Special 04. Remove and Salvage Modular Block Retaining Wall	555.000 LF	_____.____	_____.____
0820	SPV.0090 Special 05. Traffic Control Gawk Screen Furnished	21,597.000 LF	_____.____	_____.____
0822	SPV.0090 Special 06. Traffic Control Gawk Screen Installed	21,597.000 LF	_____.____	_____.____
0824	SPV.0090 Special 07. Traffic Control Gawk Screen Moved	7,832.000 LF	_____.____	_____.____
0826	SPV.0180 Special 01. Slope Paving Repair	89.000 SY	_____.____	_____.____
0828	531.2024 Drilling Shaft 24-Inch	128.000 LF	_____.____	_____.____

Proposal ID: 20220208002 Project(s): 1016-05-70

Federal ID(s): N/A

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0830	673.1225.S Install Pole Mounted Cabinet	1.000 EACH	_____._____	_____._____
0832	208.0100 Borrow	27,663.000 CY	_____._____	_____._____
		Section: 0001	Total:	_____._____
			Total Bid:	_____._____