



# Wisconsin Department of Transportation

## Division of Transportation Systems Development

Bureau of Project Development  
4822 Madison Yards Way, 4<sup>th</sup> Floor South  
Madison, WI 53705

March 1, 2022

Telephone: (608) 266-1631  
Facsimile (FAX): (608) 266-8459

### NOTICE TO ALL CONTRACTORS:

**Proposal #44: 8142-00-70, WISC 2022261**  
**STH 35 – Clear Lake**  
**CTH PP to Pondhurst Drive**  
**CTH F**  
**Polk County**

### Letting of March 8, 2022

This is Addendum No. 02, which provides for the following:

#### Schedule of Items:

Added Bid Item Quantities					
Bid Item	Item Description	Unit	Old Quantity	Revised Quantity	Proposal Total
204.0110	Removing Asphaltic Surface	SY	0	227	227

#### Plan Sheets:

Revised Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of changes to sheet)
8	Construction Details (detail for asphaltic driveways updated to clearly call for the Removing Asphaltic Surface item and to keep the depth of asphalt called for equal to the existing asphaltic driveway depth in all cases)
12	Miscellaneous Quantities (added a table for Removing Asphaltic Surface to account for asphalt driveway removals)

**Schedule of Items**

Attached, dated March 1, 2022, are the revised Schedule of Items Page 3.

**Plan Sheets**

The following 8½ x 11-inch sheets are attached and made part of the plans for this proposal:

Revised: 8 & 12.

The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.


Sincerely,

*Mike Coleman*

Proposal Development Specialist  
Proposal Management Section

END OF ADDENDUM

CTH F RL

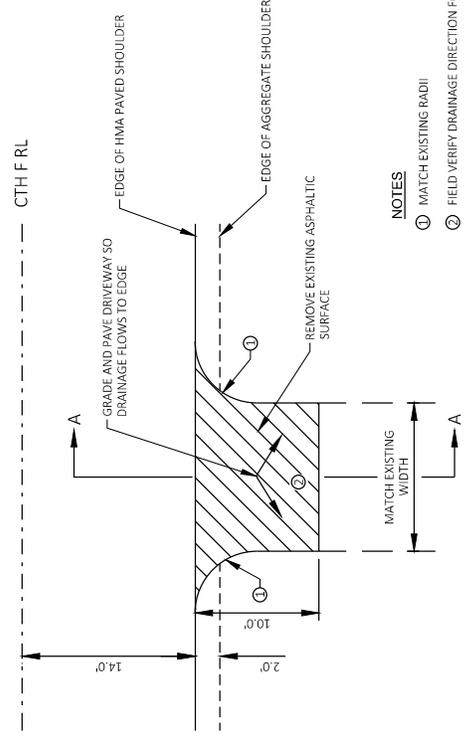


NOTES

- ① MATCH EXISTING RADI
- ② FIELD VERIFY DRAINAGE DIRECTION FOR DRIVEWAY


DRIVEWAY

Addendum No. 02  
ID 8142-00-70  
Revised Sheet 8  
March 1, 2022

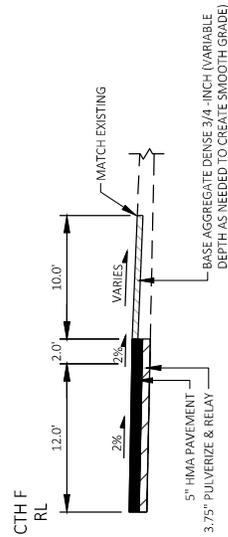

SECTIONS A-A DRIVEWAY PAVING - GRAVEL DRIVEWAY

- STA 14+48 LT STA 55+76 RT
- STA 15+68 LT STA 65+74 RT
- STA 17+49 LT STA 74+65 RT
- STA 19+38 RT STA 84+22 RT
- STA 21+93 LT STA 96+00 LT
- STA 24+93 LT STA 106+98 RT
- STA 33+44 LT STA 112+86 LT
- STA 38+28 LT STA 117+93 RT
- STA 43+18 RT STA 121+88 RT
- STA 44+45 RT STA 123+44 LT
- STA 52+12 LT STA 132+41 LT
- STA 53+11 LT STA 134+96 LT

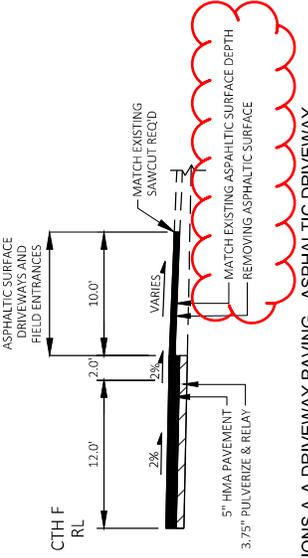

SECTIONS A-A DRIVEWAY PAVING - ASPHALTIC DRIVEWAY

- STA 56+15 LT
- STA 111+78 LT
- STA 119+66 LT
- STA 131+95 RT
- STA 136+66 LT
- STA 135+93 RT

PROJECT NO: 8142-00-70

COUNTY: POLK

HWY: CTH F

CONSTRUCTION DETAILS

SHEET 8

E

FILE NAME: X:\PROJECTS\POLK\8142-00-70\_CTH F DESIGN\CD\SHEETP\JAN02100-CD.DWG

PLOT DATE: 2/28/2022 3:35 PM

PLOT SCALE: 1:10

PLOT NAME: ALEX.ADMAS

WISDOT/CADDS SHEET 42

Addendum No. 02  
ID 8142-00-70  
Revised Sheet 12  
March 1, 2022

ASPHALTIC ITEMS		455.0605	460.5244	465.0120
		TACK COAT	HMA PAVEMENT	ASPHALTIC SURFACE DRIVEWAYS AND FIELD ENTRANCES
STATION	TO STATION	GAL	TON	TON
12+34	- 39+00	589	2,350	-
39+00	- 67+00	649	2,515	6
67+00	- 93+00	669	2,466	-
93+00	- 120+00	559	2,352	8
120+00	- 143+05	503	2,007	13
<b>ITEM TOTAL</b>		<b>3,000</b>	<b>11,690</b>	<b>28</b>

BASE AGGREGATE DENSE 3/4-INCH		305.0110	REMARKS
STATION	TO STATION	TON	
12+34	- 39+00	14	DRIVEWAYS
39+00	- 67+00	10	DRIVEWAYS
67+00	- 93+00	6	DRIVEWAYS
93+00	- 120+00	4	DRIVEWAYS
120+00	- 143+05	7	DRIVEWAYS
<b>ITEM TOTAL</b>		<b>41</b>	

PWL MIXTURE USE TABLE

THE FOLLOWING ACCEPTANCE CRITERIA ARE APPLICABLE FOR THIS PROJECT:

LOCATION	STATION	MIXTURE USE	UNDERLYING SURFACE	BID ITEMS	TONS	THICKNESS	QUALITY MANAGEMENT PROGRAM TO BE USED FOR:	
							MIXTURE ACCEPTANCE	DENSITY ACCEPTANCE
24' DRIVING LANES	12+34 TO 143+04	LOWER LAYER	PULVERIZED AND RELAY BASE	4 LT 58-34 S	5,368	2 3/4"	PWL INCENTIVE AIR VOIDS HMA PAVEMENT 460.2010	INCENTIVE DENSITY PWL HMA PAVEMENT 460.2005
24' DRIVING LANES	12+34 TO 143+04	UPPER LAYER	4 LT 58-34 S	4,392	2 3/4"		PWL INCENTIVE AIR VOIDS HMA PAVEMENT 460.2010	INCENTIVE DENSITY PWL HMA PAVEMENT 460.2005
2' SHOULDERS & SIDEROADS	12+34 TO 143+04	LOWER LAYER	PULVERIZED AND RELAY BASE	4 LT 58-34 S	1,062	2 3/4"	PWL INCENTIVE AIR VOIDS HMA PAVEMENT 460.2010	ACCEPTANCE TESTING BY THE DEPARTMENT; NOT ELIGIBLE FOR INCENTIVE
2' SHOULDERS & SIDEROADS	12+34 TO 143+04	UPPER LAYER	4 LT 58-34 S	868	2 3/4"		PWL INCENTIVE AIR VOIDS HMA PAVEMENT 460.2010	ACCEPTANCE TESTING BY THE DEPARTMENT; NOT ELIGIBLE FOR INCENTIVE

MILLING & PULVERIZING ITEMS

STATION	TO STATION	MILLING	SY	REMARKS
204.0120	-	374.1020 S	374.1020 S	QMP PULVERIZE AND RELAY COMPACTION
12+34	- 39+00	7,287	8,403	QUANTITIES INCLUDE SIDE ROADS
39+00	- 67+00	8,327	8,990	QUANTITIES INCLUDE SIDE ROADS
67+00	- 93+00	7,826	8,817	QUANTITIES INCLUDE SIDE ROADS
93+00	- 120+00	7,568	8,411	QUANTITIES INCLUDE SIDE ROADS
120+00	- 143+05	6,192	7,179	QUANTITIES INCLUDE SIDE ROADS
<b>ITEM TOTAL</b>		<b>36,900</b>	<b>41,800</b>	

REMOVING ASPHALTIC SURFACE

STATION	TO STATION	REMOVING ASPHALTIC SURFACE	SY	REMARKS
204.0110	-	204.0110	204.0110	
STA 56+15 LT	-	54	54	DRIVEWAY
STA 111+78 LT	-	32	32	DRIVEWAY
STA 119+66 LT	-	39	39	DRIVEWAY
STA 131+35 RT	-	12	12	DRIVEWAY
STA 135+90 LT	-	22	22	DRIVEWAY
STA 133+93 RT	-	68	68	DRIVEWAY
<b>ITEM TOTAL</b>		<b>227</b>	<b>227</b>	

WATER

STATION	TO STATION	MGAL
12+34	- 39+00	68
39+00	- 67+00	73
67+00	- 93+00	72
93+00	- 120+00	68
120+00	- 143+05	59
<b>ITEM TOTAL</b>		<b>340</b>

NOTE: ALL ITEMS AND QUANTITIES ON THIS SHEET ARE FOR ENGINEER ESTIMATE CATEGORY 0010 UNLESS OTHERWISE NOTED.

PROJECT NO: 8142-00-70

COUNTY: POLK

MISCELLANEOUS QUANTITIES

SHEET 12

E

FILE NAME: X:\PROJECTS\POLK\8142-00-00\_CTH\_F058\REV3\DRSHEETPLAN\03201-MOLDWG LAYOUT NAME - 01

PLOT DATE: 2/28/2022 5:13 PM

PLOT NAME: BRAD GRUB

PLOT SCALE: 1"=1'

WIS007CADD5 SHEET 42



Proposal Schedule of Items

Proposal ID: 20220308044 Project(s): 8142-00-70

Federal ID(s): WISC 2022261

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0066	740.0440 Incentive IRI Ride	10,000.000 DOL	1.00000	10,000.00
0068	ASP.1T0A On-the-Job Training Apprentice at \$5.00/HR	300.000 HRS	5.00000	1,500.00
0070	ASP.1T0G On-the-Job Training Graduate at \$5.00/HR	300.000 HRS	5.00000	1,500.00
0072	646.4520 Marking Line Same Day Epoxy 4-Inch	17,670.000 LF	_____.	_____.
0074	649.0105 Temporary Marking Line Paint 4-Inch	32,620.000 LF	_____.	_____.
0076	204.0110 Removing Asphaltic Surface	227.000 SY	_____.	_____.
<b>Section: 0001</b>			<b>Total:</b>	_____.
			<b>Total Bid:</b>	_____.

