

ORDER OF SHEETS

Section No.	1	Title
Section No.	2	Typical Sections and Details
Section No.	3	Estimate of Quantities
Section No.	3	Miscellaneous Quantities
Section No.	4	Right of Way Plat
Section No.	5	Plan and Profile
Section No.	6	Standard Detail Drawings
Section No.	7	Sign Plates
Section No.	8	Structure Plans
Section No.	9	Computer Earthwork Data
Section No.	9	Cross Sections

TOTAL SHEETS = 80

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

PLAN OF PROPOSED IMPROVEMENT

C STEVENS POINT, WEST ZINDA DRIVE

ROCKY RUN CREEK BRIDGE B-49-0061

LOCAL STREET
PORTAGE COUNTY

STATE PROJECT NUMBER
6998-13-73

STATE PROJECT	FEDERAL PROJECT	
	PROJECT	CONTRACT
6998-13-73	WISC 2025057	1



DESIGN DESIGNATION

A.A.D.T.	2025	=	660
A.A.D.T.	2045	=	720
D.H.V.		=	125 (2045)
D.D.		=	59/41
T.		=	7%
DESIGN SPEED		=	60
ESALS		=	

BEGIN PROJECT
STA 8+60.00
Y=201333.901
X=156935.375


CONVENTIONAL SYMBOLS

PLAN

CORPORATE LIMITS	
PROPERTY LINE	
LOT LINE	
LIMITED HIGHWAY EASEMENT	
EXISTING RIGHT OF WAY	
PROPOSED OR NEW R/W LINE	
SLOPE INTERCEPT	
REFERENCE LINE	
EXISTING CULVERT	
PROPOSED CULVERT (Box or Pipe)	
COMBUSTIBLE FLUIDS	
MARSH AREA	
WOODED OR SHRUB AREA	

PROFILE

GRADE LINE	
ORIGINAL GROUND	
MARSH OR ROCK PROFILE (To be noted as such)	
SPECIAL DITCH	
GRADE ELEVATION	
CULVERT (Profile View)	
UTILITIES	
ELECTRIC	
FIBER OPTIC	
GAS	
SANITARY SEWER	
STORM SEWER	
TELEPHONE	
WATER	
UTILITY PEDESTAL	
POWER POLE	
TELEPHONE POLE	

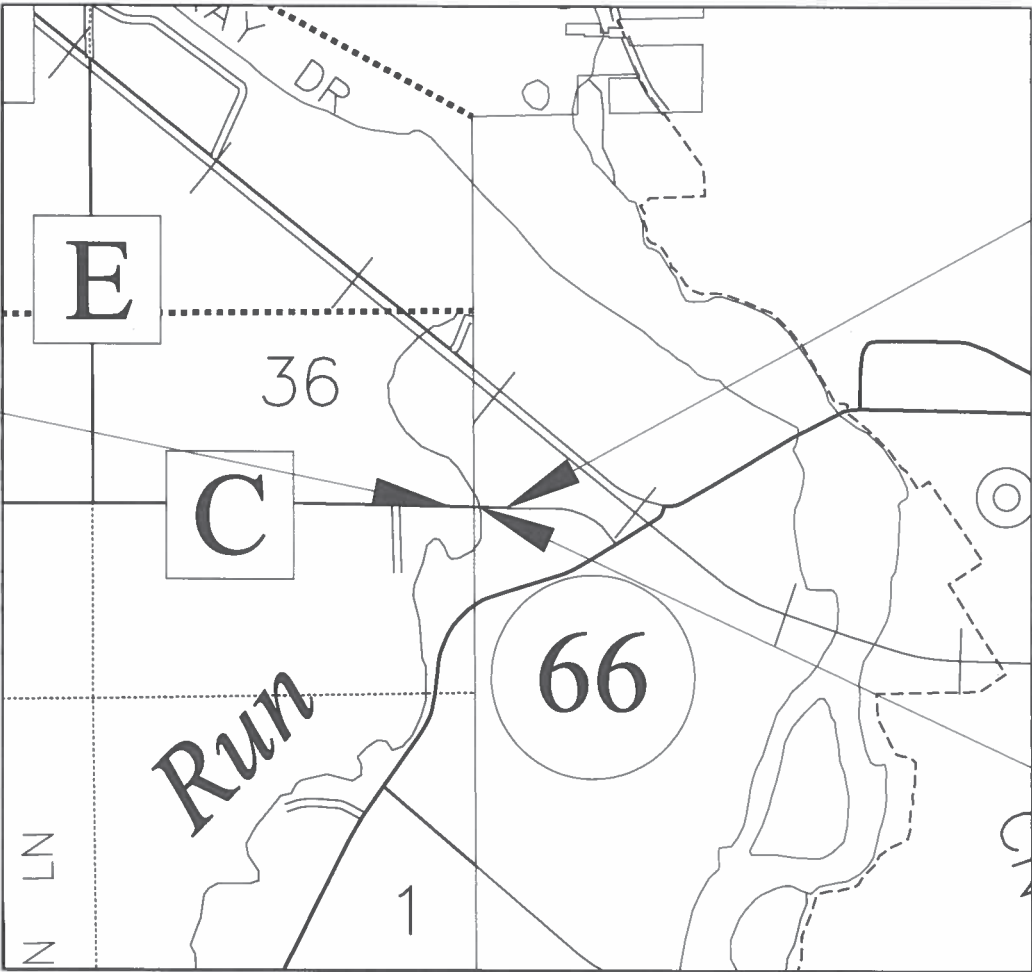

SCALE 0 0.5 MI

TOTAL NET LENGTH OF CENTERLINE = 0.049

HORIZONTAL POSITIONS SHOWN ON THIS PLAN ARE WISCONSIN COORDINATE REFERENCE SYSTEM (WISCRS), PORTAGE COUNTY, NAD83 (2011), IN U.S. SURVEY FEET. POSITIONS SHOWN ARE GRID COORDINATES, GRID BEARINGS, AND GRID DISTANCES. GRID DISTANCES ARE THE SAME AS GROUND DISTANCES.

ELEVATIONS ARE REFERENCED TO NAVD 88 (2012). GPS DERIVED ELEVATIONS ARE BASED ON GEOID 12A.

ACCEPTED FOR
CITY OF STEVENS POINT
Date 7/29/2024 Scott Abrahams Dir. of Public Works
(Signature and Title of Official)

ORIGINAL PLANS PREPARED BY
AECOM
WISCONSIN
ZACHARY T. MROZ
E-42981
MILWAUKEE
WISCONSIN
PROFESSIONAL ENGINEER
DATE: 7/23/24 [Signature]
(Professional Engineer Signature)

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION
PREPARED BY
Surveyor AECOM
Designer AECOM
Project Manager JASON SCHAEFFER
Regional Examiner REGIONAL EXAMINER
Regional Supervisor DAN ERVA

APPROVED FOR THE DEPARTMENT
DATE: 7/29/2024 [Signature]
(Signature)

UTILITIES CONTACTS

ATC

ELECTRIC-TRANSMISSION
DOUG VOSBERG
2489 RINDEN ROAD
COTTAGE GROVE, WI 53527
PHONE: 608-877-7650
EMAIL: DVOSBERG@ATCLLC.COM

AT&T WISCONSIN

COMMUNICATIONS
CHARLES BARTELT
411 7TH STREET
RACINE, WI 53403
PHONE: 920-375-9172
EMAIL: CB1461@ATT.COM

SPECTRUM

COMMUNICATIONS
JUSTIN MONROE-JIMENEZ
2701 DANIELS STREET
MADISON, WI 53718
PHONE: 608-288-6843
EMAIL: CHTR_WI_CONST@CHARTER.COM

TDS METROCOM

COMMUNICATIONS
RICKY SCHMIT
7208 SYNERGY COURT, SUITE B
WESTON, WI 54476
PHONE: 715-660-1604
EMAIL: RICKY.SCHMIT@TDSTELECOM.COM

WPS-ELECTRIC

ELECTRIC
UTILITY MANAGER
P.O. BOX 19001
GREEN BAY, WI 54307
PHONE: 920-433-1513
EMAIL: UTILITIESRELOCATION@WISCONSINPUBLICSERVICE.COM

WPS-GAS

GAS
UTILITY MANAGER
P.O. BOX 19001
GREEN BAY, WI 54307
PHONE: 920-433-1513
EMAIL: UTILITIESRELOCATION@WISCONSINPUBLICSERVICE.COM

GENERAL NOTES

THE LOCATIONS OF EXISTING UTILITY INSTALLATIONS AS SHOWN ON THE PLANS ARE APPROXIMATE. THERE MAY BE OTHER UTILITY INSTALLATIONS WITHIN THE PROJECT AREA THAT ARE NOT SHOWN.

CONTRACTOR WILL BE RESPONSIBLE FOR RESHAPING AND SEEDING ANY PREVIOUSLY GRASSED AREAS WHICH ARE DISTURBED BY OPERATIONS, OUTSIDE OF THE NORMAL CONSTRUCTION LIMITS.

BASE AGGREGATE DENSE 3/4-INCH CALCULATIONS ARE BASED ON A UNIT WEIGHT OF 2.1 TONS/CY.

BASE AGGREGATE DENSE 1 1/4-INCH CALCULATIONS ARE BASED ON A UNIT WEIGHT OF 2.0 TONS/CY.

HMA PAVEMENT WEIGHT CALCULATIONS ARE BASED ON A UNIT WEIGHT OF 112 LBS/SY/INCH.

NO TREES OR SHRUBS ARE TO BE REMOVED WITHOUT THE APPROVAL OF THE ENGINEER.

RIGHT OF WAY INFORMATION SHOWN ON THE PLANS IS APPROXIMATE.

THE CONTRACTOR SHALL PROTECT ALL SURVEY MARKERS. NO SURVEY MARKERS ARE TO BE REMOVED UNLESS APPROVED BY THE ENGINEER.

WHEN THE QUANTITY OF THE ITEMS OF BASE AGGREGATE, SUBBASE OR HMA PAVEMENT IS MEASURED FOR PAYMENT BY THE TON OR CUBIC YARD, THE DEPTH OR THICKNESS OF THE LAYERS SHOWN ON THE PLAN IS APPROXIMATE AND THE ACTUAL THICKNESS WILL DEPEND ON THE DISTRIBUTION OF THE MATERIAL AS DIRECTED BY THE ENGINEER.

EROSION CONTROL FEATURES AS SHOWN IN THE PLANS ARE AT APPROXIMATE LOCATIONS. EXACT LOCATIONS WILL BE DETERMINED BY THE CONTRACTOR'S EROSION CONTROL IMPLEMENTATION PLAN (ECIP) AND APPROVED BY THE ENGINEER. MAINTAIN EROSION CONTROL MEASURES UNTIL SUCH A TIME AS THE ENGINEER DETERMINES THE MEASURE IS NO LONGER NECESSARY.

THE CONTRACTOR'S PAVING OPERATION SHALL BE CONSISTENT WITH THE TYPICAL SECTIONS AND CONSTRUCTED TO PREVENT LONGITUDINAL JOINTS FROM BEING LOCATED WITHIN A DRIVING OR TURNING LANE.

PRIOR TO PLACEMENT OF GUARDRAIL THE SHOULDERS SHALL BE IN PLACE, SHAPED AND COMPACTED.

TRAFFIC CONTROL DEVICES SHALL BE ADJUSTED TO FIT FIELD CONDITIONS AS DIRECTED BY THE ENGINEER.

THE CONTRACTOR SHALL NOT OPERATE BEYOND THE SLOPE INTERCEPTS AS SHOWN ON THE PLANS WHEN ADJACENT TO WETLANDS, WATERWAYS, OR ENVIRONMENTALLY SENSITIVE AREAS.

WETLANDS, WATERWAYS, AND OTHER ENVIRONMENTALLY SENSITIVE AREAS SHALL BE PROTECTED AT ALL TIMES. DO NOT DRIVE OR STORE EQUIPMENT, OR STORE CONSTRUCTION MATERIALS IN THESE SITES.

STANDARD ABBREVIATIONS

ABUT	ABUTMENT	LT	LEFT
AC	ACRE	LHF	LEFT HAND FORWARD
AGG	AGGREGATE	L	LENGTH OF CURVE
AH	AHEAD	LF	LINEAR FOOT
∠	ANGLE	LC	LONG CHORD OF CURVE
AADT	ANNUAL AVERAGE DAILY TRAFFIC	LS	LUMP SUM
AEW	APRON ENDWALL	MGAL	ONE THOUSAND GALLONS
ASPH	ASPHALTIC	MH	MANHOLE
BK	BACK	ML OR M/L	MATCH LINE
BC	BACK OF CURB	NOM	NOMINAL
BAD	BASE AGGREGATE DENSE	NC	NORMAL CROWN
BL OR B/L	BASE LINE	NB	NORTHBOUND
BM	BENCH MARK	NO	NUMBER
CB	CATCH BASIN	OD	OUTSIDE DIAMETER
CL OR C/L	CENTER LINE	PAVT	PAVEMENT
Δ	CENTRAL ANGLE OR DELTA	PLE	PERMANENT LIMITED EASEMENT
CE	COMMERCIAL ENTRANCE	PC	POINT OF CURVATURE
CONC	CONCRETE	PI	POINT OF INTERSECTION
CSW	CONCRETE SIDEWALK	PT	POINT OF TANGENCY
CONST	CONSTRUCTION	PCC	PORTLAND CEMENT CONCRETE
CP	CONTROL POINT	LB	POUND
CO	COUNTY	PSI	POUNDS PER SQUARE INCH
CTH	COUNTY TRUCK HIGHWAY	PE	PRIVATE ENTRANCE
CY	CUBIC YARD	PROJ	PROJECT
CP	CULVERT PIPE	PL	PROPERTY LINE
CPCA	CULVERT PIPE CORRUGATED ALUMINUM	PRW	PROPOSED RIGHT OF WAY
CPCPE	CULVERT PIPE CORRUGATED POLYETHYLENE	R	RADIUS
CPCPP	CULVERT PIPE CORRUGATED POLYPROPYLENE	RL OR R/L	REFERENCE LINE
CPCS	CULVERT PIPE CORRUGATED STEEL	REQD	REQUIRED
CPCSAC	CULVERT PIPE CORRUGATED STEEL ALUMINUM COATED	RT	RIGHT
CPCSPC	CULVERT PIPE CORRUGATED STEEL POLYMER COATED	RHF	RIGHT HAND FORWARD
CPRC	CULVERT PIPE REINFORCED CONCRETE	R/W	RIGHT OF WAY
CPRCHE	CULVERT PIPE REINFORCED CONCRETE HORIZONTAL ELLIPTICAL	RD	ROAD
CPS	CULVERT PIPE SALVAGED	RDWY	ROADWAY
CPT	CULVERT PIPE TEMPORARY	SHLDR	SHOULDER
C & G	CURB AND GUTTER	SW	SIDEWALK
D	DEGREE OF CURVE	SB	SOUTHBOUND
DHV	DESIGN HOUR VOLUME	SPECS	SPECIFICATIONS
DIA	DIAMETER	SF	SQUARE FEET
DD	DIRECTIONAL DISTRIBUTION	SY	SQUARE YARD
DE	DRAINAGE EASEMENT	SDD	STANDARD DETAIL DRAWINGS
DWY	DRIVEWAY	STH	STATE TRUNK HIGHWAY
EA	EACH	STA	STATION
EB	EASTBOUND	SSPC	STORM SEWER PIPE COMPOSITE
EL OR ELEV	ELEVATION	SSCPE	STORM SEWER PIPE CORRUGATED POLYETHYLENE
EMB	EMBANKMENT	SSCPP	STORM SEWER PIPE CORRUGATED POLYPROPYLENE
EW	ENDWALL	SSPNRC	STORM SEWER PIPE NON-REINFORCED CONCRETE
EAT	ENERGY ABSORBING TERMINAL	SSPRC	STORM SEWER PIPE REINFORCED CONCRETE
ESALS	EQUIVALENT SINGLE AXLE LOADS	SSPRC	STORM SEWER PIPE REINFORCED CONCRETE
EXC	EXCAVATION	SSPRCHE	STORM SEWER PIPE REINFORCED CONCRETE HORIZONTAL ELLIPTICAL
EBS	EXCAVATION BELOW SUBGRADE	SE	SUPERELEVATION
EXIST	EXISTING	SL OR S/L	SURVEY LINE
FERT	FERTILIZER	TEMP	TEMPORARY
FE	FIELD ENTRANCE	TI	TEMPORARY INTEREST
FL OR F/L	FLOW LINE	TLE	TEMPORARY LIMITED EASEMENT
FT	FOOT	TC	TOP OF CURB
FTMS	FREE TRAFFIC MANAGEMENT SYSTEM	TL OR T/L	TRANSIT LINE
HES	HIGH EARLY STRENGTH	T	TRUCKS (PERCENT OF)
HE	HIGHWAY EASEMENT	TYP	TYPICAL
CWT	HUNDRED WEIGHT	USH	UNITED STATES HIGHWAY
IN DIA	INCH DIAMETER	VAR	VARIABLE
INL	INLET	VC	VERTICAL CURVE
ID	INSIDE DIAMETER	VPC	VERTICAL POINT OF CURVATURE
INTERS	INTERSECTION	VPI	VERTICAL POINT OF INTERSECTION
IH	INTERSTATE HIGHWAY	VPT	VERTICAL POINT OF TANGENCY
INV	INVERT	W	WEST
JT	JOINT	WB	WESTBOUND

RUNOFF COEFFICIENT TABLE

LAND USE:	HYDROLOGIC SOIL GROUP											
	A			B			C			D		
	SLOPE RANGE (PERCENT)			SLOPE RANGE (PERCENT)			SLOPE RANGE (PERCENT)			SLOPE RANGE (PERCENT)		
	0-2	2-6	6 & OVER	0-2	2-6	6 & OVER	0-2	2-6	6 & OVER	0-2	2-6	6 & OVER
ROW CROPS:	.08	.16	.22	.12	.20	.27	.15	.24	.33	.19	.28	.38
	.22	.30	.38	.26	.34	.44	.30	.37	.50	.34	.41	.56
MEDIAN STRIPTURF:	.19	.20	.24	.19	.22	.26	.20	.23	.30	.20	.25	.30
	.24	.26	.30	.25	.28	.33	.26	.30	.37	.27	.32	.40
SIDE SLOPETURF:			.25			.27			.28			.30
			.32			.34			.36			.38
PAVEMENT:												
ASPHALT:	.70 - .95											
CONCRETE:	.80 - .95											
BRICK:	.70 - .80											
DRIVES, WALKS:	.75 - .85											
ROOFS:	.75 - .95											
GRAVEL ROADS, SHOULDERS:	.40 - .60											

TOTAL PROJECT AREA = 1.54 ACRES
TOTAL AREA EXPECTED TO BE DISTURBED BY CONSTRUCTION ACTIVITIES = 0.56 ACRES



Dial **811** or (800)242-8511
www.DiggersHotline.com

PROJECT NO: 6998-13-73


HWY: WEST ZINDA DR

COUNTY: PORTAGE


GENERAL NOTES

SHEET


E



STA 6+76.47 TO STA 9+31.47
STA 10+67.97 TO STA 13+12.74

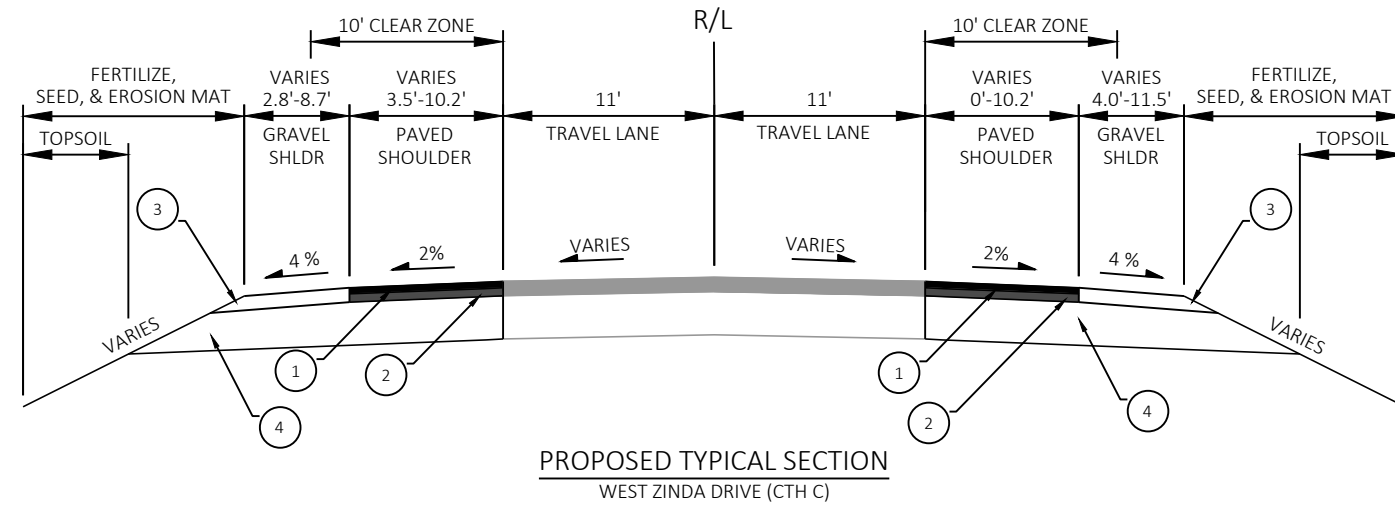
**LEGEND**

- 1 2" HMA Pavement 4 MT 58-34 S
- 2 3.25" HMA Pavement 2 MT 58-28 S
- 3 5.25" BASE AGGREGATE DENSE 3/4-INCH
- 4 12" BASE AGGREGATE DENSE 1 1/4-INCH
- 5 CONCRETE CURB & GUTTER
4-INCH SLOPED 36-INCH TYPE TBT
STA 8+62.05 TO STA 9+20.64 LT & RT
- 6 PROPOSED GUARDRAIL
STA 8+30.61 TO STA 9+23.14 LT & RT
STA 10+76.30 TO STA 11+68.82 LT & RT

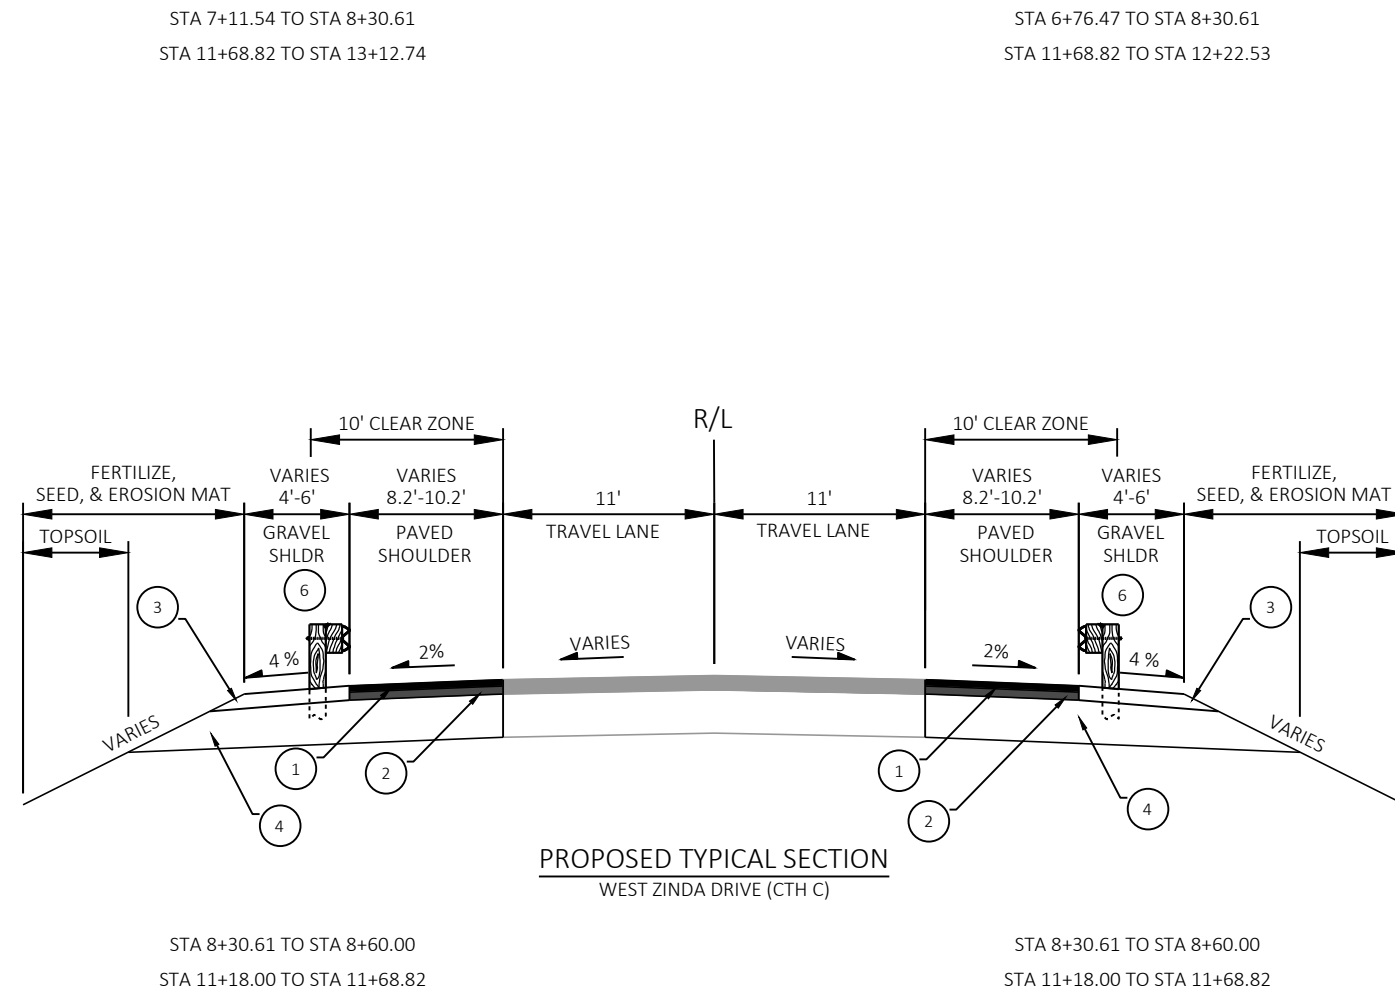





STA 8+62.05 TO STA 9+31.47

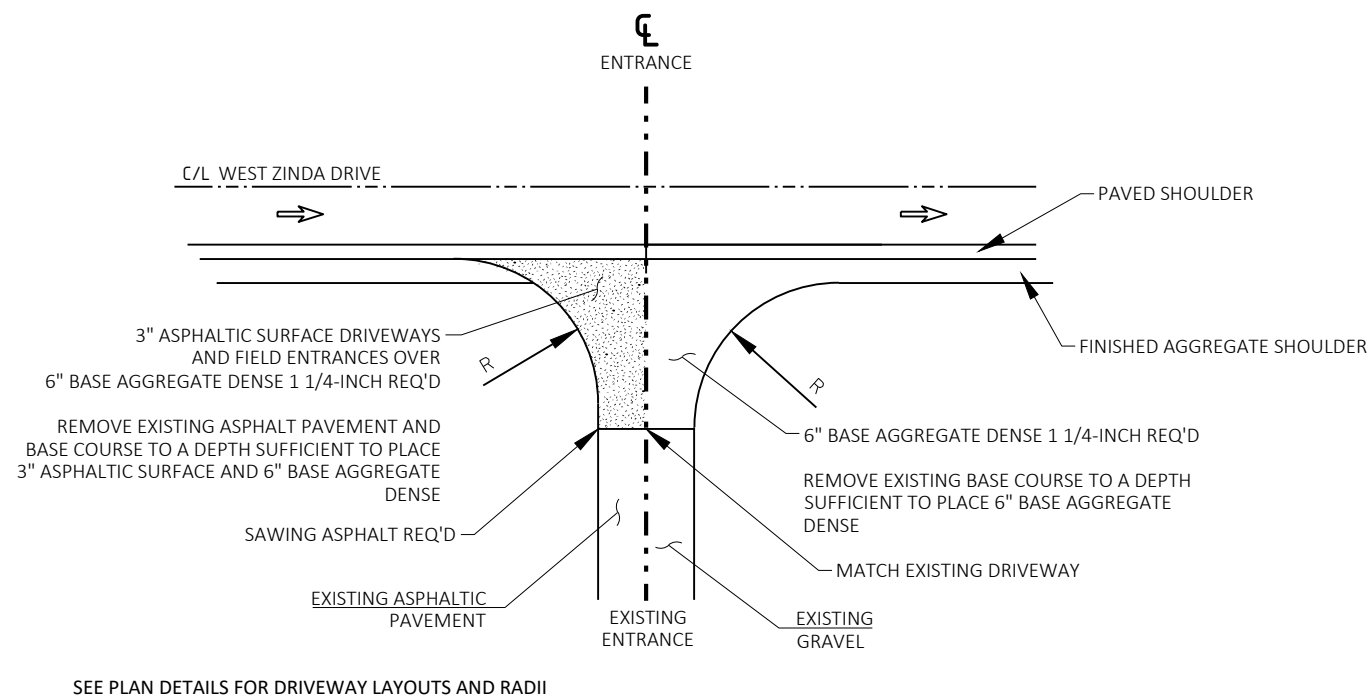

PLAN VIEW

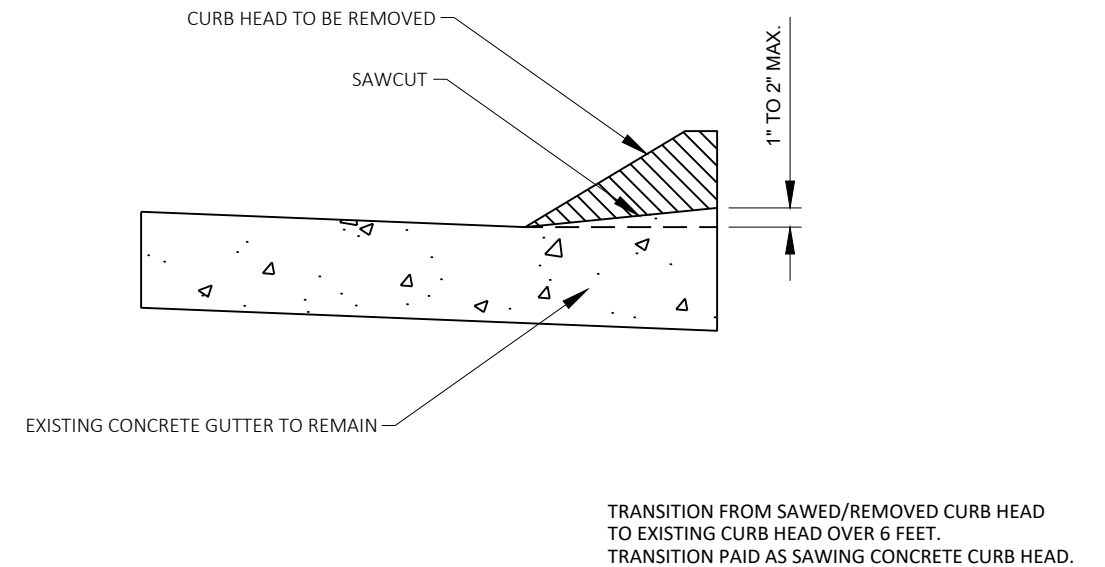RURAL DRIVEWAY (P.E. & F.E.)WEST ZINDA DRIVESTA 7+72 LT (ASPHALT)
STA 8+10 RT (GRAVEL)SAWING CONCRETE CURB HEADWEST ZINDA DRIVE

STA 12+22.5 - STA 12+44.0 RT

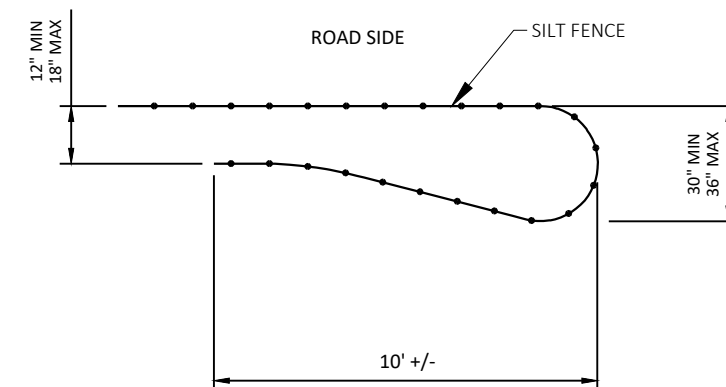SILT FENCE TURN-AROUND

SEE PLANS FOR LOCATIONS

PROJECT NO: 6998-13-73


HWY: WEST ZINDA DR


COUNTY: PORTAGE

CONSTRUCTION DETAILS

SHEET

E

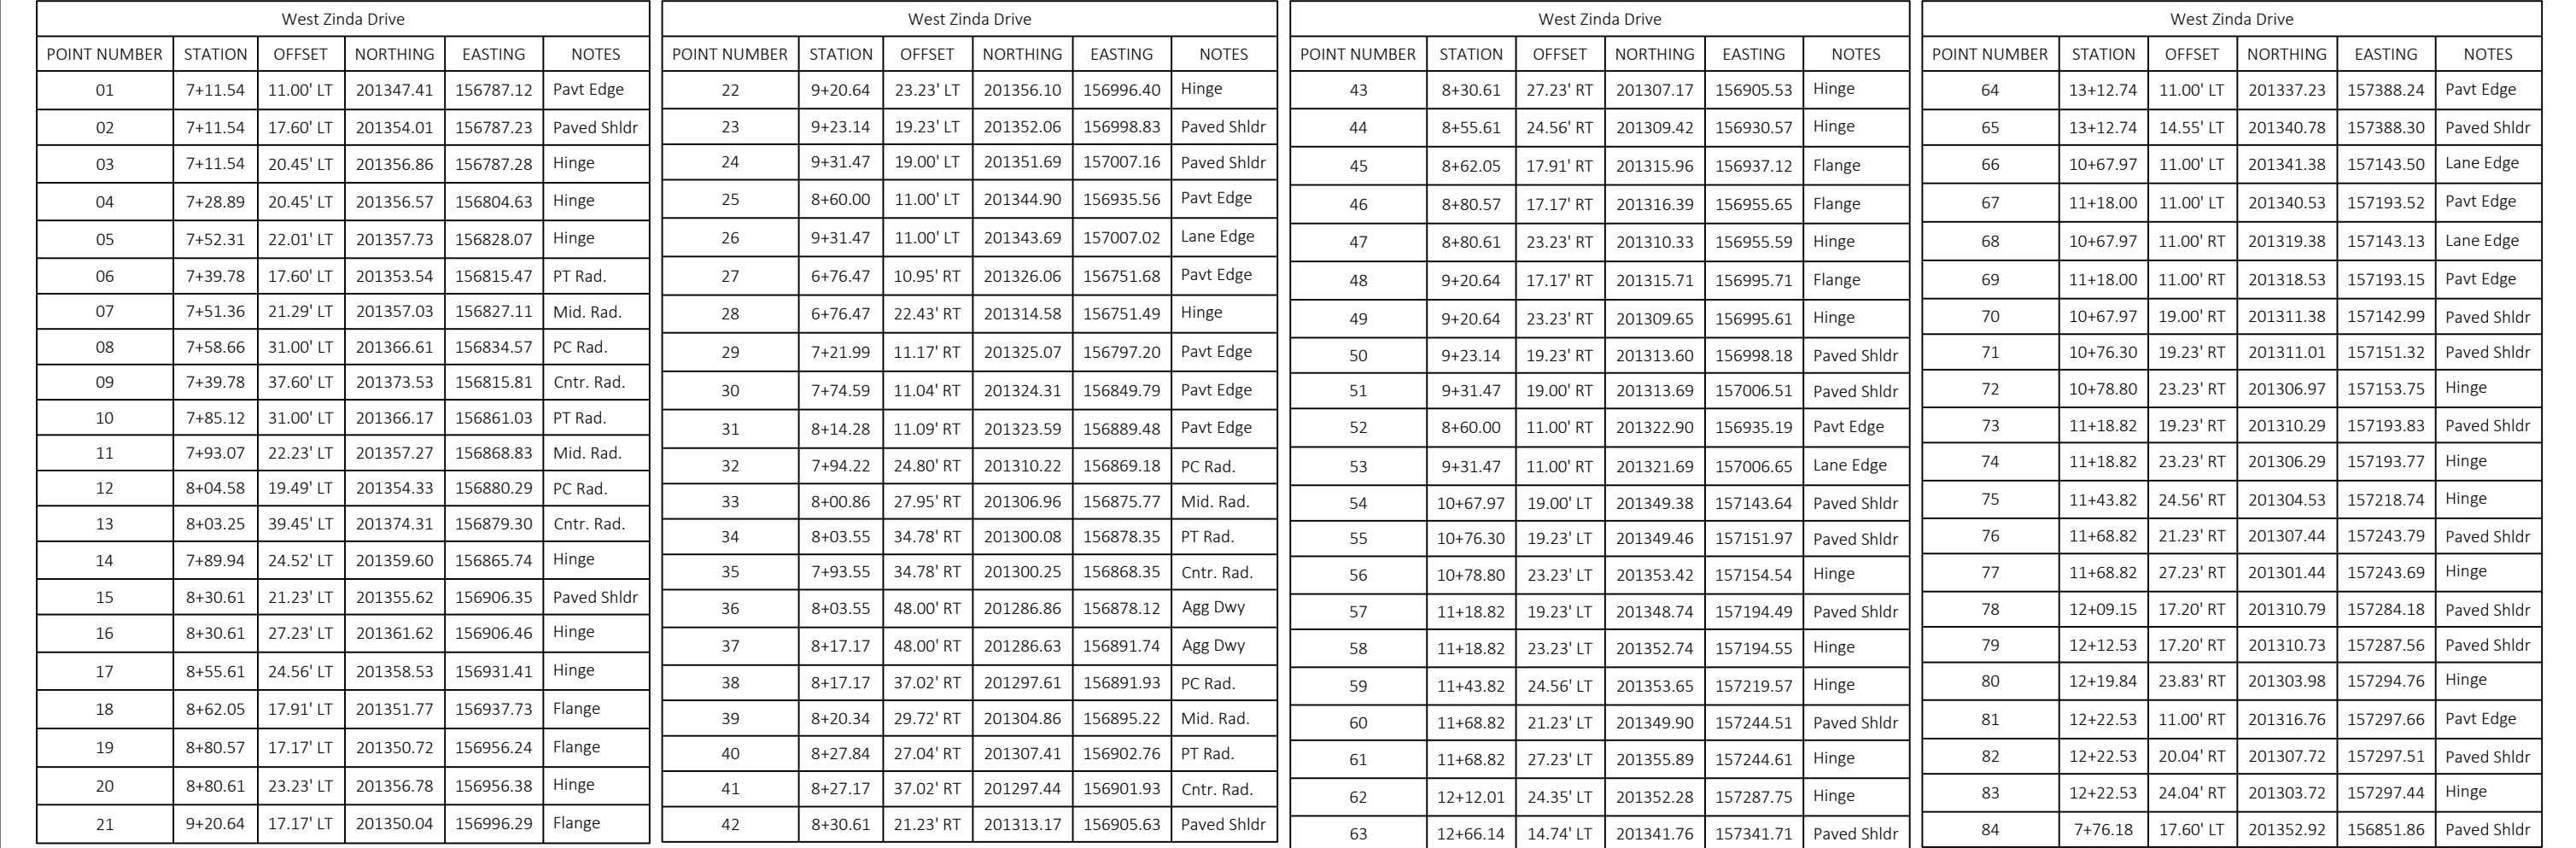



LEGEND

6W

MARKING LINE EPOXY 6-INCH (WHITE)

6DY

MARKING LINE EPOXY 6-INCH (DOUBLE YELLOW)

BASS L COTE
AND
BRENDA L COTE

CITY OF STEVENS POINT

END PROJECT
STA 11+18.00
SAWCUT REQUIREDROCKY RUN
CREEK

N

BEGIN CONSTRUCTION LT
STA 7+11.54
MATCH EXISTING

P.E. ASPHALT

EXIST R/W

6W

6DY

R/L W ZINDA DR

WEST ZINDA DRIVE (CTH C)

STRUCTURE
B-49-0061
SEE STRUCTURE PLAN

F.E. GRAVEL

BEGIN CONSTRUCTION RT
STA 6+76.47
MATCH EXISTING

BONNIE M WOCHINSKI

BEGIN PROJECT
STA 8+60.00
SAWCUT REQUIRED
Y=201333.9009
X=156935.3751END CONSTRUCTION LT
STA 13+12.74
MATCH EXISTINGSTA 12+22.53 RT
MATCH EXISTINGEND CONSTRUCTION RT
STA 12+43.99 RT

W GATES DRIVE

CITY OF STEVENS POINT

THOMAS J PHILLIP
AND
DIANE C PHILLIP

PROJECT NO: 6998-13-73


HWY: WEST ZINDA DR

COUNTY: PORTAGE

PERMANENT SIGNING AND PAVEMENT MARKING

SHEET

E

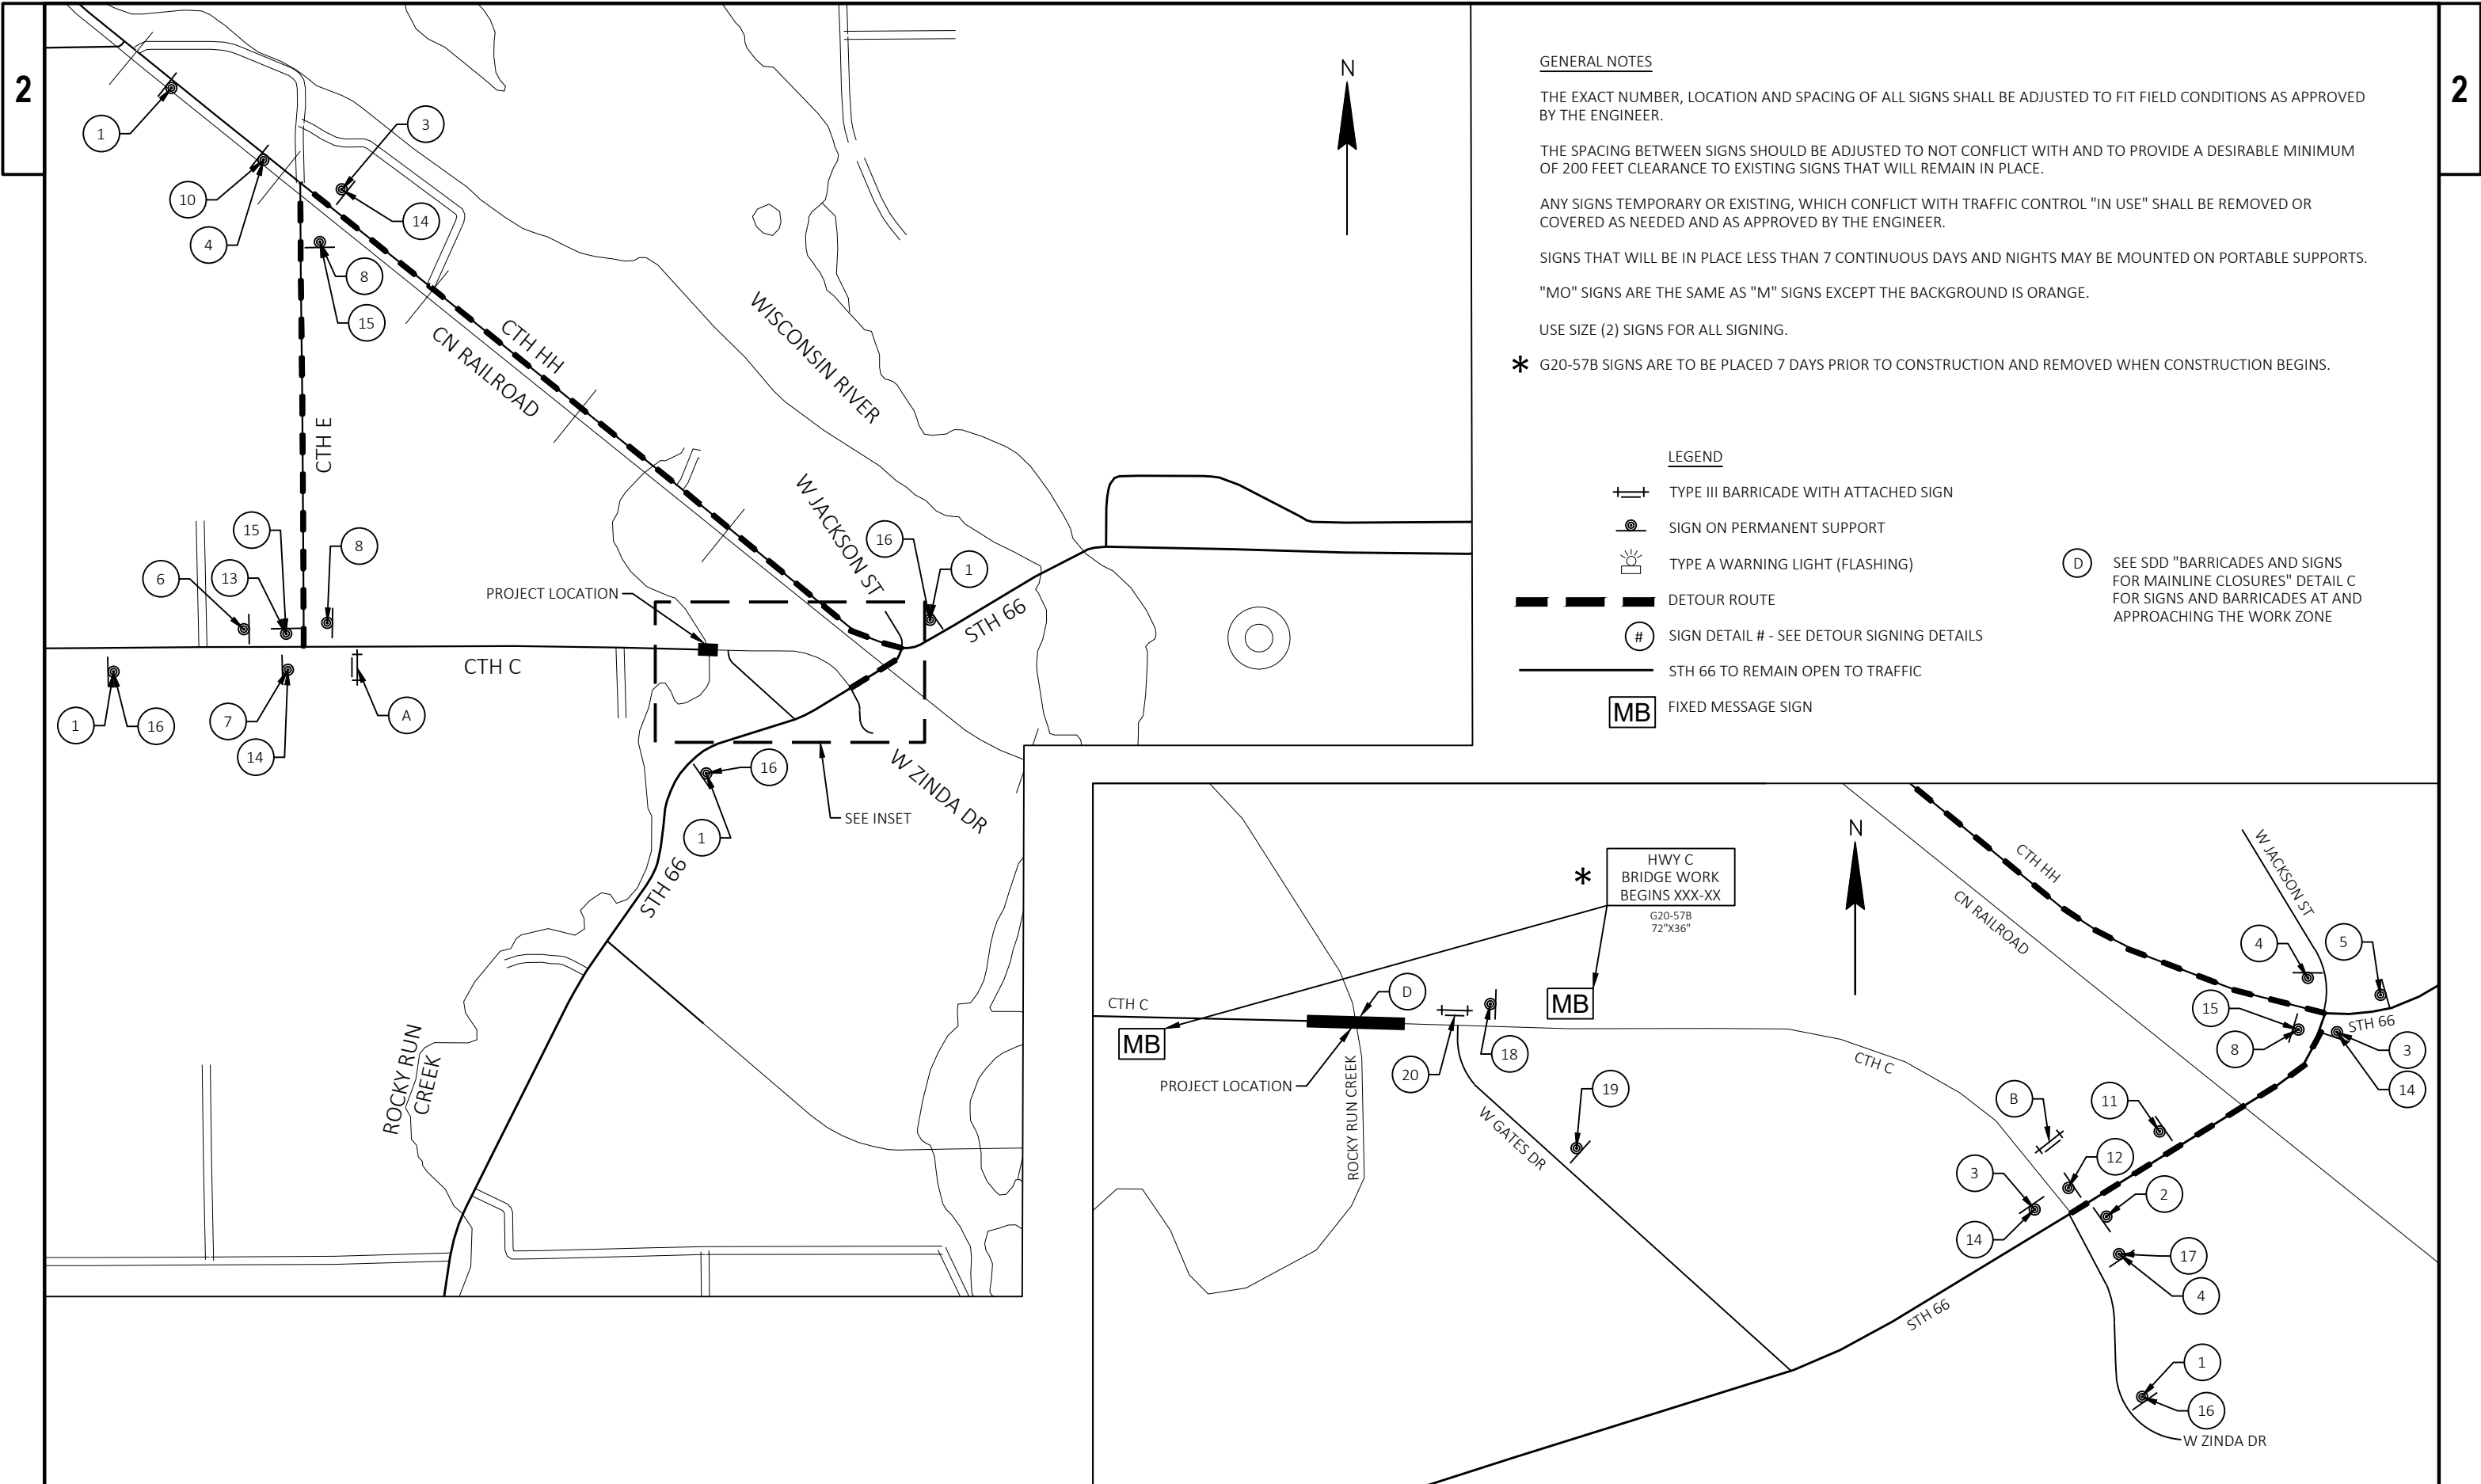

2	1	2	3	4	5	6	7	8	2		
	9	10	11	12	13	14	15	16			
	17	18	19	20	A	B					
DETOUR SIGN LEGEND											
PROJECT NO: 6998-13-73			HWY: WEST ZINDA DR		COUNTY: PORTAGE		DETOUR PLAN		SHEET	E	

Estimate Of Quantities

6998-13-73

Line	Item	Item Description	Unit	Total	Qty
0002	203.0211.S	Abatement of Asbestos Containing Material (structure) 01. B-49-0061	EACH	1.000	1.000
0004	204.0150	Removing Curb & Gutter	LF	51.000	51.000
0006	204.0165	Removing Guardrail	LF	380.000	380.000
0008	205.0100	Excavation Common	CY	722.000	722.000
0010	213.0100	Finishing Roadway (project) 01. 6998-13-73	EACH	1.000	1.000
0012	305.0110	Base Aggregate Dense 3/4-Inch	TON	170.000	170.000
0014	305.0120	Base Aggregate Dense 1 1/4-Inch	TON	1,240.000	1,240.000
0016	455.0605	Tack Coat	GAL	73.000	73.000
0018	460.2000	Incentive Density HMA Pavement	DOL	190.000	190.000
0020	460.6222	HMA Pavement 2 MT 58-28 S	TON	180.000	180.000
0022	460.6244	HMA Pavement 4 MT 58-34 S	TON	115.000	115.000
0024	465.0120	Asphaltic Surface Driveways and Field Entrances	TON	10.000	10.000
0026	502.0100	Concrete Masonry Bridges	CY	1.000	1.000
0028	502.3200	Protective Surface Treatment	SY	580.000	580.000
0030	502.3205	Pigmented Surface Sealer Reseal	SY	130.000	130.000
0032	509.0301	Preparation Decks Type 1	SY	216.000	216.000
0034	509.0302	Preparation Decks Type 2	SY	162.000	162.000
0036	509.0500	Cleaning Decks	SY	580.000	580.000
0038	509.1500	Concrete Surface Repair	SF	133.000	133.000
0040	509.2000	Full-Depth Deck Repair	SY	2.000	2.000
0042	509.2500	Concrete Masonry Overlay Decks	CY	51.000	51.000
0044	509.9020.S	Epoxy Crack Sealing	LF	22.000	22.000
0046	513.9006.S	Removing and Resetting Tubular Railing (structure) 01. B-49-0061	EACH	1.000	1.000
0048	601.0588	Concrete Curb & Gutter 4-Inch Sloped 36-Inch Type TBT	LF	118.000	118.000
0050	602.3010	Concrete Surface Drains	CY	4.000	4.000
0052	606.0200	Riprap Medium	CY	6.000	6.000
0054	614.2500	MGS Thrie Beam Transition	LF	157.600	157.600
0056	614.2610	MGS Guardrail Terminal EAT	EACH	4.000	4.000
0058	618.0100	Maintenance and Repair of Haul Roads (project) 01. 6998-13-73	EACH	1.000	1.000
0060	619.1000	Mobilization	EACH	1.000	1.000
0062	624.0100	Water	MGAL	22.000	22.000
0064	625.0100	Topsoil	SY	790.000	790.000
0066	628.1504	Silt Fence	LF	1,400.000	1,400.000
0068	628.1520	Silt Fence Maintenance	LF	1,400.000	1,400.000
0070	628.1905	Mobilizations Erosion Control	EACH	4.000	4.000
0072	628.1910	Mobilizations Emergency Erosion Control	EACH	3.000	3.000
0074	628.2008	Erosion Mat Urban Class I Type B	SY	1,440.000	1,440.000
0076	628.7504	Temporary Ditch Checks	LF	25.000	25.000
0078	628.7555	Culvert Pipe Checks	EACH	5.000	5.000
0080	629.0210	Fertilizer Type B	CWT	1.100	1.100
0082	630.0130	Seeding Mixture No. 30	LB	65.000	65.000
0084	630.0500	Seed Water	MGAL	34.000	34.000
0086	634.0614	Posts Wood 4x6-Inch X 14-FT	EACH	2.000	2.000
0088	638.2102	Moving Signs Type II	EACH	11.000	11.000
0090	638.3000	Removing Small Sign Supports	EACH	2.000	2.000
0092	638.4000	Moving Small Sign Supports	EACH	7.000	7.000
0094	642.5001	Field Office Type B	EACH	1.000	1.000
0096	643.0420	Traffic Control Barricades Type III	DAY	425.000	425.000
0098	643.0705	Traffic Control Warning Lights Type A	DAY	650.000	650.000

Estimate Of Quantities

6998-13-73

Line	Item	Item Description	Unit	Total	Qty
0100	643.0900	Traffic Control Signs	DAY	2,325.000	2,325.000
0102	643.0920	Traffic Control Covering Signs Type II	EACH	7.000	7.000
0104	643.1000	Traffic Control Signs Fixed Message	SF	36.000	36.000
0106	643.5000	Traffic Control	EACH	1.000	1.000
0108	645.0120	Geotextile Type HR	SY	28.000	28.000
0110	646.2020	Marking Line Epoxy 6-Inch	LF	1,665.000	1,665.000
0112	650.4500	Construction Staking Subgrade	LF	500.000	500.000
0114	650.5000	Construction Staking Base	LF	500.000	500.000
0116	650.5500	Construction Staking Curb Gutter and Curb & Gutter	LF	118.000	118.000
0118	650.9911	Construction Staking Supplemental Control (project) 01. 6998-13-73	EACH	1.000	1.000
0120	650.9920	Construction Staking Slope Stakes	LF	500.000	500.000
0122	690.0150	Sawing Asphalt	LF	590.000	590.000
0124	690.0250	Sawing Concrete	LF	3.000	3.000
0126	715.0502	Incentive Strength Concrete Structures	DOL	500.000	500.000
0128	ASP.1T0A	On-the-Job Training Apprentice at \$5.00/HR	HRS	300.000	300.000
0130	ASP.1T0G	On-the-Job Training Graduate at \$5.00/HR	HRS	600.000	600.000
0132	SPV.0060	Special 01. Foam Void Filling B-49-0061	EACH	1.000	1.000
0134	SPV.0090	Special 01. Sawing Concrete Curb Head	LF	22.000	22.000

REMOVALS

				204.0150 REMOVING CURB & GUTTER	690.0150 SAWING ASPHALT	690.0250 SAWING CONCRETE	SPV.0090.01 SAWING CONCRETE CURB HEAD
STA	-	STA	SIDE	LF	LF	LF	LF
7+12	-	8+60	LT/RT	---	225	---	---
7+59	-	7+85	LT	---	30	---	---
11+18	-	13+13	LT/RT	---	335	---	---
11+72	-	12+23	RT	51	---	---	---
12+23	-	12+23	RT	---	---	3	---
12+23	-	12+44	RT	---	---	---	22
PROJECT 6998-13-73 TOTAL				51	590	3	22

REMOVING GUARDRAIL

						204.0165 REMOVING GUARDRAIL
LOCATION	STA	-	STA	SIDE	LF	
NW	8+31	-	9+23	LT	95	
SW	8+32	-	9+23	RT	95	
NE	10+76	-	11+71	LT	95	
SE	10+76	-	11+69	RT	95	
PROJECT 6998-13-73 TOTAL						380

DIVISION	FROM/TO STATION	LOCATION	205.0100 COMMON EXCAVATION (1)		SALVAGED/UNUSABLE PAVEMENT MATERIAL (4)	AVAILABLE MATERIAL (5)	UNEXPANDED FILL	EXPANDED FILL (13)	MASS ORDINATE +/- (14)	WASTE (15)
			CUT (2)	EBS EXCAVATION				FACTOR 1.25		
DIVISION 1 - WEST ZINDA DRIVE - WEST										
	6+76 to 9+21	WEST ZINDA DRIVE - WEST	399	--	0	399	65	81	318	--
DIVISION 1 SUBTOTAL			399	0	0	399	65	81	318	318
DIVISION 2 - WEST ZINDA DRIVE - EAST										
	10+79 to 13+13	WEST ZINDA DRIVE - EAST	323	--	0	323	32	40	283	--
DIVISION 2 SUBTOTAL			323	0	0	323	32	40	283	283
CATEGORY 0010 TOTAL			722	0	0	722	97	121	601	601
CATEGORY 0010 TOTAL COMMON EXCAVATION			722							
GRAND TOTAL			722	0	0	722	97	121	601	601
TOTAL COMMON EXCAVATION			722							

NOTES:
(1) COMMON EXCAVATION IS THE SUM OF THE CUT AND EBS EXCAVATION COLUMNS. ITEM NUMBER 205.0100
(2) SALVAGED/UNSUABLE PAVEMENT MATERIAL IS INCLUDED IN CUT.
(4) SALVAGED/UNUSABLE PAVEMENT MATERIAL
(5) AVAILABLE MATERIAL = CUT - SALVAGED/UNUSUABLE PAVEMENT MATERIAL
(13) EXPANDED FILL FACTOR = 1.25
(14) THE MASS ORDINATE + OR - QTY CALCULATED FOR THE DIVISION. PLUS QUANTITY INDICATES AN EXCESS OF MATERIAL WITHIN THE DIVISION. MINUS INDICATES A SHORTAGE OF MATERIAL WITHIN THE DIVISION.
(15) FACTORS USED TO COMPUTE ANTICIPATED WASTE AND THE COMPUTED WASTE VOLUME IDENTIFIED ARE FOR GENERAL INFORMATION ONLY.

ALL ITEMS ARE CATEGORY 0010 UNLESS OTHERWISE SPECIFIED.

3

BASE AGGREGATE DENSE

			305.0110	305.0120	624.0100
			3/4-INCH	1 1/4-INCH	WATER
			TON	TON	MGAL
STATION - STATION		LOCATION			
6+76 - 8+60		SHOULDERS WEST	80	440	8
8+60 - 9+31		FULL WEST	0	235	4
10+68 - 11+18		FULL EAST	15	190	3
11+18 - 13+13		SHOULDERS EAST	75	375	7
PROJECT 6998-13-73 TOTAL			170	1,240	22

ASPHALTIC ITEMS

	455.0605	460.6222	460.6244	465.0120
	TACK	HMA	HMA	ASPHALTIC SURFACE
	COAT	PAVEMENT	PAVEMENT	DRIVEWAYS AND
		2 MT 58-28 S	4 MT 58-34 S	FIELD ENTRANCES
LOCATION	GAL	TON	TON	TON
SHOULDERS WEST	18	45	28	10
FULL WEST	22	51	35	---
FULL EAST	15	39	24	---
SHOULDERS EAST	18	45	28	---
PROJECT 6998-13-73 TOTAL	73	180	115	10

3

CONCRETE CURB & GUTTER

				601.0588
				4-INCH SLOPED
				36-INCH TYPE TBT
STATION - STATION		LOCATION	LF	
8+62 - 9+21		LT	59	
8+62 - 9+21		RT	59	
PROJECT 6998-13-73 TOTAL			118	

CONCRETE SURFACE DRAINS

			602.3010
			CONCRETE
			SURFACE DRAINS
STATION	LOCATION	CY	
8+77.5	LT	2	
8+77.5	RT	2	
PROJECT 6998-13-73 TOTAL		4	

RIPRAP & GEOTEXTILE

		606.0200	645.0120
		RIPRAP	GEOTEXTILE
		MEDIUM	TYPE HR
STATION	LOCATION	CY	SY
8+78	LT	3	14
8+78	RT	3	14
PROJECT 6998-13-73 TOTAL		6	28

EROSION CONTROL MOBILIZATION

	628.1905	628.1910
	MOBILIZATIONS	MOBILIZATIONS
	EROSION	EROSION
	CONTROL	CONTROL
PROJECT	EACH	EACH
6998-13-73	4	3
PROJECT 6998-13-73 TOTAL	4	3

LANDSCAPING

	625.0100	628.2008	629.0210	630.0130	630.0500
	TOPSOIL	EROSION MAT URBAN	FERTILIZER	SEEDING	SEED
		CLASS I TYPE B	TYPE B	MIXTURE NO. 30	WATER
LOCATION	SY	SY	CWT	LB	MGAL
WEST	460	725	0.5	33	17
EAST	170	420	0.3	19	10
UNDISTRIBUTED	160	290	0.3	13	7
PROJECT 6998-13-73 TOTAL	790	1,440	1.1	65	34

EROSION CONTROL

	628.1504	628.1520	628.7504	628.7555
	SILT	SILT	TEMPORARY	CULVERT
	FENCE	FENCE	DITCH	PIPE
		MAINTENANCE	CHECKS	CHECKS
LOCATION	LF	LF	LF	EACH
WEST	605	605	20	3
EAST	515	515	---	---
UNDISTRIBUTED	280	280	5	2
PROJECT 6998-13-73 TOTAL	1,400	1,400	25	5

ALL ITEMS ARE CATEGORY 0010 UNLESS OTHERWISE SPECIFIED.

3

GUARDRAIL

			614.2500 MGS THRIE BEAM TRANSITION	614.2610 MGS GUARDRAIL TERMINAL EAT	
STATION	-	STATION	LOCATION	LF	EACH
8+31	-	9+23	NW	39.4	1
8+31	-	9+23	SW	39.4	1
10+76	-	11+69	NE	39.4	1
10+76	-	11+69	SE	39.4	1
PROJECT 6998-13-73 TOTAL				157.6	4

SIGNING

				634.0614 POSTS WOOD 4X6-INCH X 14-FT EACH	638.2102 MOVING SIGNS TYPE II EACH	638.3000 REMOVING SMALL SIGN SUPPORTS EACH	638.4000 MOVING SMALL SIGN SUPPORTS EACH
LOCATION	SIDE	SIGN CODE	SIGN MESSAGE				
WEST	LT	W5-52-L	BRIDGE CLEARANCE STRIPER DOWN RIGHT	---	1	---	1
WEST	RT	W5-52-R	BRIDGE CLEARANCE STRIPER DOWN LEFT	---	1	---	1
EAST	LT	W5-52-R	BRIDGE CLEARANCE STRIPER DOWN LEFT	---	1	---	1
EAST	RT	W5-52-L	BRIDGE CLEARANCE STRIPER DOWN RIGHT	---	1	---	1
EAST	RT	-	NO ENGINE BRAKING EXCEPT IN EMERGENCY	---	1	---	---
EAST	RT	R2-1	SPEED LIMIT 35 MPH	1	1	1	---
EAST	LT	R2-1	SPEED LIMIT 55 MPH	1	1	1	---
EAST	RT	D11-1	BIKE ROUTE	---	1	---	1
EAST	LT	D11-10A	TOWN OF LINWOOD ATV ROUTE SIGN	---	1	---	1
EAST	LT	-	ATV SPEED LIMIT 35 MPH	---	1	---	---
EAST	LT	D11-1	BIKE ROUTE	---	1	---	1
PROJECT 6998-13-73 TOTAL				2	11	2	7

3

TRAFFIC CONTROL

		643.0420 TRAFFIC CONTROL BARRICADES TYPE III		643.0705 TRAFFIC CONTROL WARNING LIGHTS TYPE A		643.0900 TRAFFIC CONTROL SIGNS		643.0920 TRAFFIC CONTROL COVERING SIGNS TYPE II		643.1000 TRAFFIC CONTROL SIGNS FIXED MESSAGE
LOCATION	DAYS IN SERVICE	NO.	DAY	NO.	DAY	NO.	DAY	EACH	CYCLES	SF
Project Advance Warning	7	---	---	---	---	---	---	---	---	36
DETOUR	25	17	425	26	650	93	2,325	7	1	---
PROJECT 6998-13-73 TOTAL			425		650		2,325	7		36

PAVEMENT MARKING

		646.2020 MARKING LINE EPOXY 6-INCH DOUBLE YELLOW		WHITE
STATION - STATION	LOCATION	LF		
6+76 - 12+23	RT	---	547	
7+12 - 13+13	LT	---	602	
8+60 - 11+18	R/L	516	---	
SUBTOTAL		516	1,149	
PROJECT 6998-13-73 TOTAL		1,665		


CONSTRUCTION STAKING

				650.4500	650.5000	650.5500	650.9911.01	650.9920
				CONSTRUCTION	CONSTRUCTION	CONSTRUCTION	CONSTRUCTION	CONSTRUCTION
				STAKING	STAKING	STAKING	STAKING	STAKING
				SUBGRADE	BASE	CURB GUTTER	SUPPLEMENTAL	SLOPE
						AND	CONTROL	STAKES
						CURB & GUTTER	6998-13-73	
STATION	-	STATION	LOCATION	LF	LF	LF	EACH	LF
6+76	-	9+31	WEST	255	255	118	---	255
10+68	-	13+13	EAST	245	245	---	---	245
PROJECT				---	---	---	1	---
PROJECT 6998-13-73 TOTAL				500	500	118	1	500


ALL ITEMS ARE CATEGORY 0010 UNLESS OTHERWISE SPECIFIED.

Standard Detail Drawing List


08D01-23A	CONCRETE CURB & GUTTER
08D01-23B	CONCRETE CURB, TIES AND CURB AND GUTTER APPLICATIONS
08D02-08A	CONCRETE SURFACE DRAINS FLUME TYPE AT STRUCTURES
08D02-08B	CONCRETE SURFACE DRAINS FLUME TYPE AT STRUCTURES
08D02-08C	CONCRETE SURFACE DRAINS FLUME TYPE AT STRUCTURES
08E08-03	TYPICAL INSTALLATIONS OF EROSION BALES / TEMPORARY DITCH CHECKS
08E09-06	SILT FENCE
08E15-01	CULVERT PIPE CHECK
12A03-10	NAME PLATE (STRUCTURES)
13C19-03	HMA LONGITUDINAL JOINTS
14B29-01	SAFETY EDGE
14B42-07A	MIDWEST GUARDRAIL SYSTEM (MGS) GUARDRAIL
14B42-07B	MIDWEST GUARDRAIL SYSTEM (MGS) GUARDRAIL
14B42-07C	MIDWEST GUARDRAIL SYSTEM (MGS) GUARDRAIL
14B42-07D	MIDWEST GUARDRAIL SYSTEM (MGS) GUARDRAIL
14B44-04A	MIDWEST GUARDRAIL SYSTEM ENERGY ABSORBING TERMINAL (MGS)
14B44-04B	MIDWEST GUARDRAIL SYSTEM ENERGY ABSORBING TERMINAL (MGS)
14B44-04C	MIDWEST GUARDRAIL SYSTEM ENERGY ABSORBING TERMINAL (MGS)
14B45-05A	MIDWEST GUARDRAIL SYSTEM THRIE BEAM TRANSITION (MGS)
14B45-05B	MIDWEST GUARDRAIL SYSTEM THRIE BEAM TRANSITION (MGS)
14B45-05C	MIDWEST GUARDRAIL SYSTEM THRIE BEAM TRANSITION (MGS)
14B45-05E	MIDWEST GUARDRAIL SYSTEM THRIE BEAM TRANSITION (MGS)
15C02-09A	BARRICADES AND SIGNS FOR MAINLINE CLOSURES
15C02-09B	BARRICADES AND SIGNS FOR VARIOUS CLOSURES
15C02-09C	DETOUR SIGNING FOR MAINLINE CLOSURES
15C02-09H	MODIFIED ROUTE ASSEMBLY FOR DETOUR SIGNING
15C08-23A	PERMANENT LONGITUDINAL PAVEMENT MARKINGS
15C11-10B	CHANNELIZING DEVICES DRUMS, CONES, BARRICADES AND VERTICAL PANELS

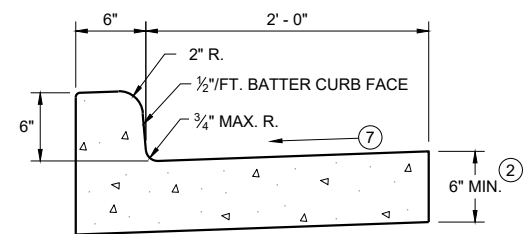


TYPES A^① & D

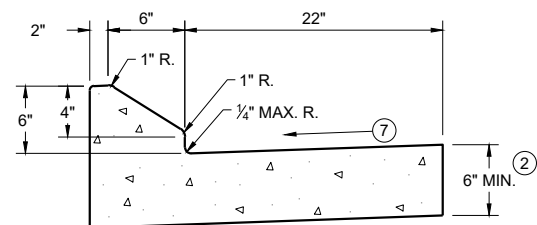


6" SLOPED CURB TYPES G ^① & J

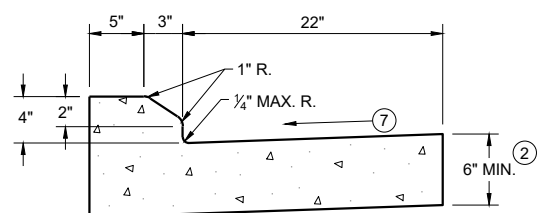

4" SLOPED CURB TYPES G^① & J




TYPES K^① & L
(OPTIONAL CURB SHAPE)

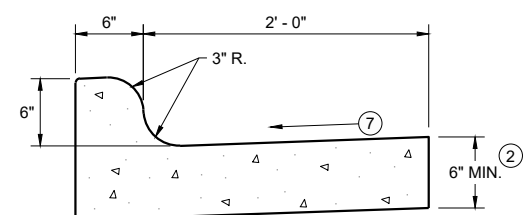


TYPES K¹ & L

CONCRETE CURB AND GUTTER 30"

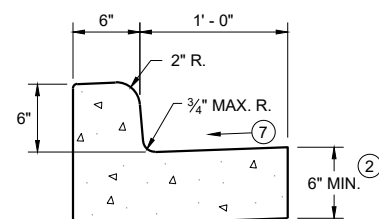


TYPES A^① & D

CONCRETE CURB AND GUTTER 18"

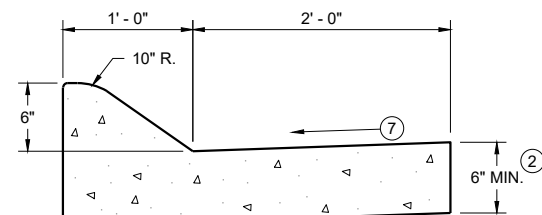


6" SLOPED CURB TYPES A^① & D

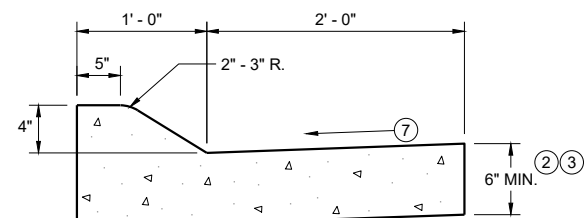


4" SLOPED CURB TYPES A ^① & D

CONCRETE CURB AND GUTTER 36"

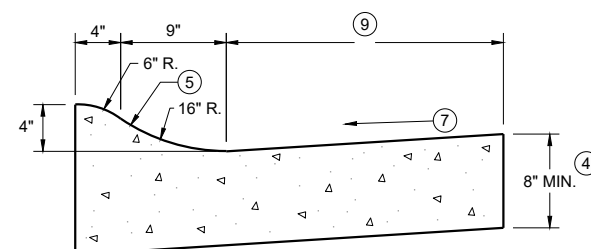

4" SLOPED CURB TYPES R^① & T

TBT & TBTT	X
30"	22"
36"	28"

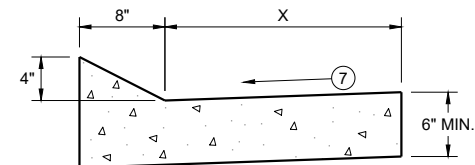


TYPES TBT & TBTT ^①

CONCRETE CURB AND GUTTER


PAVEMENT THICKNESS AND MAXIMUM CONCRETE PANEL WIDTH TABLE

PAVEMENT THICKNESS	MAXIMUM PANEL WIDTH
LESS THAN 10"	12'
10" & ABOVE	15'

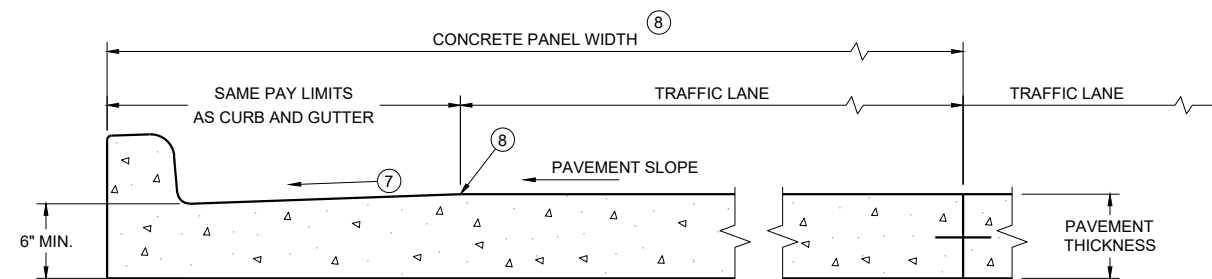

PARTIAL SECTION OF PAVEMENT WITH INTEGRAL CURB AND GUTTER *

* BIKE LANE IS NOT SHOWN

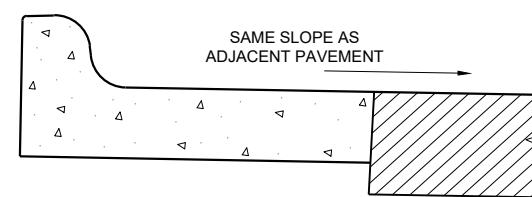

REVERSE SLOPE GUTTER

(TYPICAL FOR ALL CURB & GUTTER TYPES)

CONCRETE CURB AND GUTTER

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

GENERAL NOTES


DETAILS OF CONSTRUCTION AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE CONTRACT.

PAVEMENT TIES AND TIE BARS SHALL BE EPOXY COATED IN CONFORMANCE WITH SUBSECTION 505.2.6.2 OF THE STANDARD SPECIFICATIONS.


INTEGRAL CURB AND GUTTER SHALL CONFORM TO THE DETAILS SHOWN FOR CONCRETE CURB AND GUTTER INCLUDING THE TRANSVERSE GUTTER SLOPE.

UNLESS OTHERWISE SHOWN ON THE TYPICAL CROSS SECTIONS, THE BASE AGGREGATE AND COMMON EXCAVATION LIMITS ARE 2' - 0" BEHIND THE BACK OF CURBS.

- ① TIE BARS ARE REQUIRED FOR CURB AND GUTTERS TYPES A, G, K, R, AND TBTT.
- ② THE BOTTOM OF CURB AND GUTTER MAY BE CONSTRUCTED EITHER LEVEL OR PARALLEL TO THE SLOPE OF THE SUBGRADE OR BASE AGGREGATE PROVIDED A 6" MINIMUM GUTTER THICKNESS IS MAINTAINED.
- ③ USE 8" MINIMUM GUTTER THICKNESS WHEN USED WITH AN ADJACENT CONCRETE TRUCK APRON PLACED BEHIND BACK OF CURB.
- ④ THE BOTTOM OF CURB AND GUTTER MAY BE CONSTRUCTED EITHER LEVEL OR PARALLEL TO THE SLOPE OF THE SUBGRADE OR BASE AGGREGATE PROVIDED A 8" MINIMUM GUTTER THICKNESS IS MAINTAINED.
- ⑤ UNLESS OTHERWISE NOTED, FOR STAKING PURPOSES THE FACE OF CURB IS 6" FROM THE BACK OF CURB.
- ⑥ WHEN REVERSE SLOPE GUTTER IS REQUIRED, THE LOCATION(S) WILL BE SHOWN ELSEWHERE IN THE PLAN.
- ⑦ USE 4% GUTTER CROSS SLOPE UNLESS OTHERWISE NOTED IN THE PLANS.
- ⑧ INCLUDE LONGITUDINAL JOINT AND TIE BARS ALONG LANE EDGE WHEN CONCRETE PANEL WIDTH EXCEEDS THE MAXIMUM WIDTH PER TABLE BELOW. LONGITUDINAL JOINT(S) ARE NOT ALLOWED WITHIN TRAFFIC LANES AND BIKE LANES. LONGITUDINAL JOINT MAY BE SAWED.
- ⑨ CONCRETE CURB AND GUTTER 4-INCH SLOPED 30-INCH TYPE "R" AND "T" = 17 INCHES
CONCRETE CURB AND GUTTER 4-INCH SLOPED 36-INCH TYPE "R" AND "T" = 23 INCHES

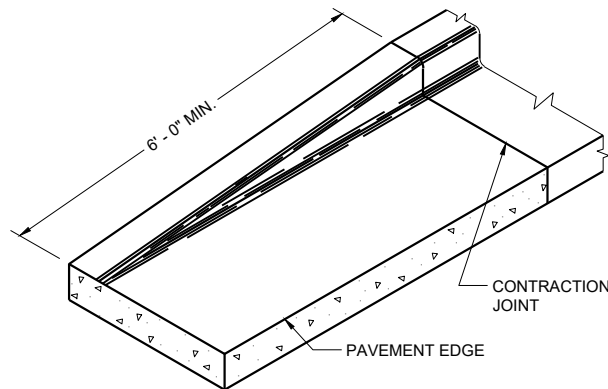


END SECTION CURB AND GUTTER

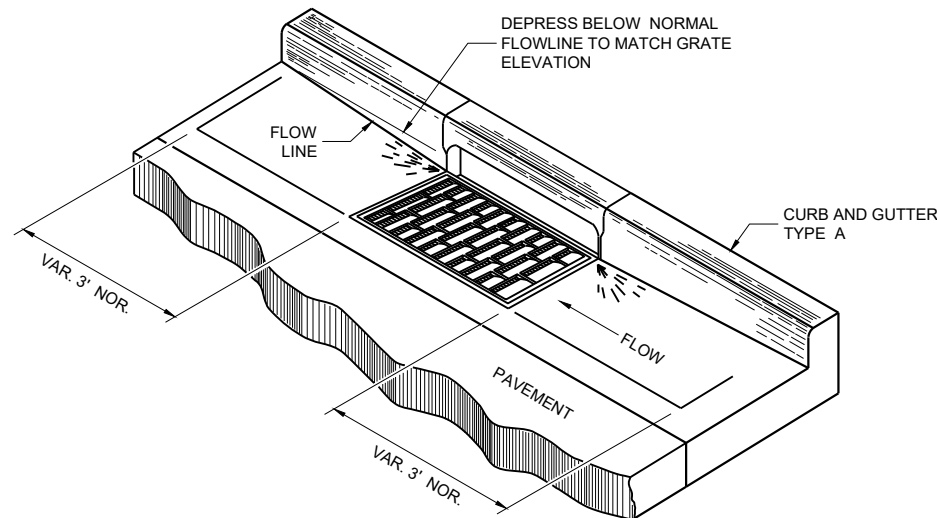


DETAIL OF CURB AND GUTTER AT INLETS


(TYPICAL H INLET COVER SHOWN)

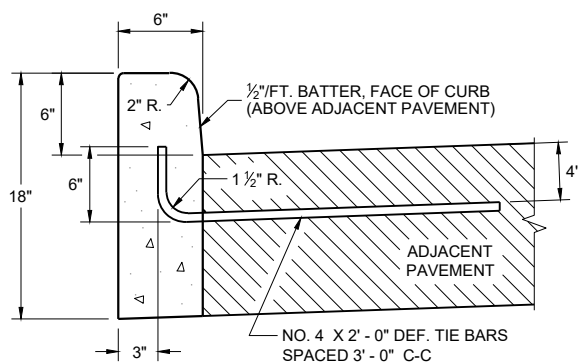


TYPES A^① & D

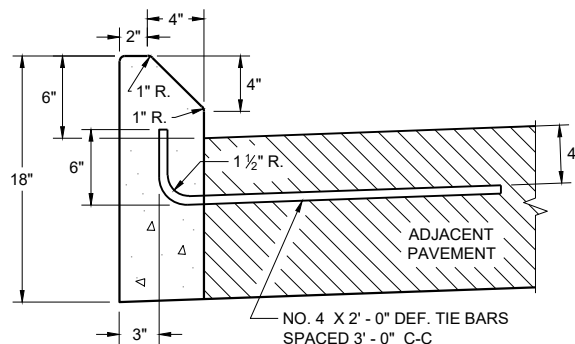


TYPES G^① & J
CONCRETE CURB

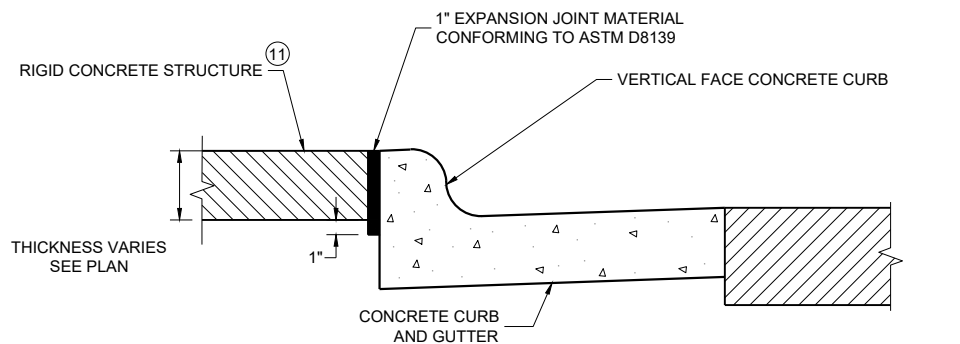

EXPANSION JOINT DETAIL FOR VERTICAL CURB ABUTTING A RIGID STRUCTURE^⑪

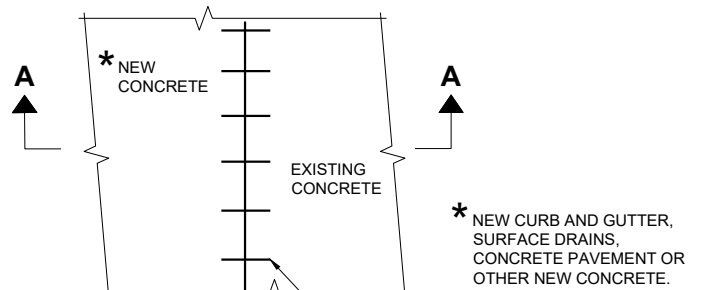

PLAN VIEW

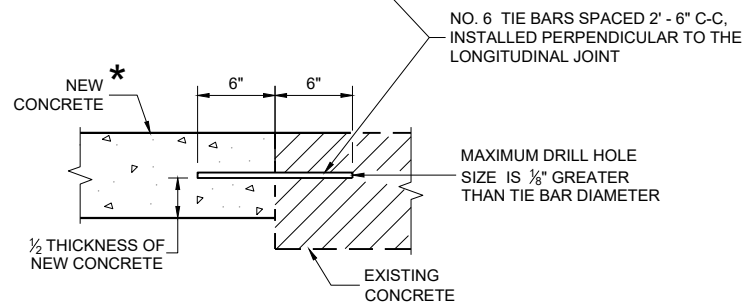

SECTION A - A
TIE BARS DRILLED INTO EXISTING PAVEMENT


GENERAL NOTES

DETAILS OF CONSTRUCTION AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE CONTRACT.


PAVEMENT TIES AND TIE BARS SHALL BE EPOXY COATED IN CONFORMANCE WITH SUBSECTION 505.2.6.2 OF THE STANDARD SPECIFICATIONS.

UNLESS OTHERWISE SHOWN ON THE TYPICAL CROSS SECTIONS, THE BASE AGGREGATE AND COMMON EXCAVATION LIMITS ARE 2' - 0" BEHIND THE BACK OF CURBS.

- ① TIE BARS ARE REQUIRED FOR CURB AND GUTTERS TYPES A, G, K, R, AND TBTT.
- ② THE BOTTOM OF CURB AND GUTTER MAY BE CONSTRUCTED EITHER LEVEL OR PARALLEL TO THE SLOPE OF THE SUBGRADE OR BASE AGGREGATE PROVIDED A 6" MINIMUM GUTTER THICKNESS IS MAINTAINED.
- ⑩ REFER TO SDD 08D18 AND 08D19 FOR ADDITIONAL DRIVEWAY ENTRANCE CURB DETAILS.
- ⑪ PLACE 1" THICK EXPANSION JOINT MATERIAL BETWEEN VERTICAL FACE CURB TYPES EXTENDING FROM THE TOP OF CURB TO 1 INCH BELOW THE ADJOINING CONCRETE SURFACE. RIGID CONCRETE STRUCTURES INCLUDE RAISED CONCRETE MEDIANS, CONCRETE SAFETY ISLANDS, SPLITTER ISLANDS, OR LOCATIONS IDENTIFIED ON THE PLANS.

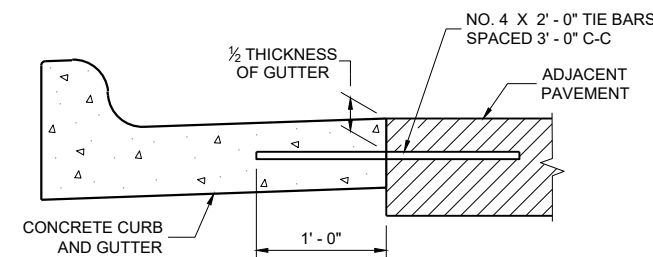

TYPICAL TIE BAR LOCATION^①



DRIVEWAY ENTRANCE CURB^⑩
(WHEN DIRECTED BY THE ENGINEER)

CONCRETE CURB, TIES
AND CURB AND GUTTER
APPLICATIONS

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
May 2023 /S/ Rodney Taylor
DATE ROADWAY STANDARDS DEVELOPMENT
FHWA UNIT SUPERVISOR


GENERAL NOTES

DETAILS OF CONSTRUCTION, MATERIALS AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE STANDARD SPECIFICATIONS AND THE APPLICABLE SPECIAL PROVISIONS.


ALL STEEL REINFORCEMENT SHALL BE EMBEDDED 2 INCHES CLEAR UNLESS OTHERWISE SHOWN OR NOTED.

- 1 USE A JOINT SEALANT CONFORMING TO STANDARD SPECIFICATION 415.2.6.
- 2 NO. 4 X 2' - 0" TIE BARS SPACED AT 12" C-C TO BE PLACED BY BRIDGE CONTRACTOR OR DRILLED TIE BARS PLACED AS DIRECTED BY THE ENGINEER.
- 3 PAVED CONCRETE SHOULDER (SDD 13A03) OR CONCRETE DRAINAGE SLAB.
- 4 CONCRETE PAVEMENT APPROACH SLAB (SHOWN) OR STRUCTURE APPROACH SLAB AND CONCRETE PAVEMENT APPROACH SLAB. SEE SDD 13B02.
- 5 PAVED CONCRETE SHOULDER (SDD 13A03) OR ASPHALT SHOULDER.

- 6 CONCRETE CURB AND GUTTER 4-INCH SLOPED 36-INCH TYPE TBT OR TBTT. USE TYPE TBTT CURB WITH NO. 4 X 2' - 0" TIE BARS SPACED AT 3' - 0" C-C ONLY WHEN ADJACENT TO CONCRETE PAVEMENTS.
- 7 PLACE FLUME BEFORE MSG THRIE BEAM TRANSITION POST 1 (SEE SDD 14B45)
- 8 CENTER FLUME BETWEEN POSTS. 6-INCH MINIMUM SEPARATION FROM OUTSIDE EDGE OF FLUME TO POSTS.
- 9 MINIMUM REINFORCEMENT SHALL BE 4" X 4" - W3.0 X W3.0 OR NO. 3 BARS LONGITUDINAL AND TRANSVERSE SPACING 12" C-C.
- 10 SEE ROADWAY PLANS FOR FLUME LOCATION.
- 11 START CURB AND GUTTER TRANSITION OR END SECTION.
- 12 DEPRESS FLOW LINE (SEE DETAIL)

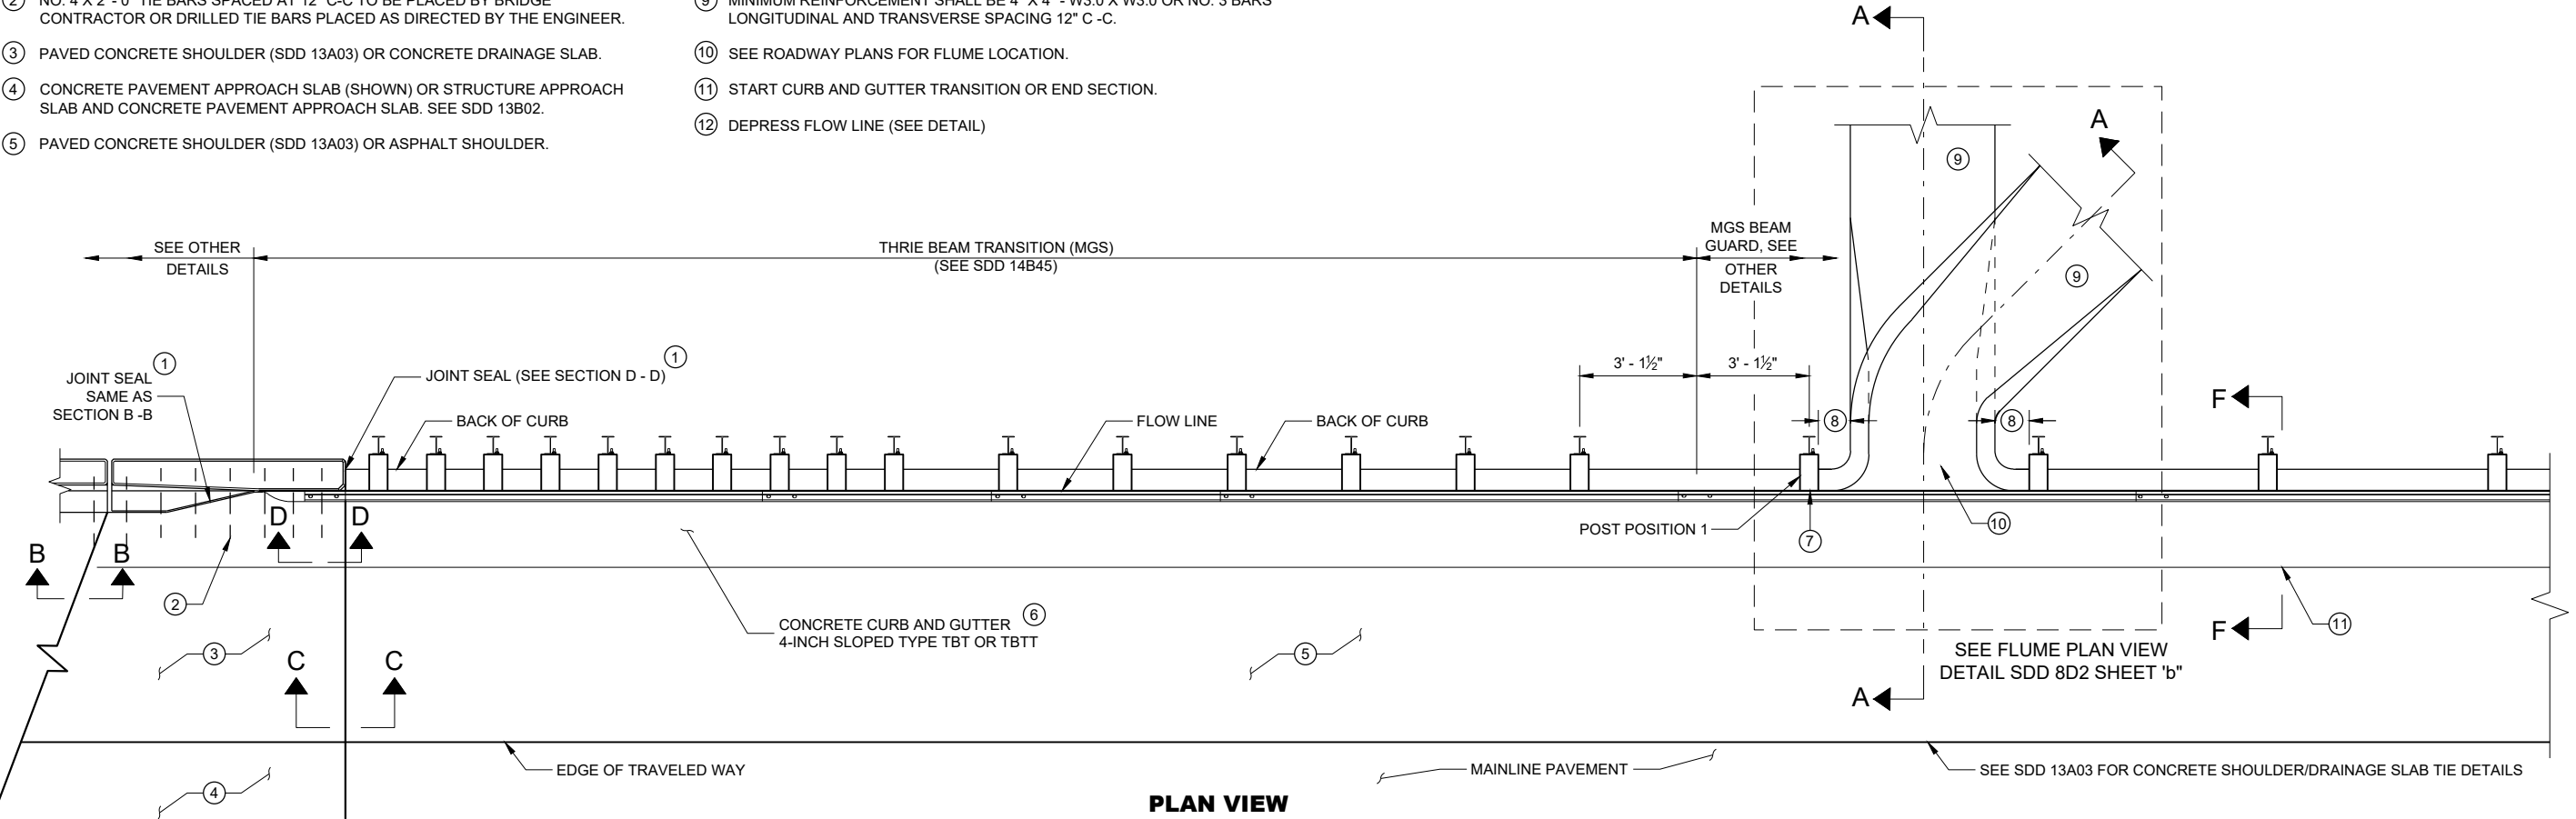


PLAN VIEW

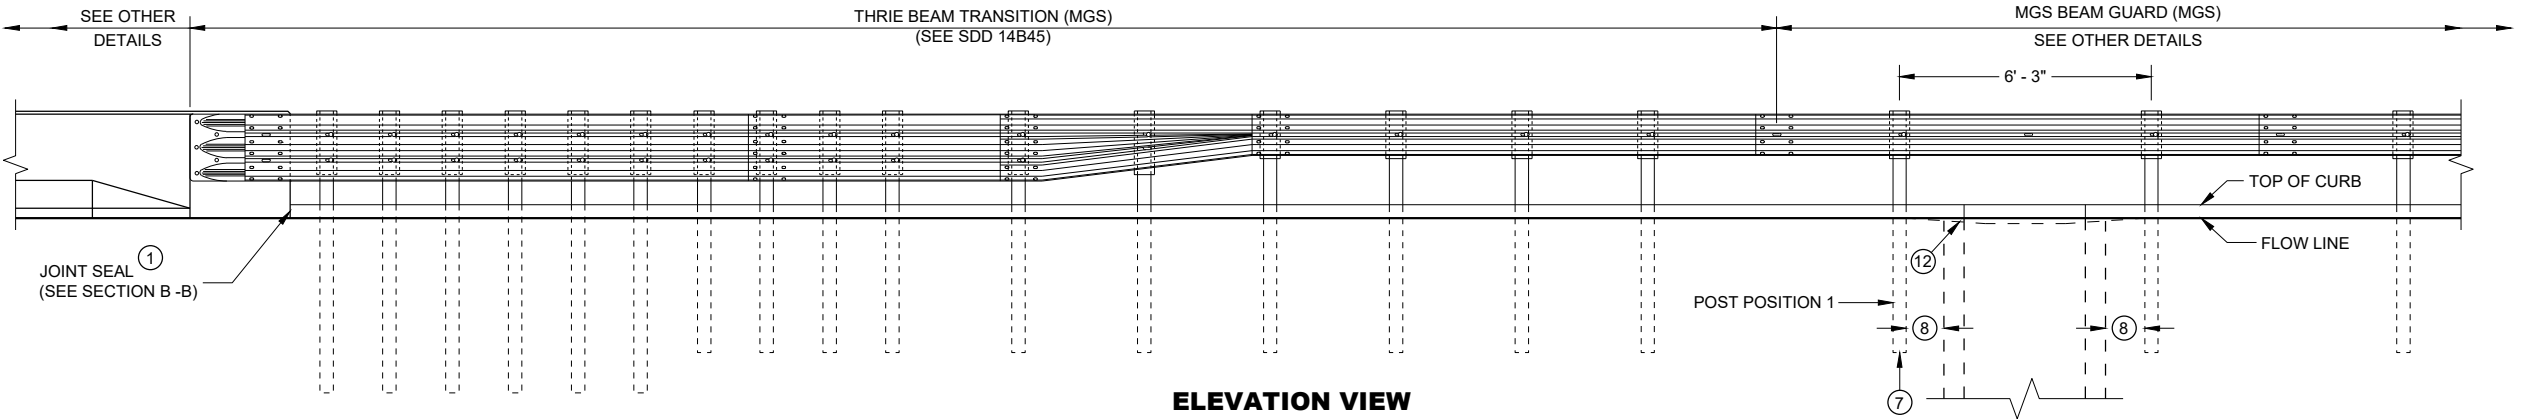


ELEVATION VIEW

CONCRETE SURFACE
DRAINS FLUME TYPE
AT STRUCTURES


STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

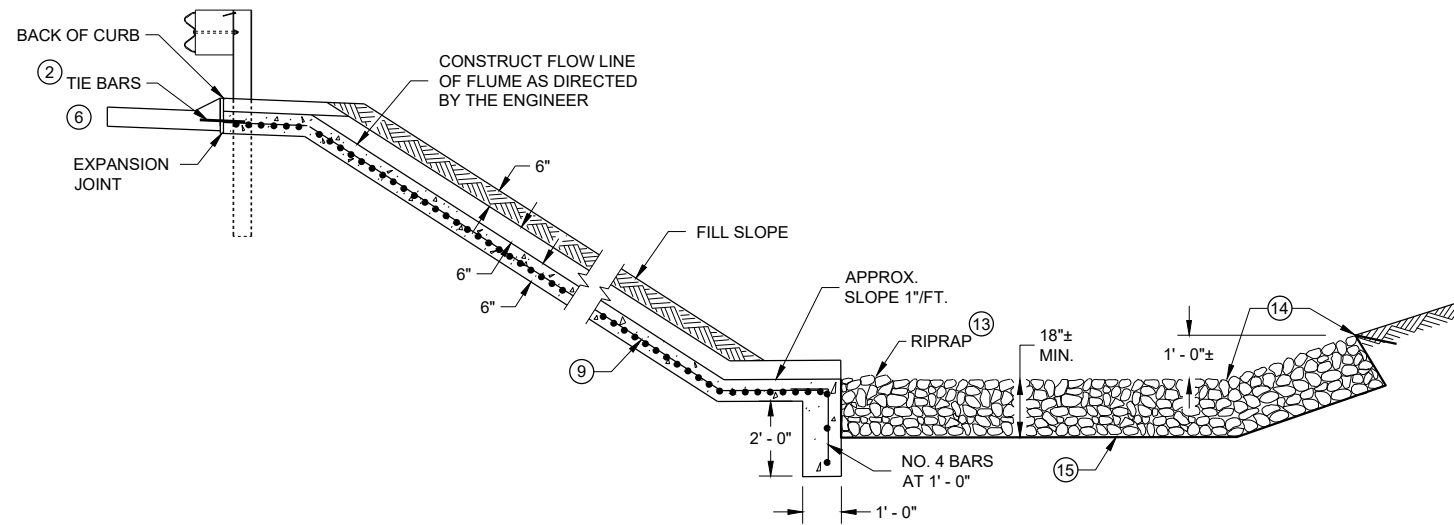


SECTION A - A

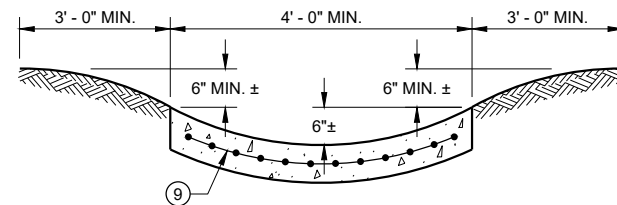



SECTION G - G

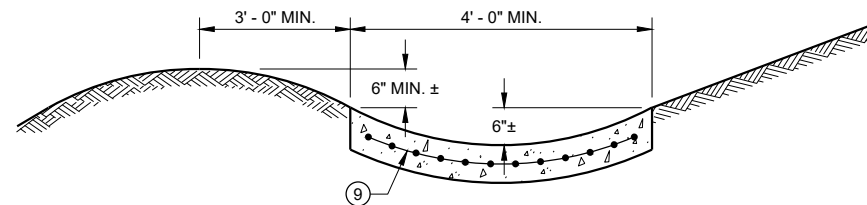

SECTION H - H

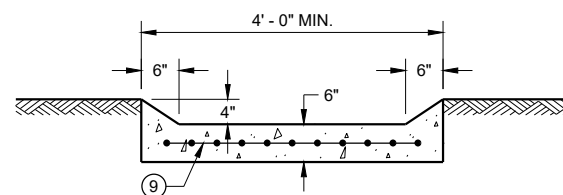

SECTION I - I

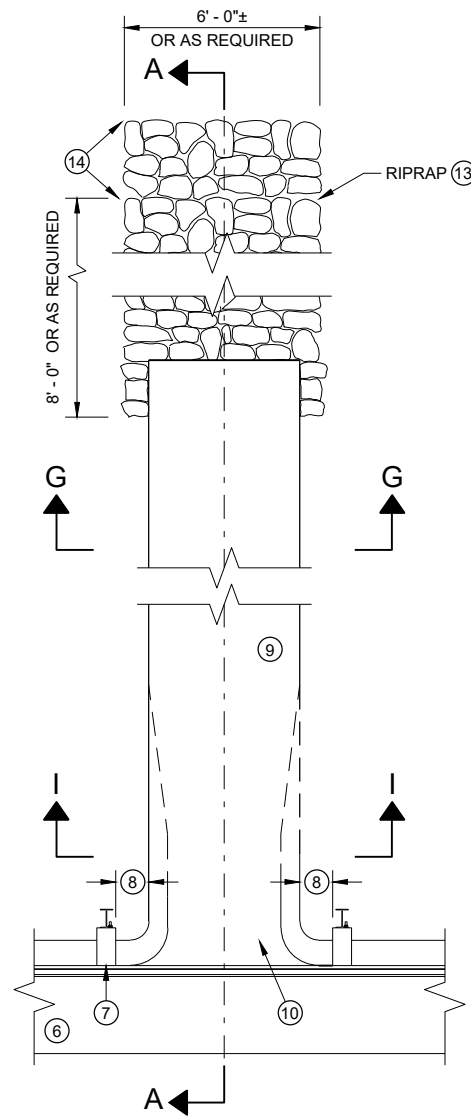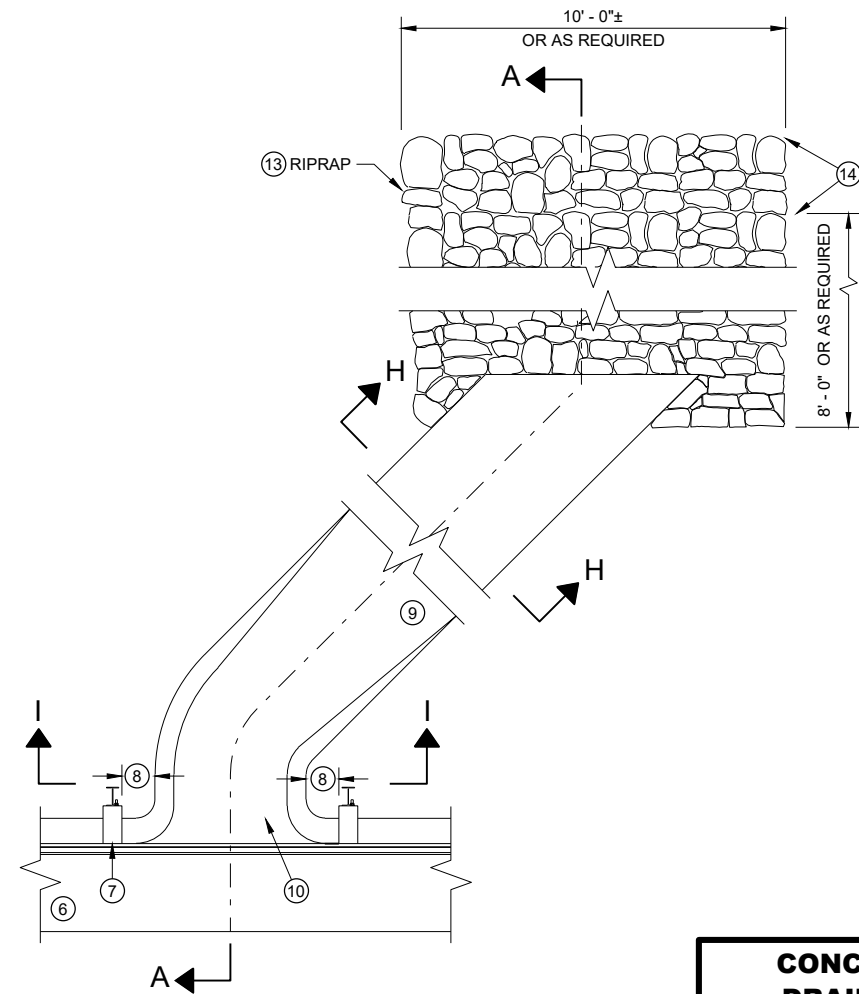PLAN VIEW
PERPENDICULAR FLUMEPLAN VIEW
SKEWED FLUME

GENERAL NOTES

DETAILS OF CONSTRUCTION, MATERIALS AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE STANDARD SPECIFICATIONS AND THE APPLICABLE SPECIAL PROVISIONS.


ALL STEEL REINFORCEMENT SHALL BE EMBEDDED 2 INCHES CLEAR UNLESS OTHERWISE SHOWN OR NOTED.

- ① USE A JOINT SEALANT CONFORMING TO STANDARD SPECIFICATION 415.2.6.
- ② NO. 4 X 2' - 0" TIE BARS SPACED AT 12" C-C TO BE PLACED BY BRIDGE CONTRACTOR OR DRILLED TIE BARS PLACED AS DIRECTED BY THE ENGINEER.
- ③ PAVED CONCRETE SHOULDER (SDD 13A03) OR CONCRETE DRAINAGE SLAB.
- ④ CONCRETE PAVEMENT APPROACH SLAB (SHOWN) OR STRUCTURE APPROACH SLAB AND CONCRETE PAVEMENT APPROACH SLAB. SEE SDD 13B02 AND STRUCTURE PLANS.
- ⑤ PAVED CONCRETE SHOULDER (SDD 13A03) OR ASPHALT SHOULDER.
- ⑥ CONCRETE CURB AND GUTTER 4-INCH SLOPED 36-INCH TYPE TBT OR TBT. USE TYPE TBT CURB WITH NO. 4 X 2' - 0" TIE BARS SPACED AT 3' - 0" C-C ONLY WHEN ADJACENT TO CONCRETE PAVEMENTS.


- ⑦ PLACE FLUME BEFORE MSG THRIE BEAM TRANSITION POST 1 (SEE SDD 14B45)
- ⑧ CENTER FLUME BETWEEN POSTS. 6-INCH MINIMUM SEPARATION FROM OUTSIDE EDGE OF FLUME TO POSTS.
- ⑨ MINIMUM REINFORCEMENT SHALL BE 4" X 4" - W3.0 X W3.0 OR NO. 3 BARS LONGITUDINAL AND TRANSVERSE SPACING 12" C - C.
- ⑩ SEE ROADWAY PLANS FOR FLUME LOCATION.
- ⑪ START CURB AND GUTTER TRANSITION OR END SECTION.
- ⑫ DEPRESS FLOW LINE (SEE DETAIL)
- ⑬ MEDIUM RIPRAP UNLESS OTHERWISE SPECIFIED.
- ⑭ LIMITS OF ADDITIONAL RIPRAP WHEN SPECIAL DITCH AS REQUIRED.
- ⑮ GEOTEXTILE TYPE HR.

**CONCRETE SURFACE
DRAINS FLUME TYPE
AT STRUCTURES**


STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

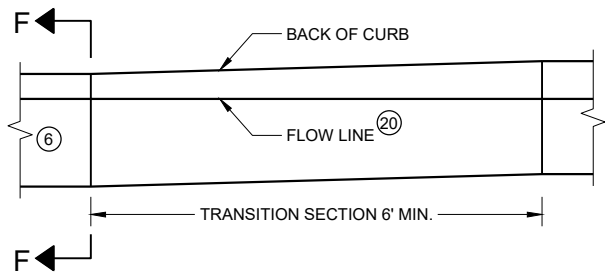


**CURB AND GUTTER TRANSITION SECTION
CONCRETE CURB AND GUTTER 4-INCH SLOPED
36 INCH TYPE TBT OR TBTT**

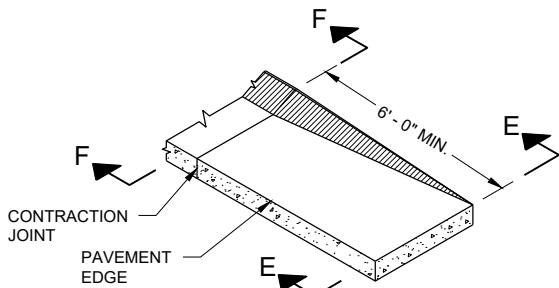


**CURB AND GUTTER END SECTION
CONCRETE CURB AND GUTTER 4-INCH SLOPED
36 INCH TYPE TBT OR TBTT**

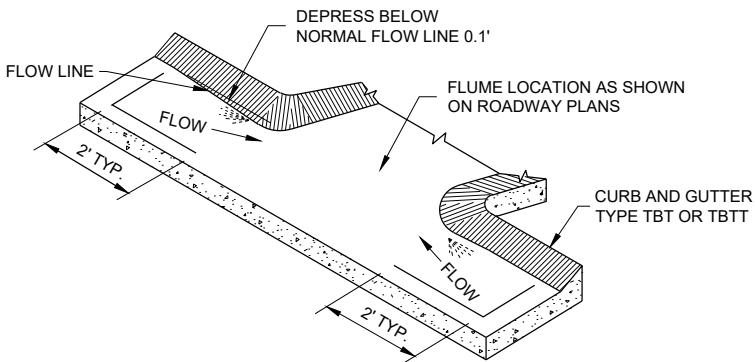


**CURB AND GUTTER FLOW LINE DEPRESSION
AT FLUMES CONCRETE CURB AND GUTTER
4-INCH SLOPED 36 INCH TYPE TBT OR TBTT**

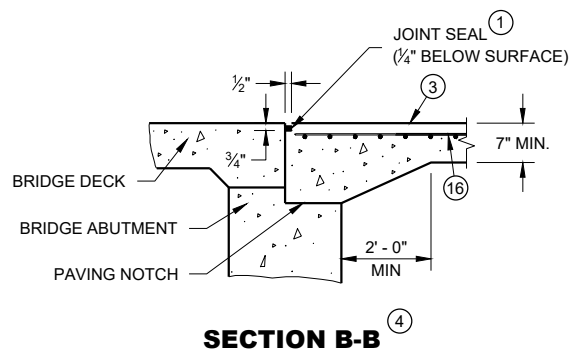


SECTION B-B

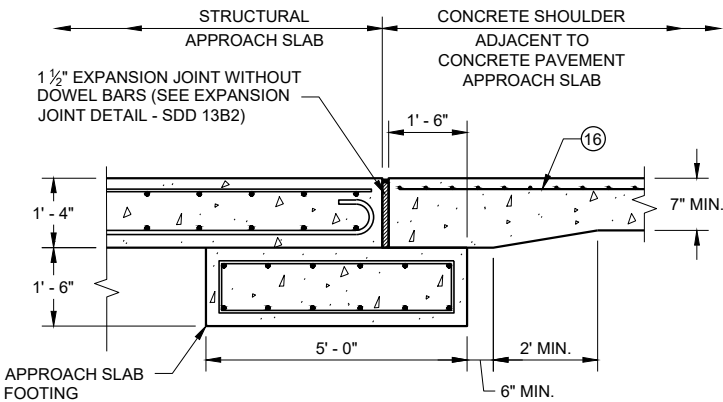


**SECTION C - C
JOINT DETAIL FOR BRIDGE WITH STRUCTURAL
APPROACH SLAB AND CONCRETE APPROACH SLAB**

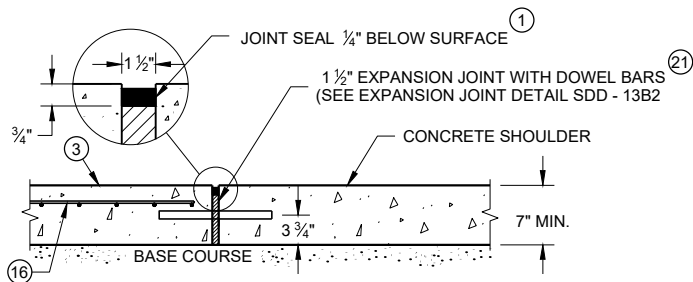


**SECTION C - C
JOINT DETAIL FOR BRIDGE APPROACH
WITH CONCRETE SHOULDERS**

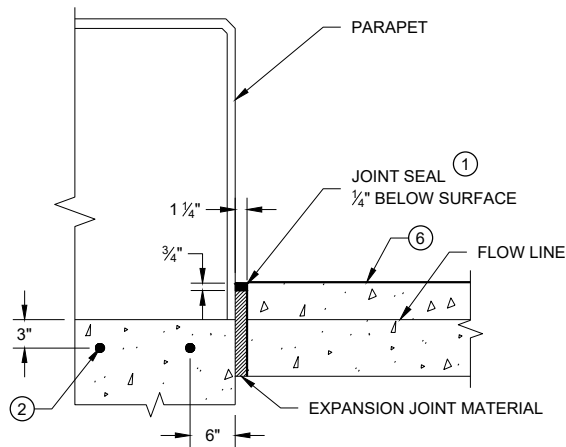

SECTION D - D

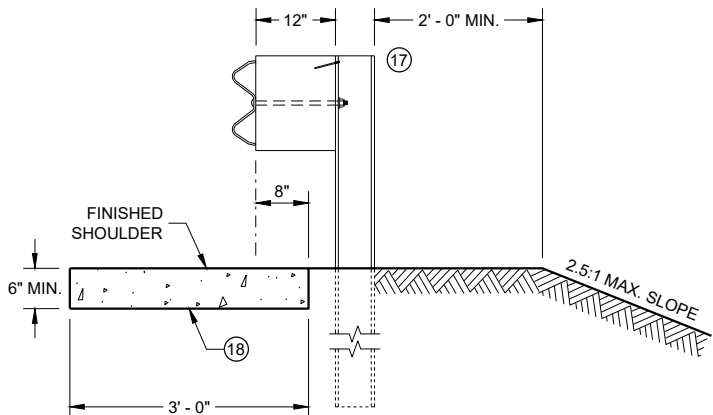

SECTION E - E

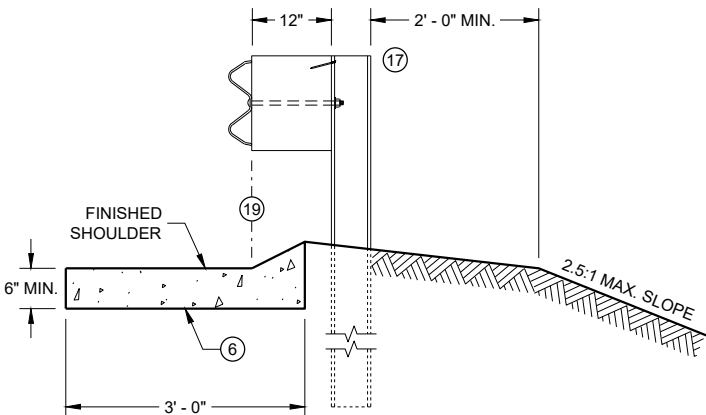

SECTION F - F

GENERAL NOTES

DETAILS OF CONSTRUCTION, MATERIALS AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE STANDARD SPECIFICATIONS AND THE APPLICABLE SPECIAL PROVISIONS.


ALL STEEL REINFORCEMENT SHALL BE EMBEDDED 2 INCHES CLEAR UNLESS OTHERWISE SHOWN OR NOTED.

- USE A JOINT SEALANT CONFORMING TO STANDARD SPECIFICATION 415.2.6.
- NO. 4 X 2' - 0" TIE BARS SPACED AT 12" C-C TO BE PLACED BY BRIDGE CONTRACTOR OR DRILLED TIE BARS PLACED AS DIRECTED BY THE ENGINEER.
- PAVED CONCRETE SHOULDER (SDD 13A03) OR CONCRETE DRAINAGE SLAB.
- CONCRETE PAVEMENT APPROACH SLAB (SHOWN) OR STRUCTURE APPROACH SLAB AND CONCRETE PAVEMENT APPROACH SLAB. SEE SDD 13B02 AND STRUCTURE PLANS.
- PAVED CONCRETE SHOULDER (SDD 13A03) OR ASPHALT SHOULDER.
- CONCRETE CURB AND GUTTER 4-INCH SLOPED 36-INCH TYPE TBT OR TBTT. USE TYPE TBTT CURB WITH NO. 4 X 2' - 0" TIE BARS SPACED AT 3' - 0" C-C ONLY WHEN ADJACENT TO CONCRETE PAVEMENTS.
- PLACE FLUME BEFORE MSG THRIE BEAM TRANSITION POST 1 (SEE SDD 14B45)
- CENTER FLUME BETWEEN POSTS. 6-INCH MINIMUM SEPARATION FROM OUTSIDE EDGE OF FLUME TO POSTS.
- MINIMUM REINFORCEMENT SHALL BE 4" X 4" - W3.0 X W3.0 OR NO. 3 BARS LONGITUDINAL AND TRANSVERSE SPACING 12" C-C.
- SEE ROADWAY PLANS FOR FLUME LOCATION.
- START CURB AND GUTTER TRANSITION OR END SECTION.
- DEPRESS FLOW LINE (SEE DETAIL)
- MEDIUM RIPRAP UNLESS OTHERWISE SPECIFIED.
- LIMITS OF ADDITIONAL RIPRAP WHEN SPECIAL DITCH IS REQUIRED.
- GEOTEXTILE TYPE HR.
- MINIMUM REINFORCEMENT SHALL BE 6" X 6" - W4.0 X W4.0 OR NO. 3 BARS LONGITUDINAL AND TRANSVERSE SPACING 12" C-C.
- MSG THRIE BEAM TRANSITION POST 1. SEE SDD 14B45 FOR ADDITIONAL CONSTRUCTION DETAILS AND ACCEPTABLE MATERIALS.
- MAINTAIN WIDTH, THICKNESS AND CROSS SLOPE OF ADJACENT TYPE TBT OR TBTT CURB. SEE NOTE 6 FOR TIE BAR SPACING.
- ALIGN FACE OF POST BLOCK WITH FLOW LINE.
- MAINTAIN FLOW LINE AT EDGE OF PAVEMENT/FACE OF BEAM GUARD AS APPLICABLE.
- DO NOT CONSTRUCT AN EXPANSION JOINT OR INSTALL DOWEL BARS WHEN ABUTTING HMA PAVEMENTS.

CONCRETE SURFACE DRAINS FLUME TYPE AT STRUCTURES

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION



APPROVED
May 2023 /S/ Rodney Taylor
DATE ROADWAY STANDARDS DEVELOPMENT
ENGINEER
FHWA

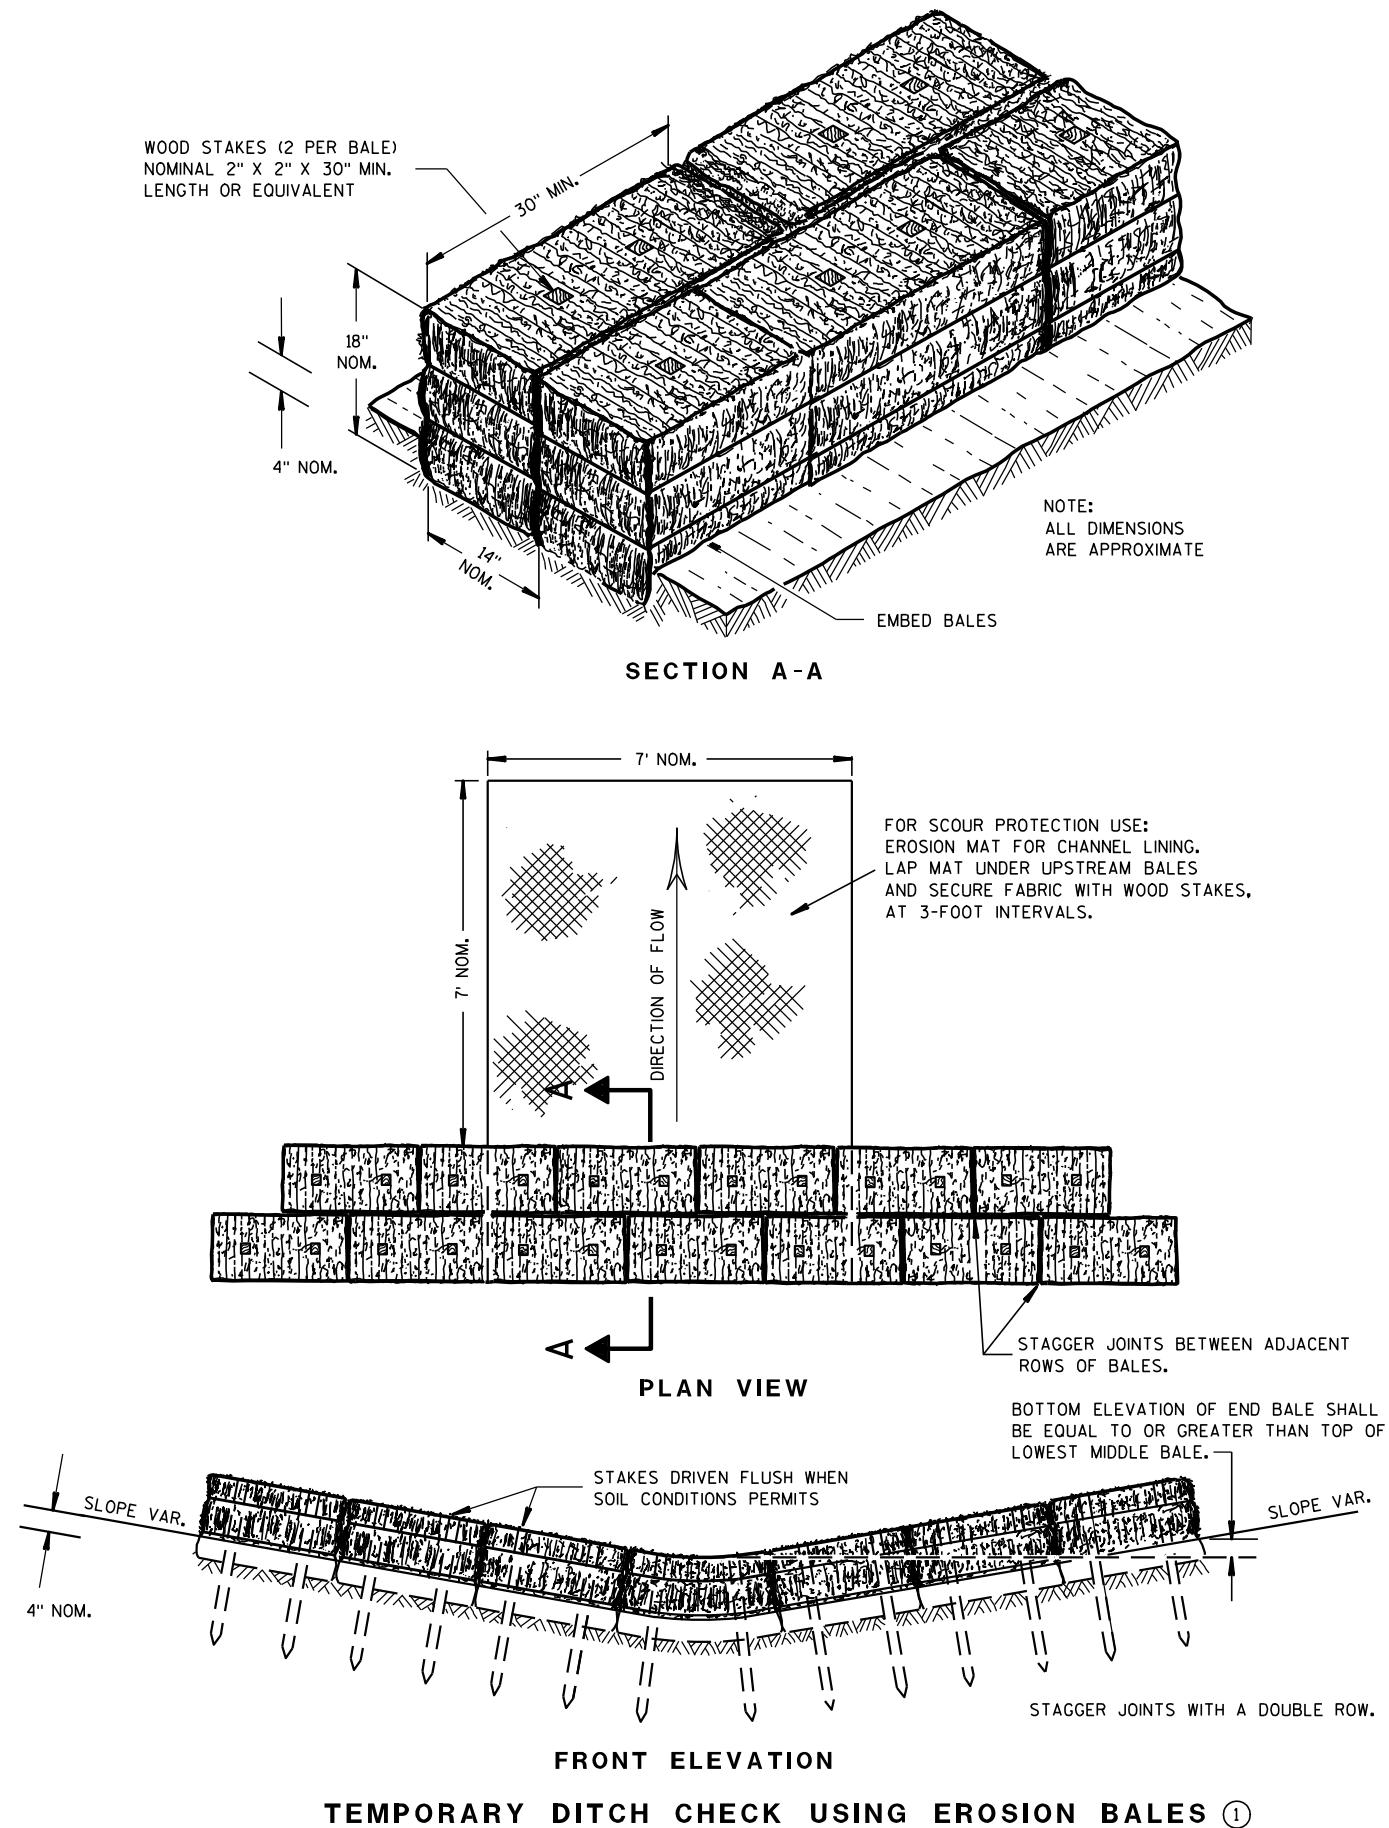

GENERAL NOTES

DETAILS OF CONSTRUCTION, MATERIALS AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE STANDARD SPECIFICATIONS AND THE APPLICABLE SPECIAL PROVISIONS.

- ① TEMPORARY DITCH CHECKS EITHER EROSION BALES OR MANUFACTURED SHALL BE PAID FOR UNDER THE BID ITEM OF TEMPORARY DITCH CHECK. THE DEPARTMENT WILL NOT PAY FOR TEMPORARY DITCH CHECKS CONSTRUCTED OF A SINGLE ROW OF EROSION BALES.

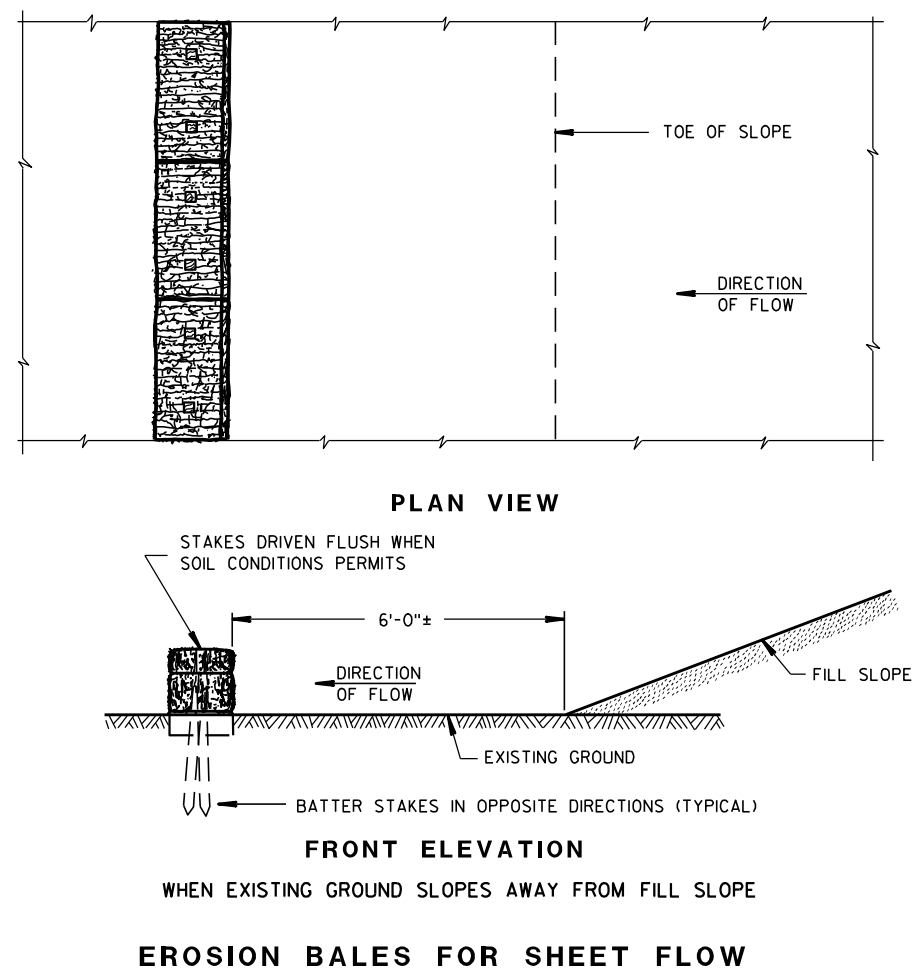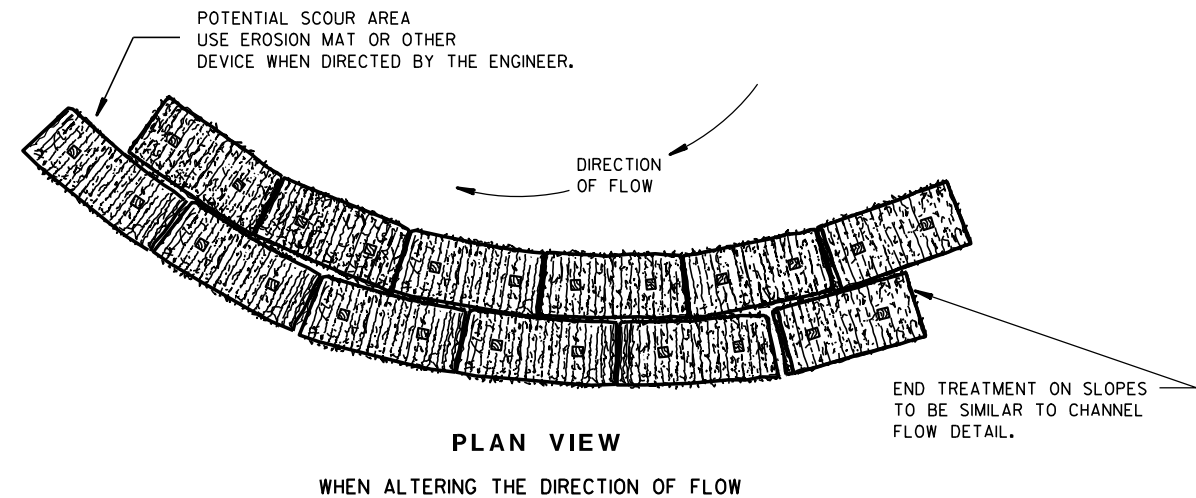TYPICAL INSTALLATIONS OF
EROSION BALES / TEMPORARY
DITCH CHECKS

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED

6/04/02
DATE

FHWA


/S/ Beth Canestra
CHIEF ROADWAY DEVELOPMENT ENGINEER




- ① HORIZONTAL BRACE REQUIRED WITH 2" X 4" WOODEN FRAME OR EQUIVALENT AT TOP OF POSTS.
- ② FOR MANUAL INSTALLATIONS THE TRENCH SHALL BE A MINIMUM OF 4" WIDE & 6" DEEP TO BURY AND ANCHOR THE GEOTEXTILE FABRIC. FOLD MATERIAL TO FIT TRENCH AND BACKFILL & COMPACT TRENCH WITH EXCAVATED SOIL.
- ③ WOOD POSTS SHALL BE A MINIMUM SIZE OF 1 1/8" X 1 1/8" OF OAK OR HICKORY.
- ④ SILT FENCE TO EXTEND ACROSS THE TOP OF THE PIPE.
- ⑤ CONSTRUCT SILT FENCE FROM A CONTINUOUS ROLL IF POSSIBLE BY CUTTING LENGTHS TO AVOID JOINTS. IF A JOINT IS NECESSARY USE ONE OF THE FOLLOWING TWO METHODS; A) OVERLAP THE END POSTS AND TWIST, OR ROTATE, AT LEAST 180 DEGREES, B) HOOK THE END OF EACH SILT FENCE LENGTH.



SILT FENCE	
STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION	
APPROVED <u>4-29-05</u> DATE	<u>/S/ Beth Cannestra</u> CHIEF ROADWAY DEVELOPMENT ENGINEER
FHWA	

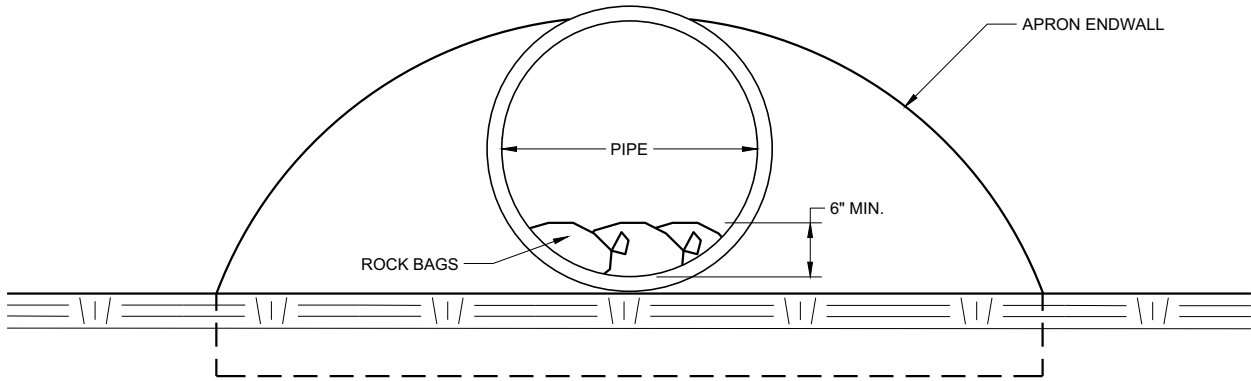


END VIEW

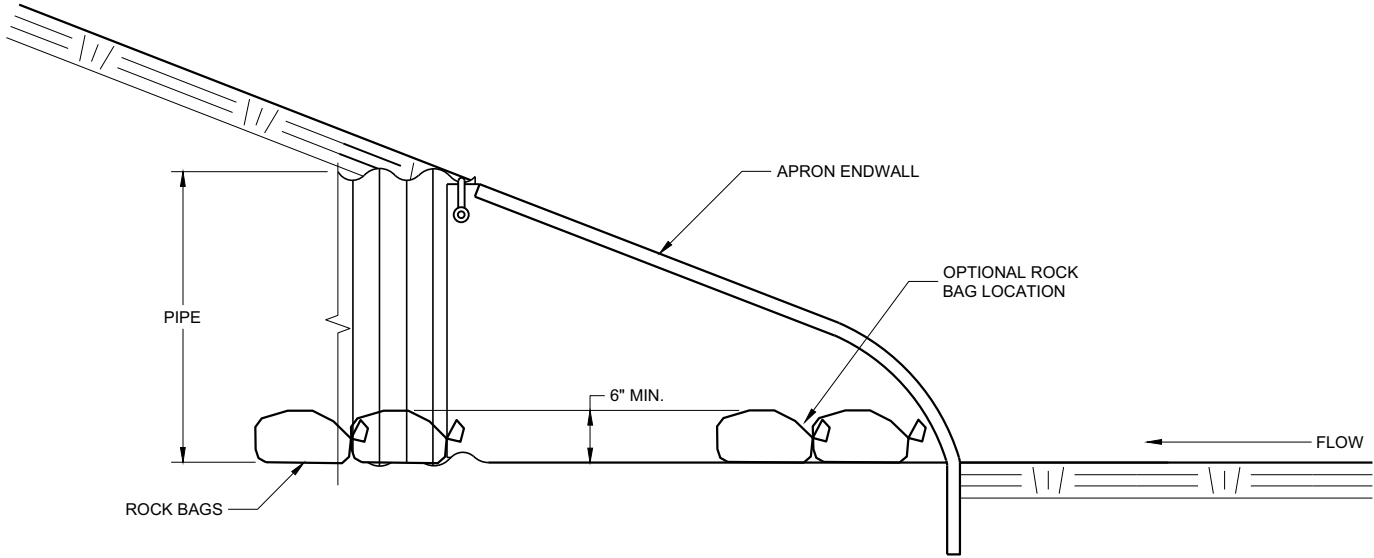


SIDE VIEW

CULVERT PIPE CHECK
(INSTALL ON INLET END ONLY)

CULVERT PIPE CHECK	
STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION	
APPROVED May 2019 DATE	/S/ Daniel Schave EROSION CONTROL ENGINEER
FHWA	

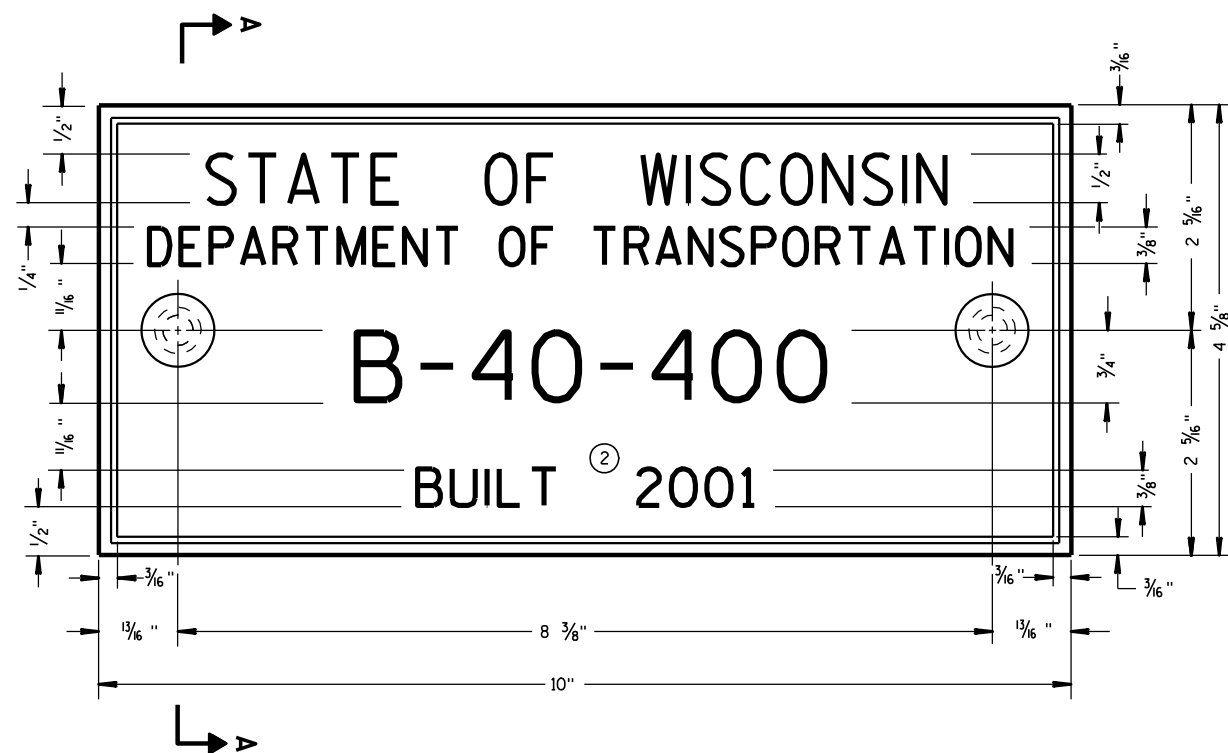

TYPICAL NAME PLATE
(BRIDGES, CULVERTS, AND RETAINING WALLS)

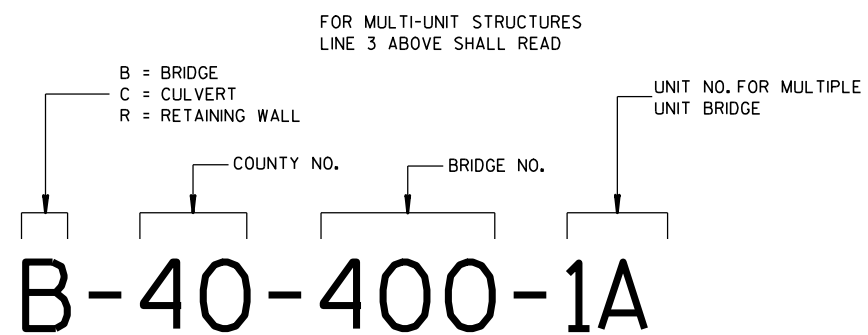


**NUMBERING DESIGNATION
MULTI-UNIT STRUCTURES**

GENERAL NOTES


NAME PLATES TO BE INSTALLED ON BRIDGES, CULVERTS, AND RETAINING WALLS SHALL CONFORM TO THE REQUIREMENTS OF SECTION 502.3.11 OF THE STANDARD SPECIFICATIONS.

THE BRIDGE NUMBER AND YEAR BUILT SHOWN ON THIS DRAWING ARE EXAMPLES ONLY. SEE CONSTRUCTION PLANS FOR INDIVIDUAL NUMBERING AND YEAR BUILT.

- ① EPOXY RESIN SHALL BE FROM AN APPROVED MANUFACTURER AND USED IN ACCORDANCE WITH MANUFACTURER'S RECOMMENDATIONS.
- ② REHABILITATION OF AN EXISTING STRUCTURE SHOULD USE THE DATE OF ORIGINAL STRUCTURE CONSTRUCTION.

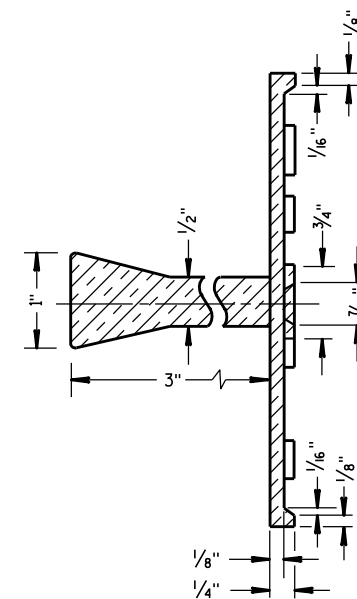


SECTION A-A

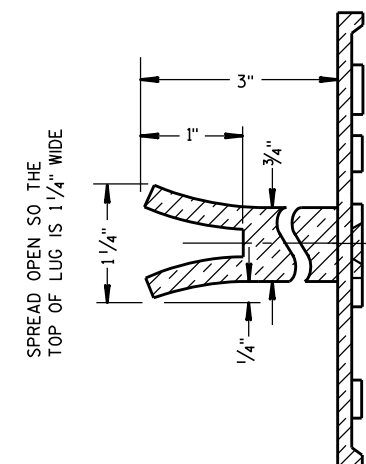

ALTERNATE LUG

- ① ADHERE ANCHOR LUG TO PRECAST RETAINING WALL WITH EPOXY RESIN.

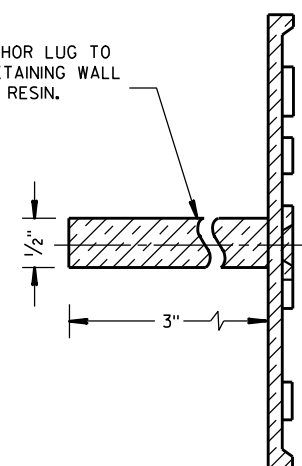

ALTERNATE LUG
(FOR ATTACHMENT TO PRECAST STRUCTURES)

**NAME PLATE
(STRUCTURES)**


STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED


3/26/10
DATE

FHWA


/S/ Scot Becker
CHIEF STRUCTURAL DEVELOPMENT ENGINEER

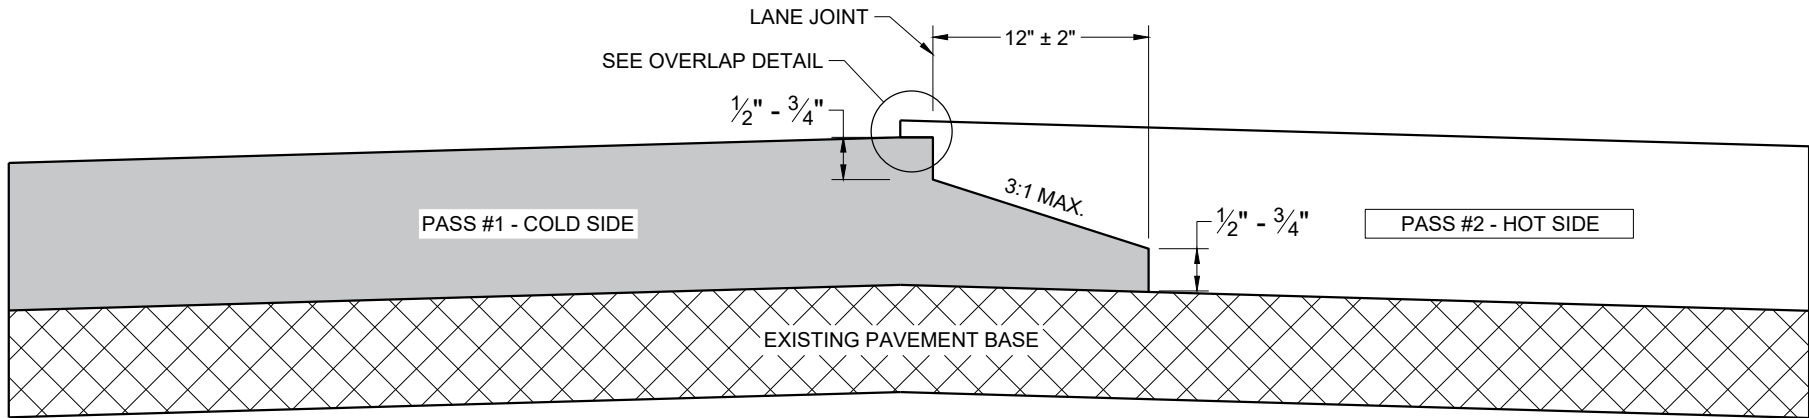

**TYPICAL PAVEMENT CROSS SECTION
NOTCHED WEDGE JOINT**

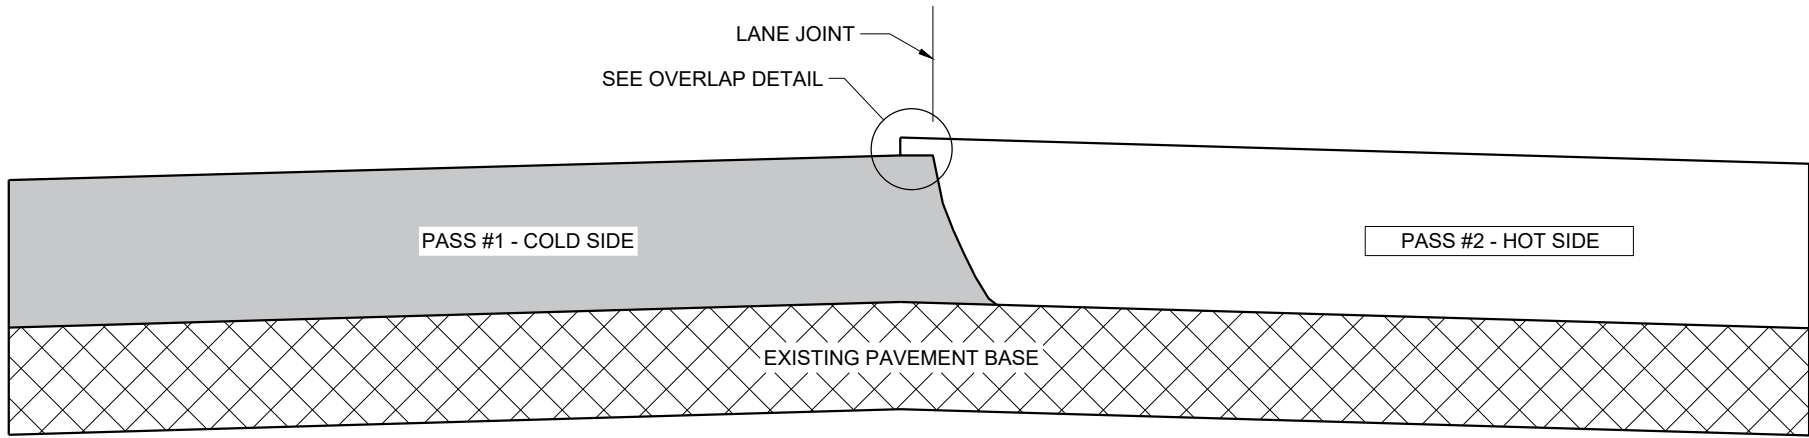

**TYPICAL PAVEMENT CROSS SECTION
VERTICAL JOINT**

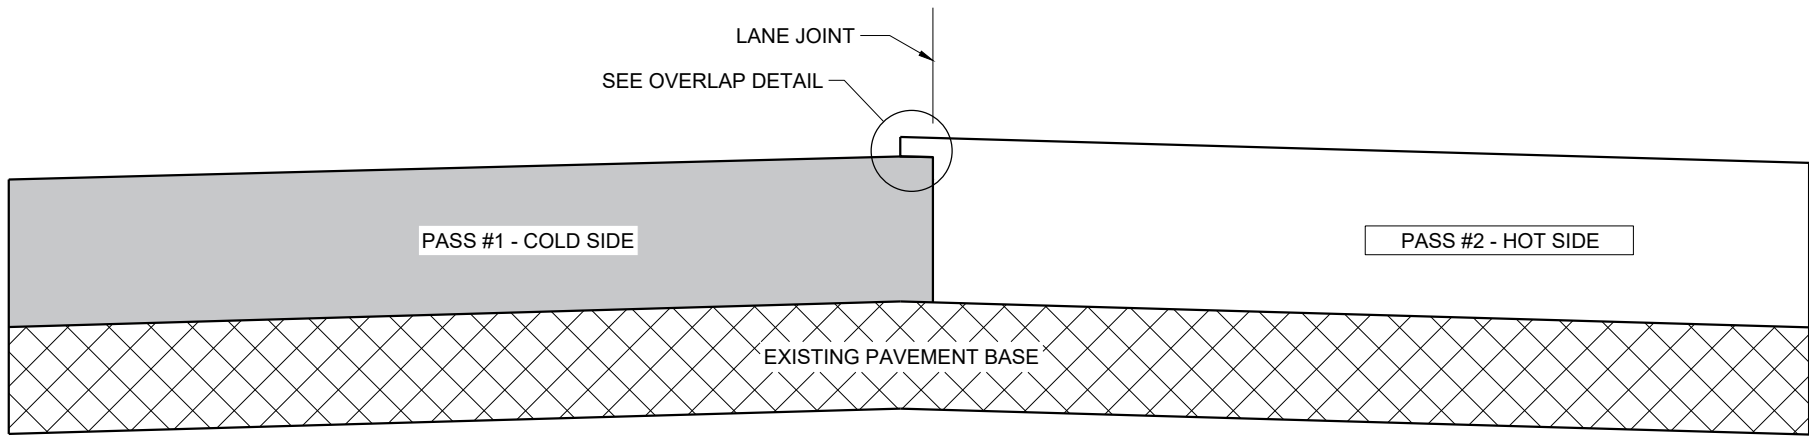

**TYPICAL PAVEMENT CROSS SECTION
VERTICAL JOINT (MILLED)**

GENERAL NOTES


IN ADDITION TO THE DETAILS PROVIDED IN THIS DRAWING, CONFORM TO STANDARD SPECIFICATION 450.3.2.8 FOR WHEN A NOTCHED WEDGE JOINT IS REQUIRED AND FOR GENERAL JOINT CONSTRUCTION REQUIREMENTS.

FOR ALL LONGITUDINAL JOINTS, ENSURE THE PAVER SCREED OVERLAPS THE PREVIOUSLY PLACED PAVEMENT BY $1" \pm 0.5"$ AND THE HOT SIDE OF THE JOINT REMAINS HIGHER THAN THE COLD SIDE BY APPROXIMATELY $0.1"$ AFTER FINAL COMPACTION. (IT WILL BE FLUSH WHEN PAVING IN ECHELON.)

ONLY REMOVE THE LONGITUDINAL NOTCHED WEDGE JOINT FOR SMA PAVEMENT OR AS DIRECTED BY THE ENGINEER TO ADDRESS SPECIFIC LENGTHS OF JOINT DAMAGED BY TRAFFIC.

WHEN MILLING BACK OR REMOVING ANY LONGITUDINAL JOINT, LIMIT THE MATERIAL REMOVED TO $2"$ FROM THE TOP NOTCH OR FROM THE VERTICAL JOINT EDGE ON THE COLD SIDE OF THE JOINT.

USE LONGITUDINAL MILLED JOINT AS PLANS SHOW OR THE AS THE ENGINEER DIRECTS.

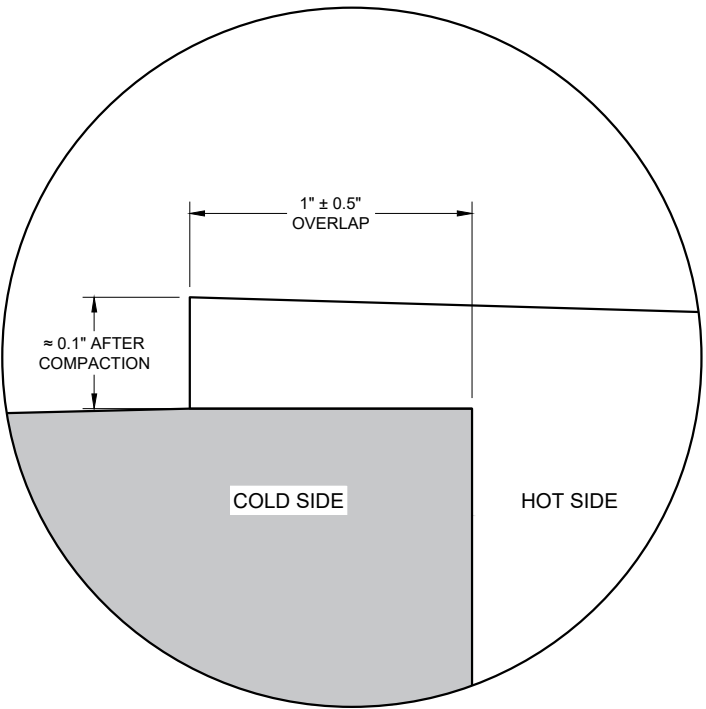


OVERLAP DETAIL (TYPICAL)


HMA LONGITUDINAL JOINTS

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION


APPROVED
November 2020
DATE
/S/ Steven Hefel
HMA PAVEMENT ENGINEER
FHWA

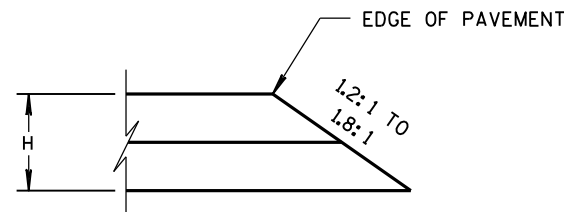


CONSTRUCTED WITH FINAL TWO LAYERS
FOR H 5" OR LESS

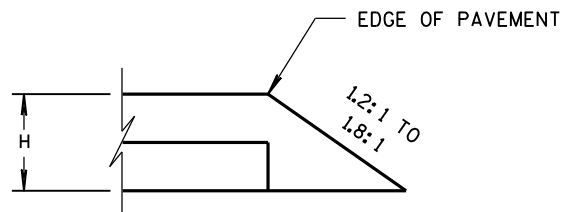

CONSTRUCTED WITH FINAL LAYER
FOR H 5" OR LESS

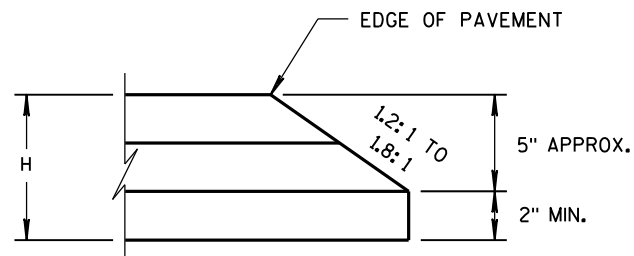


CONSTRUCTED WITH FINAL TWO LAYERS
FOR H GREATER THAN 5"

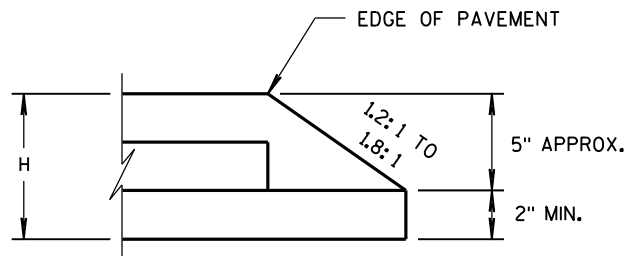

CONSTRUCTED WITH FINAL LAYER
FOR H GREATER THAN 5"

HMA PAVEMENT AND HMA OVERLAYS

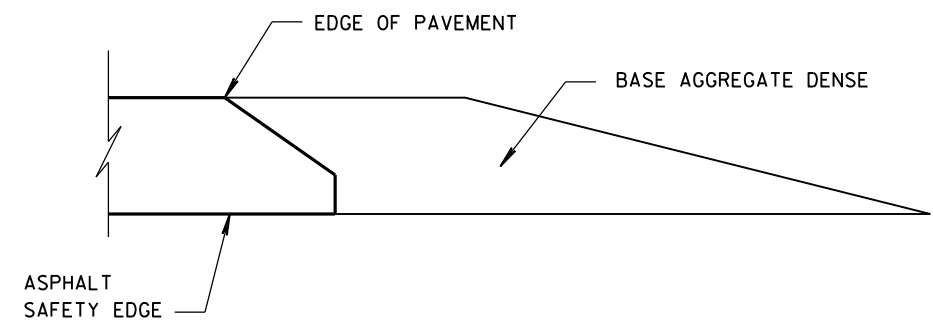

FINISHED SHOULDER AGGREGATE PLACEMENT

SAFETY EDGE_{SM}

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION










APPROVED

11/30/2012
DATE

FHWA


/s/ Jerry H. Zogg
ROADWAY STANDARDS DEVELOPMENT
ENGINEER

- ① WOOD OR STEEL POSTS (w6X9 OR w6X8.5) MAY BE USED. DO NOT INTERMIX WOOD AND STEEL POSTS. INSTALL STEEL POSTS WITH HOLES ON APPROACHING TRAFFIC SIDE.
- ② USE WOOD OR APPROVED PLASTIC BLOCKOUTS. WOOD BLOCKOUTS MAY BE CONSTRUCTED OUT OF TWO OR MORE WOOD BLOCKOUTS. SEE ALTERNATE WOOD BLOCKOUT DETAIL. DIMENSIONS OF APPROVED PLASTIC BLOCKOUTS MAY VARY.
- ③ IF ROCK IS ENCOUNTERED DURING EXCAVATION, PROVIDE A HOLE 12 INCHES IN DIAMETER EXTENDING 20 INCHES DEEP INTO THE ROCK. PLACE APPROXIMATELY 2 1/2" INCHES OF GRANULAR MATERIAL IN THE BOTTOM OF THE HOLE. CUT THE POSTS THE TO LENGTH AND INSTALL. BACKFILL WITH EXCAVATED MATERIAL AND COMPACT. BACKFILL IS TO BE FREE OF LARGE ROCKS.
- ④ WHEN THE DISTANCE FROM BACK OF POST TO SHOULDER HINGE POINT IS LESS THAN 2 FEET INSTALL LONGER POST AT HALF POST SPACING (K).
- ⑤ FOR NEW MGS INSTALLATION TOP OF W-BEAM RAIL TOLERANCE IS $\pm 1"$. FOR EXISTING MGS INSTALLATION TOP OF W-BEAM IS BETWEEN 27 3/4" TO 32".
- ⑥ WHEN USING STEEL POST AND WOOD BLOCKOUTS INSTALL FOUR 16D GALVANIZED NAILS. INSTALL NAILS AT THE BACK CORNERS OF THE BLOCK AND BEND THE NAILS OVER THE FLANGE OF THE STEEL POST.
- ⑦ TOTAL POST LENGTH FOR TYPE K IS 7' - 0".
TOTAL POST LENGTH FOR OTHER MGS TYPES IS 6' - 0".

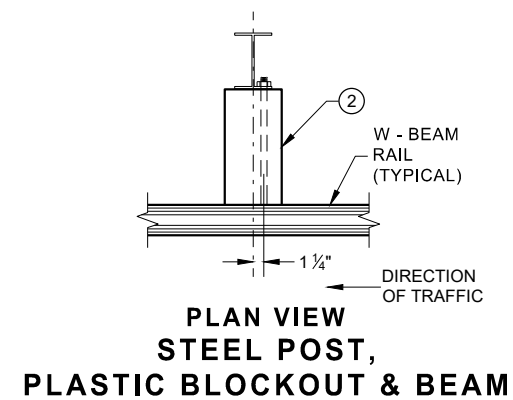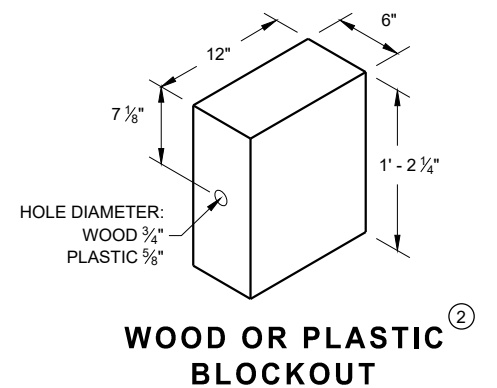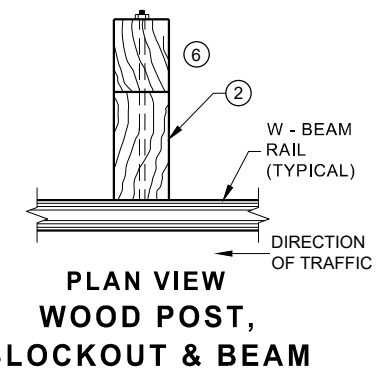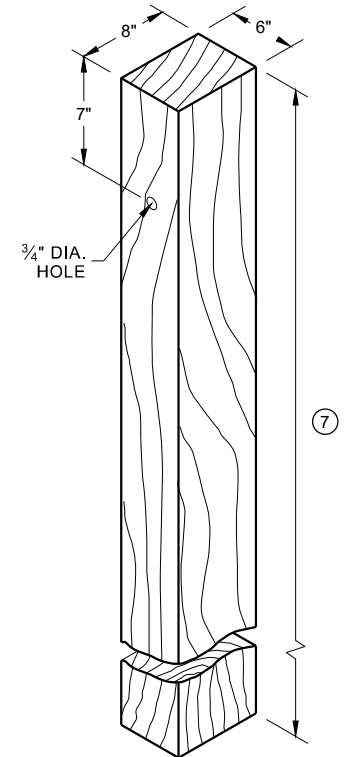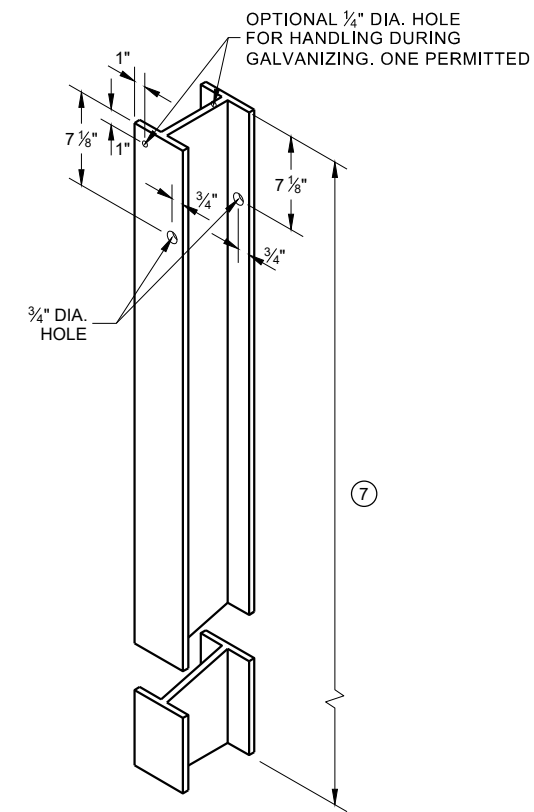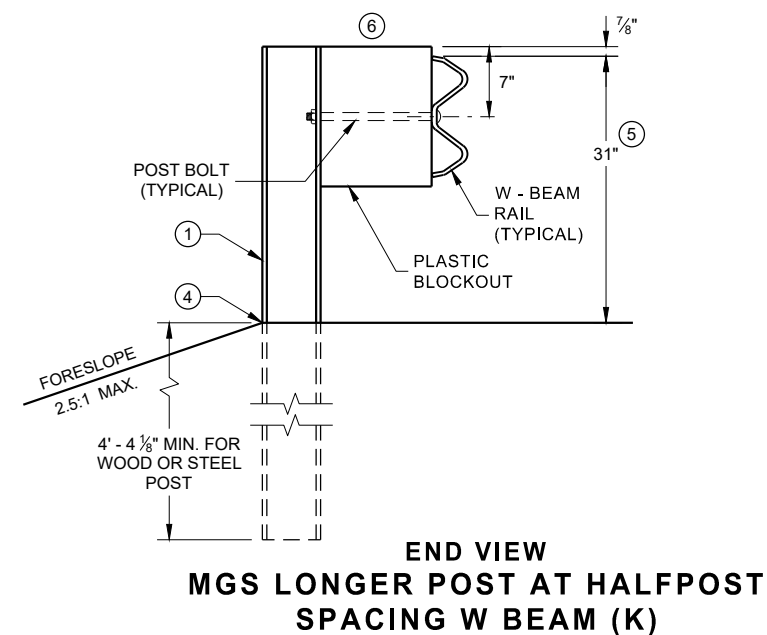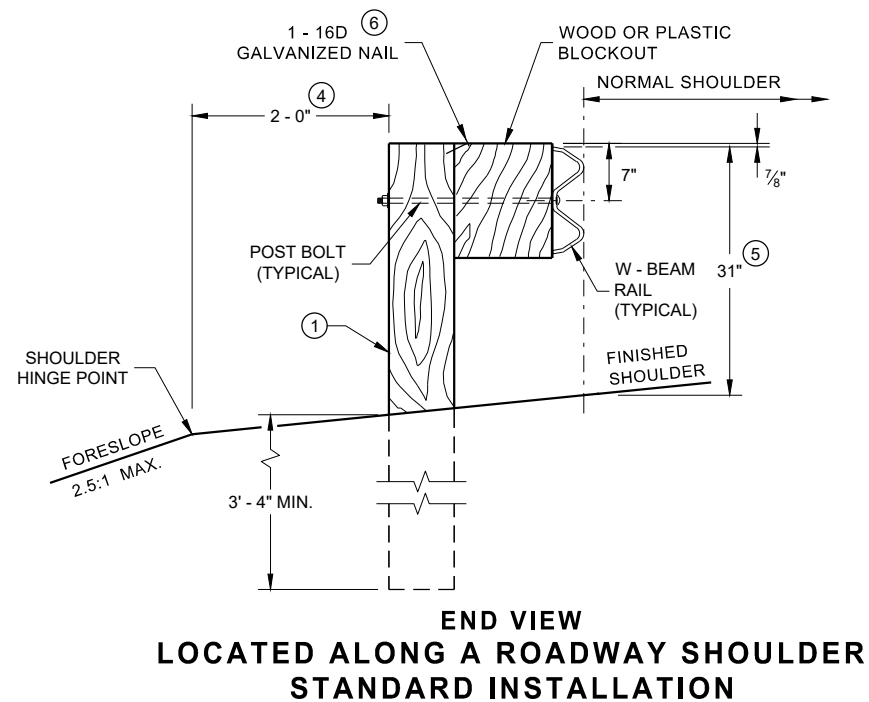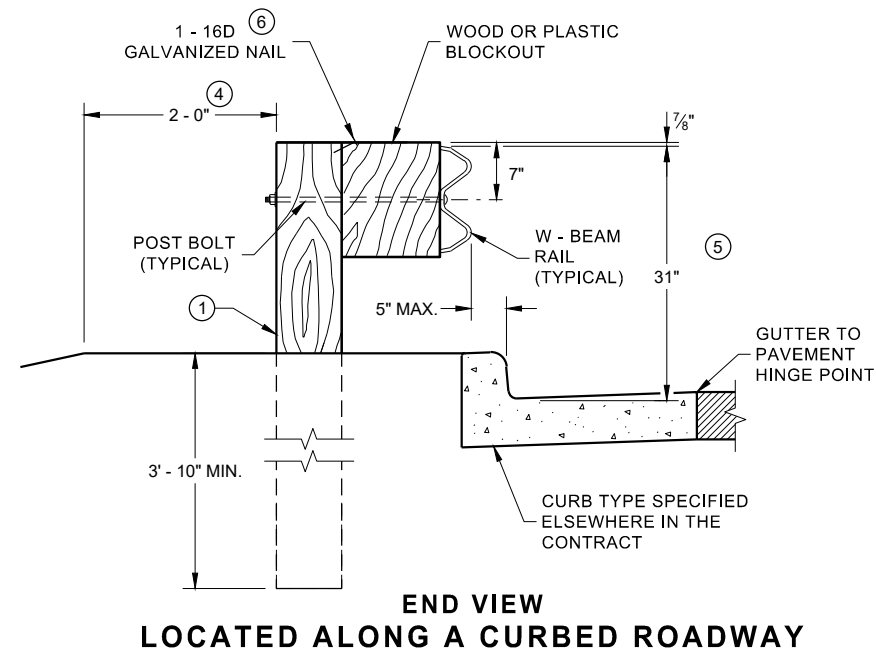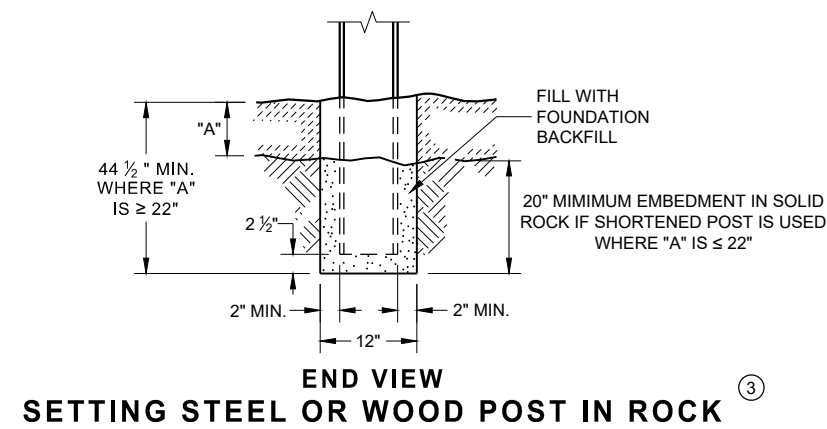


**MIDWEST GUARDRAIL SYSTEM
(MGS) GUARDRAIL**


STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

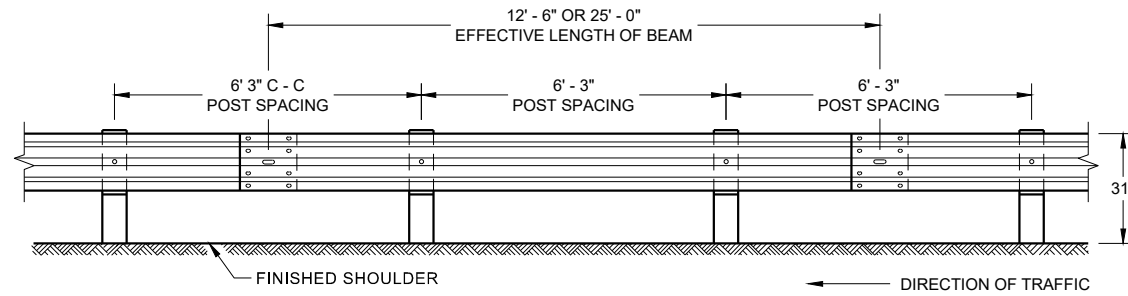


**FRONT VIEW
POST SPACING STANDARD INSTALLATION**

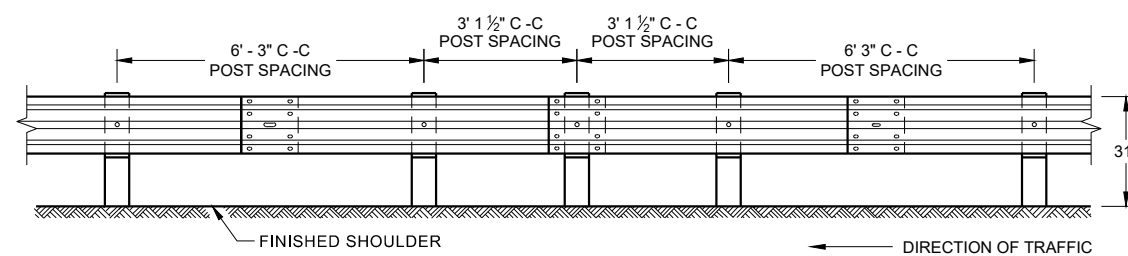


**FRONT VIEW
HALF POST SPACING (HS) AND
HALF POST SPACING WITH LONGER POSTS (K)**

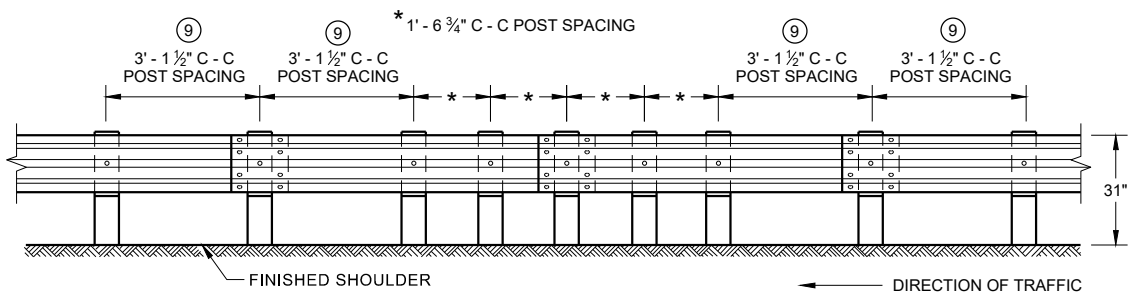


**FRONT VIEW
QUARTER POST SPACING (QS)**

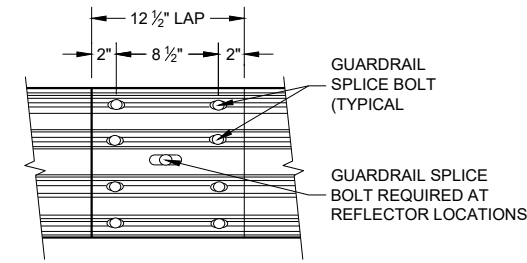


**FRONT VIEW
MID-SPAN BEAM SPLICE**

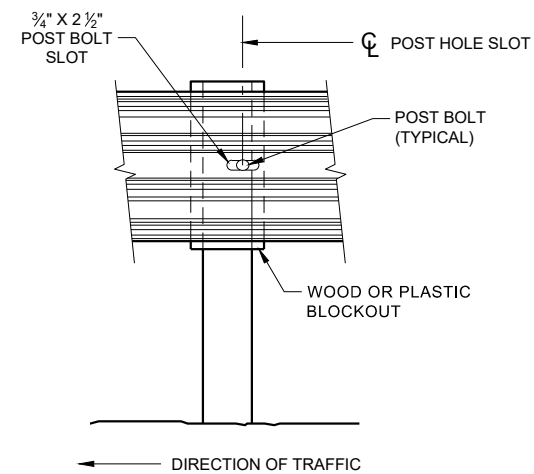

FRONT VIEW AT STEEL POST

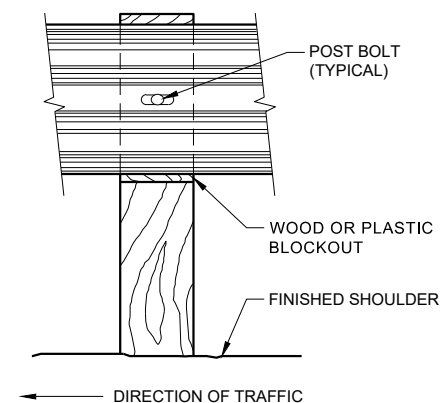

FRONT VIEW AT WOOD POST

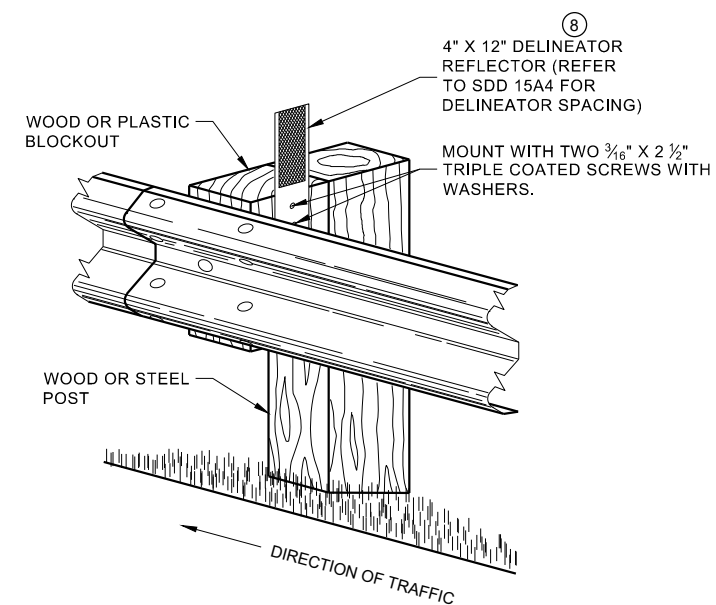


**ONE SIDED REFLECTOR DETAIL
AND TYPICAL INSTALLATION**

GENERAL NOTES

- 8 DO NOT INSTALL REFLECTORS ON THE FIRST 50 FEET OF THE APPROACH END OF THE ENERGY ABSORBING TERMINAL.
- 9 25 FEET OF HALF POST SPACING IS REQUIRED ON APPROACH AND DEPARTURE ENDS OF QUARTER POST SPACING.

POST BOLTS ARE A 3/8" DIAMETER ASTM A307 GUARDRAIL BOLT. A POST BOLT REQUIRES 3/8" DIAMETER A563A DOUBLE RECESSED (DR) HEAVY HEX NUT AND 3/8" DIAMETER F844 FLAT WASHER. POST BOLTS MAY BE LONGER IF MULTIPLE BLOCKOUTS ARE BEING USED.


GUARD RAIL SPLICE BOLTS ARE A 3/8" DIAMETER ASTM A307 GUARDRAIL HEAD BOLT. A GUARDRAIL SPLICE BOLT REQUIRES 3/8" DIAMETER A563A DOUBLE RECESSED (DR) HEAVY HEX NUT.

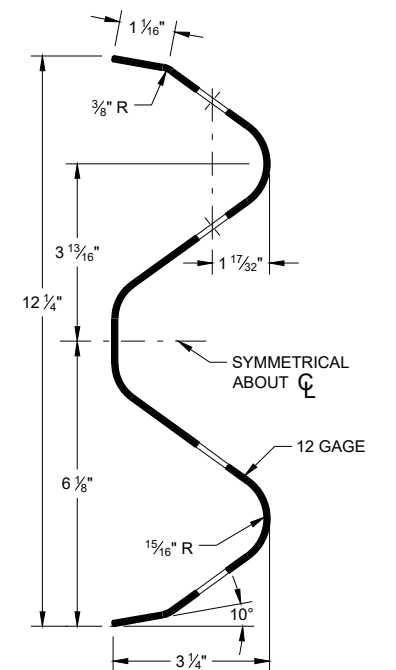

SECTION THRU W-BEAM RAIL


**MIDWEST GUARDRAIL SYSTEM
(MGS) GUARDRAIL**

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

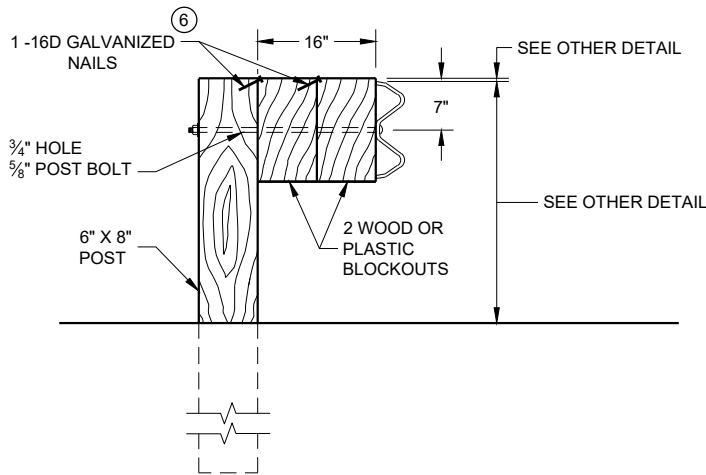

DETAIL FOR 16" BLOCKOUT DEPTH


IT IS ACCEPTABLE TO USE BLOCKOUTS UP TO 16" DEEP TO INCREASE THE POST OFFSET TO AVOID UNDERGROUND OBSTACLES. THERE IS NO LIMIT TO THE NUMBER OF POSTS THAT CAN HAVE ADDITIONAL BLOCKOUTS UP TO 16" DEEP.

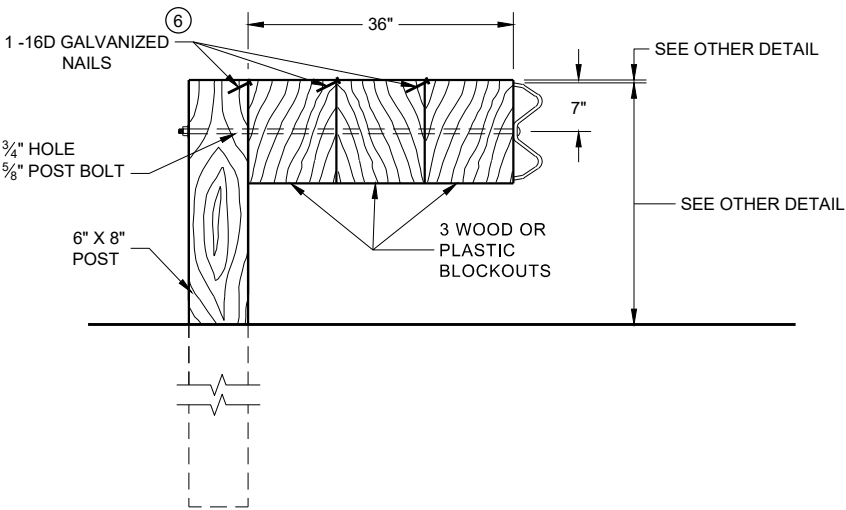

DETAIL FOR 36" BLOCKOUT DEPTH


NOTES: UNDER SPECIAL CIRCUMSTANCES, SUCH AS AVOIDING OBSTACLES THAT ARE NOT RELOCATED, IT IS ACCEPTABLE TO INSTALL ADDITIONAL BLOCKOUTS TO OBTAIN UP TO 36" DEPTH FOR ONE OR TWO POSTS IN A SECTION OF GUARDRAIL.
DO NOT USE 16" OR 36" BLOCKOUTS IF IT CAUSES THE POST TO BE DRIVEN BEYOND SHOULDER HINGE POINT OR CAUSES A FIXED OBJECT TO BE WITHIN THE DEFLECTION DISTANCE OF THE BARRIER.

- NOTE:
- 1. ALL FILLETS SHALL HAVE A MINIMUM RADIUS OF 3/16".
 - 2. IF THE BOLT EXTENDS MORE THAN 1/4" FROM THE NUT THE BOLT SHOULD BE TRIMMED BACK.

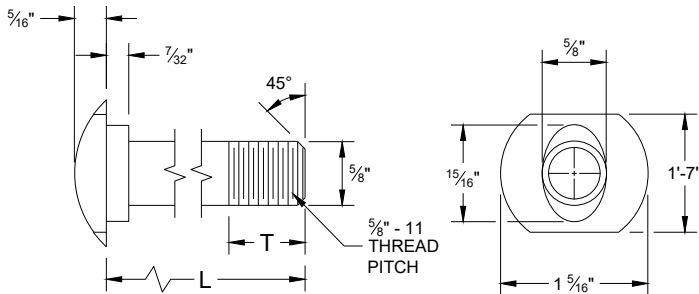


POST BOLT TABLE

L	T (MIN.)
1 1/4"	1 1/8"
2"	1 3/4"
10"	4"
14"	4 1/16"
18"	4"
21"	4 1/16"
25"	4"




ALTERNATE BOLT HEAD

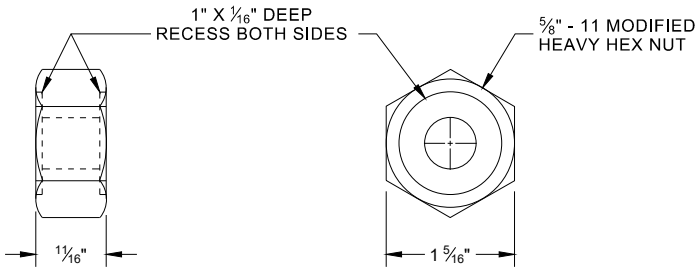


POST BOLT, SPLICE BOLT AND RECESS NUT


- 6 WHEN USING STEEL POST AD WOOD BLOCKOUTS, INSTALL FOUR 16D GALVANIZED NAILS. INSTALL NAILS AT THE BACK CORNERS OF THE BLOCK AND BEND THE NAILS OVER THE FLANGE OF THE STEEL POST.

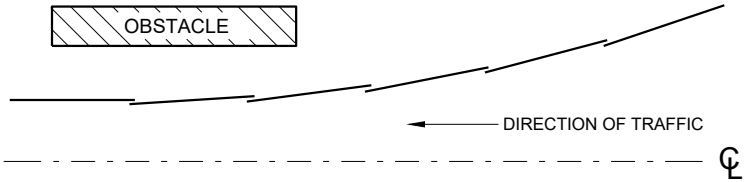


PLAN VIEW
BEAM LAPPING DETAIL

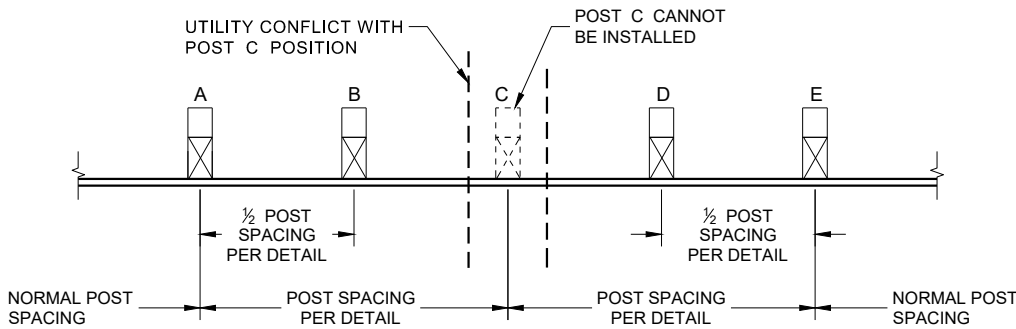

POST DRIVING FOR CONTINUOUS
UNDERGROUND OBSTRUCTION

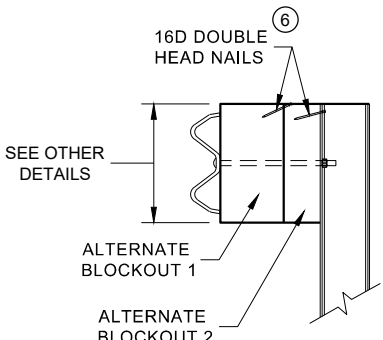

SIDE VIEW




PLAN VIEW


ALTERNATE WOOD
BLOCKOUT DETAIL

MIDWEST GUARDRAIL SYSTEM
(MGS) GUARDRAIL


STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

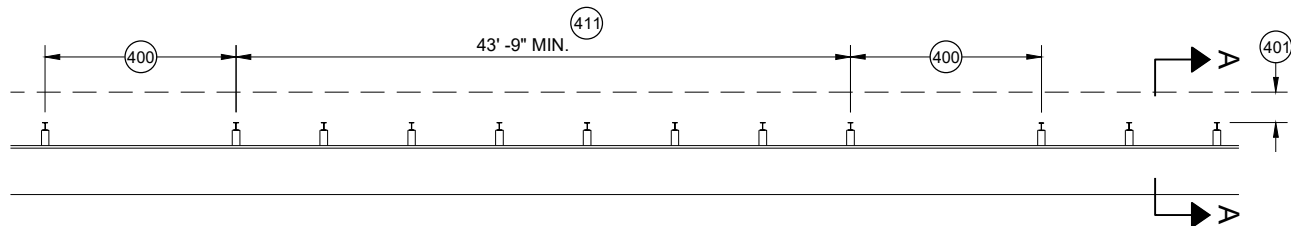


MISSING POST IN MGS GUARDRAIL

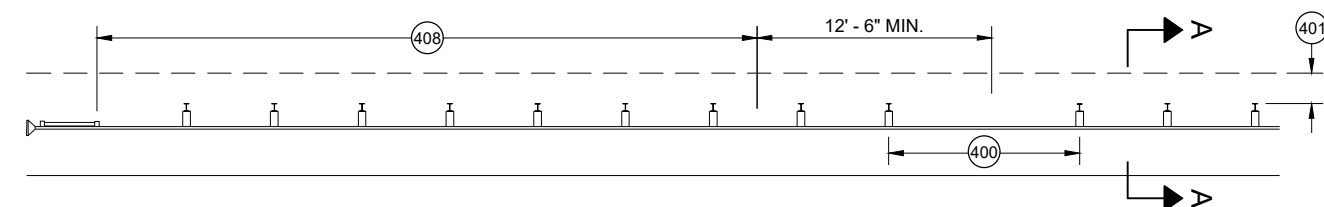


MISSING POST IN MGS GUARDRAIL NEAR EAT

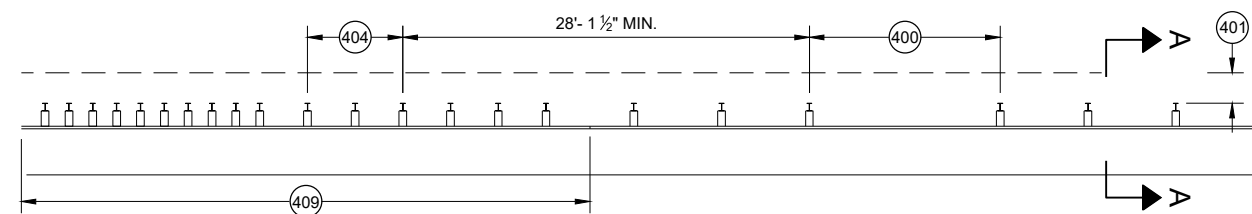


MISSING POST IN MGS GUARDRAIL NEAR AN APPROACH TRANSITION

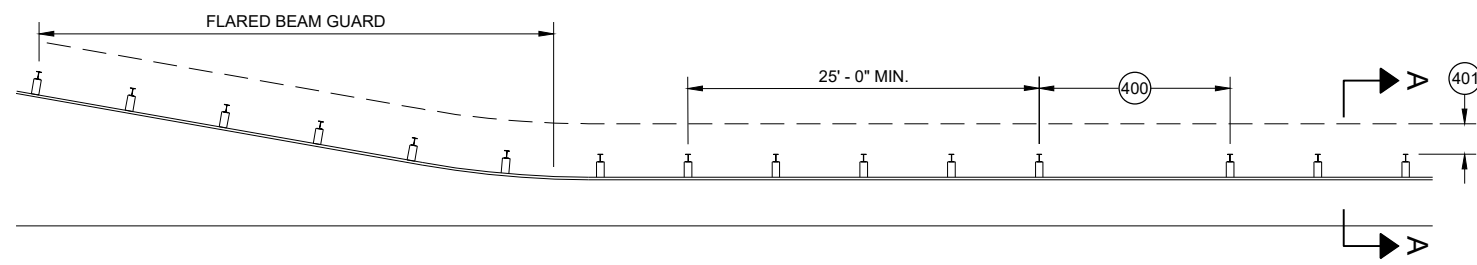

MISSING POST IN MGS GUARDRAIL NEAR FLARED BEAM GUARD

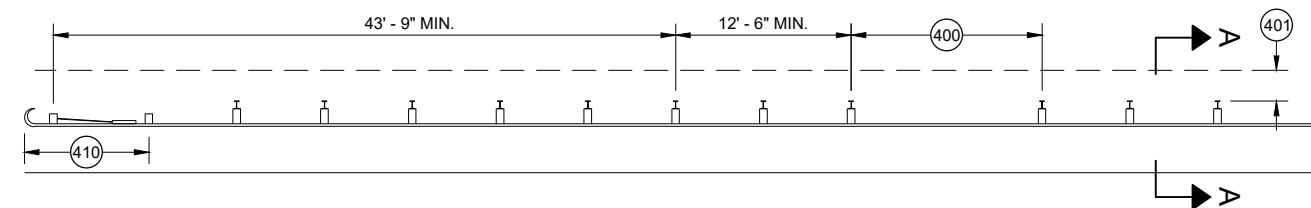


MISSING POST IN MGS GUARDRAIL NEAR A TYPE 2 END TERMINAL

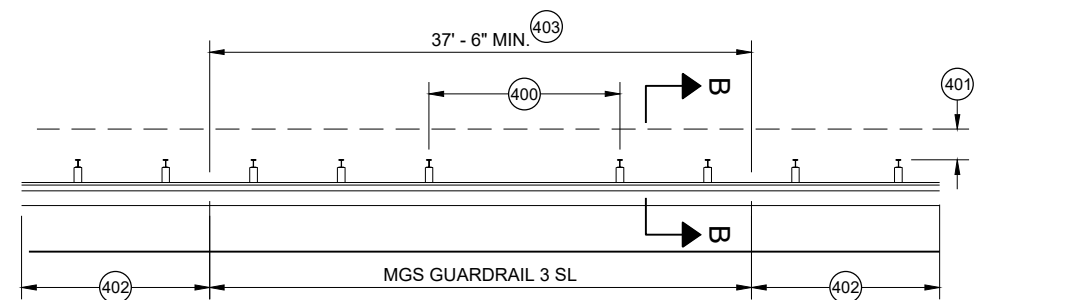


MISSING POST IN SHORT SPAN MGS GUARDRAIL NEAR CURB (SL)

- (400) MAX SPAN 12' - 6"
- (401) 2' MIN.
- (402) MGS GUARDRAIL 3
- (403) NESTING BEAM GUARD
- (404) ASYMMETRIC TRANSITION
- (405) SOIL WELL DRAINED AND COMPACTED
- (406) SEE OTHER DRAWINGS IN THIS SDD
- (407) SEE OTHER DRAWINGS FOR MIN. SPACING BETWEEN SPANS
- (408) SEE SDD 14B44
- (409) SEE SDD 14B45
- (410) SEE SDD 14B47
- (411) MINIMUM DISTANCE BETWEEN MISSING POST SPANS.

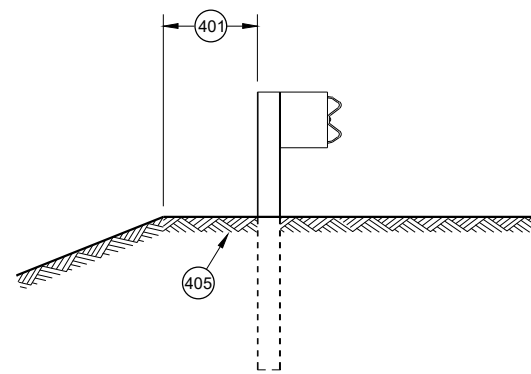

SECTION A - A

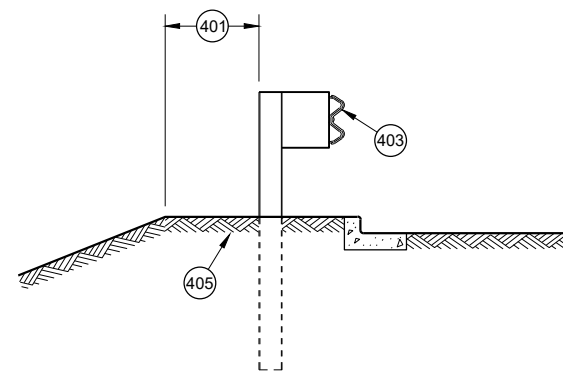

SECTION B - B

**MIDWEST GUARDRAIL SYSTEM
(MGS) GUARDRAIL**

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
May 2021
DATE
/S/ Rodney Taylor
ROADWAY STANDARDS DEVELOPMENT
UNIT SUPERVISOR

FHWA


- A) THE SLOPE IN THE AREA BOUNDED BY THE GRADELINE, THE HINGE POINT LINE (HPL) AND THE CLEAR ZONE LIMITS (CZL) SHALL BE 4:1 OR FLATTER.
- B) AFTER FINAL ASSEMBLY, RECHECK CABLE TO BE SURE IT IS TAUT AND HAS NOT RELAXED
- C) DIFFERENT MANUFACTURERS REQUIRE DIFFERENT PERFORATED W - BEAM RAIL END PANELS. SEE MANUFACTURER'S INFORMATION.
- D) ATTACH ALUMINUM SHEET TO E.A.T. HEAD USING 4 STAINLESS STEEL SELF - TAPPING SCREWS. ONE SCREW PER CORNER.
- E) HARDWARE MAY VARY BETWEEN MANUFACTURER. SEE MANUFACTURER'S DRAWING FOR INFORMATION.

DIMENSIONS MAY VARY, MANUFACTURER'S INFORMATION.

THE CENTER OF THE UPPER 3 1/2" DIAMETER HOLE ON POST NUMBER 3 THROUGH POST 9 IS TO BE FLUSH WITH THE GROUND LINE UP TO A MAXIMUM OF 2" ABOVE GROUND LINE. WOOD BLOCKS ON POSTS NUMBERED 3 THROUGH 9 MAY BE ADJUSTED UP TO 3" ABOVE THE TOP OF POST.




STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

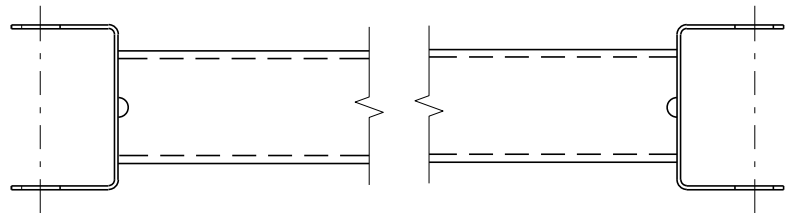


GENERIC GROUND STRUT⁹ ^E

BILL OF MATERIALS	
PART NO.	DESCRIPTION MATERIALS PROVIDED BY MGS EAT MANUFACTURER. SEE MANUFACTURER'S DETAILS FOR MORE INFORMATION.
①	UPPER POST NO. 1 6" X 6" TUBE
②	LOWER POST NO. 1
③	WOOD CRT
④	WOOD BLOCKOUT
⑤	PIPE SLEEVE
⑥	BEARING PLATE
⑦	BCT CABLE ASSEMBLY
⑧	ANCHOR CABLE BOX
⑨	GROUND STRUT
⑩	PERFORATED W-BEAM RAIL END PANEL, 12'-6" LONG.
⑪	STANDARD W-BEAM RAIL. MULTIPLE SECTIONS REQUIRED. SECTIONS VARY IN LENGTH.
⑫	IMPACT HEAD
⑬	EAT MARKER POST - YELLOW (SEE APPROVED PRODUCTS LIST)
⑭	SOIL PLATE
⑮	UPPER POST NO. 2
⑯	LOWER POST NO. 2

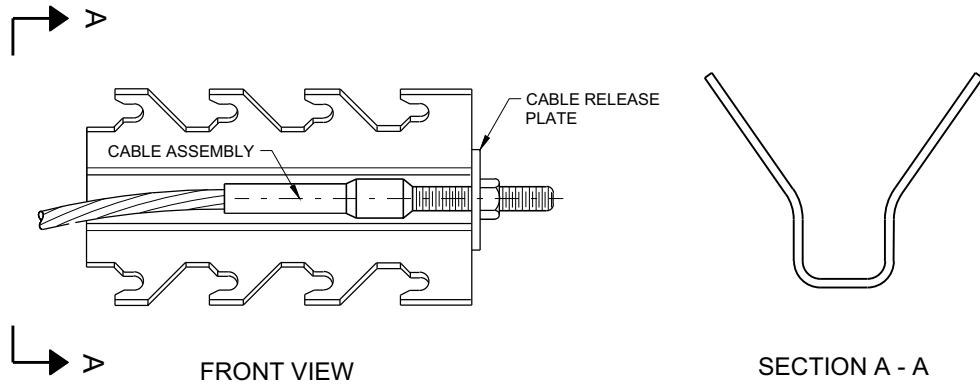


GENERIC ANCHOR CABLE BOX⁹ ^E

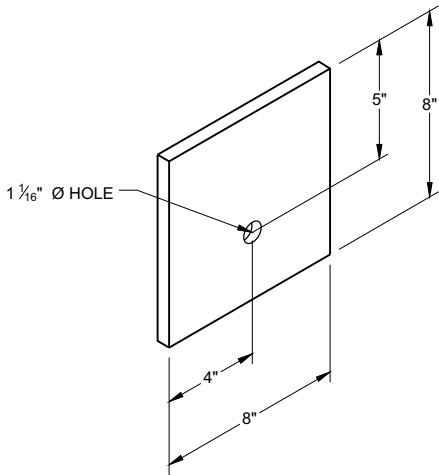


BEARING PLATE⁶ ^E

MIDWEST GUARDRAIL SYSTEM
ENERGY ABSORBING TERMINAL
(MGS)


STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

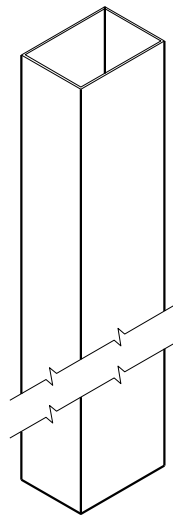


UPPER POST NO. 1 ⁽¹⁾ (E)

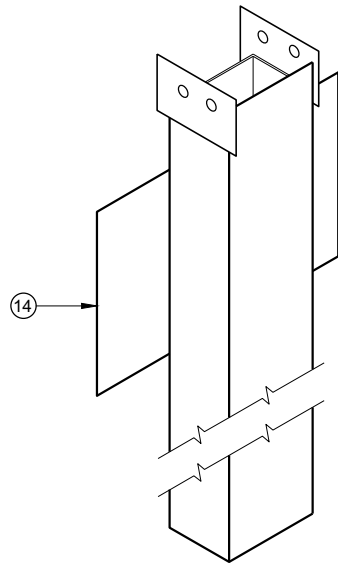


LOWER POST NO. 1 ⁽²⁾ (E)

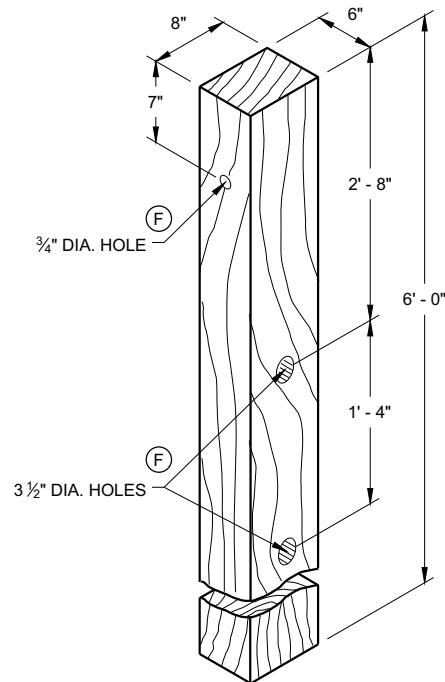


WOOD CRT POST ⁽³⁾ (E)
POSTS NUMBER 3-9




UPPER POST NO. 2 ⁽¹⁵⁾ (E)




LOWER POST NO. 2 ⁽¹⁶⁾ (E)

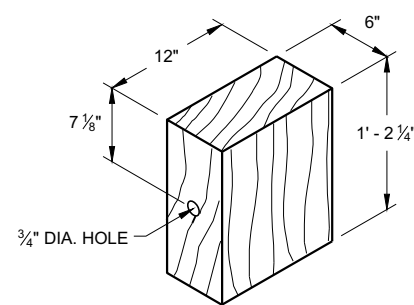


WOOD BLOCKOUT ⁽⁴⁾
REQ'D. AT ALL POSTS EXCEPT POST NO'S 1 & 2

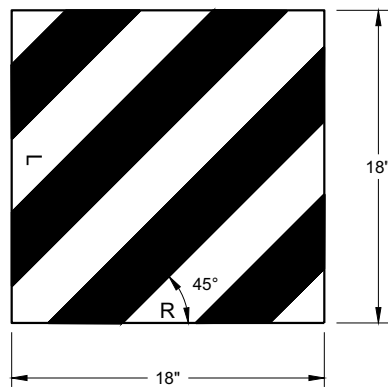

REFLECTIVE SHEETING DETAIL ^(E)

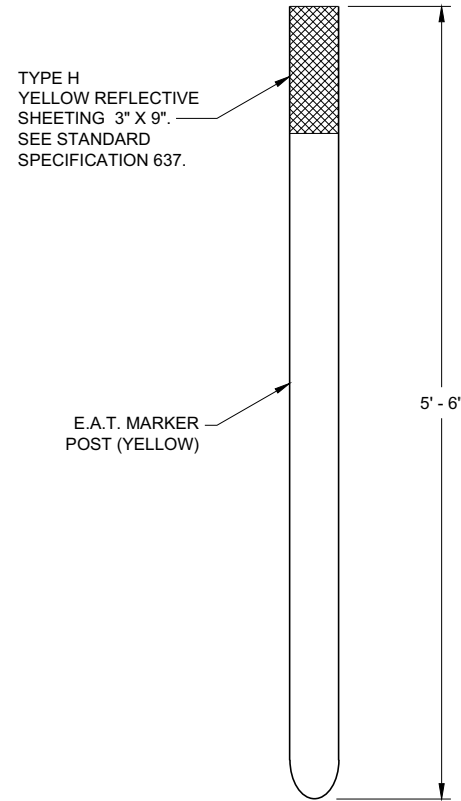


FRONT VIEW




SIDE VIEW

E.A.T. MARKER POST ⁽¹³⁾



SIDE VIEW




TOP VIEW

ALTERNATE WOOD
BLOCKOUT DETAIL


**MIDWEST GUARDRAIL SYSTEM
ENERGY ABSORBING TERMINAL
(MGS)**

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
7/2018
DATE
/S/ Rodney Taylor
ROADWAY STANDARDS DEVELOPMENT
UNIT SUPERVISOR
FHWA

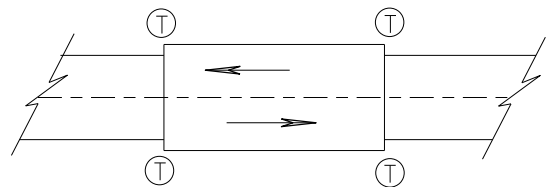

TWO WAY TRAFFIC

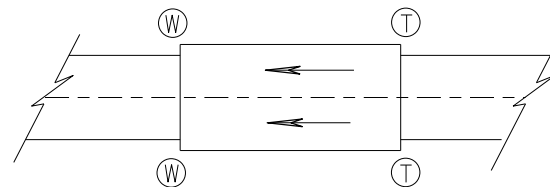

ONE WAY TRAFFIC

(T) THRIE BEAM CONNECTION

(W) W-BEAM CONNECTION WHEN REQUIRED

TYPICAL LOCATIONS OF THRIE BEAM AND W-BEAM CONNECTIONS TO BRIDGE

GENERAL NOTES


IF ROCK IS ENCOUNTERED, REMOVE ROCK TO FULL DEPTH OF POST PLUS 2 1/2", AND 12" DIAMETER AROUND POST. SEE 14B42 FOR MORE DETAILS.

TRANSITION USES STEEL POSTS ONLY.


SEE STANDARD DETAIL DRAWING 14 B 42 FOR MORE INFORMATION.

POST 2 THROUGH 17 USES STEEL POST ONLY

- ① BRIDGE RAILING TYPE "W" DOES NOT REQUIRE A TERMINAL CONNECTOR.
- ② OPTIONAL CURB AND GUTTER OR DRAINAGE FEATURE SEE PLAN FOR INFORMATION.
- ⑬ STEEL OR WOOD POST IS ACCEPTABLE AT POST 1. SEE SDD14B42

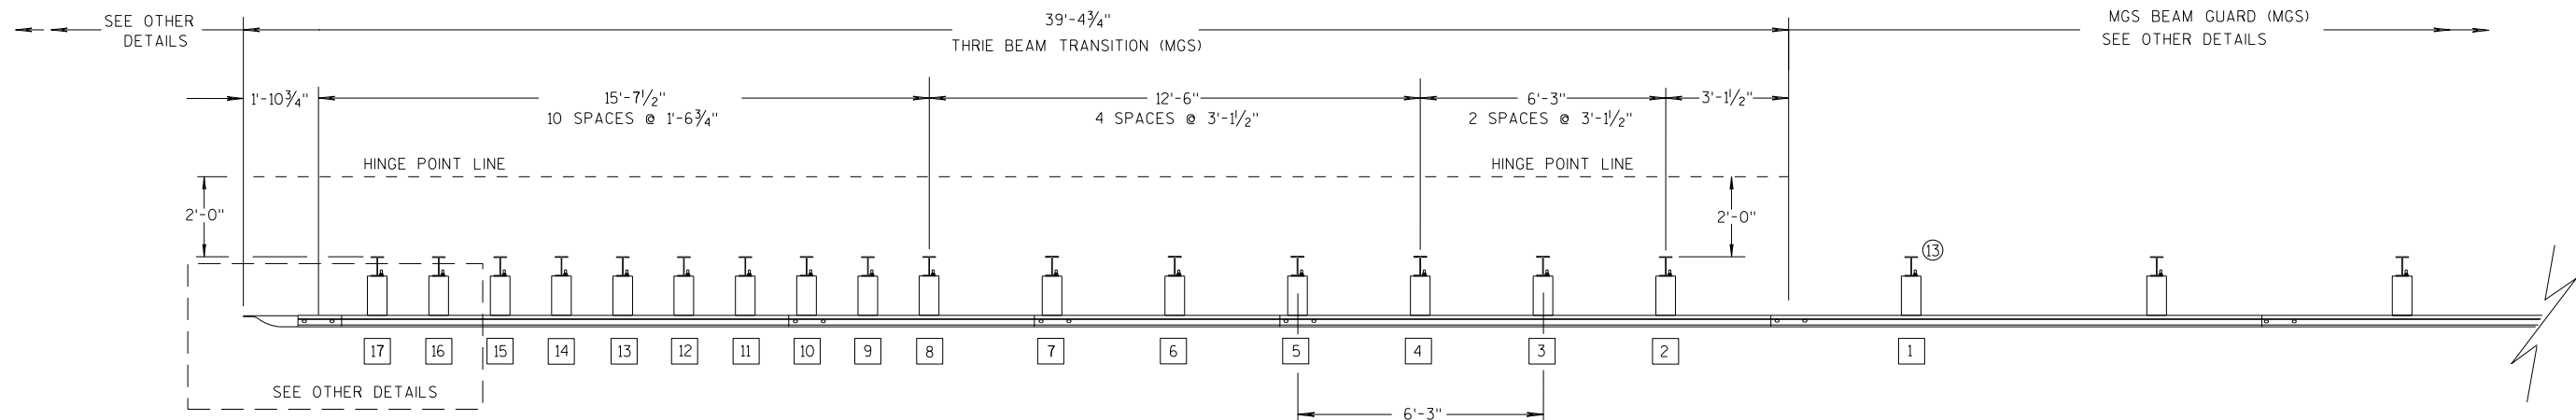

PLAN VIEW

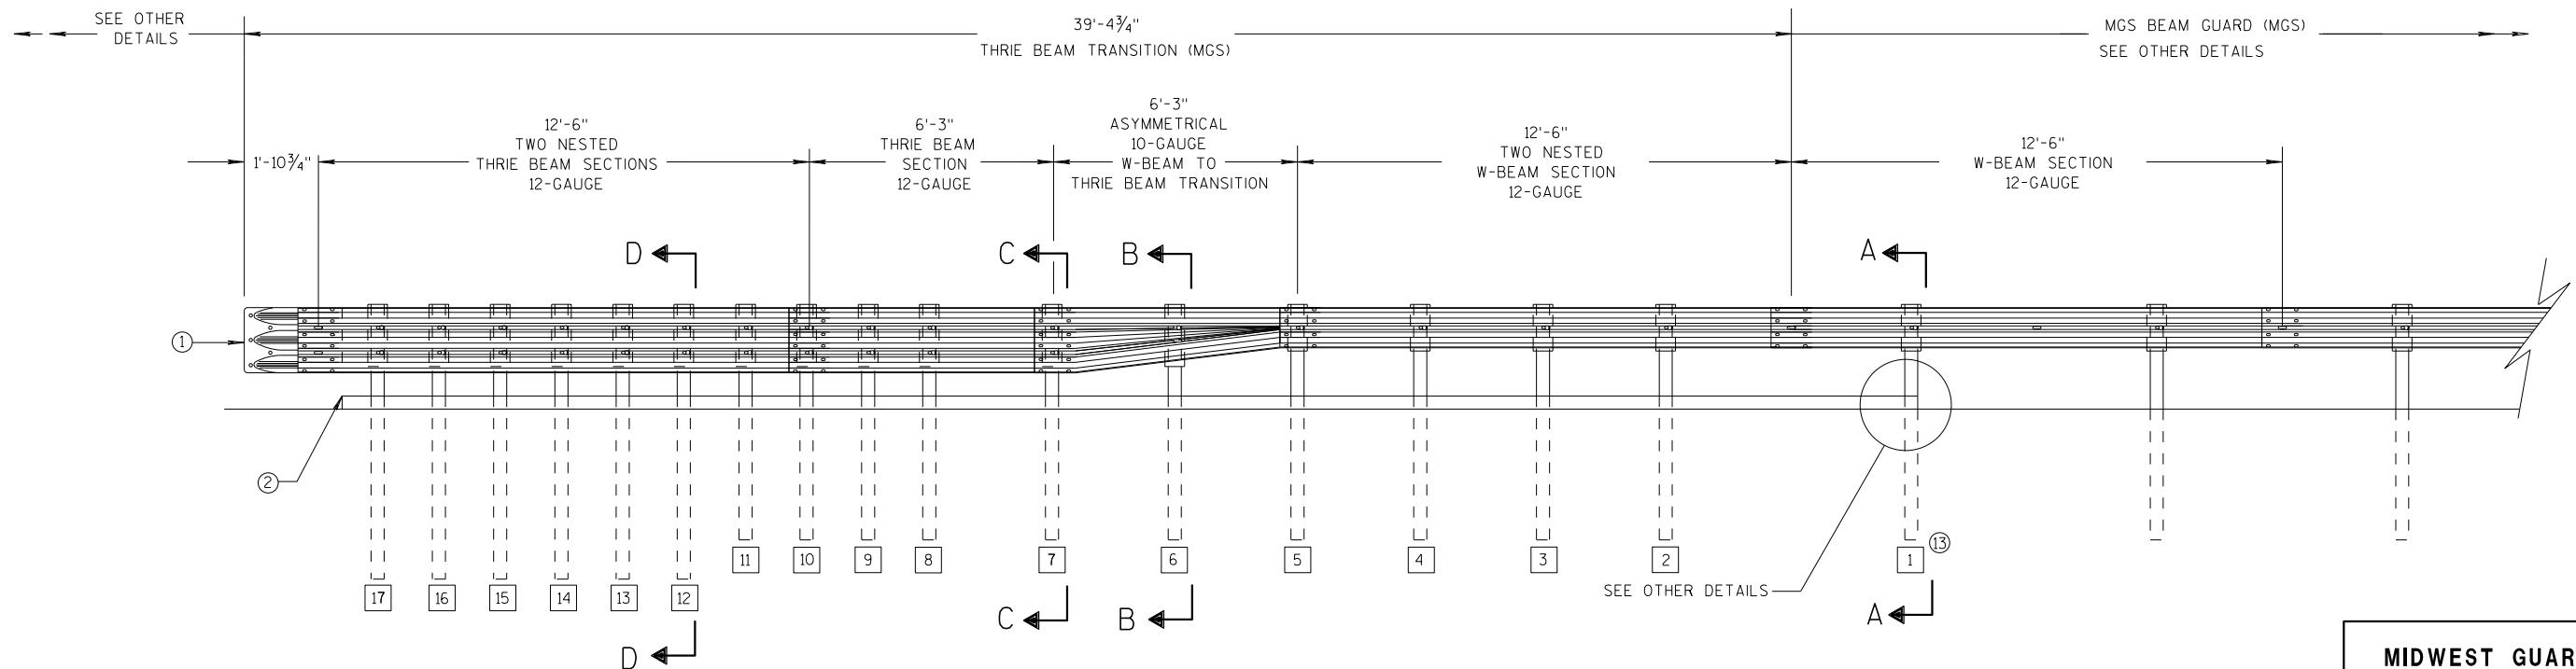

ELEVATION VIEW


MIDWEST GUARDRAIL SYSTEM THRIE BEAM TRANSITION

MIDWEST GUARDRAIL SYSTEM
THRIE BEAM TRANSITION (MGS)


STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

6

- S.D.D. 14 B 45-5b**




S.D.D. 14 B 45-5b




S.D.D. 14 B 45-5b




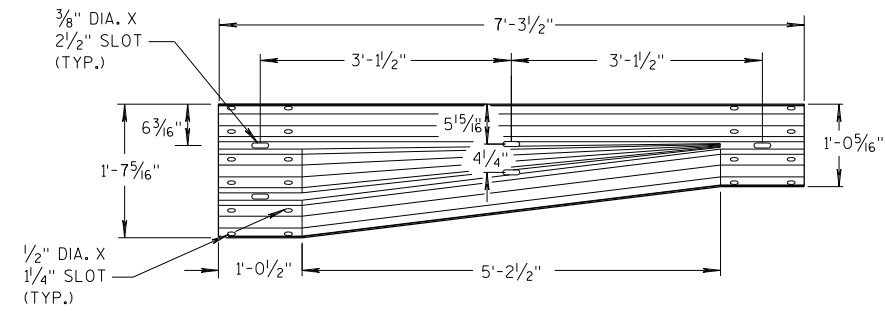


W-BEAM TO THRIE BEAM TRANSITION SECTION

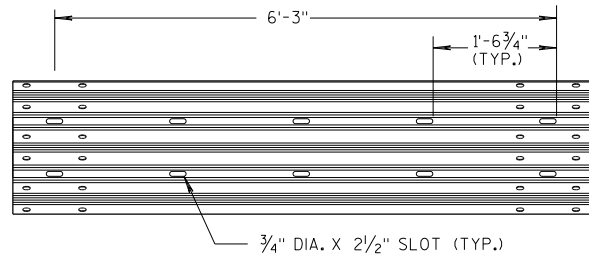


6'-3" THRIE BEAM SECTION

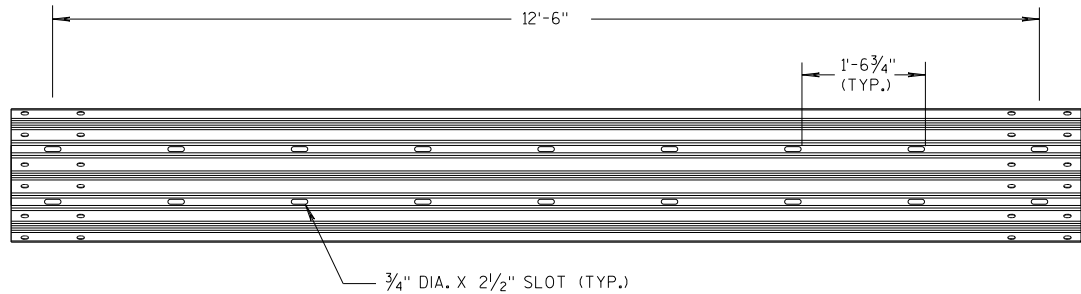

12'-6" THRIE BEAM SECTION

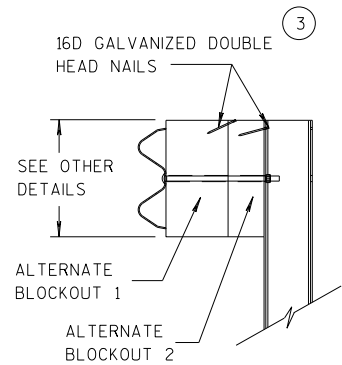


SIDE VIEW

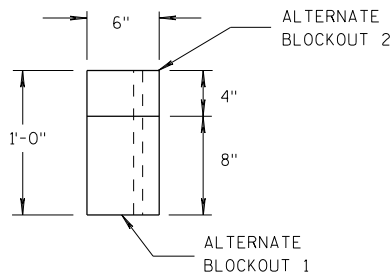

TOP VIEW


ALTERNATE WOOD BLOCKOUT DETAIL

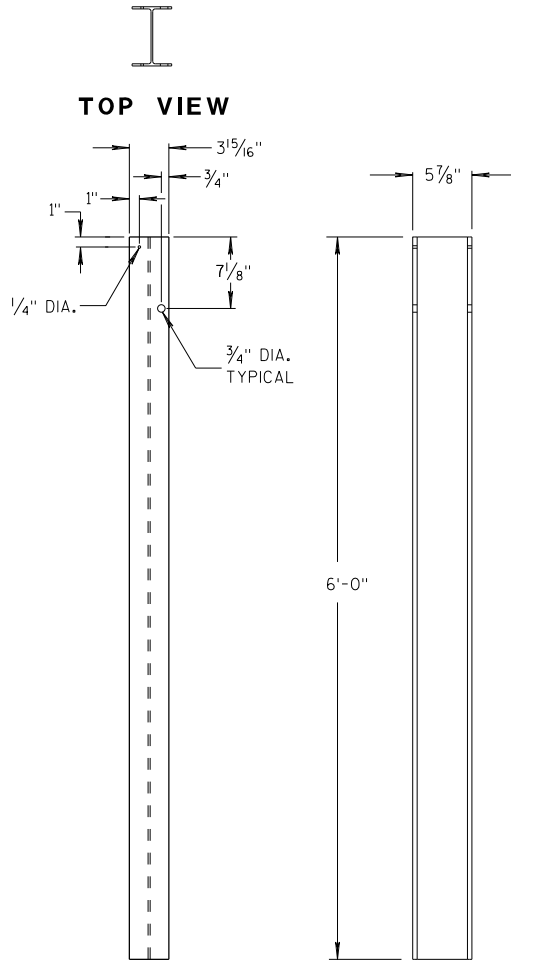


FRONT VIEW

SIDE VIEW

STEEL POSTS 1-5




TOP VIEW



FRONT VIEW


BLOCKOUT POSTS 1-5

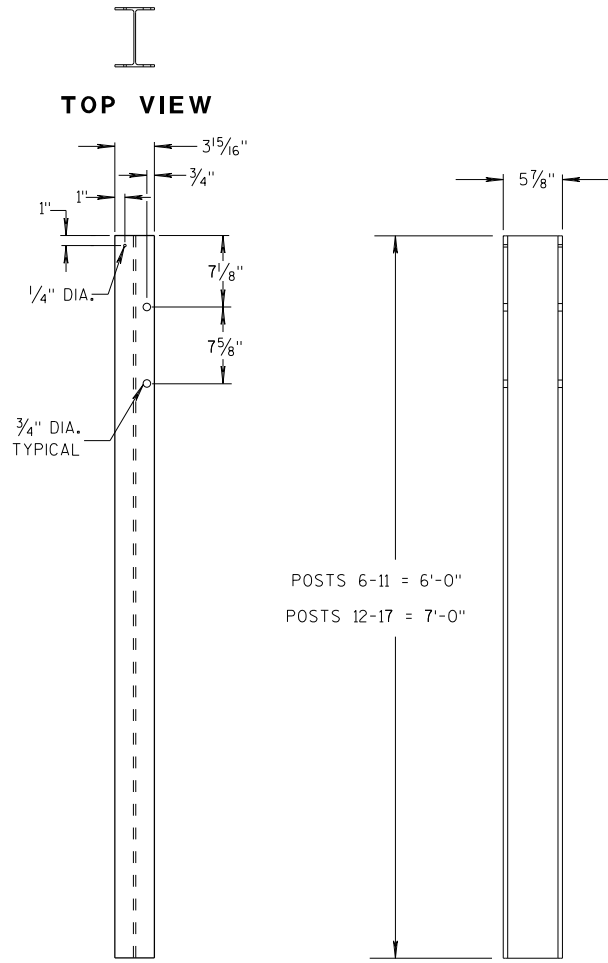


FRONT VIEW

SIDE VIEW

STEEL POSTS 6-17



TOP VIEW



FRONT VIEW

BLOCKOUT POSTS 6-17

GENERAL NOTES

STEEL POSTS ARE W6X9 OR W6X8.5.

BOLT HOLES FOR POST ARE ON FRONT AND OF SIDE OF POST.

③ WHEN USING STEEL POSTS AND WOOD BLOCKOUTS INSTALL FOUR 16D GALVANIZED NAILS. INSTALL NAILS AT THE BACK CORNERS OF THE BLOCK AND BEND THE NAILS OVER THE FLANGE OF THE STEEL POST.

⑤ WOOD BLOCKS MAY BE CONSTRUCTED OUT OF 2 WOOD BLOCKS. SEE ALTERNATE WOOD BLOCK DETAIL.

⑬ STEEL OR WOOD POST IS ACCEPTABLE AT POST 1. SEE SDD 14B42.


MIDWEST GUARDRAIL SYSTEM
THRIE BEAM TRANSITION (MGS)

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

GENERAL NOTES


THESE ARE TYPICAL CONNECTION DETAILS. ADJUST THE POSTION OF CONNECTIONS TO EXISTING BRIDGES TO FIT THE ACTUAL BRIDGE AND SITE DIMENSIONS.

- ②
- OPTIONAL CURB AND GUTTER OR DRAINAGE FEATURE SEE PLAN FOR INFORMATION.
- ④
- TOLERANCE FOR TOP OF BEAM IS ± 1".
- ⑥
- DRILLING BOLT HOLES THROUGH THE PARAPET, BOLTS, NUTS, WASHERS AND REPAIRING DAMAGED CONCRETE ARE INCIDENTAL TO THE CONTRACT.
- ⑦
- BOLTS MAY BE A325 BOLTS OR A449 BOLTS. BOLT LENGTH AND THREADING LENGTH ARE TO ALLOW FOR A TIGHT CONNECTION BETWEEN RIGID BARRIER AND THRIE BEAM CONNECTION PLATE. CONTRACTOR IS TO FIELD VERIFY BOLT LENGTH AND THREAD LENGTH. ONE ROUND WASHER REQUIRED BETWEEN BOLT HEAD AND THRIE BEAM CONNECTOR PLATE. BOLTS THAT EXTEND THROUGH THE PARAPET AND OUT THE BACK FACE REQUIRE A HARDENED ROUND STEEL WASHER THAT IS 2" O.D. X 5/32" THICK AND ONE PLATE WASHER. REPAIR ANY DAMAGED CONCRETE FROM BOLT INSTALLATION.
- ⑧
- THE RECESS FOR A W-BEAM CONNECTION, WHICH EXISTS ON SOME PARAPETS OF THIS TYPE, SHALL BE FILLED WITH A TREATED TIMBER BLOCKOUT. BLOCKOUT SIZE IS 1'-6" X 2'-0" X 3 1/2".
- ⑨
- BOLT, NUT AND WASHERS NOT REQUIRED FOR THIS LOCATION WHEN RETROFITTING AN EXISTING PAPAPET AND THE HOLE IS EITHER ABOVE PARAPET OR WITHIN 4 INCHES OF THE EDGE OF PARAPET.

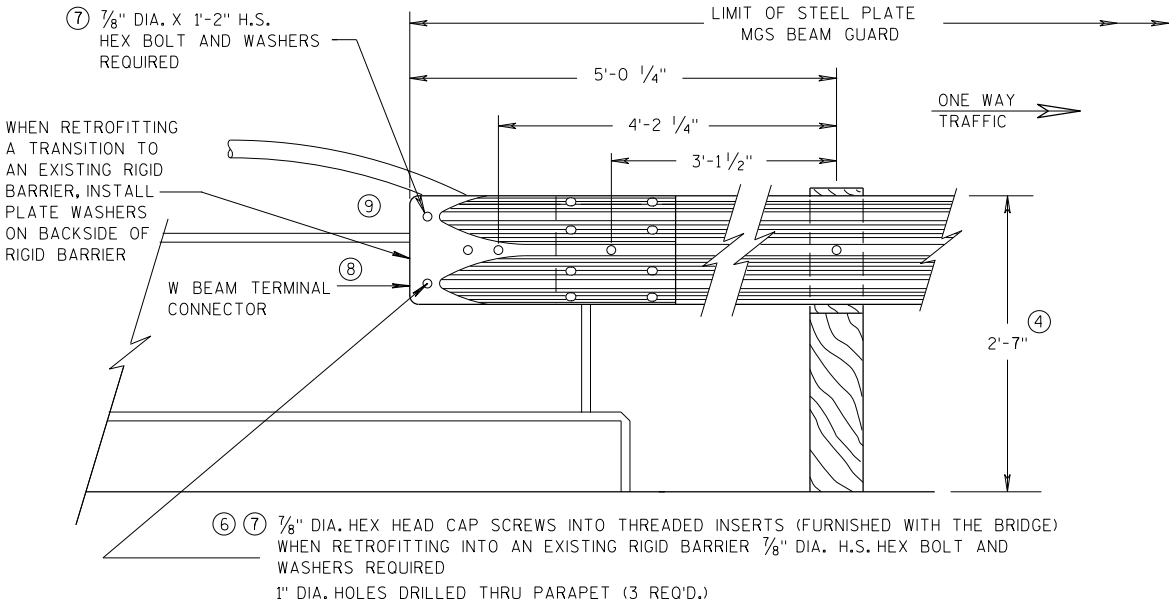


FRONT VIEW

W BEAM CONNECTION TO VERTICAL FACE PARAPET
(USE ONLY ON THE TRAFFIC EXIT END OF ONE WAY BRIDGES)

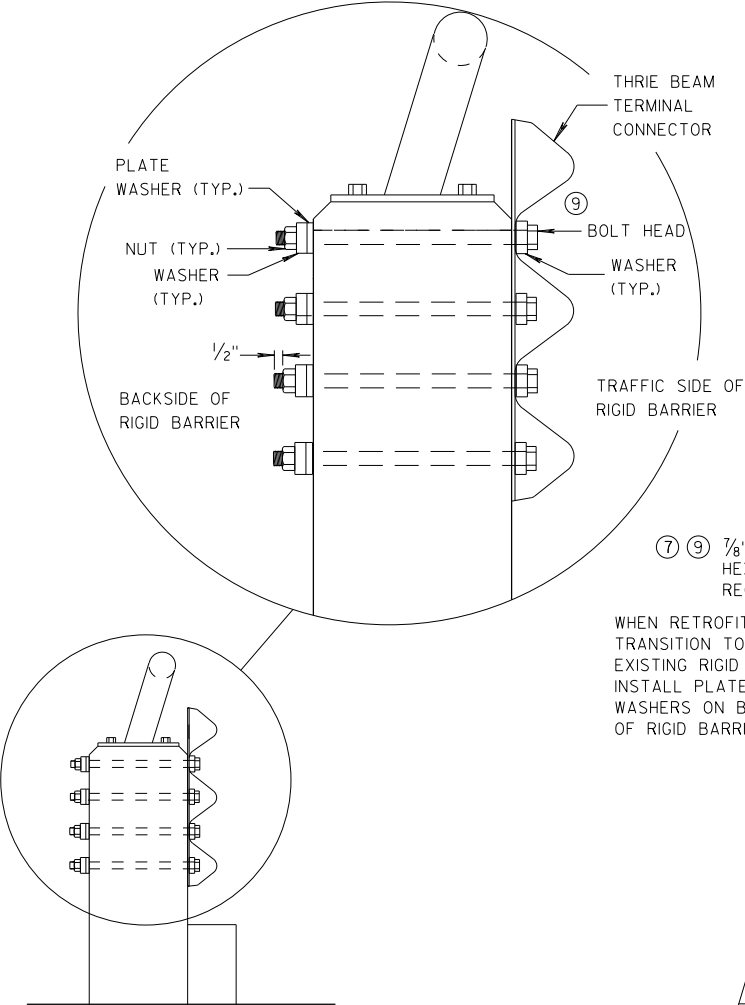


SECTION G-G

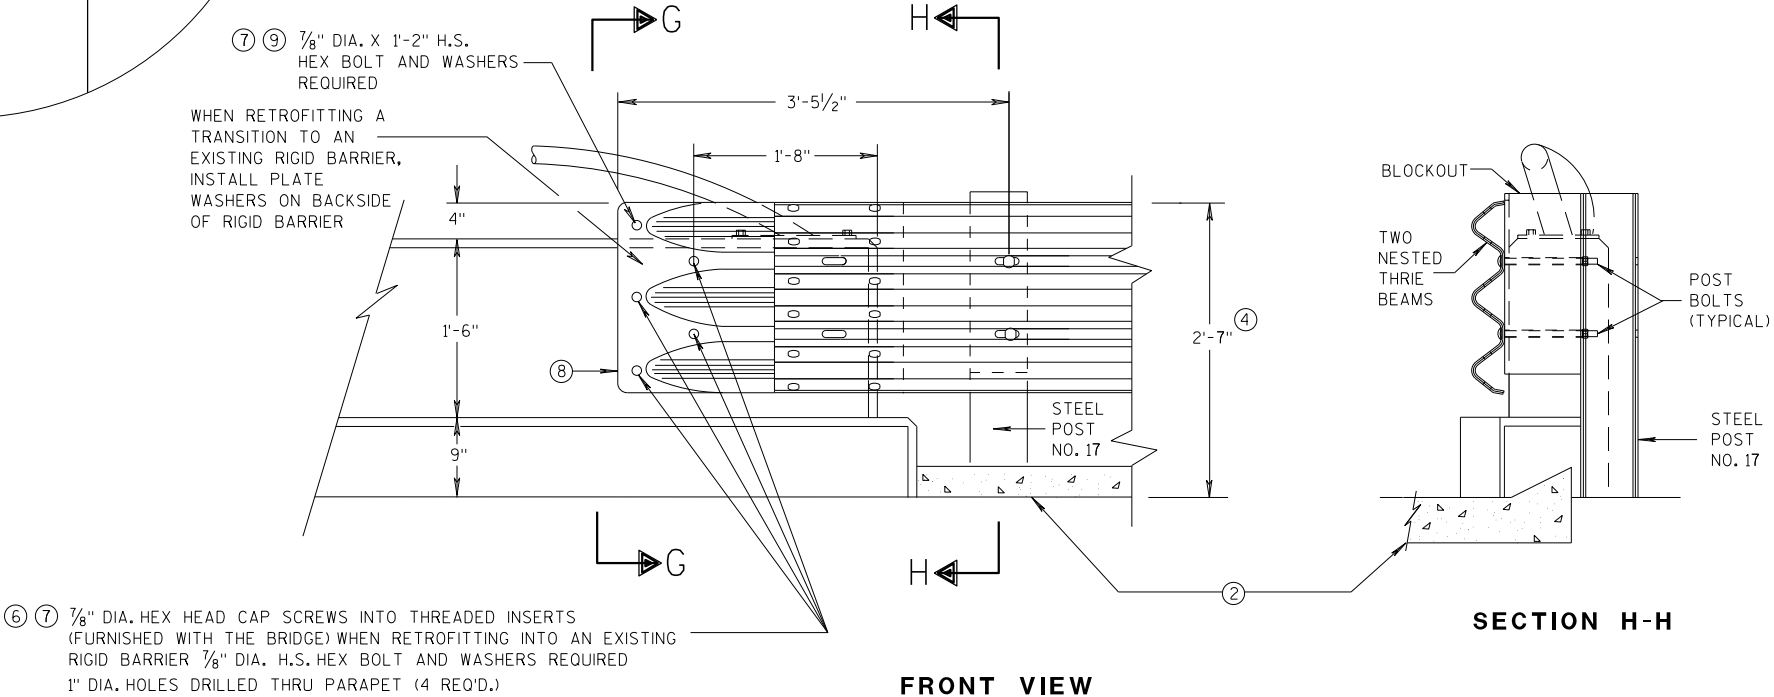

FRONT VIEW

THRIE BEAM CONNECTION TO VERTICAL FACED PARAPETS

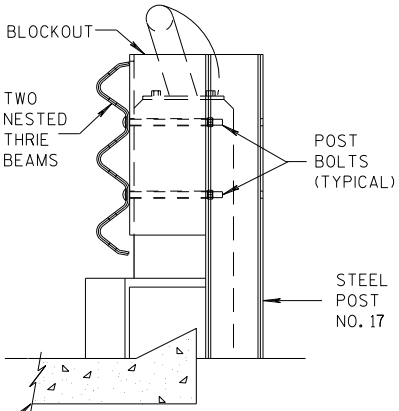


SECTION H-H


MIDWEST GUARDRAIL SYSTEM
THRIE BEAM TRANSITION (MGS)

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
07/2018
DATE
FHWA
/S/ Rodney Taylor
ROADWAY STANDARDS DEVELOPMENT
UNIT SUPERVISOR

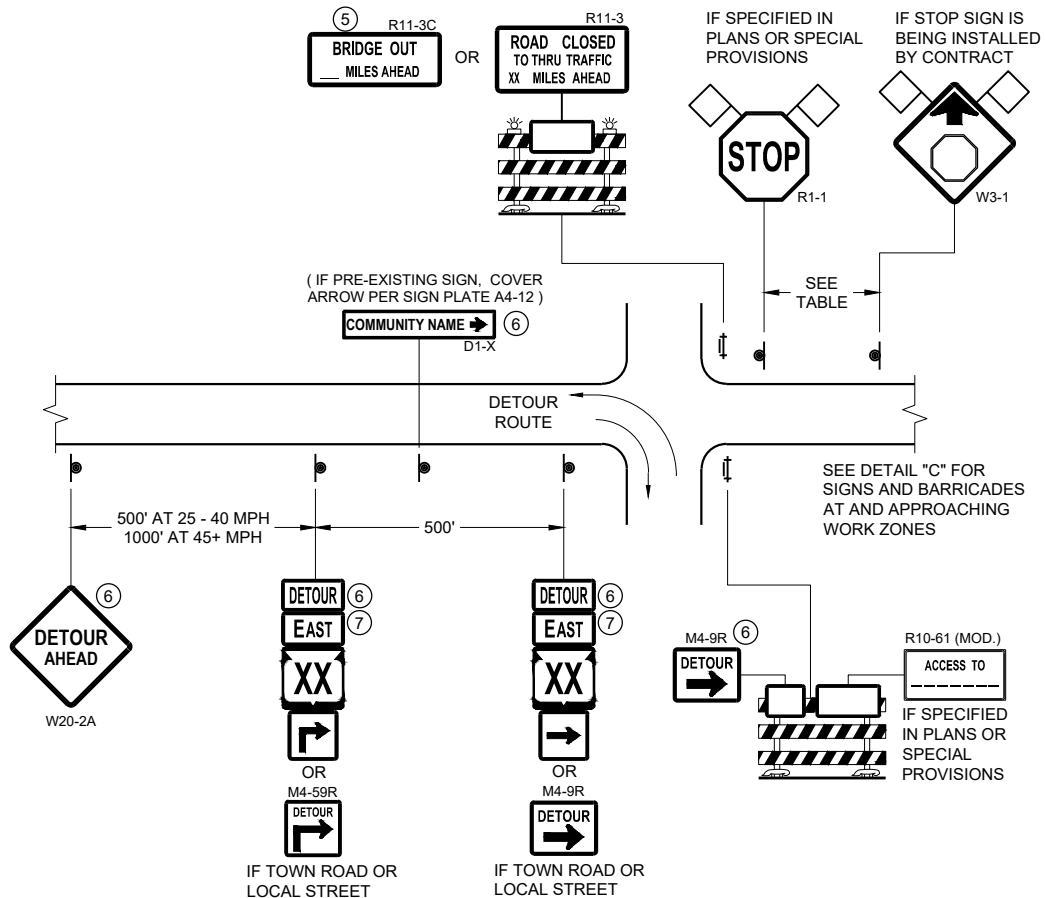

DETAIL A
MAINLINE CLOSURE WITH POSTED DETOUR
WORK ZONE GREATER THAN OR EQUAL TO ½ MILE FROM
DETOUR ROUTE (1000 FEET IF URBAN)

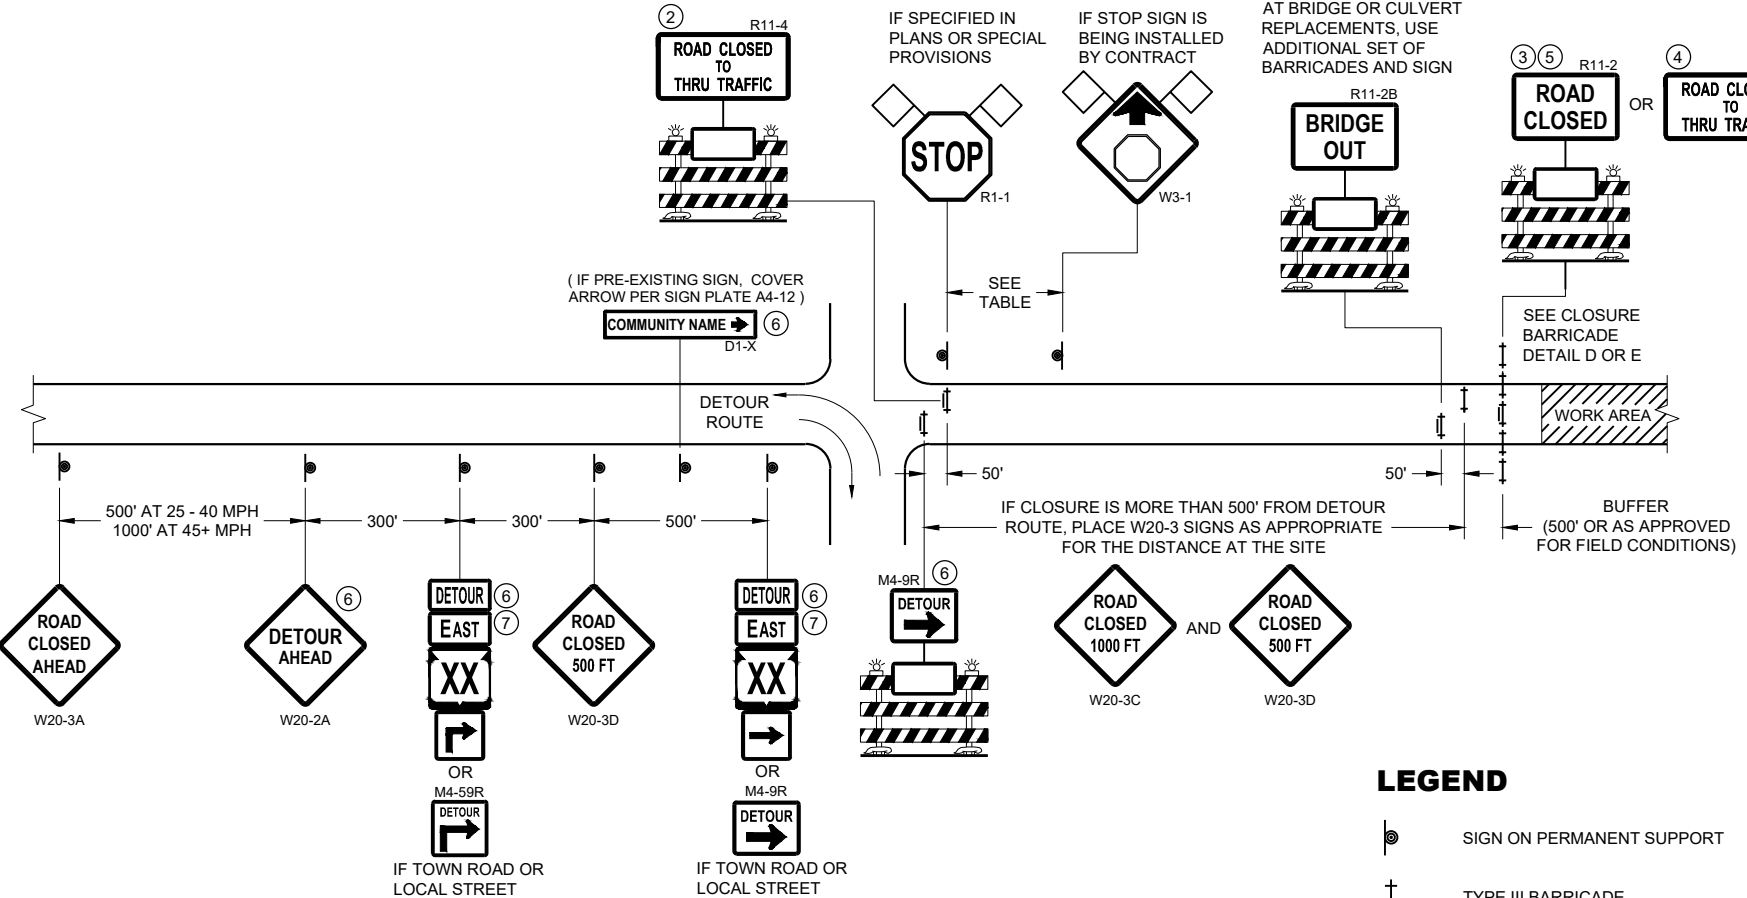


DETAIL B
MAINLINE CLOSURE WITH POSTED DETOUR
WORK ZONE LESS THAN ½ MILE FROM
DETOUR ROUTE (1000 FEET IF URBAN)

- LEGEND**
- SIGN ON PERMANENT SUPPORT
 - TYPE III BARRICADE
 - TYPE III BARRICADE WITH ATTACHED SIGN
 - TYPE "A" WARNING LIGHT (FLASHING)
 - WORK AREA
 - FLAGS, 16" X 16" MIN. (ORANGE)

- DETOUR M4 - 8
- EAST M3 - X
- XX M1 - 4 OR XX M1 - 6 OR COUNTY M1 - 5A
- OR M05 - 1 OR M06 - 1

SPEED LIMIT (MPH)	"STOP AHEAD" ADVANCE WARNING DISTANCE (FT)
25	200
30	200
35	350
40	350
45	500
50	550
55	750

SEE SDD 15C2-SHEET "b"
FOR GENERAL NOTES
AND FOOTNOTES ① THROUGH ⑦

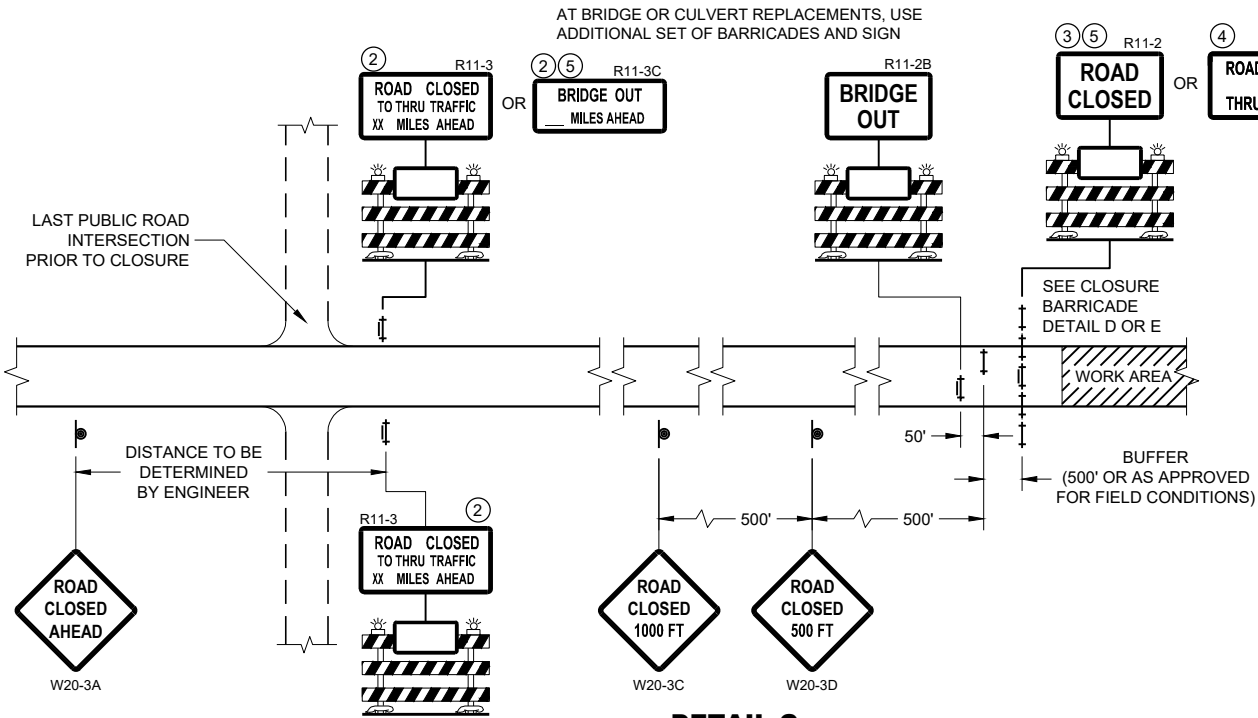


DETAIL C
MAINLINE CLOSURE, NO POSTED DETOUR

**BARRICADES AND SIGNS
FOR MAINLINE CLOSURES**


STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
May 2023 /S/ Andrew Heidtke
DATE WORK ZONE ENGINEER

FHWA

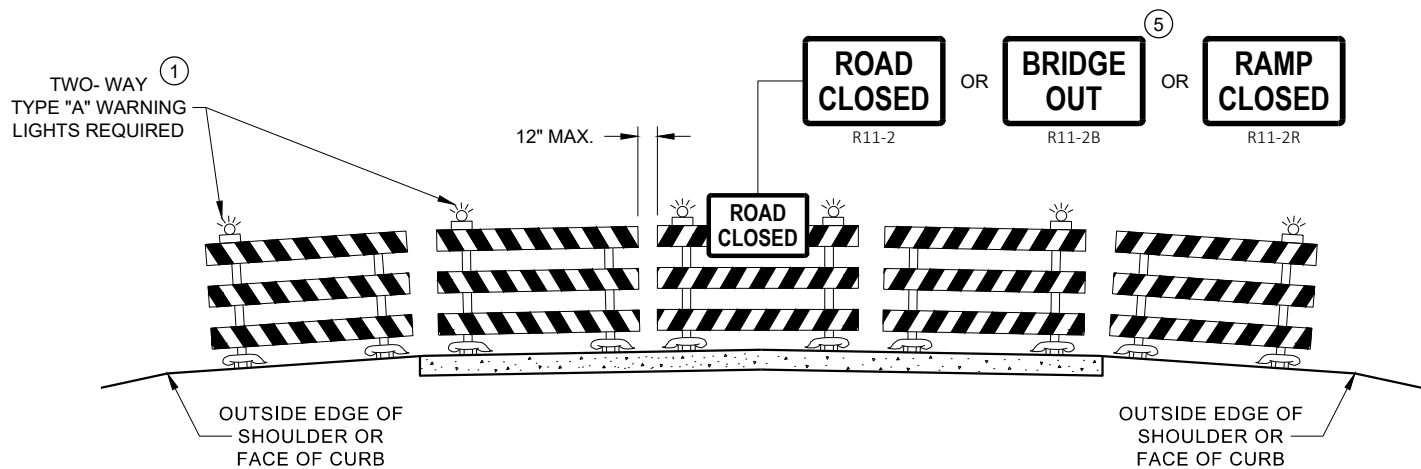

DETAIL D
ROAD CLOSURE BARRICADE DETAIL
APPROACH VIEW

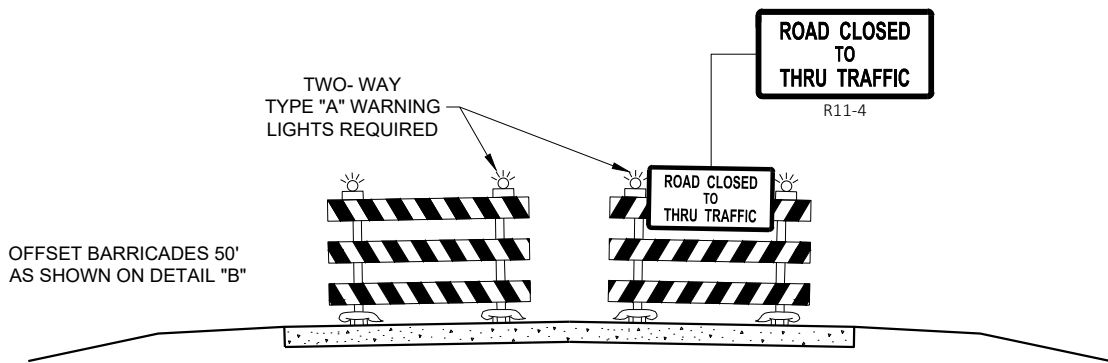

DETAIL E
LANE CLOSURE BARRICADE DETAIL
APPROACH VIEW

SEE SDD 15C2 - SHEET "a" FOR LEGEND

GENERAL NOTES

THE EXACT NUMBER, LOCATION, AND SPACING OF ALL SIGNS AND BARRICADES SHALL BE ADJUSTED TO FIT FIELD CONDITIONS AS APPROVED BY THE ENGINEER.

ANY SIGNS TEMPORARY OR EXISTING, WHICH CONFLICT WITH TRAFFIC CONTROL "IN USE", SHALL BE REMOVED OR COVERED AS NEEDED AND AS APPROVED BY THE ENGINEER.

THE SPACING BETWEEN TRAFFIC CONTROL SIGNS SHOULD BE ADJUSTED TO NOT CONFLICT WITH AND SHOULD PROVIDE A DESIRABLE MINIMUM OF 200 FEET CLEARANCE TO EXISTING SIGNS THAT WILL REMAIN IN PLACE.

BARRICADES THAT MUST BE MOVED FOR A WORK OPERATION SHALL BE IMMEDIATELY RE-ESTABLISHED UPON COMPLETION OF THE OPERATION, OR FOR CONTINUING OPERATIONS, AT THE END OF EACH WORKING DAY.

SIGNS THAT WILL BE IN PLACE LESS THAN 7 CONTINUOUS DAYS AND NIGHTS MAY BE MOUNTED ON PORTABLE SUPPORTS.

ALL TYPE III BARRICADES SHALL HAVE RAILS REFLECTORIZED ON BOTH FACES. STRIPES SHALL BE PROPERLY SLOPED DOWN TOWARD THE TRAFFIC SIDE OR AS SHOWN IN THE ROAD CLOSURE BARRICADE DETAIL "D" FOR FULL ROAD CLOSURES.

TYPE "A" LOW - INTENSITY FLASHING WARNING LIGHTS SHALL BE VISIBLE ON BOTH SIDES OF THE BARRICADE.

THE R11 - 2, R11 - 3, M4 - 9, R11 - 4, AND R10 - 61 SIGNS PLACED ON THE BARRICADES SHALL COVER NO MORE THAN THE TOP RAIL. THE SIGNS SHALL NOT COVER ANY PORTION OF THE MIDDLE RAIL OR BOTTOM RAILS.

"WO" AND "MO" SIGNS ARE THE SAME AS "W" AND "M" SIGNS EXCEPT THE BACKGROUND IS ORANGE.

ALL SIGNS SHALL BE 48" X 48" UNLESS OTHERWISE NOTED BELOW:

- R11 - 2 SHALL BE 48" X 30"
- R11 - 3 SHALL, R11 - 4 AND R10 - 61 SHALL BE 60 " X 30"
- M4 - 9 SHALL BE 30" X 24"
- M3 - X SHALL BE 24" X 12" (36" X 18" IF NEEDED TO MATCH EXISTING SIGNS)
- M4 - 8 SHALL BE 24" X 12" (36" X 18" IF NEEDED TO MATCH EXISTING SIGNS)
- M1 - 4, M1 - 5A AND M1 - 6 SHALL BE 24" X 24" (36" X 36" IF NEEDED TO MATCH EXISTING SIGNS)
- MO5 - 1 AND MO6 - 1 SHALL BE 21" X 21" (30" X 30" IF NEEDED TO MATCH EXISTING SIGNS)
- D1 - X SHALL BE AS SHOWN ON SPECIFIC PROJECT SIGNING DETAIL SHEETS.
- R1 - 1 SHALL BE 36" X 36"


- 1 TWO WARNING LIGHTS SHALL BE PROVIDED ON THE CENTER BARRICADE AND A MINIMUM OF ONE WARNING LIGHT SHALL BE PROVIDED ON EACH OF THE OTHER BARRICADES WITHIN THE ROADWAY LIMITS. SPACING OF THE WARNING LIGHTS SHALL BE UNIFORM TO THE EDGE OF ROADWAY AS SHOWN (APPROX. 8 FOOT LIGHT SPACING).
- 2 THESE SIGNS AND BARRICADES ARE NOT REQUIRED IF ROAD CLOSURE BEGINS AT AN INTERSECTION.
- 3 FOR ROAD CLOSURE WITHOUT LOCAL ACCESS TO PROJECT, SEE ROAD CLOSURE BARRICADE DETAIL "D".
- 4 FOR ROAD CLOSURE WITH LOCAL ACCESS TO PROJECT, SEE ROAD CLOSURE BARRICADE DETAIL "E".
- 5 FOR BRIDGE OR CULVERT REPLACEMENTS, SUBSTITUTE "BRIDGE OUT" INSTEAD OF "ROAD CLOSED" ON R11 - 2 AND R11 - 3 SIGNS.
- 6 INSTALL DETOUR AND COMMUNITY GUIDE SIGNS AND ARROWS ONLY IF SPECIFIED IN THE CONTRACT. IF THERE ARE EXISTING ROUTE MARKER ASSEMBLIES THAT WILL REMAIN IN PLACE, ADJUST THE LOCATION OF THE DETOUR ROUTE SIGNS TO CORRESPOND WITH THE EXISTING ASSEMBLIES. MODIFY EXISTING SIGNS WHERE POSSIBLE. SEE SPECIFIC PROJECT DETOUR SIGNING DETAIL SHEETS. IF DETOUR SIGNS ARE BEING INSTALLED BY OTHERS, PLACE THE CONTRACTED TRAFFIC CONTROL SIGNS TO ALLOW FOR PLACEMENT OF ALL WARNING, DETOUR AND GUIDE SIGNS AS SHOWN.
- 7 "EAST" CARDINAL DIRECTION MARKERS AND RIGHT TURN ARROWS ARE SHOWN. USE OTHER CARDINAL DIRECTIONS AND ARROWS AS APPROPRIATE.

BARRICADES AND SIGNS
FOR
VARIOUS CLOSURES

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
May 2023 /S/ Andrew Heidtke
DATE WORK ZONE ENGINEER


FHWA

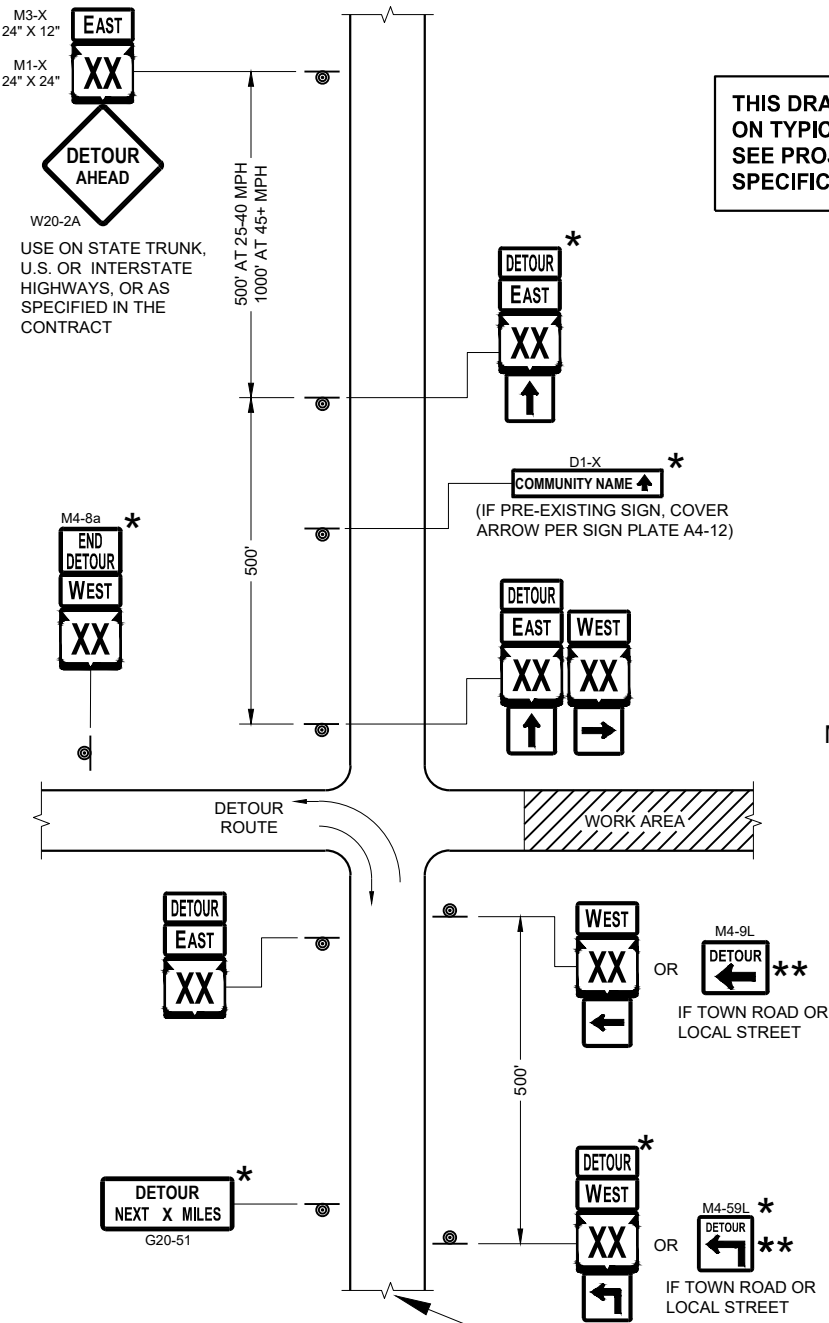

SEE SPECIFIC PROJECT DETOUR
SIGNING DETAIL SHEETS AND
DETAIL A OR B ON SDD SHEET 15C02 - SHEET "a"


THIS DRAWING PROVIDES GENERAL GUIDANCE
ON TYPICAL DETOUR SIGN LAYOUT AND SPACING.
SEE PROJECT DETOUR SIGNING SHEETS FOR
SPECIFIC DETAILS FOR EACH PROJECT.

MATCH POINT

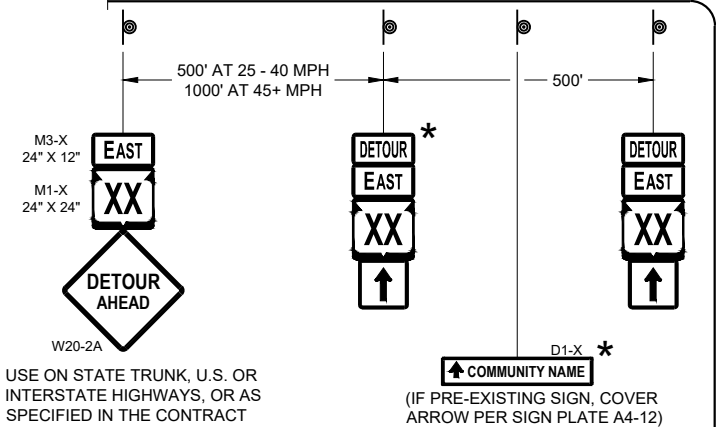

DETAIL F
DETOUR SIGNING

LEGEND

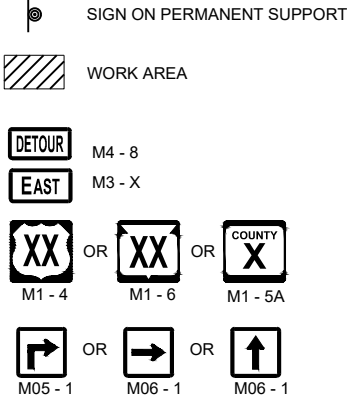

GENERAL NOTES

THE EXACT NUMBER, LOCATION AND SPACING OF ALL SIGNS SHALL BE ADJUSTED TO FIT FIELD CONDITIONS AS APPROVED BY THE ENGINEER.

IF THERE ARE EXISTING ROUTE MARKER ASSEMBLIES THAT WILL REMAIN IN PLACE, ADJUST THE LOCATION OF THE DETOUR ROUTE SIGNS TO CORRESPOND WITH THE EXISTING ASSEMBLIES. SEE SPECIFIC PROJECT DETOUR SIGNING DETAIL SHEETS. MODIFY EXISTING SIGNS WHERE POSSIBLE.

THE SPACING BETWEEN TRAFFIC CONTROL AND DETOUR SIGNS SHOULD BE ADJUSTED TO NOT CONFLICT WITH AND TO PROVIDE A DESIRABLE MINIMUM OF 200 FEET CLEARANCE TO EXISTING SIGNS THAT WILL REMAIN IN PLACE.

ANY SIGNS TEMPORARY OR EXISTING, WHICH CONFLICT WITH TRAFFIC CONTROL "IN USE" SHALL BE REMOVED OR COVERED AS NEEDED AND AS APPROVED BY THE ENGINEER.


SIGNS THAT WILL BE IN PLACE LESS THAN 7 CONTINUOUS DAYS AND NIGHTS MAY BE MOUNTED ON PORTABLE SUPPORTS.

"MO" SIGNS ARE THE SAME AS "M" SIGNS EXCEPT THE BACKGROUND IS ORANGE.

SIGN SIZES SHALL BE AS FOLLOWS:

- M3-X SHALL BE 24" X 12" (36" X 18" IF NEEDED TO MATCH EXISTING SIGNS)
- M4-8 SHALL BE 24" X 12" (36" X 18" IF NEEDED TO MATCH EXISTING SIGNS)
- M1-4, M1-5A AND M1-6 SHALL BE 24" X 24" (36" X 36" IF NEEDED TO MATCH EXISTING SIGNS)
- M05-1 AND M06-1 SHALL BE 21" X 21" (30" X 30" IF NEEDED TO MATCH EXISTING SIGNS)
- M4-9 AND M4-59 SHALL BE 30" X 24"
- M4-8a SHALL BE 24" X 18"
- G20-51 SHALL BE 60" X 24"
- W20-2A SHALL BE 48" X 48"
- D1-X SHALL BE AS SHOWN ON SPECIFIC PROJECT SIGNING DETAIL SHEETS.

- * OPTIONAL SIGNS. SEE SPECIFIC PROJECT DETOUR SIGNING DETAIL SHEETS.
- ** FOR A TOWN ROAD OR LOCAL STREET DETOURED ONTO A STATE TRUNK HIGHWAY, PLACE A ROAD NAME PLAQUE ABOVE THE M4-9 SIGN AS SPECIFIED IN THE CONTRACT.

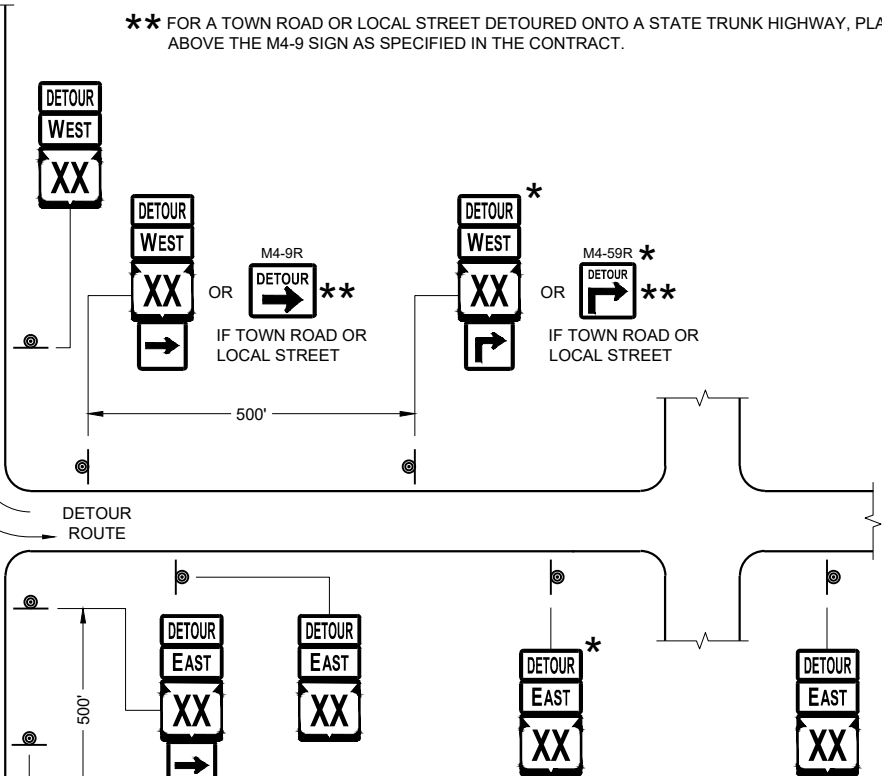


PLACE SIGNS BEYOND INTERSECTIONS
WITH STATE OR COUNTY TRUNK
HIGHWAYS OR AT 4 MILE MAXIMUM
SPACING (4 BLOCKS IF URBAN AREA)

DETOUR SIGNING
FOR MAINLINE CLOSURES

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
May 2023 /S/ Andrew Heidtke
DATE WORK ZONE ENGINEER

FHWA

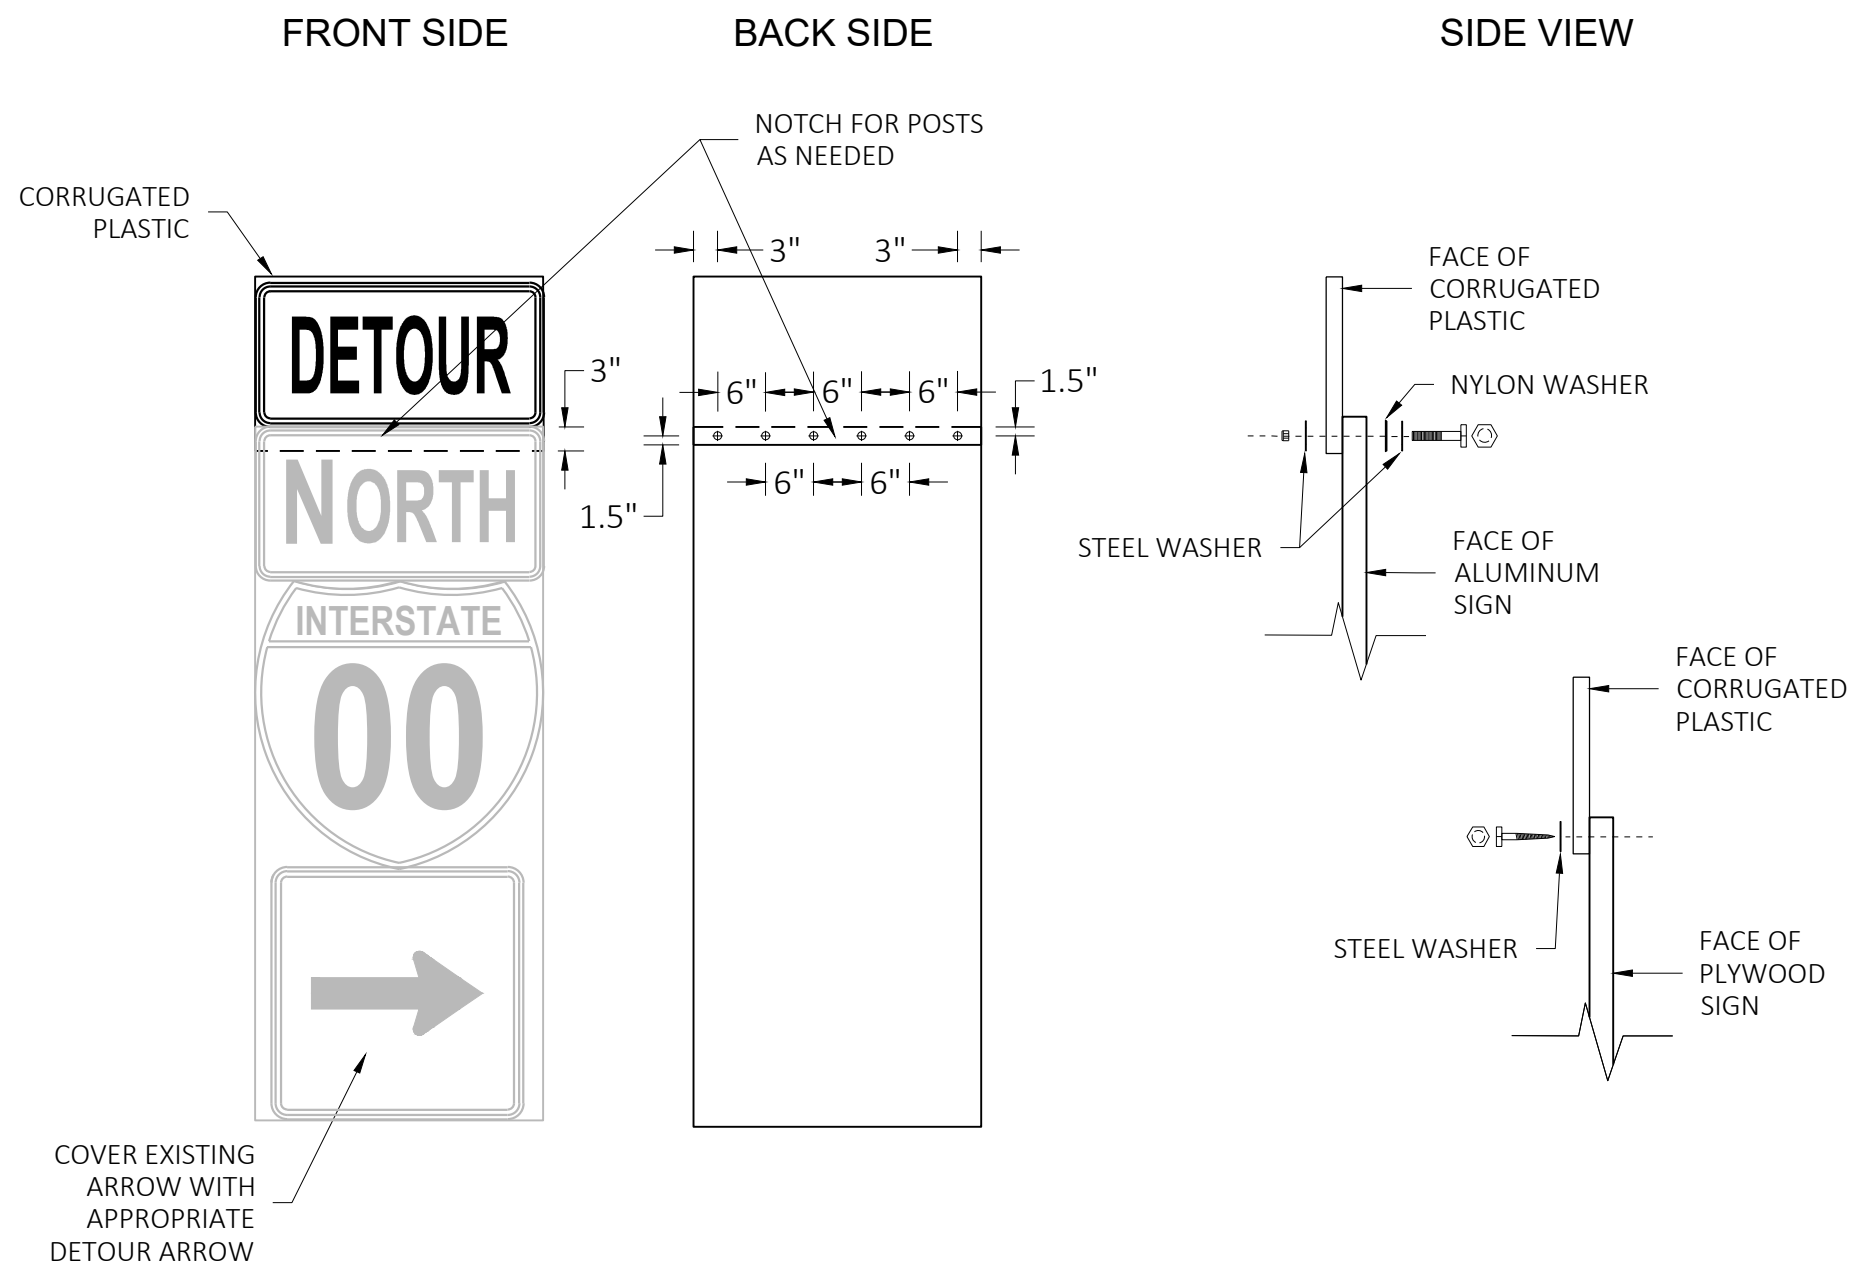

GENERAL NOTES

CELLS OF CORRUGATED PLASTIC SHALL BE VERTICALLY ORIENTED.

PROVIDE A 0.4-INCH THICK BASE CORRUGATED PLASTIC WITH A 0.035-INCH WALL THICKNESS AND 0.4-INCH CELL SIZE.

FOR 36" WIDE SIGNS: USE 6 FASTENERS AS SHOWN.

FOR 24" WIDE SIGNS: USE 4 FASTENERS WITH EDGE SPACING AS SHOWN AND 6" SPACING BETWEEN FASTENERS.

METAL WASHERS, NUTS, BOLTS AND LAGS SHALL HAVE HEXAGONAL HEADS AND SHALL BE EITHER:

- A. HOT DIP GALVANIZED IN ACCORDANCE WITH ASTM DESIGNATION: A 153, CLASS D, OR SC 3.
- B. ELECTRO-GALVANIZED IN ACCORDANCE WITH ASTM DESIGNATION: B 633, TYPE III, SC3

THREADS ON BOLTS AND NUTS SHALL BE MANUFACTURED WITH SUFFICIENT ALLOWANCE FOR THE CADMIUM PLATE OR GALVANIZED COATING TO PERMIT THE NUTS TO RUN FREELY ON THE BOLTS.

PLYWOOD SIGNS:

LAG SCREWS - 5/16" x 1"

ALUMINUM SIGNS:

MACHINE BOLTS - 5/16" x 1-1/4" LENGTH W/NUTS

WASHERS:

1-1/4" O.D. x 3/8" I.D. x 1/16" STEEL

1-1/4" O.D. x 3/8" I.D. x .080 NYLON

MODIFIED ROUTE ASSEMBLY FOR DETOUR SIGNING

MODIFIED ROUTE ASSEMBLY FOR DETOUR SIGNING

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED

May 2023


DATE

/S/ Andrew Heidtke


ROADWAY STANDARDS DEVELOPMENT

ENGINEER

FHWA

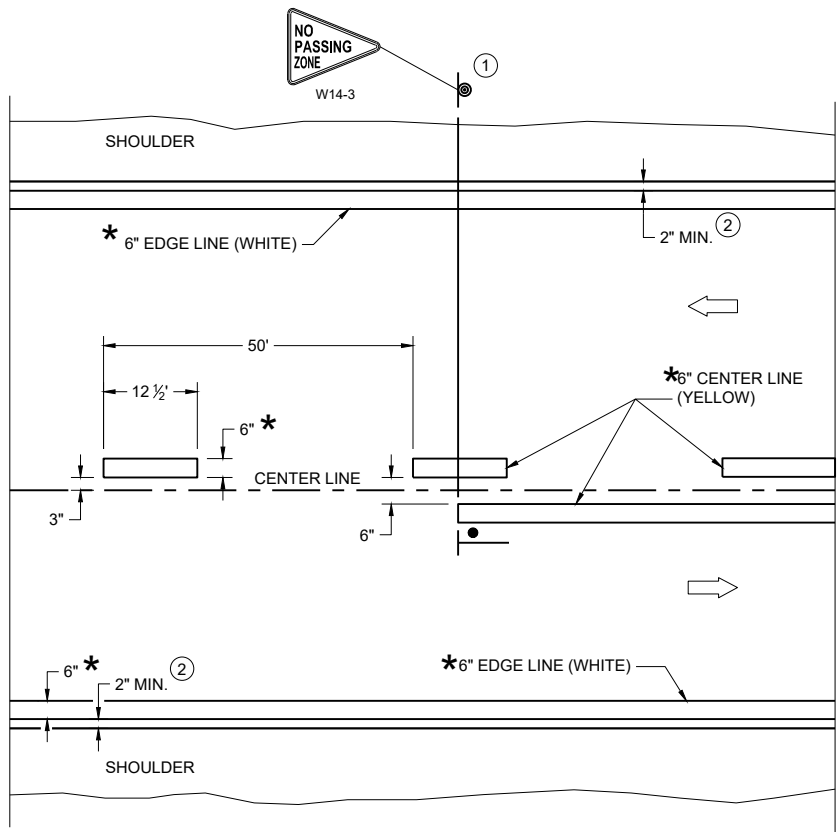

TWO WAY TRAFFIC

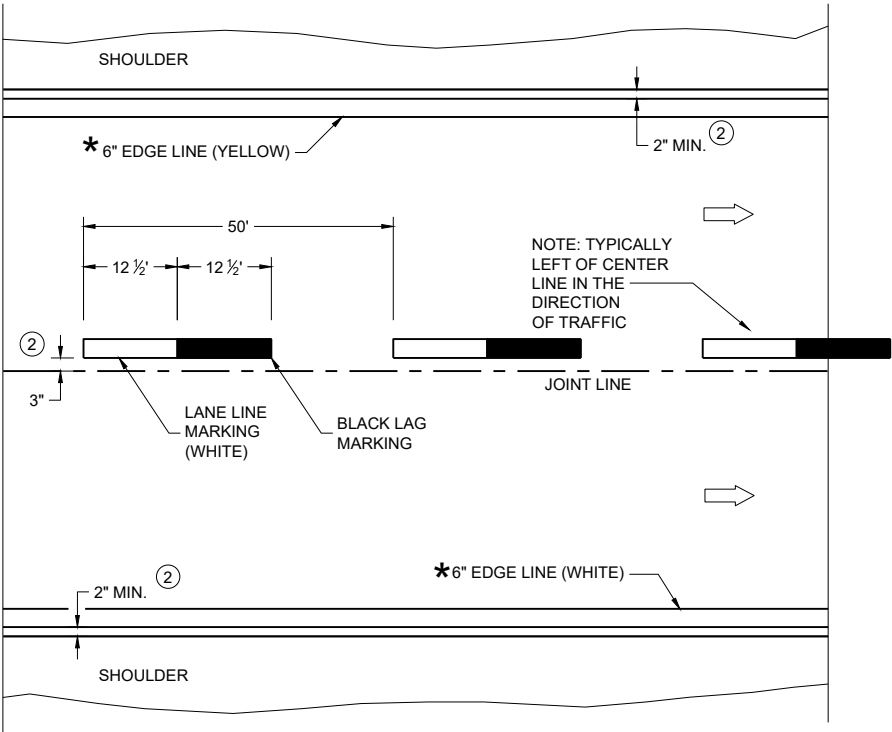

ONE WAY TRAFFIC

PERMANENT PAVEMENT MARKING

*CONFIRM MARKING LINE WIDTH WITH THE MISCELLANEOUS QUANTITIES

GENERAL NOTES


DETAILS OF CONSTRUCTION NOT SHOWN ON THIS DRAWING SHALL CONFORM TO STANDARD SPECIFICATIONS AND SPECIAL PROVISIONS.

- ① LOCATE THE NO PASSING ZONE W14-3 SIGN WITHIN 50 FEET OF THE "T" MARKING
- ② MEASURE FROM EDGE OF MARKING TO JOINT LINE. THIS DOES NOT INCLUDE SPACE NEEDED FOR GROOVING OPERATIONS.

LEGEND


- "T" MARKING
- SIGN ON PERMANENT SUPPORT
- DIRECTION OF TRAFFIC

PERMANENT LONGITUDINAL PAVEMENT MARKINGS	
STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION	
APPROVED May 2023 DATE	/S/ Jeannie Silver Statewide Pavement Marking Engineer

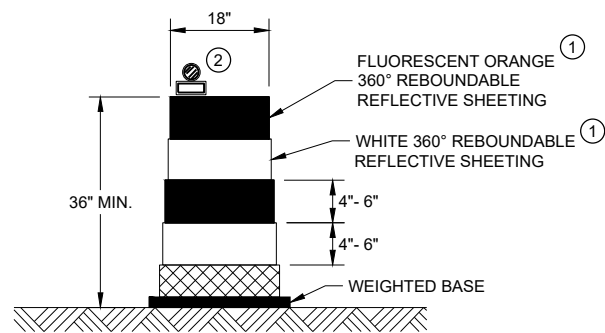


DRUM

BALLAST WIDTHS
RANGE FROM 24"-36"

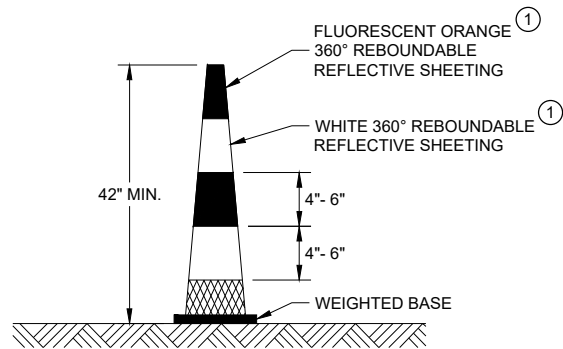


42" CONE

DO NOT USE IN TAPERS
½ SPACING OF DRUMS
BALLAST WIDTHS
RANGE FROM 14"-20"

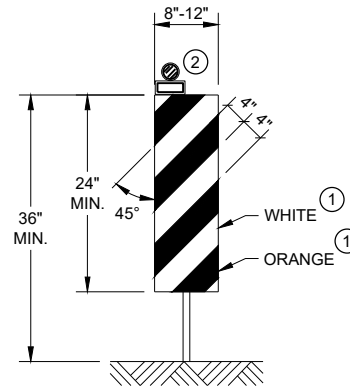


VERTICAL PANEL

THE STRIPES SHALL SLOPE DOWNWARD TO
THE TRAFFIC SIDE FOR CHANNELIZATION.

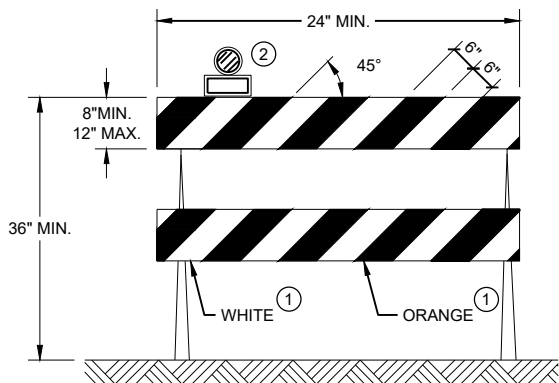

TYPE II BARRICADE

FOR RAILS LESS THAN 36" LONG, 4" WIDE STRIPES
MAY BE USED. ALL STRIPES SHALL SLOPE DOWNWARD
TO THE TRAFFIC SIDE FOR CHANNELIZATION.

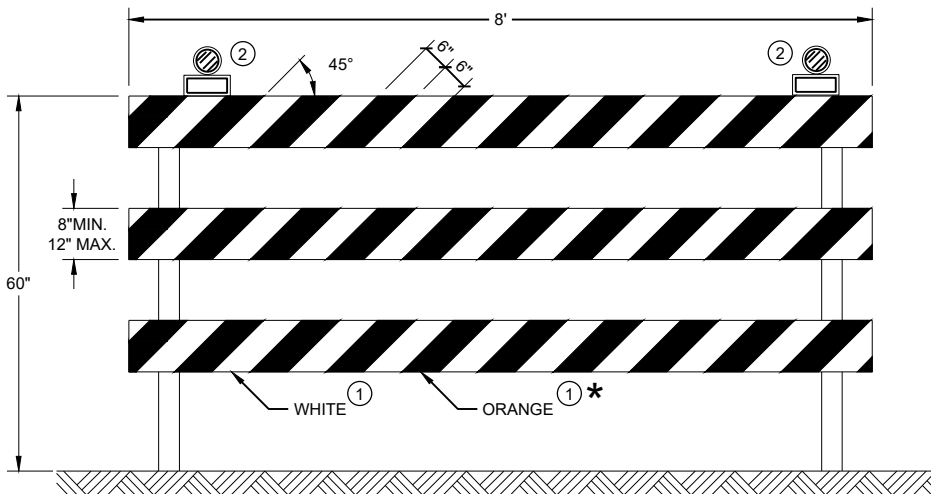

TYPE III BARRICADE

IF SIGN MOUNTED, DO NOT COVER MORE THAN 50% OF THE TOP
TWO RAILS OR 33% OF THE TOTAL AREA OF THE THREE RAILS.

* IF USED FOR A PERMANENT APPLICATION USE RED SHEETING.

GENERAL NOTES

- ① REFLECTIVE SHEETING SHALL FOLLOW THE REQUIREMENTS IN THE APPROVED PRODUCTS LISTING FOR SIGN SHEETING.
- ② LOCATION OF WARNING LIGHTS WHEN SHOWN ON THE PLAN.


**CHANNELIZING DEVICES
DRUMS, CONES, BARRICADES
AND VERTICAL PANELS**

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION


APPROVED
November 2022 /S/ Andrew Heidtke
DATE WORK ZONE ENGINEER

FHWA


TYPICAL ASSEMBLIES



J1-1




J1-2

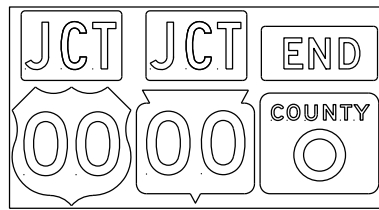


J1-3




JR1-1




J2-1



J2-2

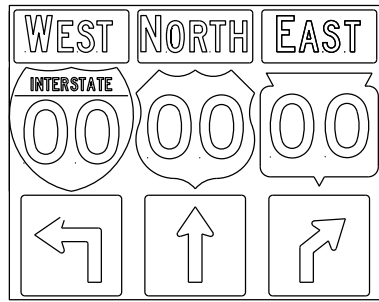


J2-3




JV


(Typical Vertical J-Assembly
See Note 10 and 11)




J3-1



J3-2

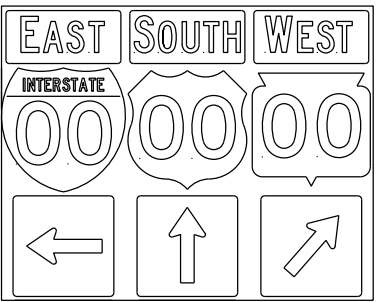

J3-3




JH-1

Blue Background


Black




J4-1






J4-2



J4-2

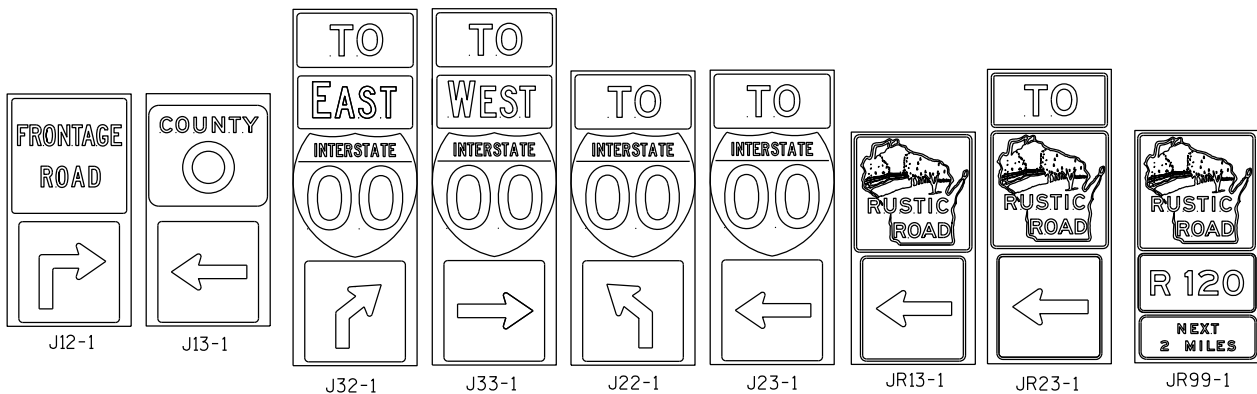

blue background
with interstate

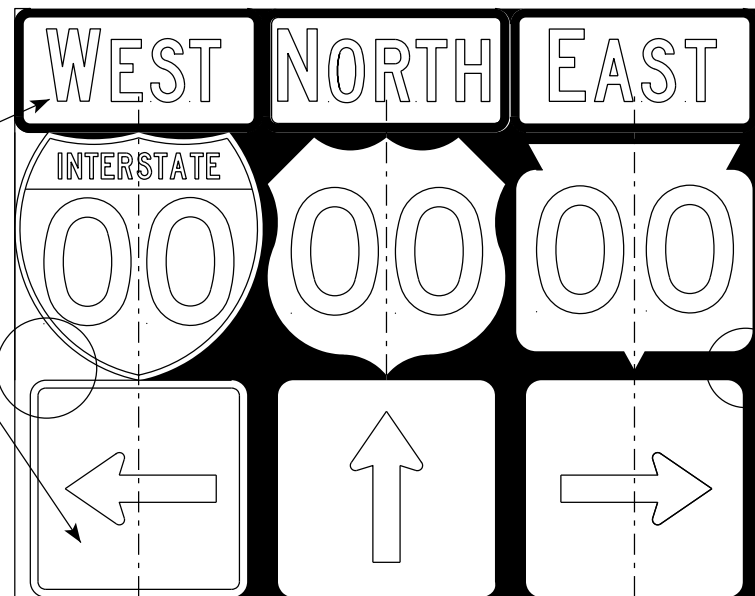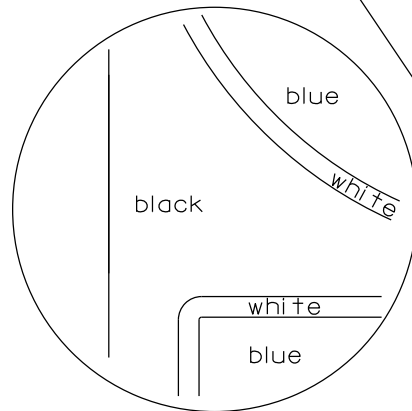

black background



ROUTE MARKERS & COMPONENTS
IN TYPICAL ASSEMBLIES

WISCONSIN DEPT OF TRANSPORTATION



APPROVED *Matthew R. Raub*
for State Traffic Engineer

DATE 6/7/23 PLATE NO. A2-1S.10

URBAN AREA

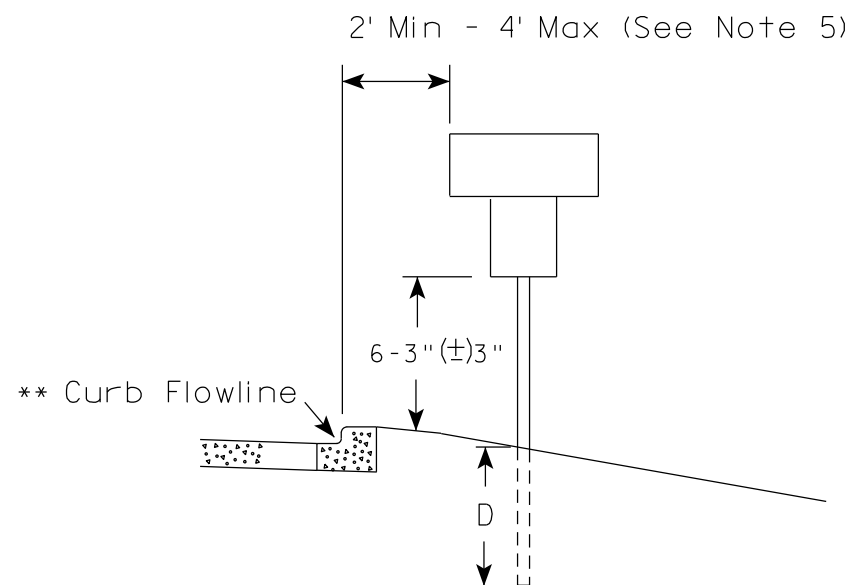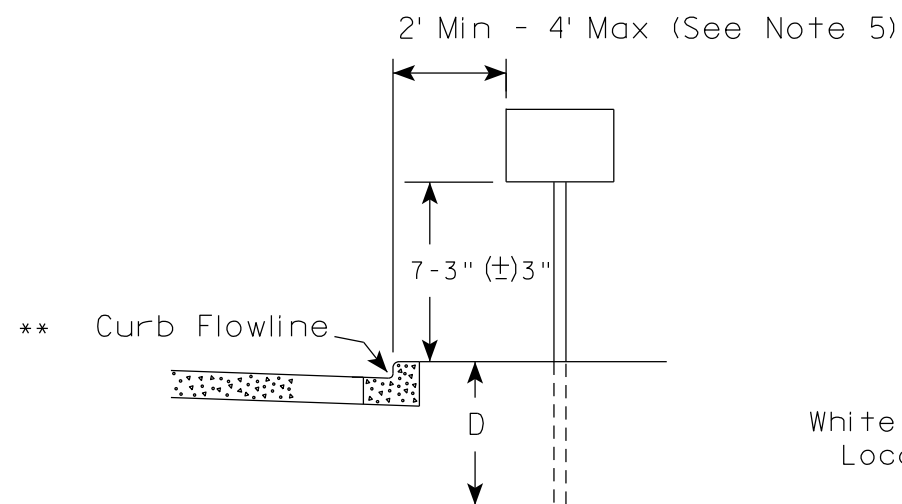

RURAL AREA (See Note 2)

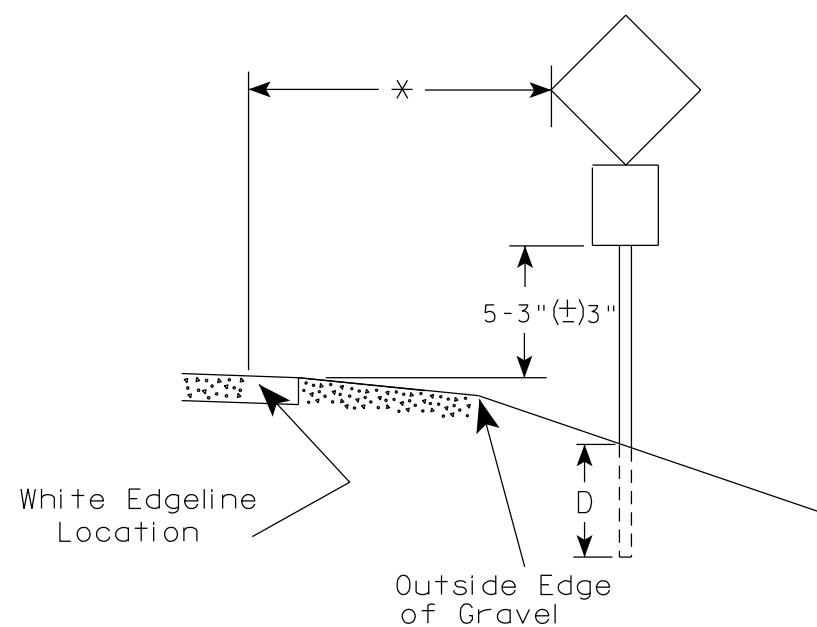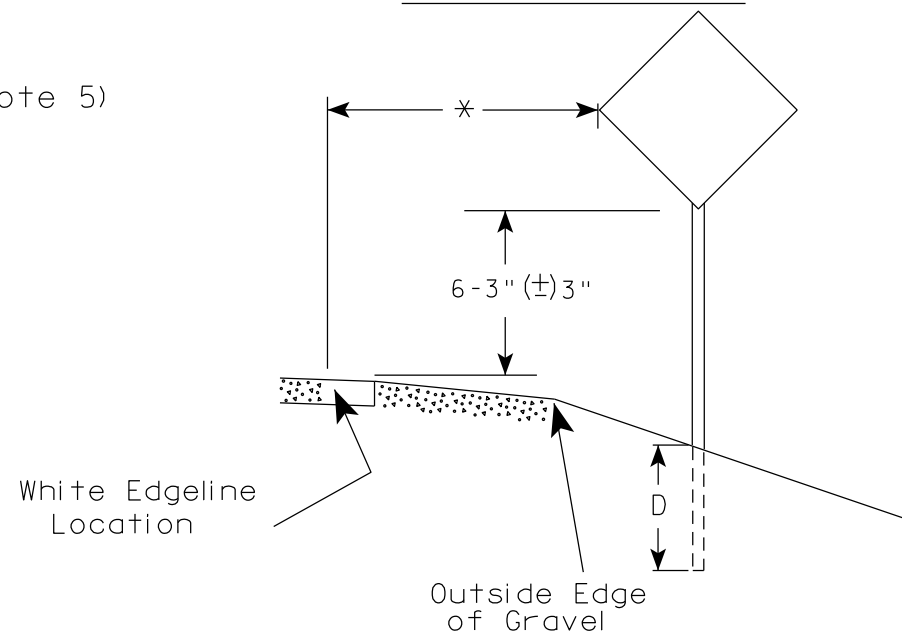

POST EMBEDMENT DEPTH

Area of Sign Installation (Sq. Ft.)	D (Min)
20 or Less	4'
Greater than 20	5'

- Signs wider than 4 feet or 20 sq.ft or larger, shall be mounted on multiple posts. Refer to plate A4-4.
- If signs are mounted on or behind barrier wall, see A4-10 sign plate.
The Double Arrow sign (W12-1D) shall be mounted at a height of 2'-3" (±) 3". The Chevron sign (W1-8), Roundabout Chevron panel (R6-4B), Enhanced Reference Markers, Clearance Markers (W5-52), Mile Markers (D10 series), In Road Object Markers (W5-54) & End of Road Markers (W5-56) shall be mounted at a height of 4'-3" (±) 3".
- For expressways and freeways, mounting height is 7'- 3" (±) 3" or 6'-3" (±) 3" depending upon existence of a sub-sign.
- Minimum mounting height for signs mounted on traffic signal poles is 5'- 3" (±) 3".
- Offset distance shall be consistent with existing signs or consistent throughout length of project.
- Folding signs shall be mounted at a height of 5'-3" (±) 3" or as directed by the Engineer.

* * The existence of curb and gutter does not in itself mandate the vertical clearance illustrated. That height is typically measured where there is sidewalk adjacent to the roadway or parking is permitted. In the absence of sidewalk vertical clearance is measured from the top of the curb. Offset of signs is measured from the flow line.


* 6 feet from edge of a paved shoulder or 12 feet from the edge of pavement (edge line location) or 2 feet from outside edge of gravel, whichever is greater unless directed by project engineer.

TYPICAL INSTALLATION
OF PERMANENT TYPE II
SIGNS ON SINGLE POSTS

WISCONSIN DEPT OF TRANSPORTATION

APPROVED Matthew R. Rauch
for State Traffic Engineer


DATE 12/6/23 PLATE NO. A4-3.23

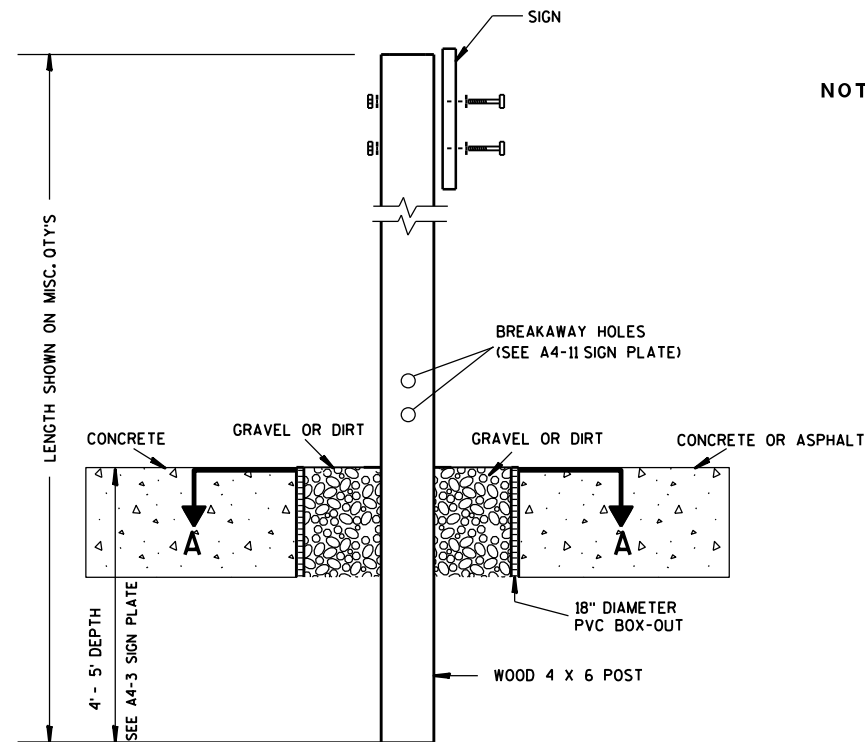

ELEVATION VIEW


DETAIL OF WOOD 4 X 6 SIGN POST IN BOX-OUT

- NOTES: 1. ALL MATERIAL TO BE APPROVED BY ENGINEER PRIOR TO INSTALLATION
2. SEE SIGN PLATE A4-8 FOR SIGN HARDWARE REQUIREMENTS
3. 18 INCH X 18 INCH SQUARE BOX-OUTS MAY BE USED FOR INSTALLATIONS IN EXISTING CONCRETE OR ASPHALT LOCATIONS.

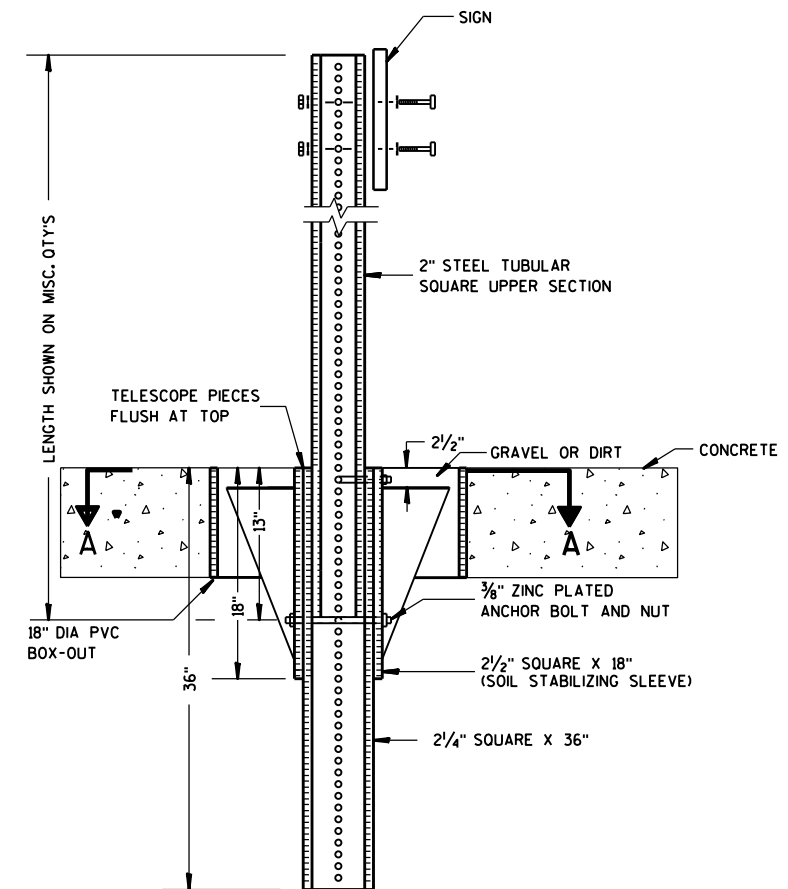

ELEVATION VIEW

DETAIL OF STEEL 2 X 2 SIGN POST IN BOX-OUT

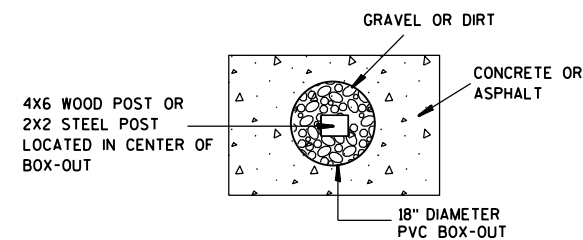

PLAN VIEW

FOR NEW CONCRETE/ASPHALT INSTALLATIONS

SIGN POST
BOX-OUTS
A4-3B

WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
for State Traffic Engineer
DATE 1/27/14 PLATE NO. A4-3B.1

PROJECT NO:


HWY:

COUNTY:



SHEET NO:

E


URBAN AREA

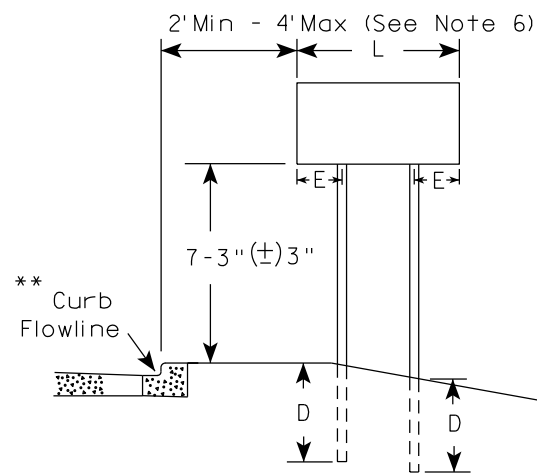


RURAL AREA (See Note 3)

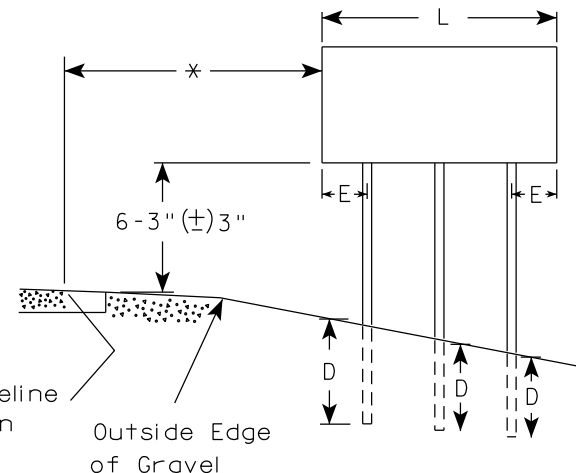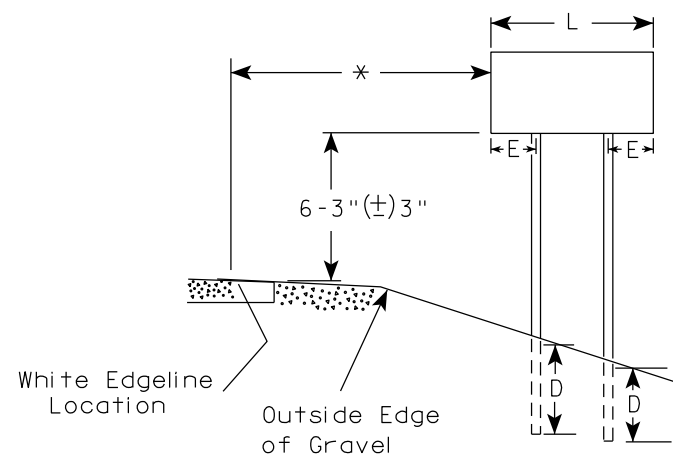

2' Min - 4' Max (See Note 6)

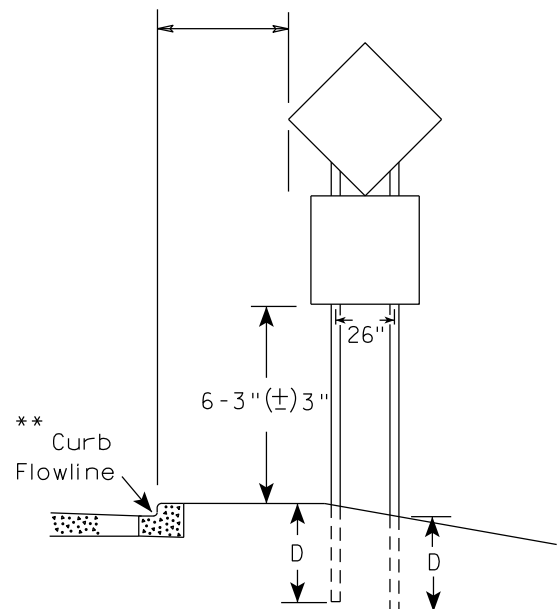

48" DIAMOND WARNING SIGN

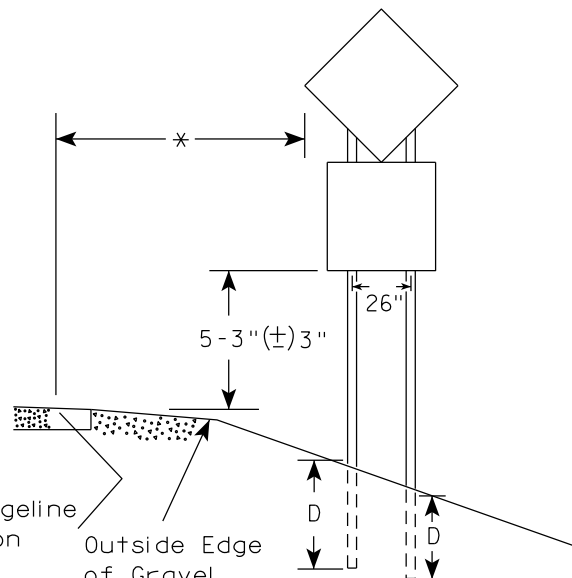

48" DIAMOND WARNING SIGN

SIGN SHAPE OTHER THAN DIAMOND (TWO POSTS REQUIRED)	
L	E
Greater than 48" Less than 60"	12"
60" to 108"	L/5

SIGN SHAPE OTHER THAN DIAMOND (THREE POSTS REQUIRED)	
L	E
Greater than 108" to 144"	12"

POST EMBEDMENT DEPTH


Area of Sign Installation (Sq.Ft.)	D (Min)
20 or Less	4'
Greater than 20	5'

TYPICAL INSTALLATION
OF TYPE II SIGNS
ON MULTIPLE POSTS


WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
for State Traffic Engineer

DATE 12/6/23 PLATE NO. A4-4.16

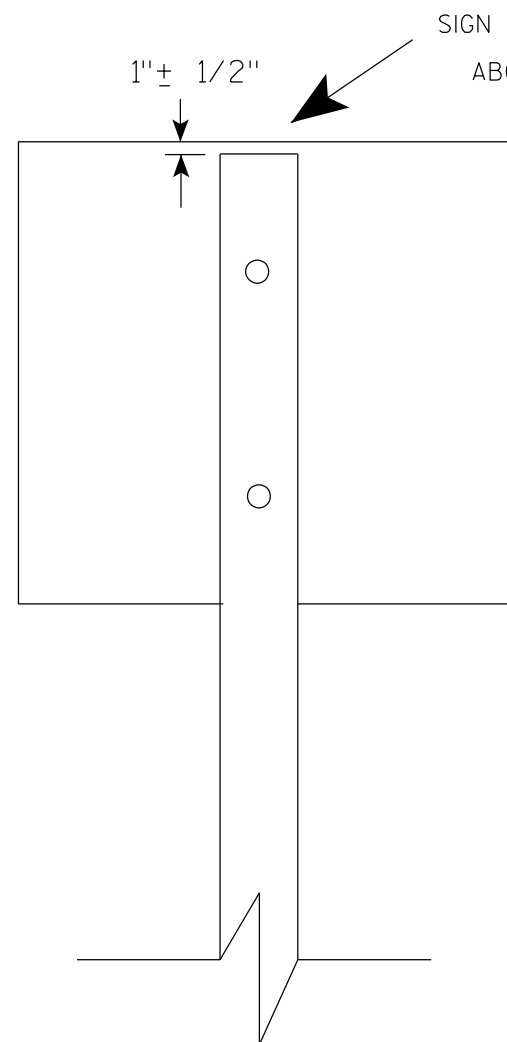

SIGN SHALL BE MOUNTED TO PROJECT
ABOVE THE TOP OF THE POST

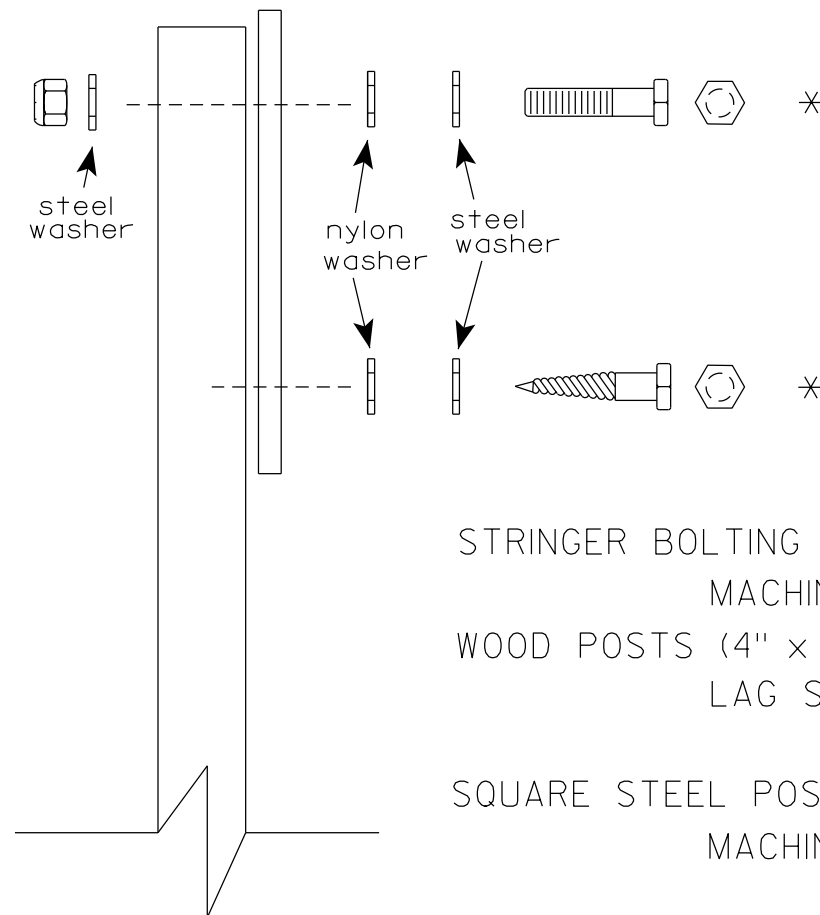

Nuts, bolts and lags used for mounting signs shall have hexagonal heads and shall be either :

- a. Hot dip galvanized in accordance with ASTM Designation: A 153, Class D, or SC 3
- b. Electro-galvanized in accordance with ASTM Designation : B 633, TYPE III, SC 3.

Threads on bolts and nuts shall be manufactured with sufficient allowance for the cadmium plate or galvanized coating to permit the nuts to run freely on the bolts.

STRINGER BOLTING TO ALUMINUM SIGNS (SEE SIGN PLATE A4-18)

MACHINE BOLTS - $\frac{5}{16}$ " X 1-3/4" Length w/ lock nuts

WOOD POSTS (4" x 6")

LAG SCREWS - $\frac{3}{8}$ " X 3" (NO STRINGERS ON BACK OF SIGN)
 $\frac{3}{8}$ " X 4" (STRINGERS ON BACK OF SIGN)

SQUARE STEEL POSTS (2" x 2")

MACHINE BOLTS - $\frac{3}{8}$ " X 3-1/4" Length w/ nuts (NO STRINGER ON BACK OF SIGN)
 $\frac{3}{8}$ " X 5" Length w/ nuts (STRINGERS ON BACK OF SIGN)

RIVETS - $\frac{9}{32}$ " (6605-9-6) BULB-TITE, TRI-FOLD, ALUMINUM BODY/MANDREL
O.D. FLANGE .720-.765 INCH, GRIP RANGE .042-.375 INCH

WASHERS (ALL POSTS) -

1-1/4" O.D. X $\frac{3}{8}$ " I.D. X $\frac{1}{16}$ " STEEL

1-1/4" O.D. X $\frac{3}{8}$ " I.D. X .080 NYLON

* Two different fastening systems are shown for illustration purposes. On any individual sign, either one or the other system shall be used. Actual number of fasteners per sign varies with the sign area, but normally there are two. For a single post installation, all signs greater than 9 sq. ft. require the use of 3 fasteners.

ATTACHMENT OF SIGNS TO POSTS

WISCONSIN DEPT OF TRANSPORTATION

APPROVED Matthew R. Rauch
For State Traffic Engineer

DATE 4/1/2020 PLATE NO. A4-8.9

**2 1/4 " SQUARE
12 GAUGE
PERFORATED
GALVANIZED FINISH**

4" x 10" x 10 GA. — 
STEEL PLATE (CUT
AS SHOWN) WELDED
TO ALL FOUR CORNERS
OF TELESPAR TUBE

**2 1/2" SQUARE
12 GAUGE
OMNI-DIRECTIONAL
PERFORATED
SOIL STABILIZING SLEEVE
GALVANIZED FINISH**

2 1/2" TELES PAR TUBE

4"

2 1/2"

10"

3 1/2"

19"

4" x 10" x 10 GA. STEEL PLATE (CUT AS SHOWN) WELDED TO ALL FOUR CORNERS OF TELES PAR TUBE

LENGTH SHOWN ON MISC. QTY'S

18" DIA SCHEDULE 40 PVC BOX-OUT

TELESCOPE PIECES FLUSH AT TOP

2" STEEL TUBULAR SQUARE UPPER SECTION

ALL HOLES $\frac{7}{16}$ " SPACED 1" C-C ALL FOUR SIDES

$\frac{3}{8}$ " ZINC PLATED CORNER ANCHOR BOLT AND NUT

2 1/2" GRAVEL OR DIRT

$\frac{3}{8}$ " ZINC PLATED ANCHOR BOLT AND NUT

2 1/2" SQUARE X 18" (SOIL STABILIZING SLEEVE)

2 1/4" SQUARE X 36"

SIGN

SEE SIGN PLATE A4-8 FOR BOLT WASHER, & NUT MATERIAL

36"

18"

13"

18"

LENGTH SHOWN ON MISC. QTY'S

TELESCOPE PIECES FLUSH AT TOP

2" STEEL TUBULAR SQUARE UPPER SECTION

ALL HOLES $\frac{7}{16}$ " SPACED 1" C-C ALL FOUR SIDES

$\frac{3}{8}$ " ZINC PLATED CORNER ANCHOR BOLT AND NUT

1"

$\frac{3}{8}$ " ZINC PLATED ANCHOR BOLT AND NUT

2 1/2" SQUARE X 18" (SOIL STABILIZING SLEEVE)

2 1/4" SQUARE X 36"

SEE SIGN PLATE A4-8 FOR BOLT WASHER, & NUT MATERIAL

SIGN

3/8" ZINC PLATED CORNER
ANCHOR BOLT AND NUT

DIRECTION
OF TRAFFIC

SECTION A-A

Area of Sign Installation (Sq. Ft.)	Number of Required Posts
9 or less	1
Greater than 9 less than or equal to 18	2
Greater than 18 less than or equal to 27	3

TUBULAR STEEL
SIGN POST
A4-9

WISCONSIN DEPT OF TRANSPORTATION

APPROVED Matthew R Rauch

for State Traffic Engineer

DATE 2/05/15 PLATE NO. A4-9.9

PROJECT NO:	HWY:	COUNTY:	SHEET NO:	E
-------------	------	---------	-----------	---

FILE NAME : C:\CAEFiles\Projects\tr_stdplate\A49.DGN



PLOT DATE : 05-FEB-2015 17:09

PLOT BY : mscs_ja

PLOT NAME :

PLOT SCALE : 13.659812:1.000000

WISDOT/CADDS SHEET 42

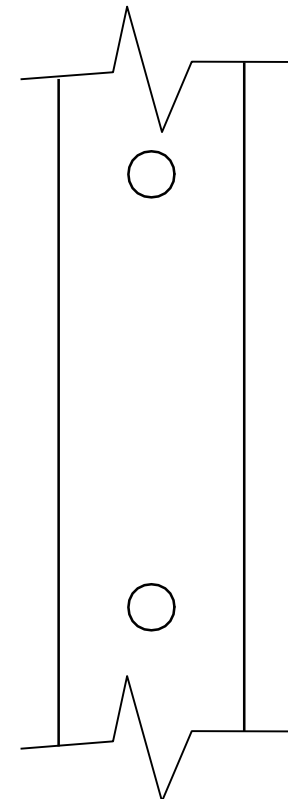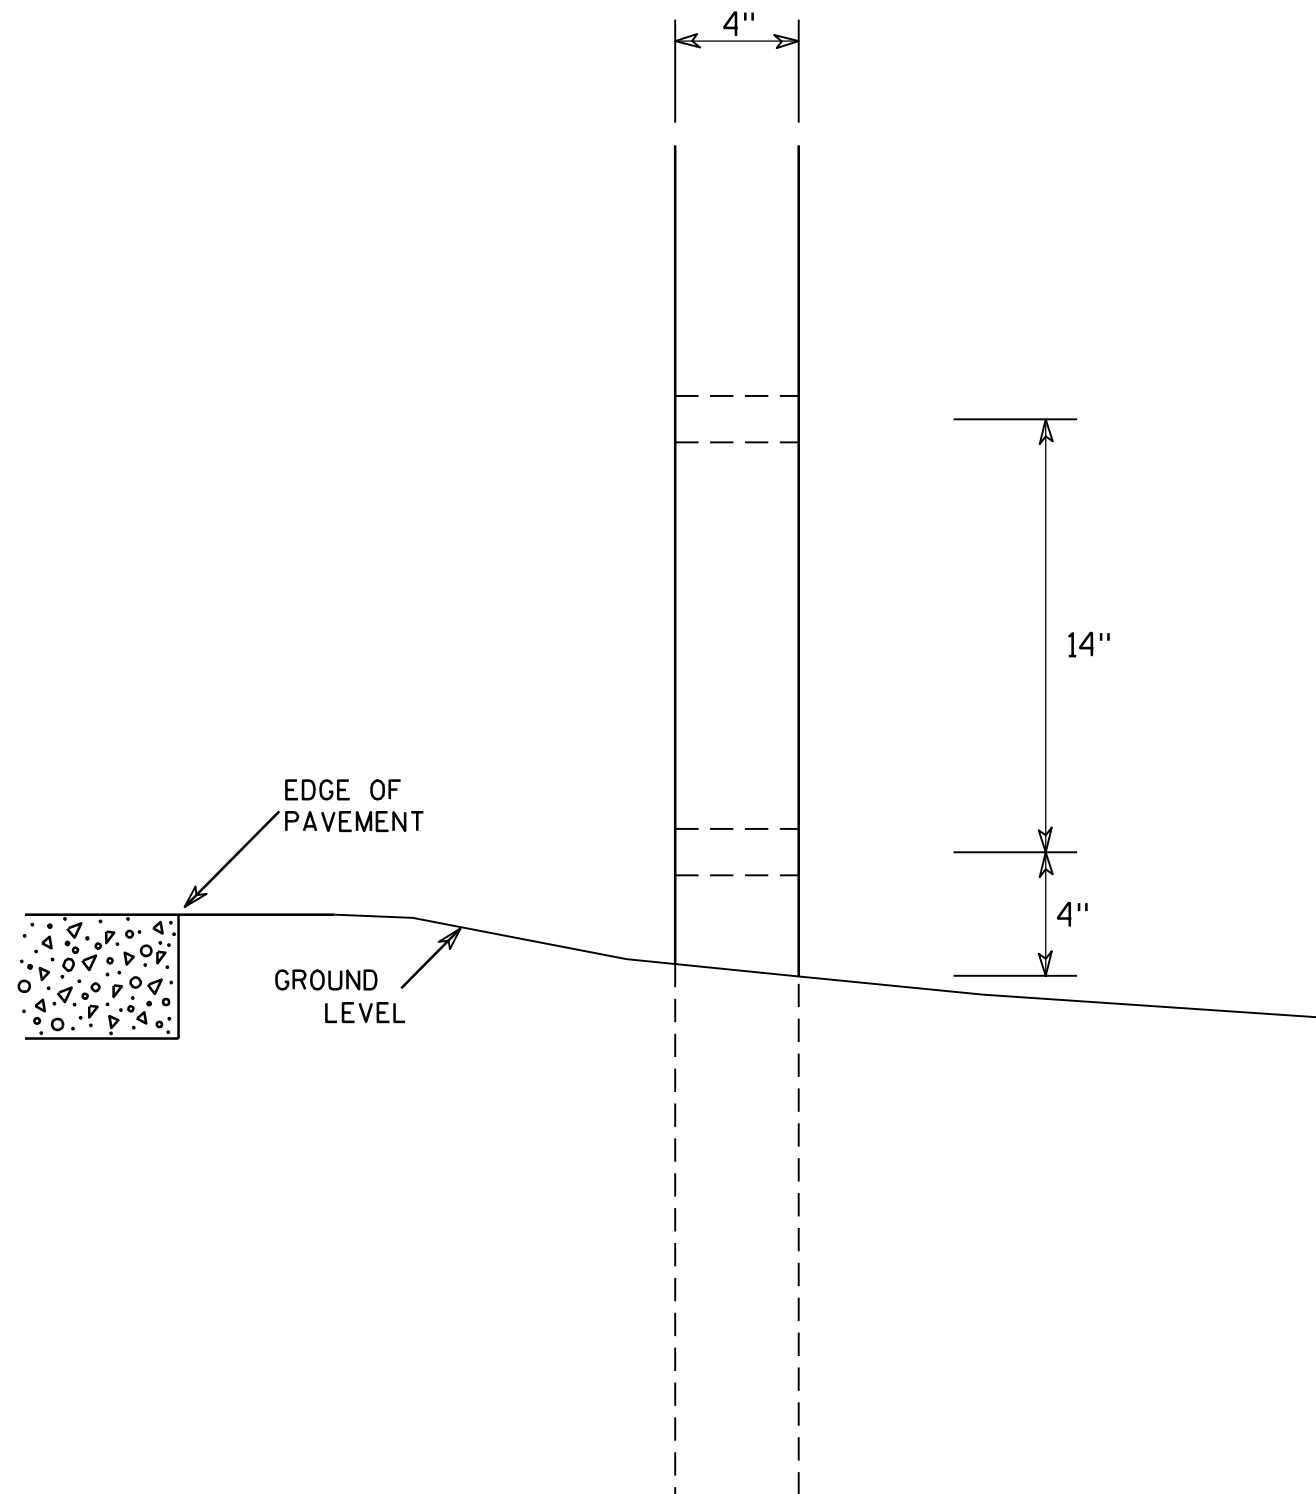

SIDE VIEW

GENERAL NOTES

1. All 4 x 6 Wood Posts shall be modified by having two 1½" diameter holes drilled perpendicular to the roadway centerline.

4 X 6 WOOD POST MODIFICATIONS

WISCONSIN DEPT OF TRANSPORTATION

APPROVED

Chester J. Spang
for State Traffic Engineer

DATE 3/27/97

PLATE NO. A4-11.2

PROJECT NO:

HWY:




COUNTY:

SHEET NO:


E

BANDING

SINGLE SIGN

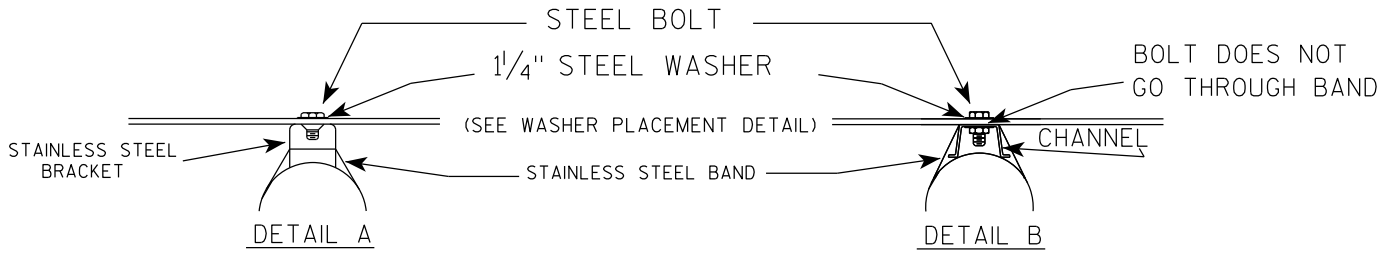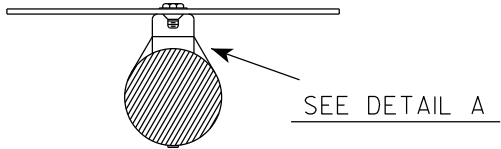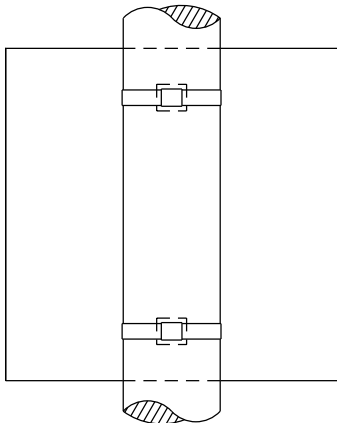

WASHER PLACEMENT

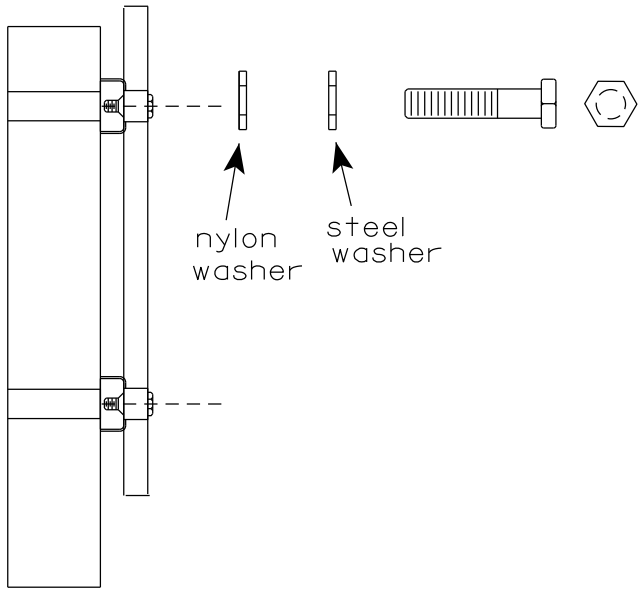


WASHERS (ALL POSTS) -
1-1/4" O.D. X 3/8" I.D. X 1/16" STEEL
1-1/4" O.D. X 3/8" I.D. X .080 NYLON
FOR ALL TYPE H SIGNS


GENERAL NOTES

1. Any sign over 3 feet in width shall use the V-Block banding method. See A5-10 standard plate.
2. Signs 3 feet or greater in height shall have three bracket bands installed. Signs less than 3 feet in height shall have two bracket bands installed.
3. Banding and assembly bracket shall be stainless steel. All bands shall be 3/4" in width and 0.025" thickness.
4. ALL SIGN MOUNTING BOLTS AND WASHERS SHALL BE EITHER:
 - a. Hot dip or mechanically galvanized in accordance with ASTM Designation: A 153, Class D
 - b. Electro-galvanized in accordance with ASTM designation: B 633, Type III, SC 3

"J" ASSEMBLY

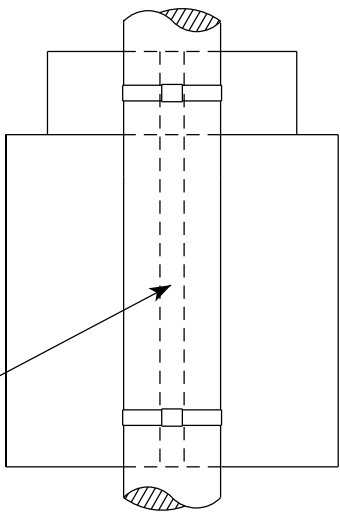

CHANNEL
SEE TYPICAL PANEL
INSTALLATION SHEET




STANDARD SIGN
SIGN BANDING DETAILS

WISCONSIN DEPT OF TRANSPORTATION


APPROVED *Matthew R. Rauch*
for State Traffic Engineer

DATE 6/10/19 PLATE NO. A5-9.4

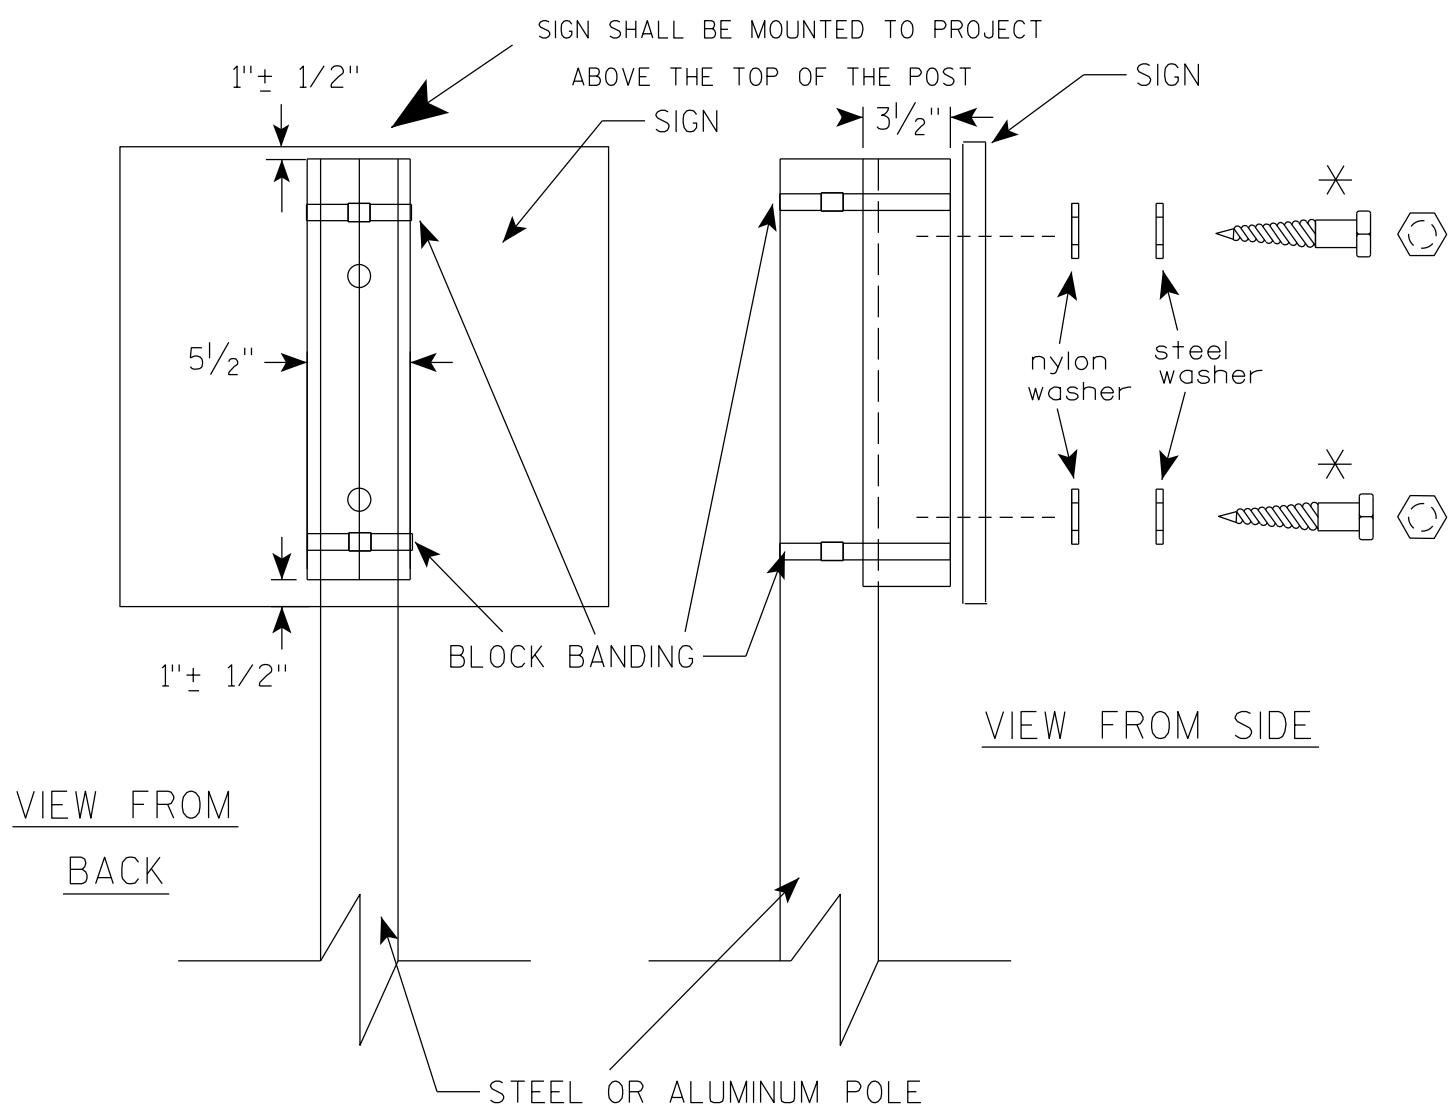

VIEW FROM
BACK

VIEW FROM SIDE

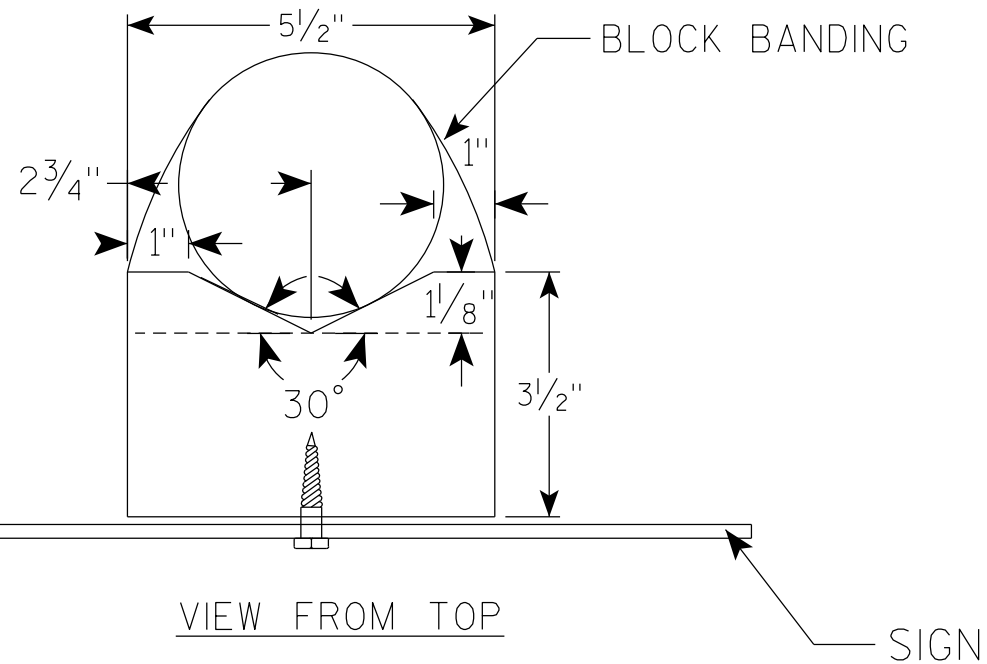

VIEW FROM TOP

GENERAL NOTES

1. WOOD 4"X6" POST MATERIAL SHALL CONFORM TO 507.2.2 OF THE WISDOT STANDARD SPECIFICATIONS
2. BLOCK BANDING AND CLIPS SHALL BE STAINLESS STEEL, $\frac{3}{4}$ " WIDTH AND 0.025" THICKNESS
3. SIGNS 3' OR GREATER IN HEIGHT SHALL UTILIZE 3 BLOCK BANDS. SIGNS UNDER 3' IN HEIGHT SHALL UTILIZE 2 BLOCK BANDS
4. ACTUAL NUMBER OF FASTENERS PER SIGN VARIES WITH THE SIGN AREA, BUT NORMALLY THERE ARE TWO. FOR SIGNS GREATER THAN 9 S.F. 3 FASTENERS SHALL BE USED.
5. ALL SIGN MOUNTING BOLTS AND WASHERS SHALL BE EITHER:
 - a. Hot dip or mechanically galvanized in accordance with ASTM Designation: A 153, Class D
 - b. Electro-galvanized in accordance with ASTM Designation : B 633, TYPE III, SC 3
6. ALL BOLTS SHALL HAVE HEXAGONAL HEADS.
7. STEEL WASHERS SHALL BE $\frac{1}{4}$ " O.D. X $\frac{3}{8}$ " I.D. X $\frac{1}{16}$ "
8. NYLON WASHERS SHALL BE $\frac{1}{4}$ " O.D. X $\frac{3}{8}$ " I.D. X .080 FOR TYPE H OR TYPE F FACE SIGN

✱ LAG BOLTS SHALL BE $\frac{3}{8}$ " X $2\frac{1}{2}$ "

BLOCK BANDING DETAIL
(V-BLOCK OPTION)

WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
for State Traffic Engineer



DATE 4/19/2022 PLATE NO. A5-10.3

PROJECT NO:



SHEET NO:

E

7

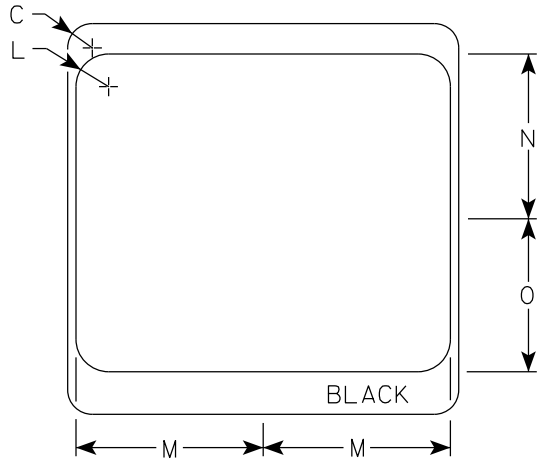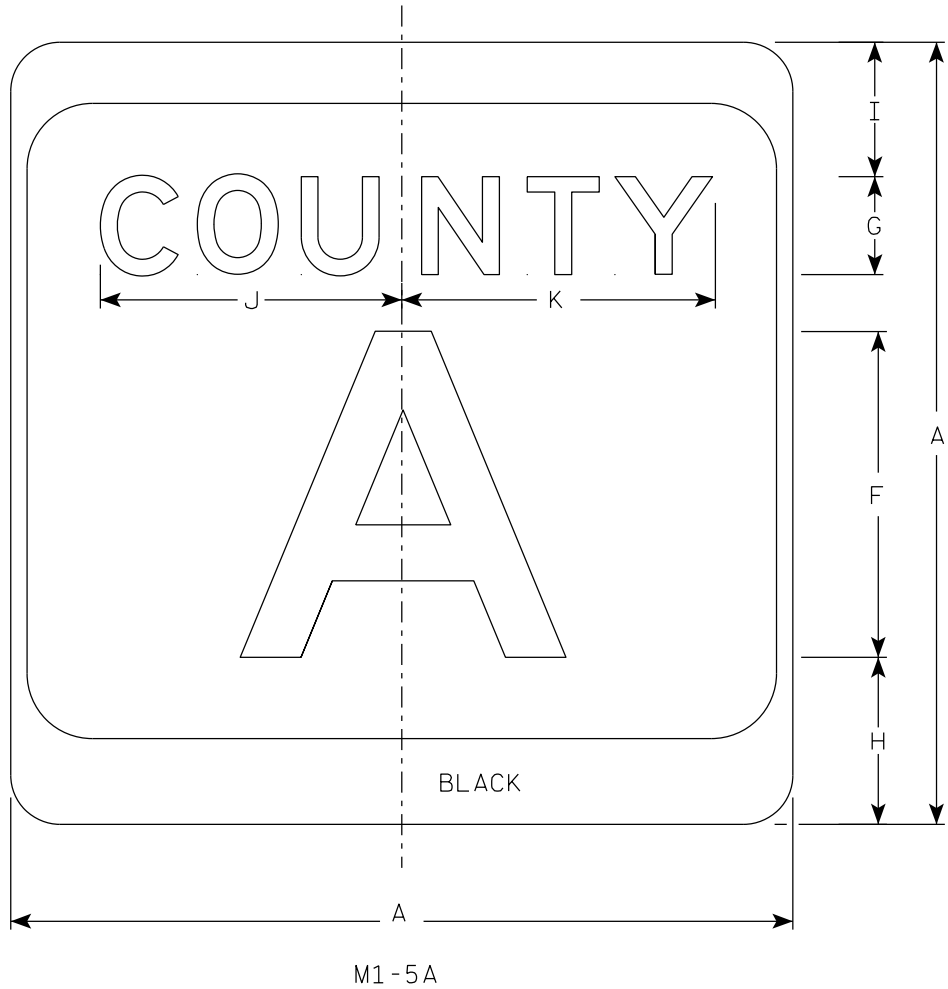

- NOTES
- Sign is Type II - Type H Reflective
 - Color:
Background - White & Black
Message - Black
 - Message Series - see Note 4
 - Message Series E for 1 letter.
Message Series D for 2 letters unless message is too big then Series C.
Message Series C for 3 letters unless message is too big then Series B.
 - Substitute appropriate letters & optically center to achieve proper balance.

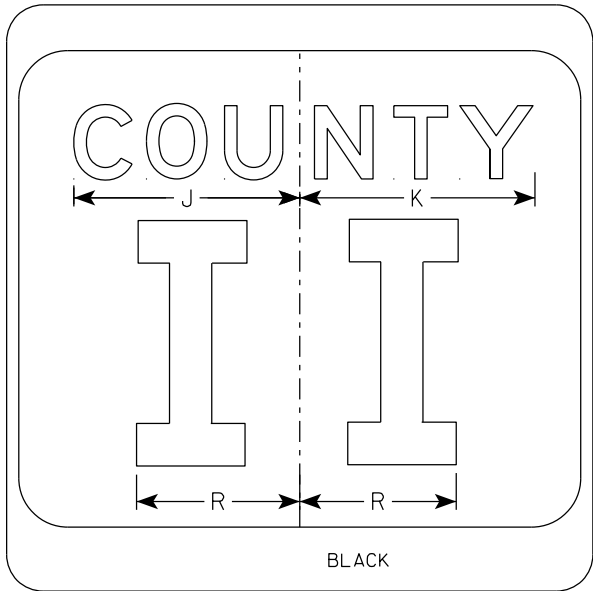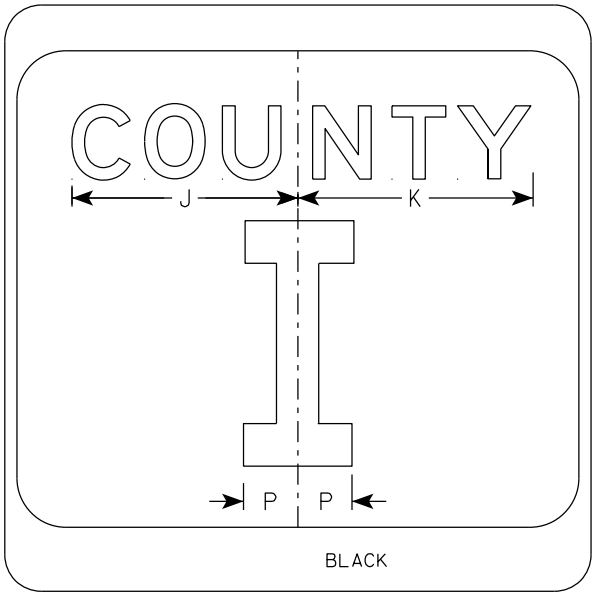

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1																											
2	24		1 1/2			10	3	5 1/8	4 1/8	9 1/4	9 5/8	2	11 1/2	10 1/8	9 3/8	2 1/4		6 5/8									4.0
2M	24		1 1/2			10	3	5 1/8	4 1/8	9 1/4	9 5/8	2	11 1/2	10 1/8	9 3/8	2 1/4		6 5/8									4.0
3	36		2 1/4			16	4	7 5/8	5 5/8	12 1/4	12 7/8	3	17 1/8	15 1/4	14	3 3/8		10									9.0
4	36		2 1/4			16	4	7 5/8	5 5/8	12 1/4	12 7/8	3	17 1/8	15 1/4	14	3 3/8		10									9.0
5	36		2 1/4			16	4	7 5/8	5 5/8	12 1/4	12 7/8	3	17 1/8	15 1/4	14	3 3/8		10									9.0

CTH MARKER


M1-5A FOR ASSEMBLIES

WISCONSIN DEPT OF TRANSPORTATION


APPROVED *Matthew R. Rauch*
for State Traffic Engineer

DATE 11/8/2022 PLATE NO. M1-5A.9


7

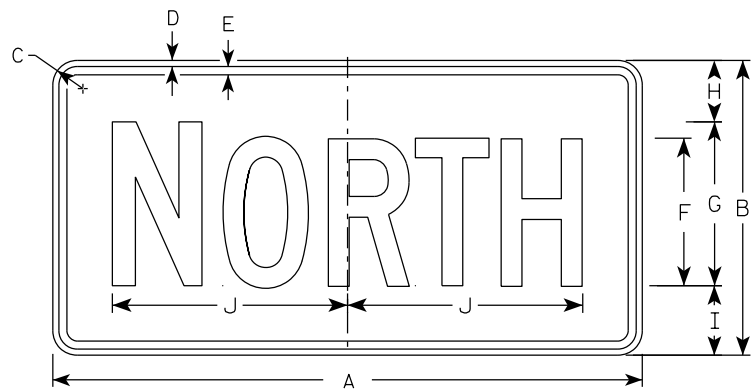


M3-1
MM3-1
MP3-1

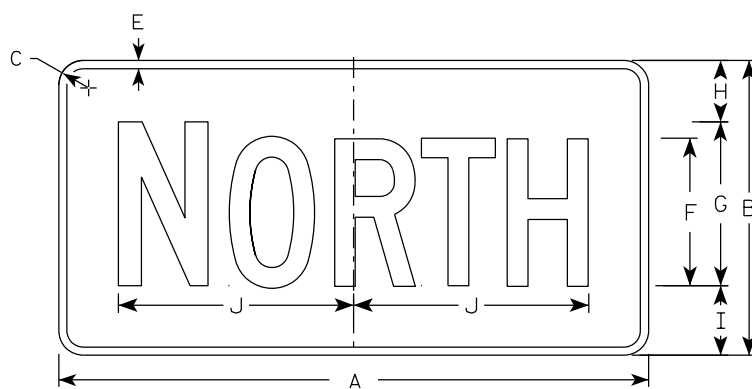


MB3-1
MK3-1
MN3-1

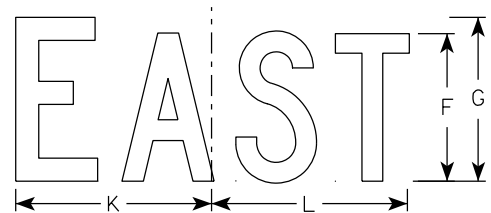


M3-2
MM3-2
MP3-2

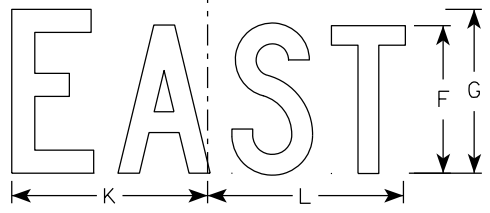


MB3-2
MK3-2
MN3-2

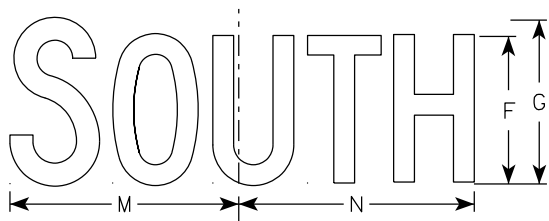


M3-3
MM3-3
MP3-3

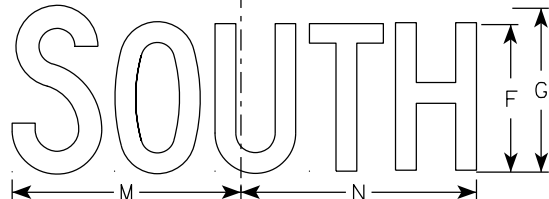

MB3-3
MK3-3
MN3-3

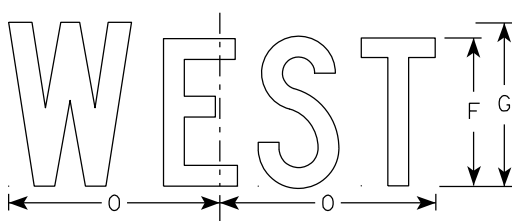

M3-4
MM3-4
MP3-4

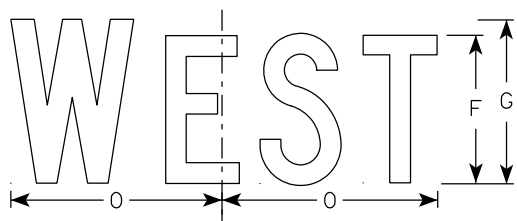

MB3-4
MK3-4
MN3-4

NOTES

- All Signs Type II - Type H Reflective
- Color:
 - Background - See note 5
 - Message - See note 5
- Message Series - C
- Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.
- M3-1 thru M3-4 Background - White
Message - Black
MB3-1 thru MB3-4 Background - Blue
Message - White
MK3-1 thru MK3-4 Background - Green
Message - White
MM3-1 thru MM3-4 Background - White
Message - Green
MN3-1 thru MN3-4 Background - Brown
Message - White
MP3-1 thru MP3-4 Background - White
Message - Blue
- Note the first letter of each direction is larger than the remainder of the message.


7

7

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1																											
2S	24	12	1 1/2	3/8	3/8	6	7	2 1/4	2 3/4	10 1/4	7 7/8	8 3/8	10 1/4	9 3/4	8 3/4												2.00
2M	24	12	1 1/2	3/8	3/8	6	7	2 1/4	2 3/4	10 1/4	7 7/8	8 3/8	10 1/4	9 3/4	8 3/4												2.00
3	36	18	1 1/2	3/8	1/2	9	10	3 3/4	4 1/4	14 3/8	12	12 1/8	14	14 1/8	13												4.5
4	36	18	1 1/2	3/8	1/2	9	10	3 3/4	4 1/4	14 3/8	12	12 1/8	14	14 1/8	13												4.5
5	36	18	1 1/2	3/8	1/2	9	10	3 3/4	4 1/4	14 3/8	12	12 1/8	14	14 1/8	13												4.5

PROJECT NO:	HWY:	COUNTY:	SHEET NO:	E
-------------	------	---------	-----------	---

7

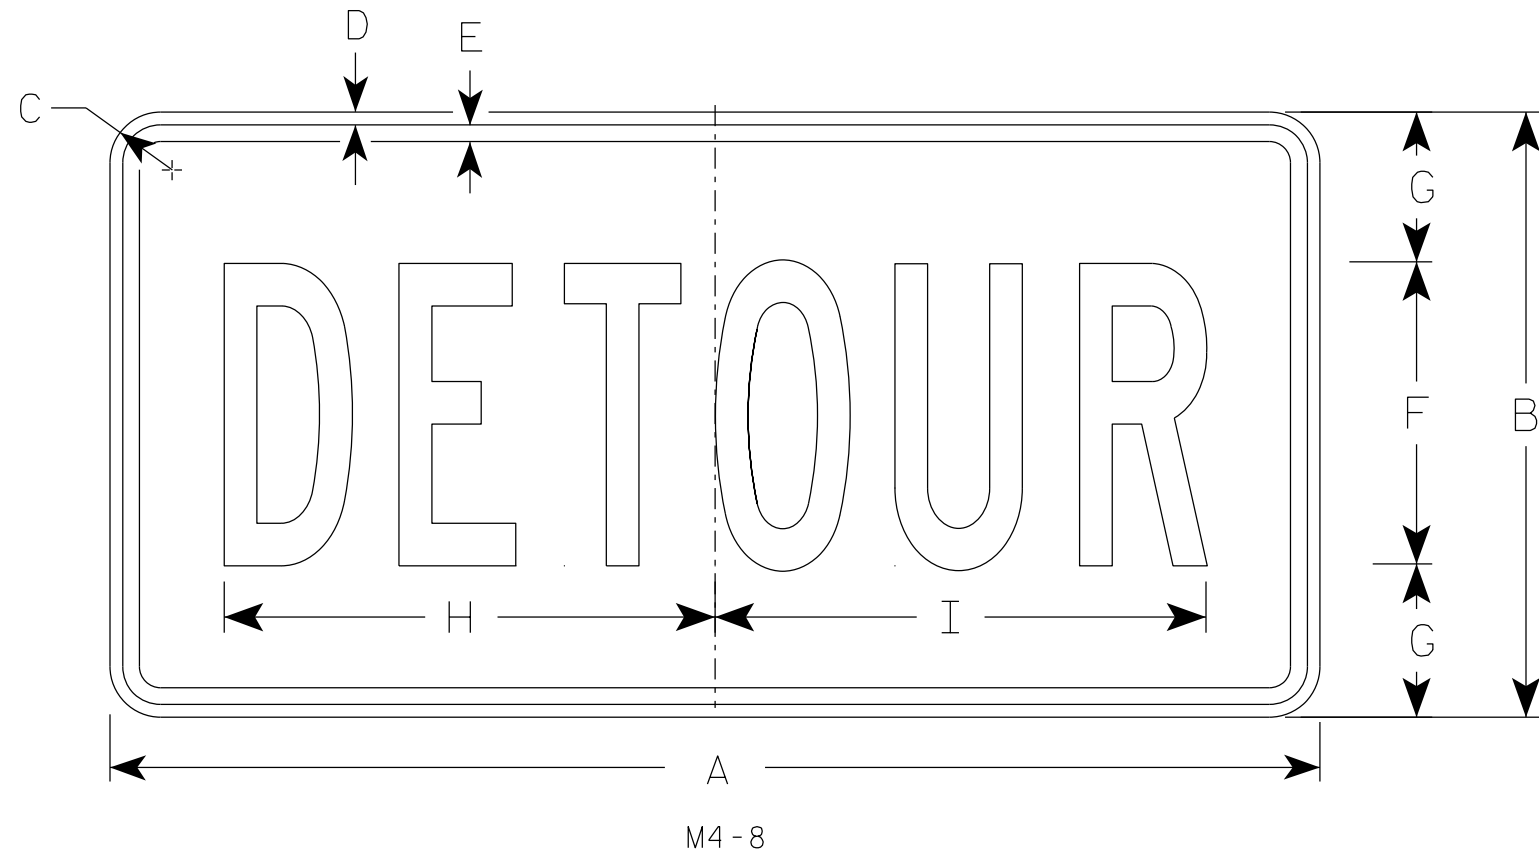

NOTES

1. Sign is Type II - Type F Reflective
2. Color:
Background - Orange
Message - Black
3. Message Series - B
4. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.

7

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	v	W	X	Y	Z	Area sq. ft.
1																											
2	24	12	1 1/2	3/8	3/8	6	3	10	10 1/4																		2.0
2M	24	12	1 1/2	3/8	3/8	6	3	10	10 1/4																		2.0
3	36	18	1 1/2	3/8	1/2	9	4 1/2	14 5/8	14 1/2																		4.5
4	36	18	1 1/2	3/8	1/2	9	4 1/2	14 5/8	14 1/2																		4.5
5	36	18	1 1/2	3/8	1/2	9	4 1/2	14 5/8	14 1/2																		4.5

STANDARD SIGN

M4-8

WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
for State Traffic Engineer

DATE 2/9/2023 PLATE NO. M4-8.4

PROJECT NO:


HWY:

COUNTY:

SHEET NO:

E

7

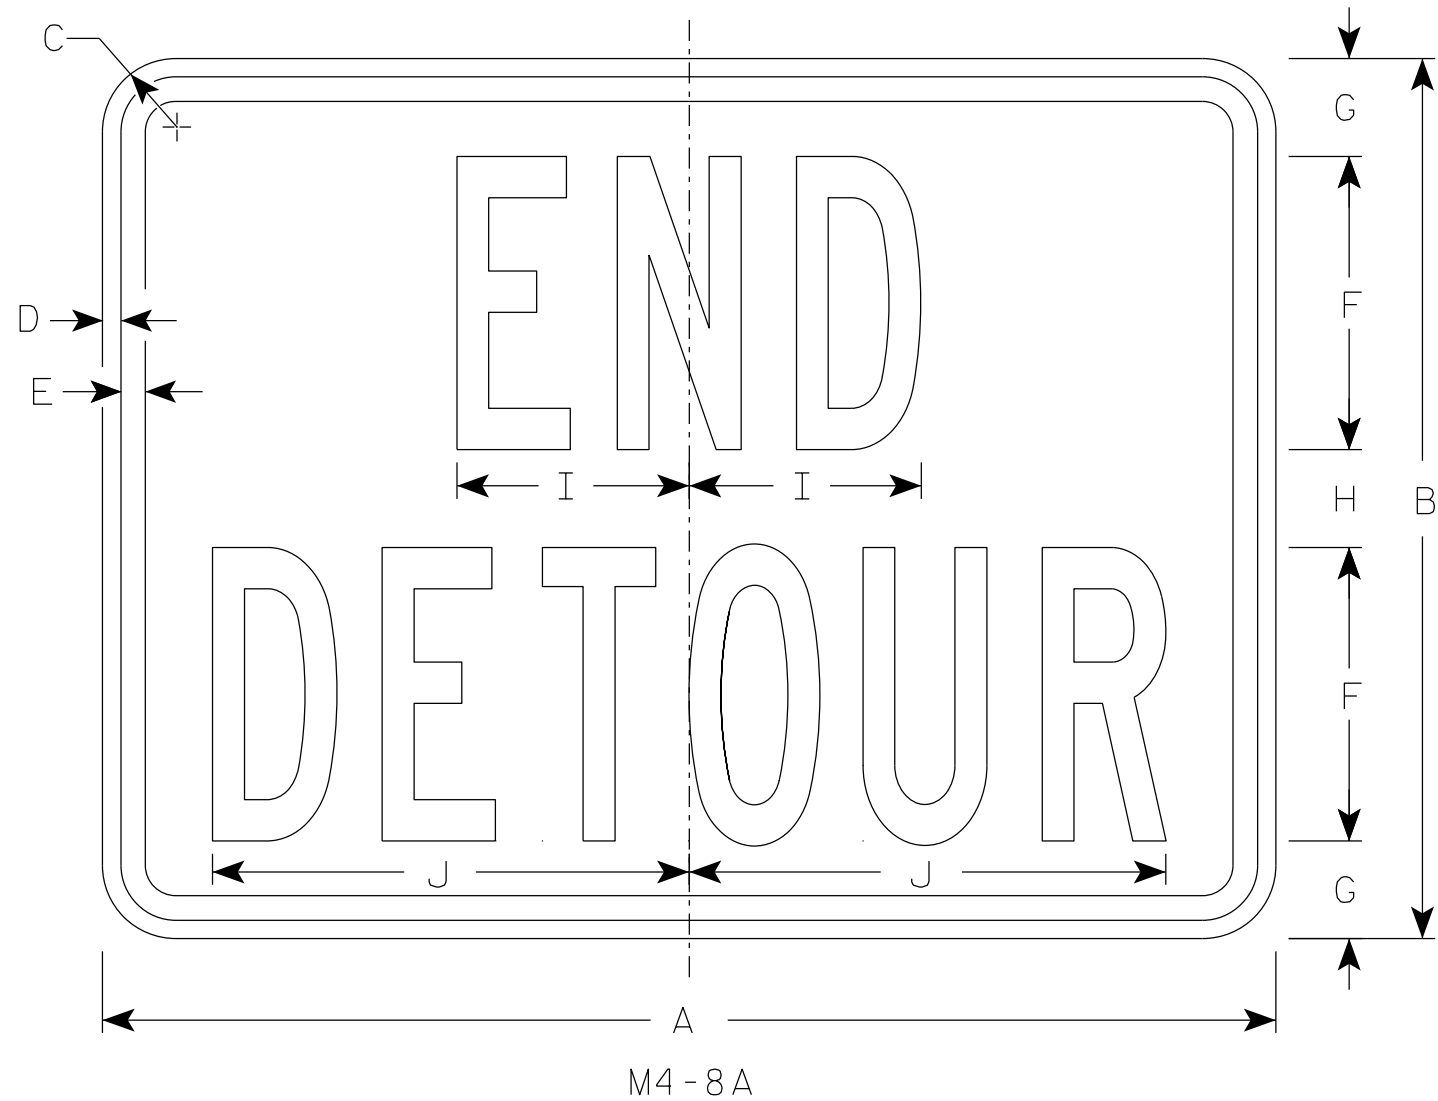

NOTES

- 1. Sign is Type II - Type F Reflective
- 2. Color:
 - Background - Orange
 - Message - Black
- 3. Message Series - B
- 4. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.

7

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	v	W	X	Y	Z	Area sq. ft.
1																											
2	24	18	1 1/2	3/8	1/2	6	2	2	4 3/4	9 3/4																	3.0
2M	24	18	1 1/2	3/8	1/2	6	2	2	4 3/4	9 3/4																	3.0
3	30	24	1 1/2	3/8	1/2	8	2 1/2	3	6 3/4	13																	5.0
4	30	24	1 1/2	3/8	1/2	8	2 1/2	3	6 3/4	13																	5.0
5	30	24	1 1/2	3/8	1/2	8	2 1/2	3	6 3/4	13																	5.0

STANDARD SIGN


M4-8A

WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
For State Traffic Engineer


DATE 2/9/2023 PLATE NO. M4-8A.4

7

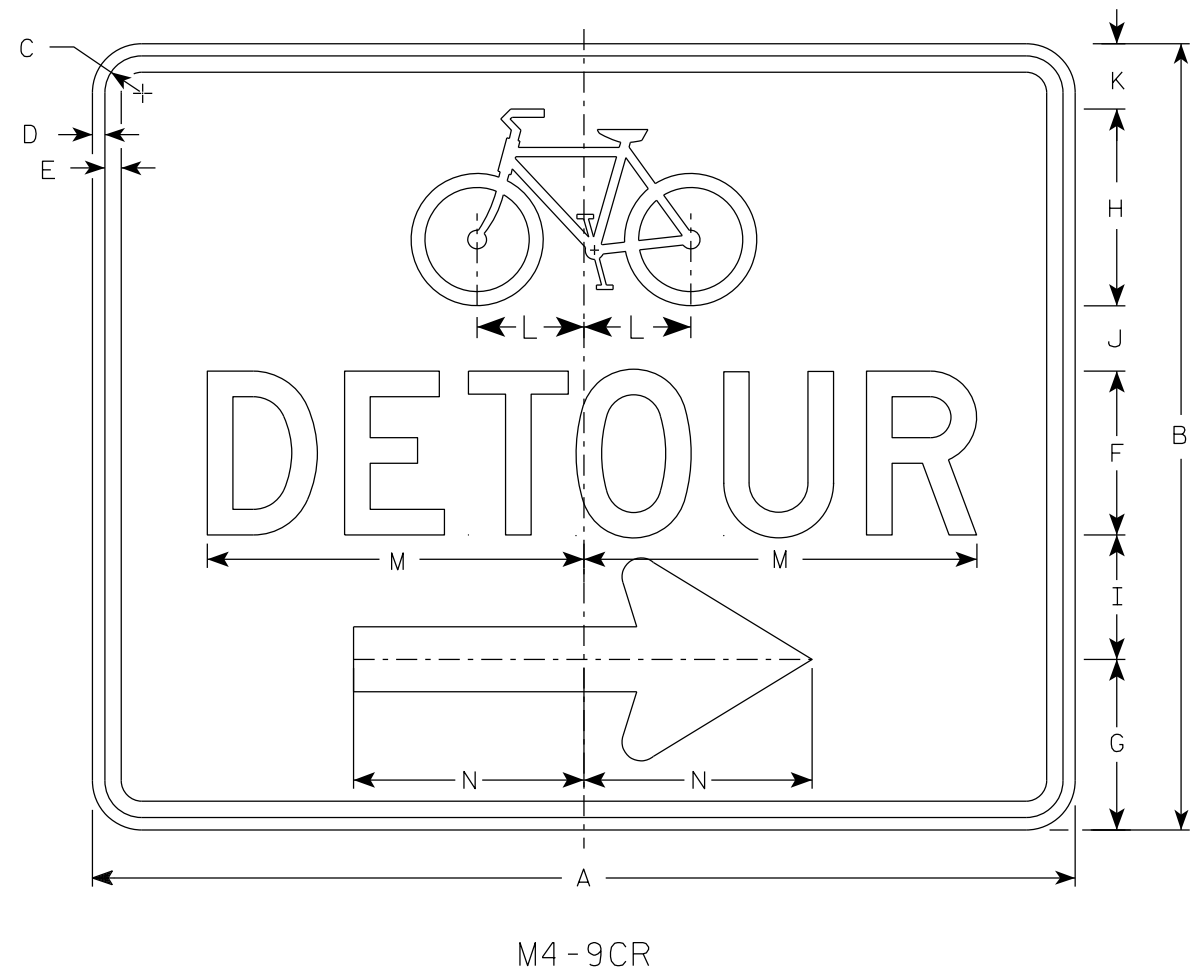

NOTES

1. Sign is Type II-Type F Reflective
2. Color:
Background - Orange
Message - Black
3. Message Series - D
4. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.
5. M4-9CL is the same as M4-9CR except the arrow is reversed.

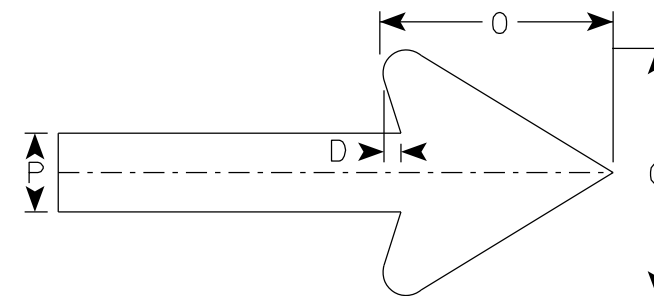

Arrow Detail

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1																											
2S	30	24	1 1/8	3/8	1/2	5	5 1/4	6	3 3/4	2	2	3 1/4	11 3/4	7	6	2											5.00
2M	30	24	1 1/8	3/8	1/2	5	5 1/4	6	3 3/4	2	2	3 1/4	11 3/4	7	6	2											5.00
3																											
4																											
5																											





STANDARD SIGN
M4-9C L&R

WISCONSIN DEPT OF TRANSPORTATION


APPROVED *Matthew R. Rauch*
for State Traffic Engineer

DATE 1/18/2023 PLATE NO. M4-9C.2

7

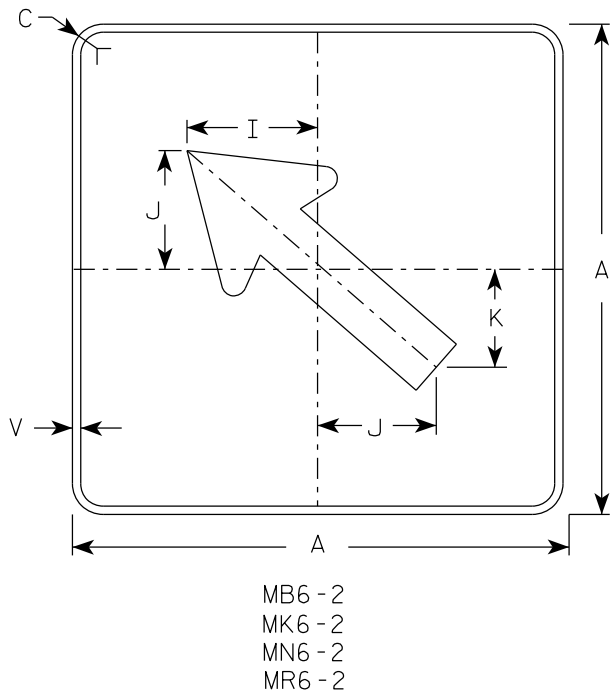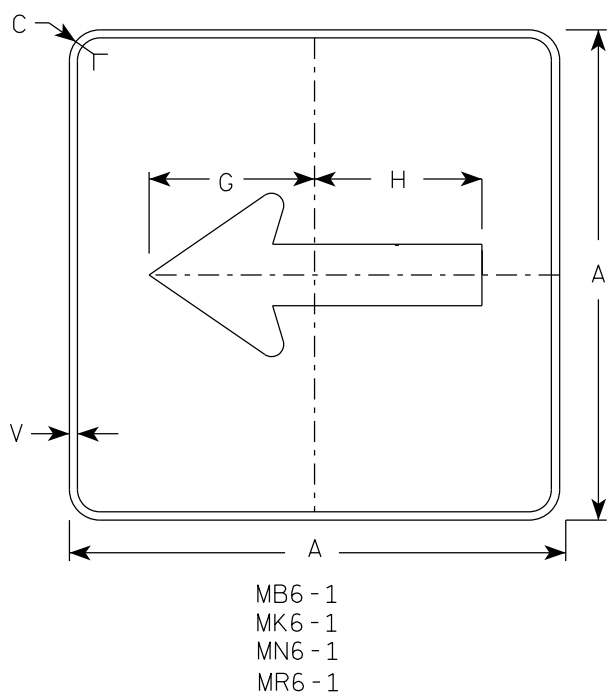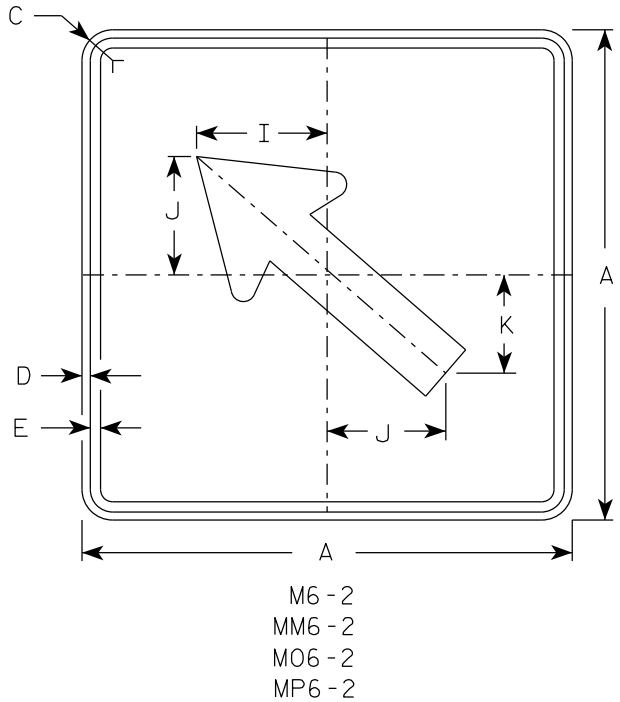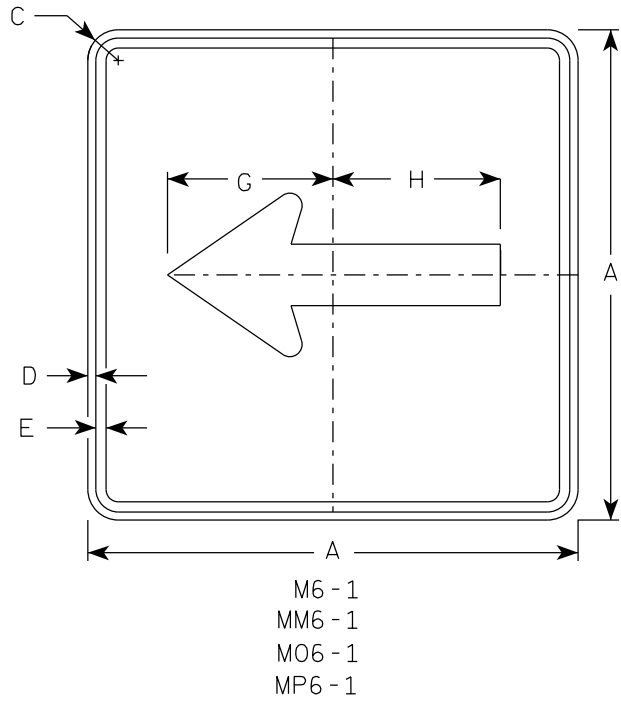

- NOTES**
- Signs are Type II - Type H Reflective except as Shown
 - Color:
Background - See note 4
Message - See note 4
 - Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.
 - M6-1 and M6-2 Background - White
Message - Black
MB6-1 and MB6-2 Background - Blue
Message - White
MK6-1 and MK6-2 Background - Green
Message - White
MM6-1 and MM6-2 Background - White
Message - Green
MN6-1 and MN6-2 Background - Brown
Message - White
M06-1 and M06-2 Background - Orange - Type F Reflective
Message - Black
MP6-1 and MP6-2 Background - White
Message - Blue
MR6-1 and MR6-2 Background - Brown
Message - Yellow

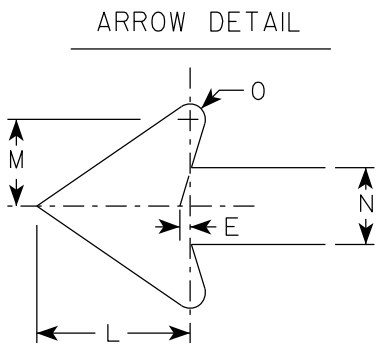

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.	
1																												
2S	21		1 1/2	3/8	3/8		7 1/2	7 1/8	5 5/8	5	4 1/4	5 1/4	3	2 5/8	1/2							1/2						3.06
2M	21		1 1/2	3/8	3/8		7 1/2	7 1/8	5 5/8	5	4 1/4	5 1/4	3	2 5/8	1/2							1/2						3.06
3	30		1 7/8	1/2	5/8		10 3/4	10 1/4	8	7 1/4	6	7 1/2	4 1/4	3 3/4	3/4							1/2						6.25
4	30		1 7/8	1/2	5/8		10 3/4	10 1/4	8	7 1/4	6	7 1/2	4 1/4	3 3/4	3/4							1/2						6.25
5	30		1 7/8	1/2	5/8		10 3/4	10 1/4	8	7 1/4	6	7 1/2	4 1/4	3 3/4	3/4							1/2						6.25

PROJECT NO:

HWY:

COUNTY:

SHEET NO:

E


STANDARD SIGN
M6-1 & M6-2
SERIES

WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
for State Traffic Engineer

DATE 2/13/2023 PLATE NO. M6-1.16

7

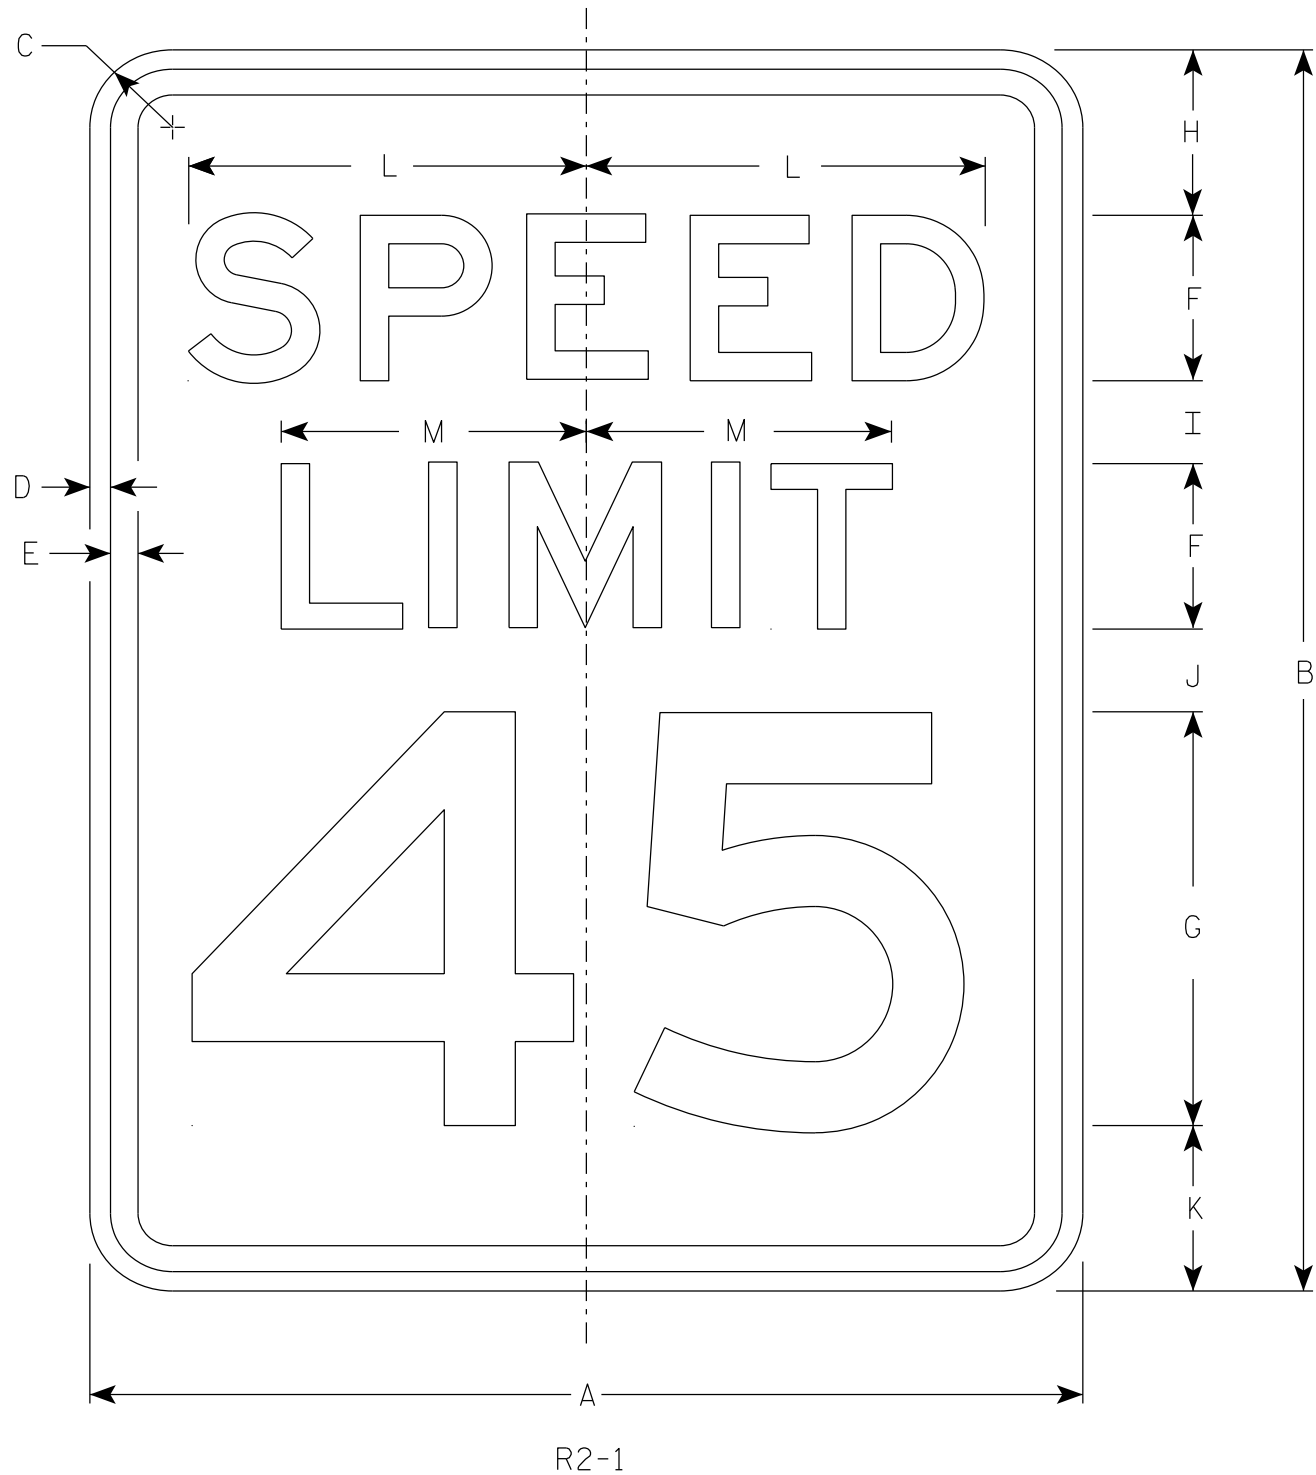

NOTES

- 1. Sign is Type II - Type H Reflective
- 2. Color:
Background - White
Message - Black
- 3. Message Series - E
- 4. Substitute appropriate numerals and optically adjust spacing to achieve proper balance.

7

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1	18	24	1 1/2	3/8	1/2	3	8	3	2	2	3	7 1/4	5 1/2														3.0
2S	24	30	1 1/2	3/8	1/2	4	10	3	2 1/4	3 3/8	3 3/8	9 5/8	7 3/8														5.0
2M	30	36	1 7/8	1/2	5/8	5	12	5	2 1/2	2 1/2	4	12	9 1/4														7.5
3	36	48	1 7/8	1/2	5/8	6	14	6	5	5	6	14 3/8	11														12.0
4	36	48	1 7/8	1/2	5/8	6	14	6	5	5	6	14 3/8	11														12.0
5	48	60	3	3/4	1	8	20	6	4 1/2	6 3/4	6 3/4	19 1/4	14 5/8														20.0


STANDARD SIGN
R2 - 1

WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
for State Traffic Engineer


DATE 2/1/23 PLATE NO. R2-1.14

7

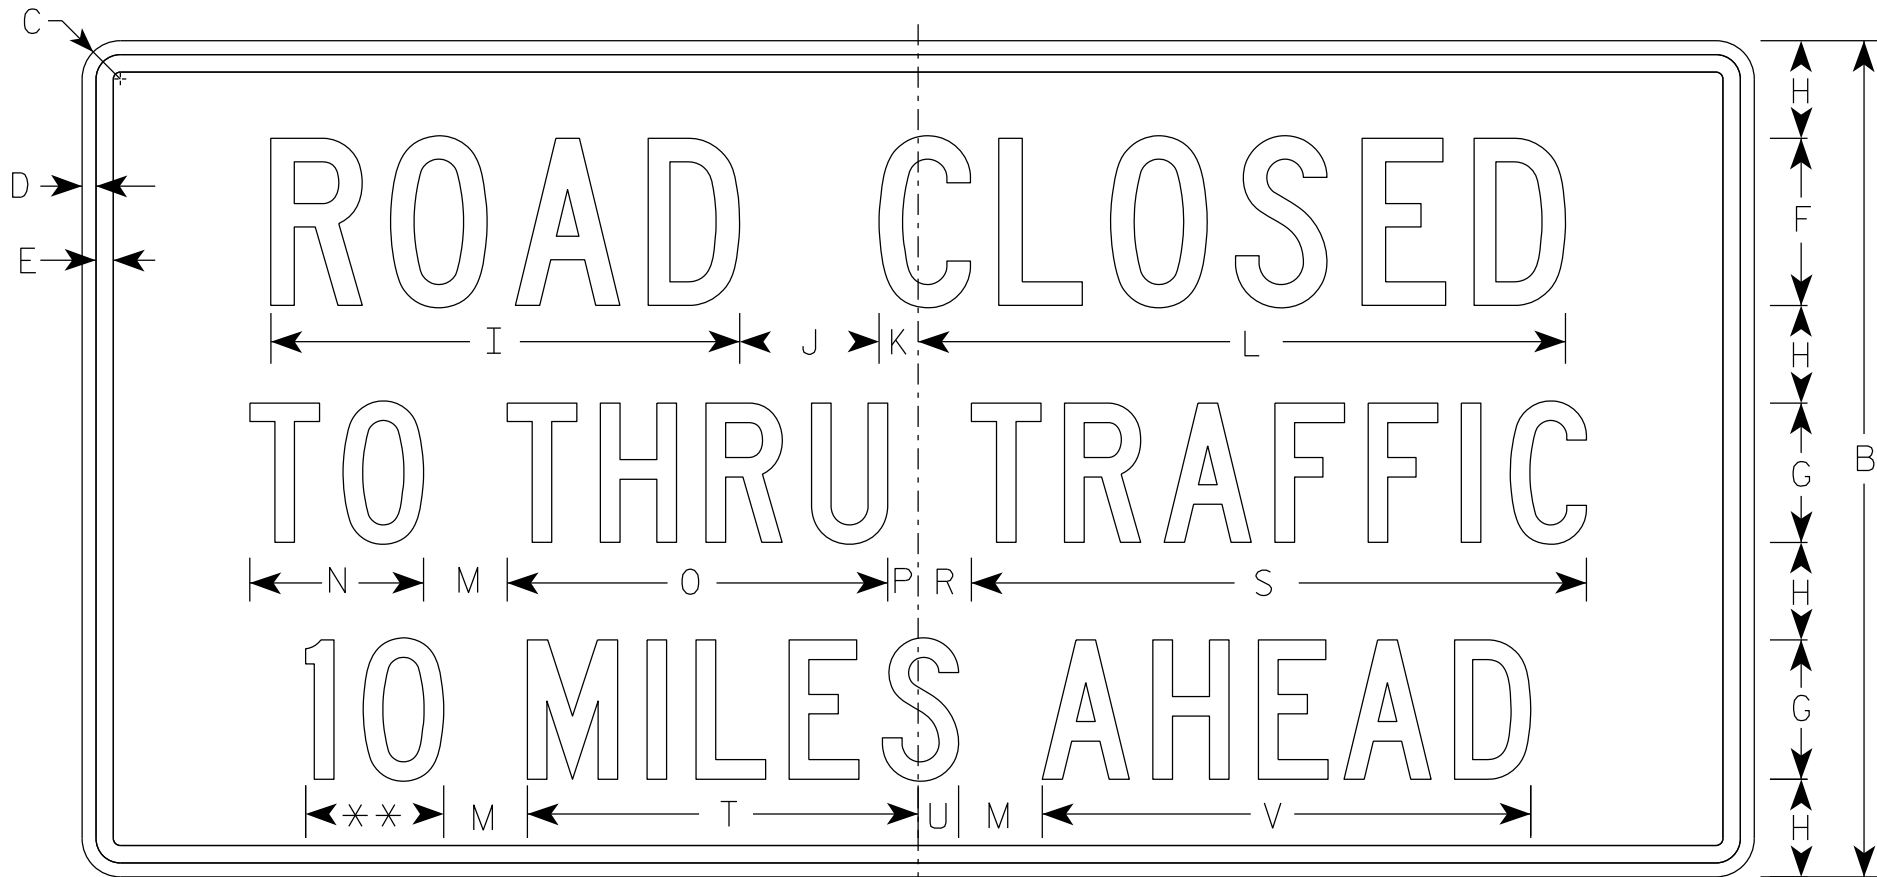

R11-3

** See Note 5

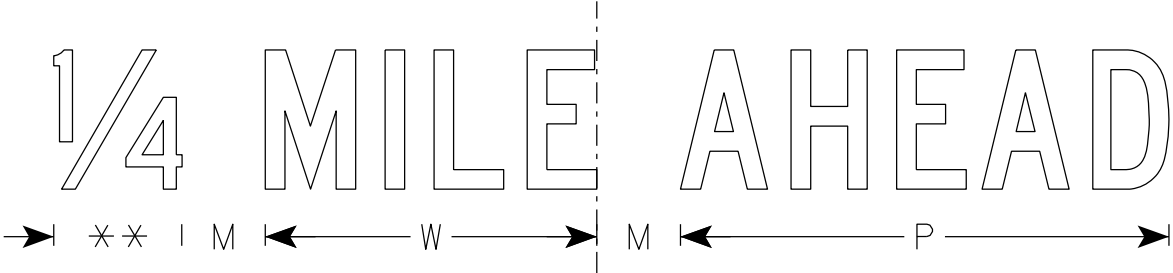

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1	36	18	1 1/2	3/8	3/8	4	3	2	11 1/4	3	1 1/8	15 3/8	2	3 3/4	8 1/4	5/8		1 3/8	13 1/4	8 3/8	7/8	10 1/2	7 1/8				4.5
2S	60	30	1 7/8	1/2	5/8	6	5	3 1/2	16 7/8	5	1 3/8	23 1/4	3	6 1/4	13 5/8	1 1/8		1 7/8	22 1/8	14	1 1/2	17 1/2	11 7/8				12.5
2M	60	30	1 7/8	1/2	5/8	6	5	3 1/2	16 7/8	5	1 3/8	23 1/4	3	6 1/4	13 5/8	1 1/8		1 7/8	22 1/8	14	1 1/2	17 1/2	11 7/8				12.5
3																											
4																											
5																											

PROJECT NO:

HWY:

COUNTY:

SHEET NO:

E


NOTES

- Sign is Type II - Type H Reflective
- Color:




Background - White

Message - Black
- Message Series - C
- Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.
- Substitute appropriate numerals to nearest quarter mile and optically adjust spacing to achieve proper balance.

7

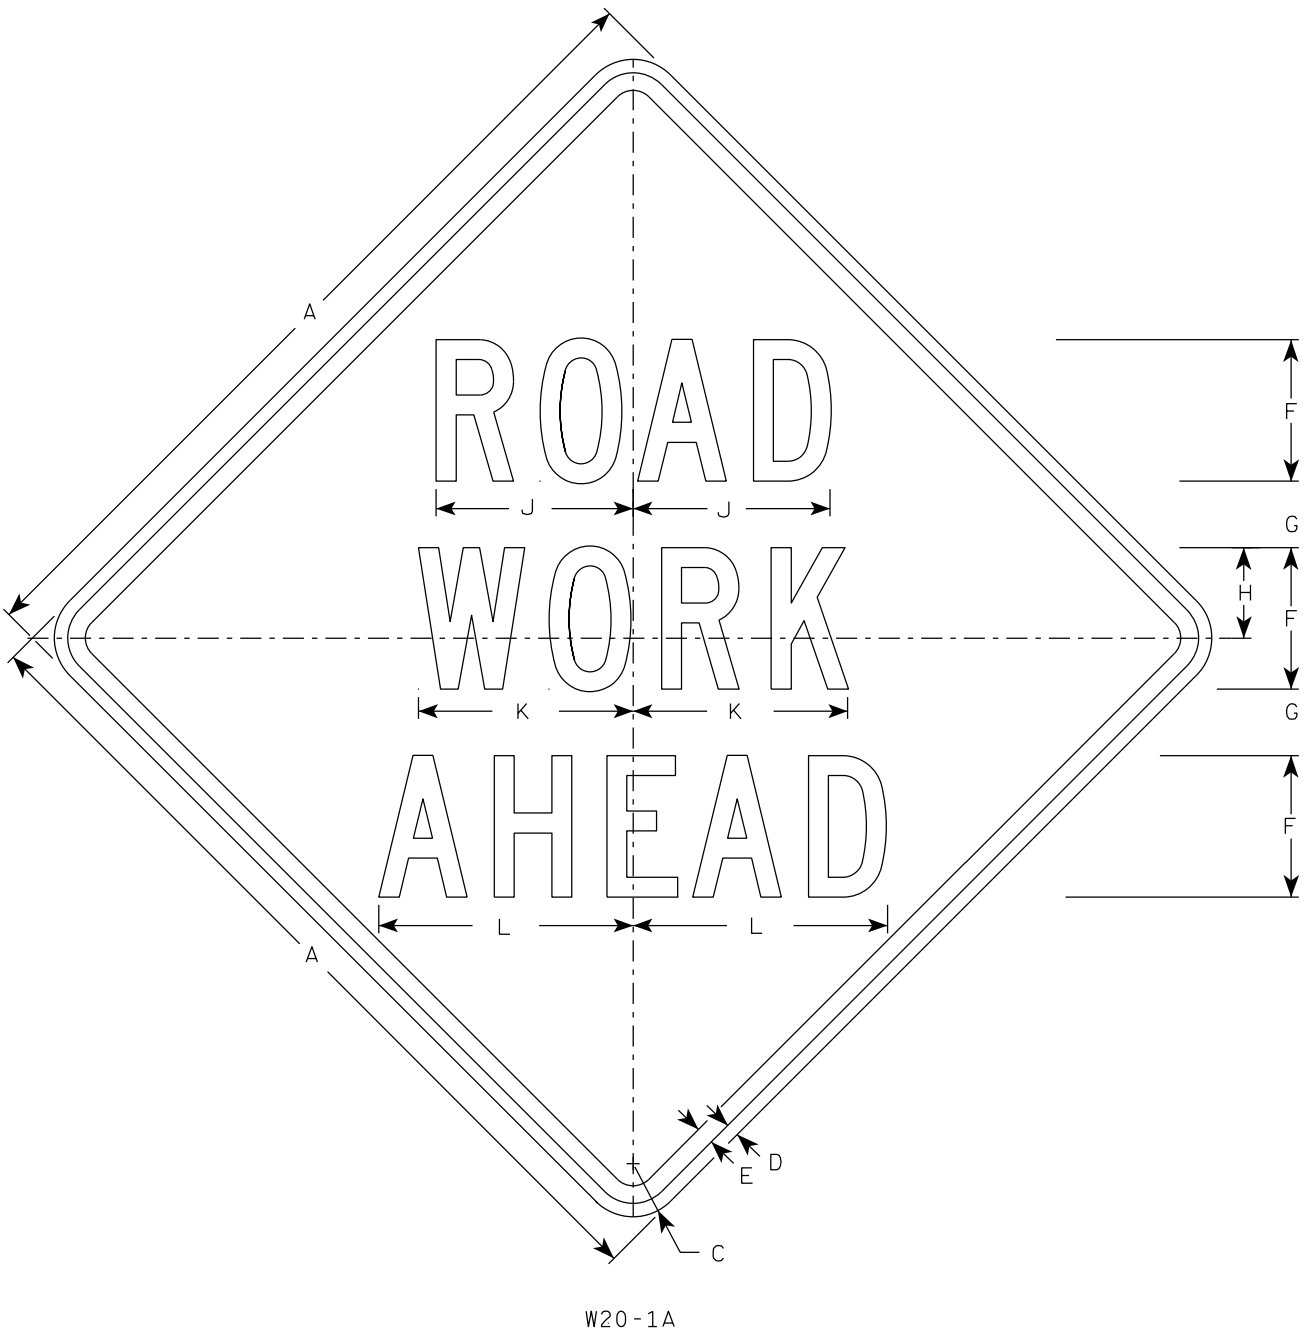


W20-1A

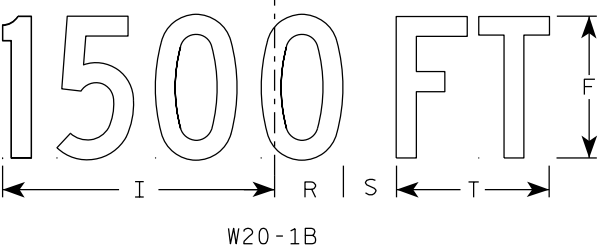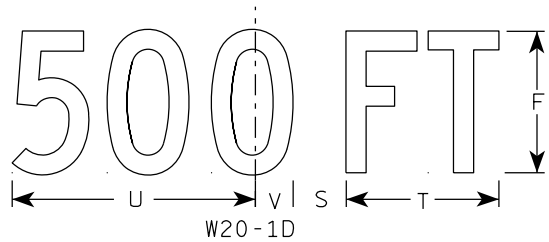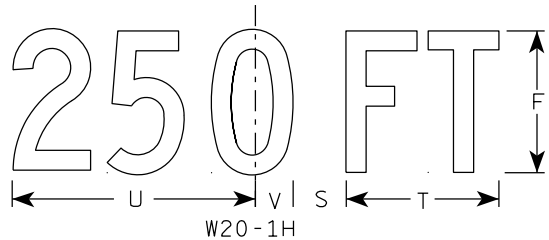


W20-1B


- NOTES
1. Sign is Type II - Type F Reflective
 2. Color:
Background - Orange
Message - Black
 3. Message Series - C
 4. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.

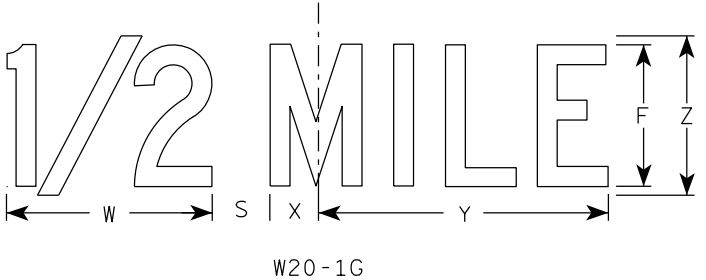

W20-1G






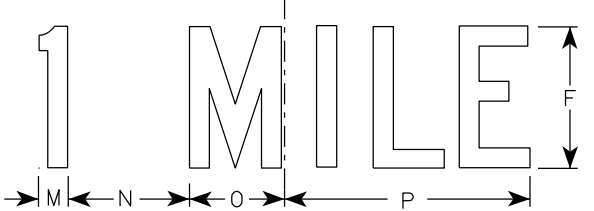


W20-1F

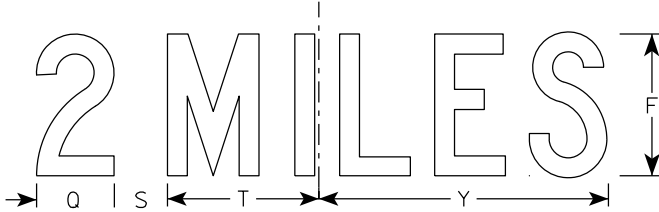

W20-1E

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	v	W	X	Y	Z	Area sq. ft.
1	36		2 1/4	5/8	3/4	5	2 5/8	3 1/4	10 1/8	7	7 5/8	8 7/8	1 1/8	4 1/2	3 1/2	9	3 1/4	2 1/2	2 1/4	5 5/8	9	1 3/8	8	1 3/4	10 3/4	6	9.0
2S	48		3	3/4	1	8	3 3/4	5 1/8	15 3/8	11 1/8	12 1/8	14 3/8	1 5/8	6 7/8	5 3/8	13 7/8	4 3/8	3 7/8	3	8 5/8	13 3/4	2 1/8	11 7/8	2 3/4	16 3/8	9	16.0
2M	48		3	3/4	1	8	3 3/4	5 1/8	15 3/8	11 1/8	12 1/8	14 3/8	1 5/8	6 7/8	5 3/8	13 7/8	4 3/8	3 7/8	3	8 5/8	13 3/4	2 1/8	11 7/8	2 3/4	16 3/8	9	16.0
3	48		3	3/4	1	8	3 3/4	5 1/8	15 3/8	11 1/8	12 1/8	14 3/8	1 5/8	6 7/8	5 3/8	13 7/8	4 3/8	3 7/8	3	8 5/8	13 3/4	2 1/8	11 7/8	2 3/4	16 3/8	9	16.0
4	48		3	3/4	1	8	3 3/4	5 1/8	15 3/8	11 1/8	12 1/8	14 3/8	1 5/8	6 7/8	5 3/8	13 7/8	4 3/8	3 7/8	3	8 5/8	13 3/4	2 1/8	11 7/8	2 3/4	16 3/8	9	16.0
5	48		3	3/4	1	8	3 3/4	5 1/8	15 3/8	11 1/8	12 1/8	14 3/8	1 5/8	6 7/8	5 3/8	13 7/8	4 3/8	3 7/8	3	8 5/8	13 3/4	2 1/8	11 7/8	2 3/4	16 3/8	9	16.0

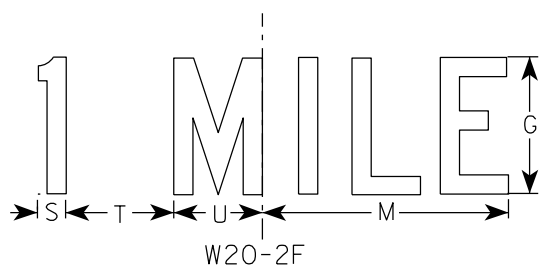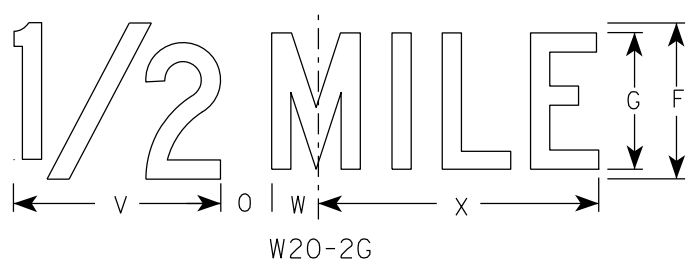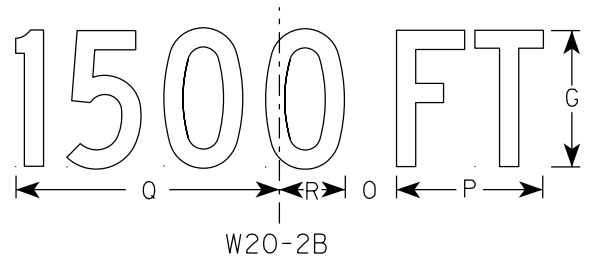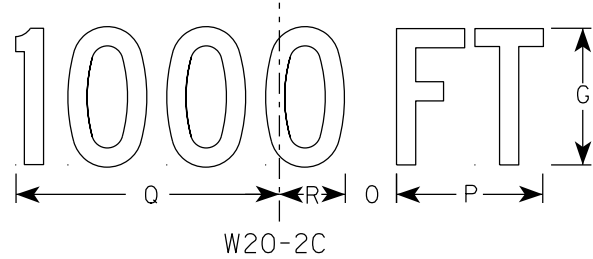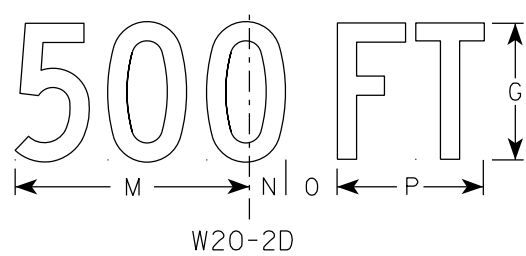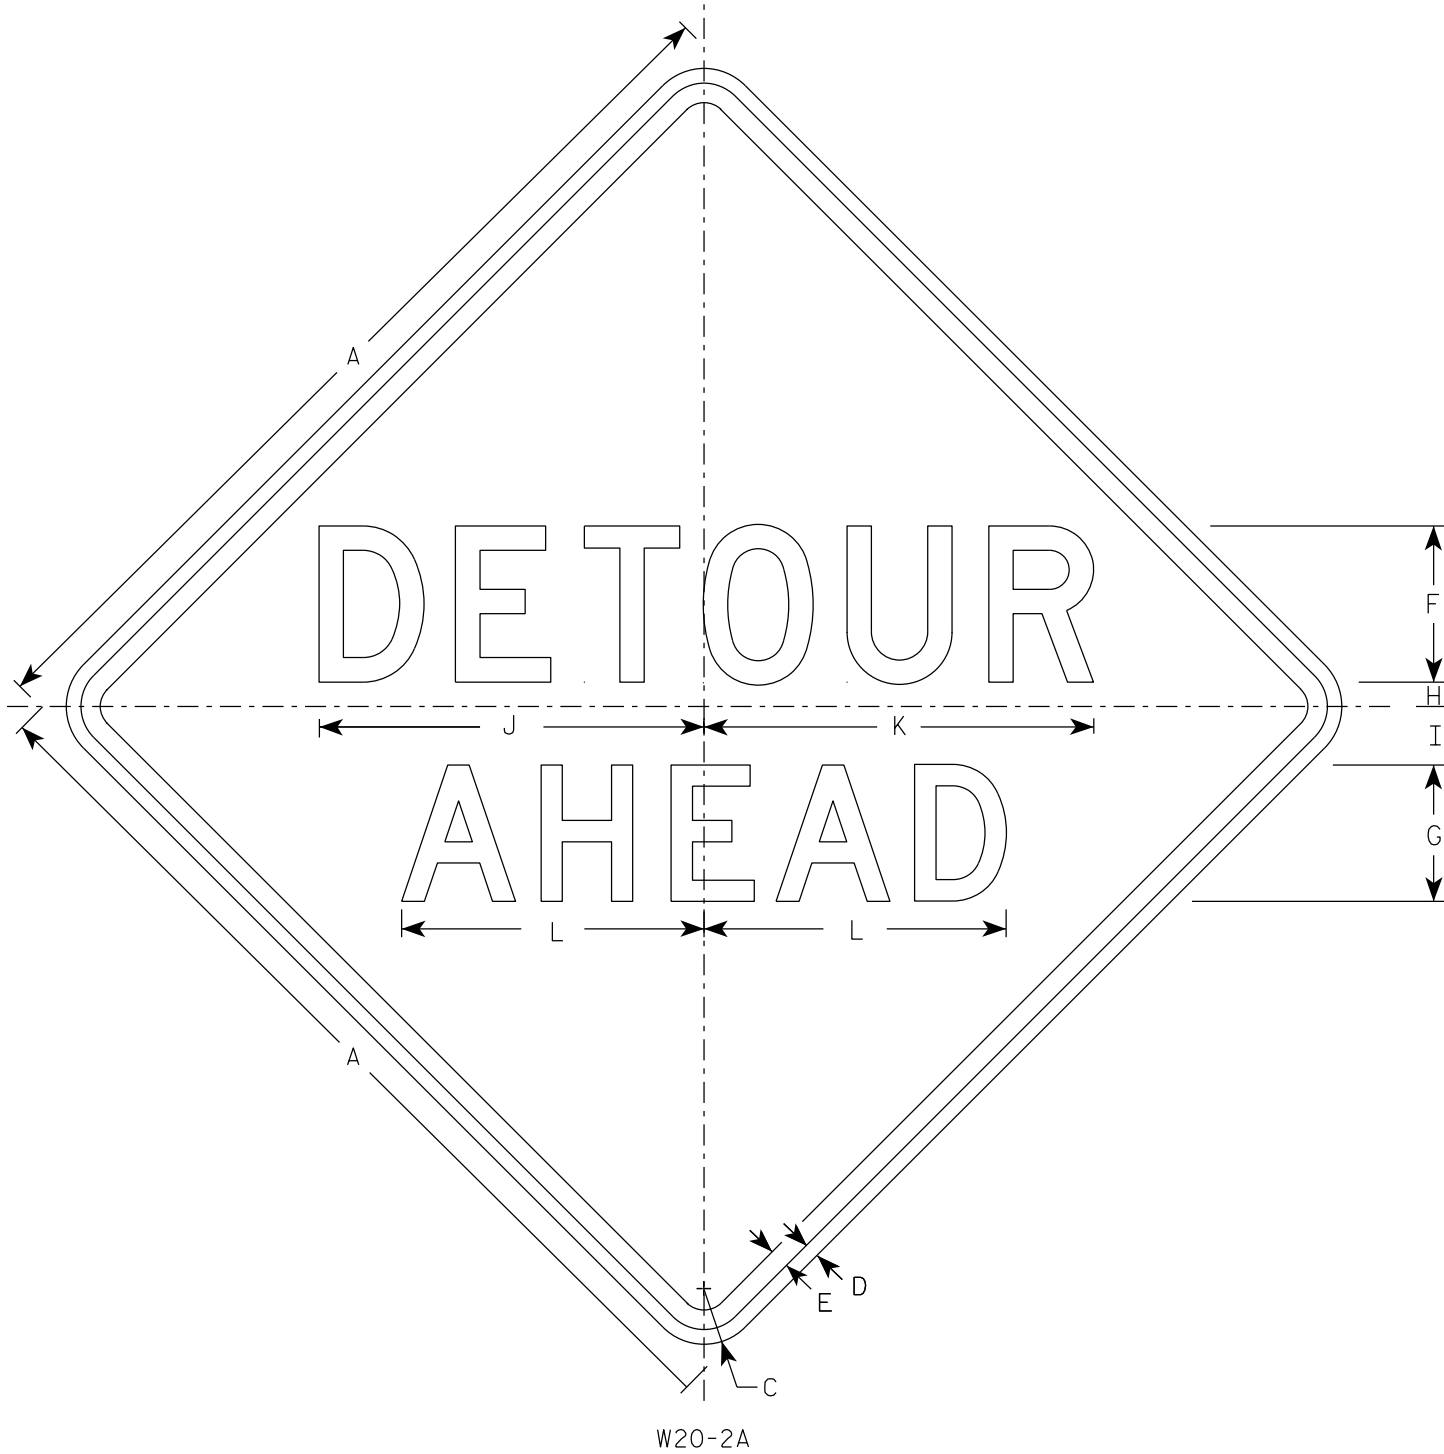

NOTES


1. Sign is Type II - Type F Reflective
2. Color:
Background - Orange
Message - Black
3. Message Series - See note 5
4. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.
5. Line 1 is Series D.
Line 2 is Series D for AHEAD and Series C for all other distances.

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	v	w	X	Y	Z	Area sq. ft.
1	36		2 1/4	5/8	3/4	6	5	1	2 1/4	14 3/4	15	11 5/8	9	1 3/8	1 7/8	5 5/8	10 1/8	2 1/2	1 1/8	4 1/2	3 1/2	8	1 3/4	10 3/4			9.0
2S	48		3	3/4	1	8	7	1 1/4	3	19 3/4	20	15 1/2	12	1 7/8	2 5/8	7 1/2	13 1/2	3 3/8	1 1/2	6	4 5/8	10 5/8	2 3/8	14 3/8			16.0
2M	48		3	3/4	1	8	7	1 1/4	3	19 3/4	20	15 1/2	12	1 7/8	2 5/8	7 1/2	13 1/2	3 3/8	1 1/2	6	4 5/8	10 5/8	2 3/8	14 3/8			16.0
3	48		3	3/4	1	8	7	1 1/4	3	19 3/4	20	15 1/2	12	1 7/8	2 5/8	7 1/2	13 1/2	3 3/8	1 1/2	6	4 5/8	10 5/8	2 3/8	14 3/8			16.0
4	48		3	3/4	1	8	7	1 1/4	3	19 3/4	20	15 1/2	12	1 7/8	2 5/8	7 1/2	13 1/2	3 3/8	1 1/2	6	4 5/8	10 5/8	2 3/8	14 3/8			16.0
5	48		3	3/4	1	8	7	1 1/4	3	19 3/4	20	15 1/2	12	1 7/8	2 5/8	7 1/2	13 1/2	3 3/8	1 1/2	6	4 5/8	10 5/8	2 3/8	14 3/8			16.0

STANDARD SIGN W20-2A,B,C,D,F & G	
WISCONSIN DEPT OF TRANSPORTATION	
APPROVED	<i>Matthew R. Rauch</i> For State Traffic Engineer
DATE 1/10/2024	PLATE NO. W20-2.7

PROJECT NO:	HWY:	COUNTY:	SHEET NO:	E
-------------	------	---------	-----------	---

7

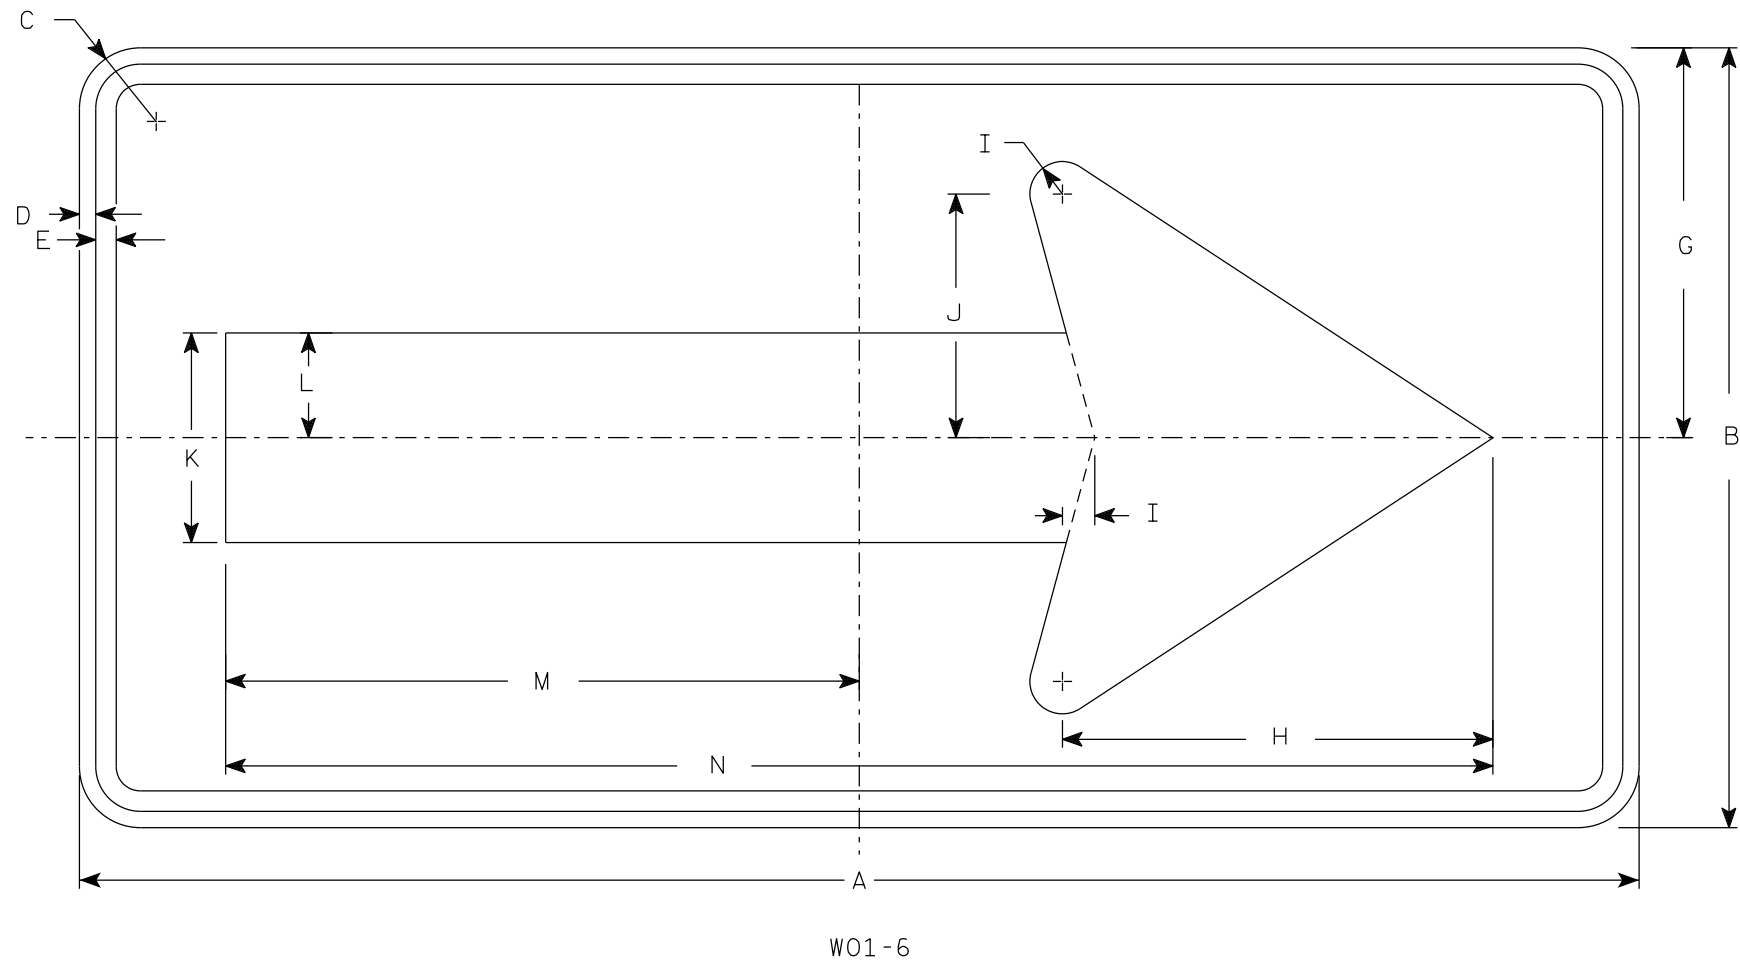

NOTES

1. Sign is Type II - Type F Reflective
2. Color:
Background - Orange
Message - Black
3. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.

7

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1																											
2S	48	24	1 7/8	1/2	5/8		12	13 1/4	1	7 1/2	6 1/2	3 1/4	19 1/2	39													8.0
2M	48	24	1 7/8	1/2	5/8		12	13 1/4	1	7 1/2	6 1/2	3 1/4	19 1/2	39													8.0
3	60	30	1 7/8	1/2	5/8		15	16 1/4	1 1/4	9 1/4	8	4	24 3/8	48 3/4													12.5
4	60	30	1 7/8	1/2	5/8		15	16 1/4	1 1/4	9 1/4	8	4	24 3/8	48 3/4													12.5
5	60	30	1 7/8	1/2	5/8		15	16 1/4	1 1/4	9 1/4	8	4	24 3/8	48 3/4													12.5

STANDARD SIGN
W01-6

WISCONSIN DEPT OF TRANSPORTATION

APPROVED
Matthew R. Rauch
for State Traffic Engineer

DATE 1/24/2024 PLATE NO. W01-6.2

PROJECT NO:

HWY:

COUNTY:

SHEET NO:

E

(X) INDICATES WING NUMBER

STATE PROJECT NUMBER

6998-13-73

DESIGN DATA

LIVE LOAD:

INVENTORY RATING: HS = 16
OPERATING RATING: HS = 27
WISCONSIN STANDARD PERMIT VEHICLE (WIS-SPV): 250 (KIPS)

MATERIAL PROPERTIES:

CONCRETE MASONRY:
SUPERSTRUCTURE & OVERLAY DECKS $f'_c = 4,000$ PSI
ALL OTHER $f'_c = 3,500$ PSI


TRAFFIC DATA

FEATURE ON: WEST ZINDA DRIVE


ADT = 660 (2025)
ADT = 720 (2045)
R.D.S. = 60 MPH

LIST OF DRAWINGS:

1. GENERAL PLAN
2. TYPICAL SECTION & QUANTITIES
3. INFRARED INSPECTION RESULTS

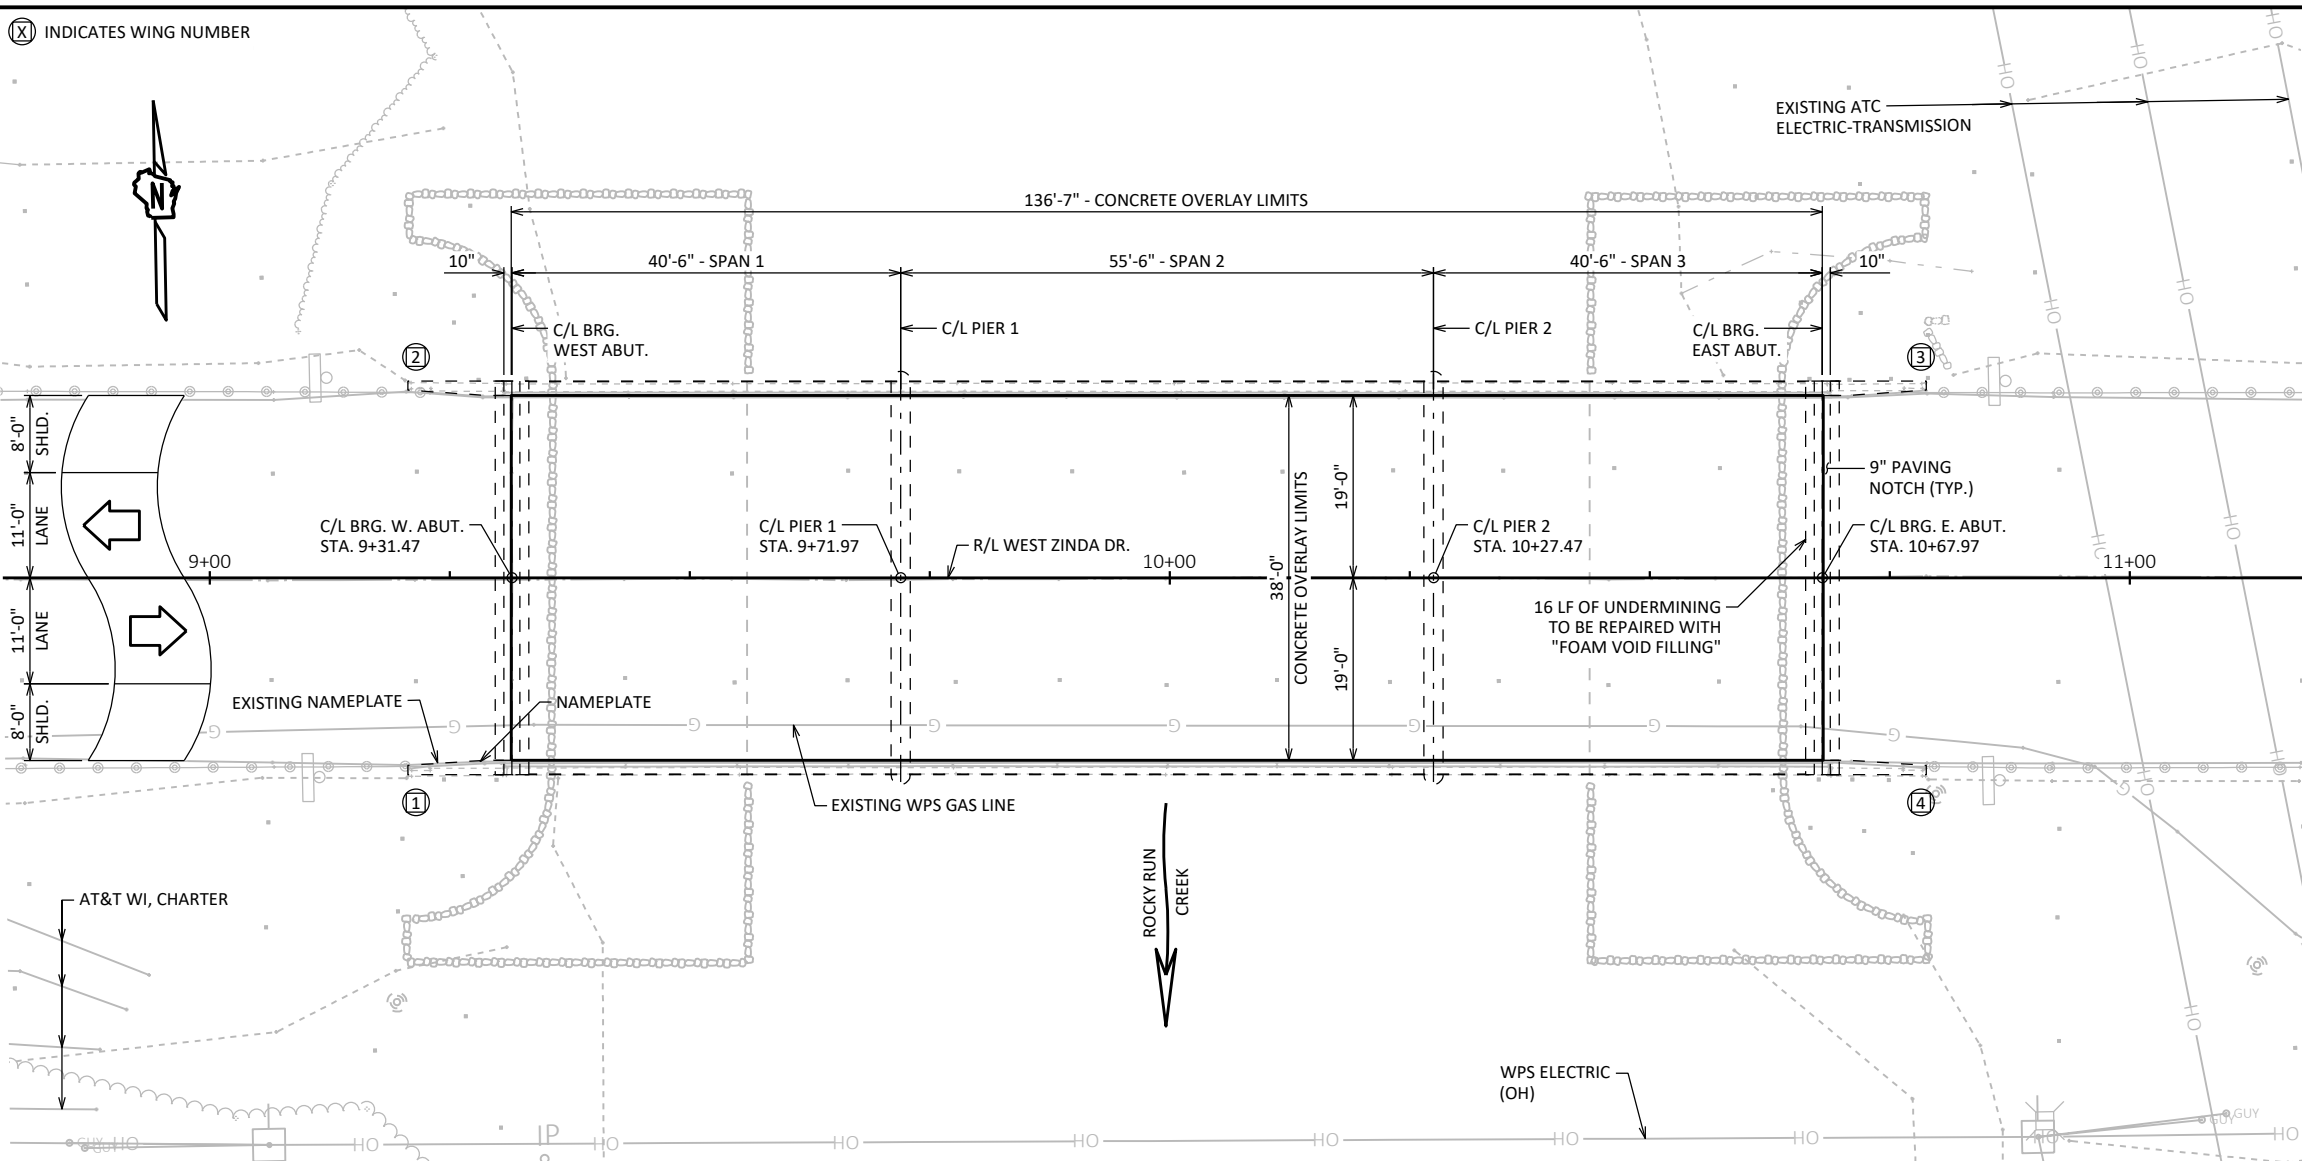


PLAN

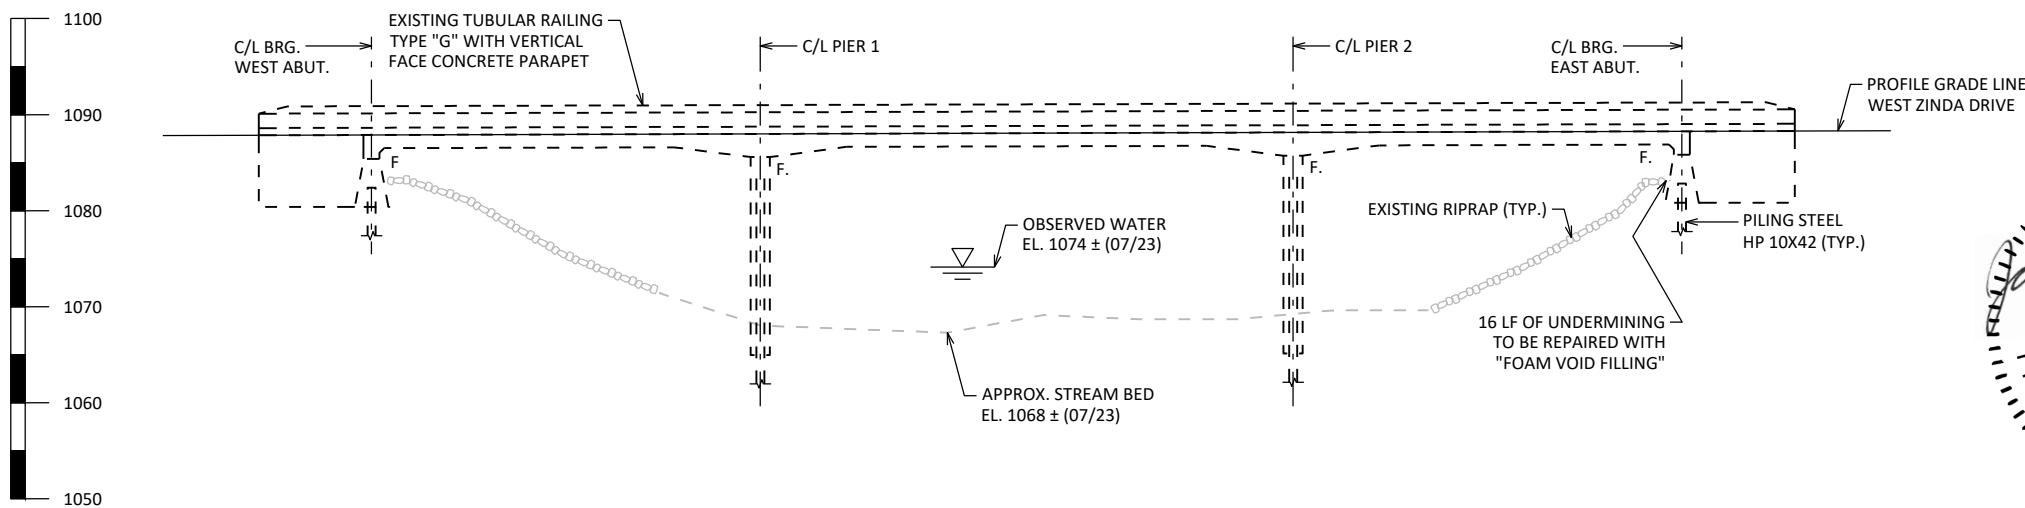

ELEVATION

(NORMAL TO ROCKY RUN CREEK)

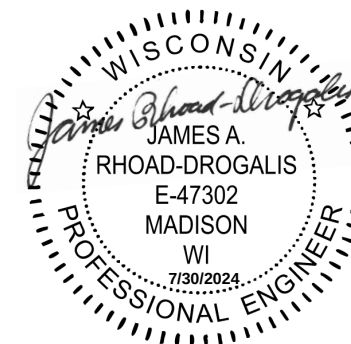

STRUCTURE DESIGN CONTACT:
BUREAU OF STRUCTURES:
AARON BONK (608) 261-0261
CONSULTANT:
JAMES RHOAD-DROGALIS (608) 828-8166

NO.	DATE	REVISION	BY
AECOM			
STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION			
ACCEPTED		SDR	08/13/24 DATE
STRUCTURE B-49-61			
WEST ZINDA DRIVE OVER ROCKY RUN CREEK			
COUNTY	PORTAGE	TOWN/CITY/VILLAGE	STEVENS POINT
DESIGN SPEC. REHABILITATION N/A			
DESIGNED BY	UD	CK'D	JRD
DRAWN BY	UD	CK'D	JRD
GENERAL PLAN			SHEET 1 OF 3

I.D. 6998-13-03

DATE: JUNE 2024

GENERAL NOTES

DRAWINGS SHALL NOT BE SCALED.

DIMENSIONS SHOWN ARE BASED ON THE ORIGINAL STRUCTURE PLANS.

PROTECTIVE SURFACE TREATMENT TO BE APPLIED TO THE ENTIRE TOP OF THE NEW CONCRETE OVERLAY.

SEAL OVERLAY CONSTRUCTION JOINTS ACCORDING TO SECTION 502.3.13.1 OF THE STANDARD SPECIFICATIONS. COST INCIDENTAL TO BID ITEM "CONCRETE MASONRY OVERLAY DECKS".

A MINIMUM OF 1-INCH OF CONCRETE SHALL BE REMOVED FROM THE ENTIRE BRIDGE DECK UNDER THE BID ITEM "CLEANING DECKS".

THE AVERAGE OVERLAY THICKNESS IS BASED ON THE THICKENESS OF THE OVERLAY PLUS ½-INCH TO ACCOUNT FOR VARIATIONS IN THE DECK SURFACE.

PREPARATION DECKS TYPE 1, PREPARATION DECKS TYPE 2, AND FULL-DEPTH DECK REPAIR AREAS AS DETERMINED BY THE ENGINEER. DECK PREPARATION AND FULL-DEPTH DECK REPAIRS SHALL BE FILLED WITH "CONCRETE MASONRY OVERLAY DECKS".

ANY EXCAVATION NECESSARY TO COMPLETE THE OVERLAY AT THE ABUTMENTS IS TO BE CONSIDERED INCIDENTAL TO THE BID ITEM "CONCRETE MASONRY OVERLAY DECKS".

PROFILE GRADE LINE SHALL BE DETERMINED IN THE FIELD BASED ON A MINIMUM OVERLAY THICKNESS OF 1½" AT THE EDGES AND 3¾" AT THE CENTERLINE PLACED ABOVE THE DECK SURFACE AFTER SURFACE PREPARATION. EXPECTED AVERAGE OVERLAY THICKNESS IS 3¾". IF EXPECTED AVERAGE OVERLAY THICKNESS IS EXCEEDED BY MORE THAN ½", CONTACT THE STRUCTURES DESIGN SECTION.

PIGMENTED SURFACE SEALER SHALL BE APPLIED TO THE TOP AND INSIDE FACES OF EXISTING PARAPETS.

"CONCRETE SURFACE REPAIR" IS ESTIMATED TO BE 39 S.F. AT ABUTMENTS, 64 SF AT PIERS AND 30 SF AT BARRIERS. "CONCRETE SURFACE REPAIR" AREAS SHOWN IN THE QUANTITIES TABLE ARE BASED ON THE BRIDGE INSPECTION REPORT AND FIELD VISIT MEASUREMENTS. EXACT AREAS OF REPAIR SHALL BE DETERMINED IN THE FIELD BY THE PROJECT ENGINEER.


"EPOXY CRACK SEALING" IS ESTIMATED TO BE 12 LF AT ABUTMENTS AND 10 LF AT PIERS. "EPOXY CRACK SEALING" AREAS SHOWN IN THE QUANTITIES TABLE ARE BASED ON THE BRIDGE INSPECTION REPORT AND FIELD VISIT MEASUREMENTS. EXACT LENGTHS OF SEALING SHALL BE DETERMINED IN THE FIELD BY THE PROJECT ENGINEER.

ALL CONCRETE REMOVAL NOT COVERED WITH CONCRETE OVERLAY SHALL BE DEFINED BY A 1-INCH DEEP SAW CUT.


THE PARAPET RECESS FOR THE W-BEAM CONNECTION SHALL BE FILLED WITH A TREATED TIMBER BLOCKOUT AND IS CONSIDERED INCIDENTAL TO BID ITEM "MGS THRIE BEAM TRANSITION". BLOCKOUT SIZE IS 1'-6" X 2'-0" X 3½".

THRIE BEAM ATTACHMENT TO PARAPET OBSCURES EXISTING NAMPLATE. THE CONTRACTOR SHALL SUPPLY A NEW NAMEPLATE IN ACCORDANCE WITH SECTION 502.3.11 OF THE STANDARD SPECIFICATIONS AND THE STANDARD DETAIL DRAWINGS. NAMEPLATE TO SHOW ORIGINAL CONSTRUCTION YEAR, SEE EXISTING NAMEPLATE FOR DATE. GRIND SURFACE OF EXISTING NAMEPLATE TO MAKE ILLEGIBLE. GRINDING OF NAMEPLATE SHALL BE CONSIDERED INCIDENTAL TO BID ITEM "NAMEPLATE".


ASBESTOS-CONTAINING MATERIAL (ACM) IS PRESENT ON B-49-0061. CATEGORY II NON-FRIABLE ACM WAS DETECTED IN THE GRAY CAULK MATERIAL ON PARAPET VERTICAL JOINTS. THIS MATERIAL IS TO BE REMOVED, AS NEEDED, AND PAID FOR UNDER BID ITEM "ABATEMENT OF ASBESTOS CONTAINING MATERIAL B-49-0061". PLACEMENT OF NEW SEALANT TO BE INCLUDED IN BID ITEM "REMOVING AND RESETTNG TUBULAR RAILING B-49-0061".

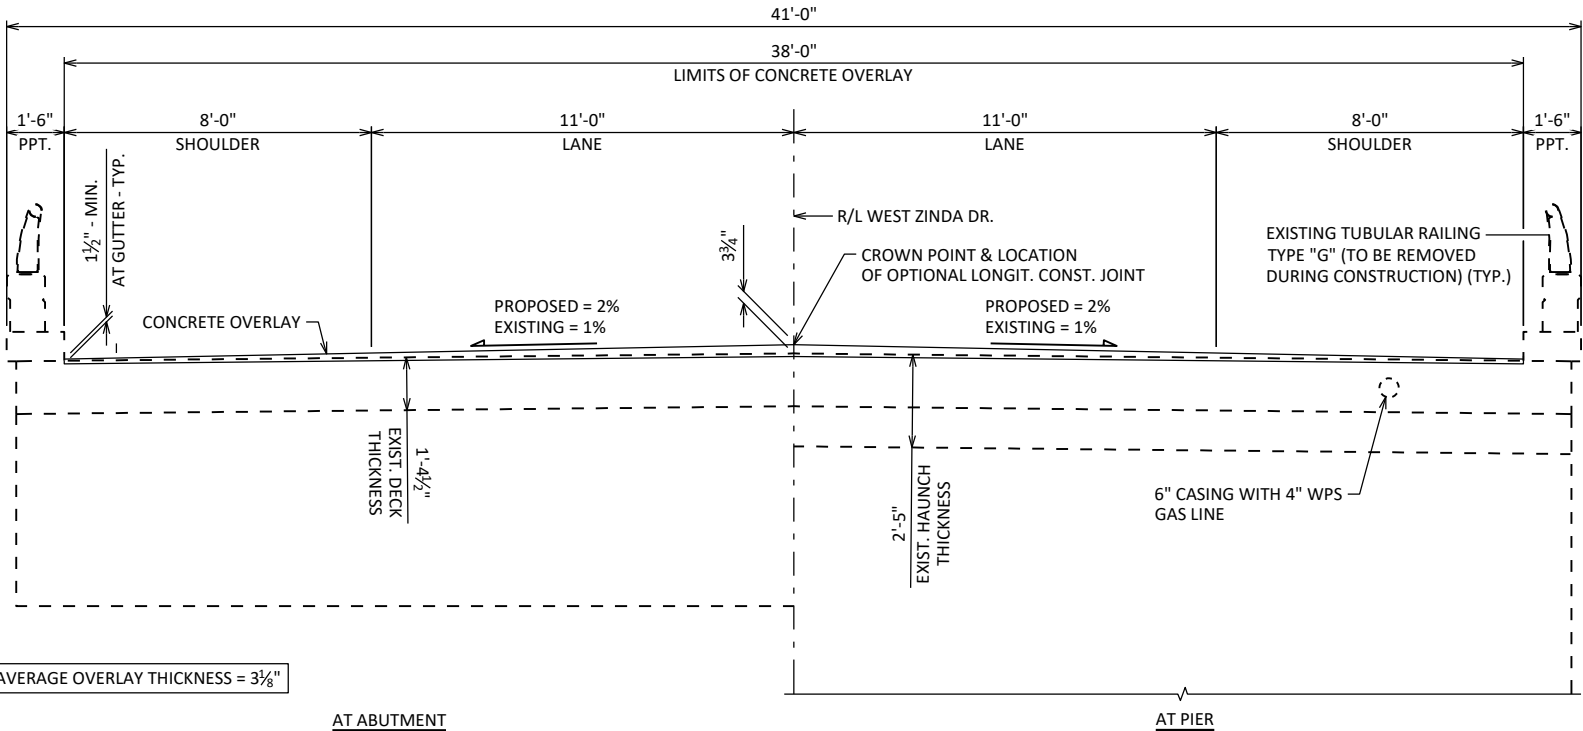

CROSS SECTION THRU ROADWAY
(LOOKING EAST)

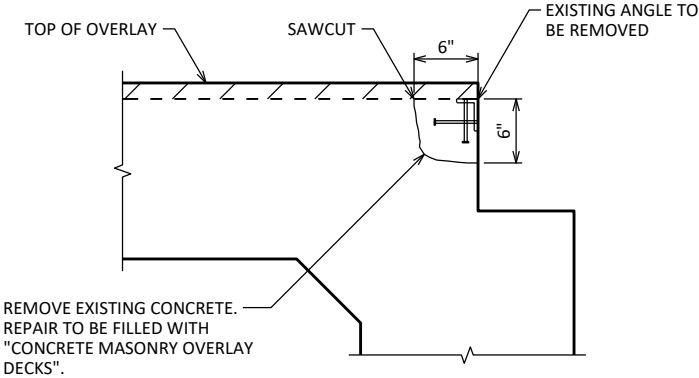

SECTION AT END OF SLAB

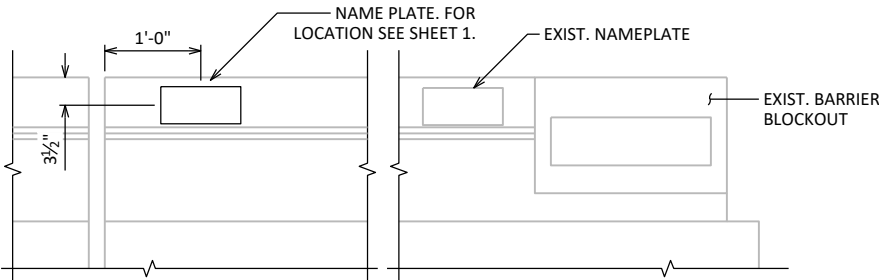


INSIDE ELEVATION OF PARAPET

TOTAL ESTIMATED QUANTITIES

BID ITEM NUMBER	BID ITEMS	UNIT	TOTALS
203.0211.S	ABATEMENT OF ASBESTOS CONTAINING MATERIAL B-49-0061	EACH	1
502.0100	CONCRETE MASONRY BRIDGES	CY	1
502.3200	PROTECTIVE SURFACE TREATMENT	SY	580
502.3205	PIGMENTED SURFACE SEALER RESEAL	SY	130
509.0301	PREPARATION DECK TYPE 1	SY	216
509.0302	PREPARATION DECK TYPE 2	SY	162
509.0500	CLEANING DECKS	SY	580
509.1500	CONCRETE SURFACE REPAIR	SF	133
509.2000	FULL-DEPTH DECK REPAIR	SY	2
509.2500	CONCRETE MASONRY OVERLAY DECKS	CY	51
509.9020.S	EPOXY CRACK SEALING	LF	22
513.9006.S	REMOVING AND RESETTNG TUBULAR RAILING B-49-0061	EACH	1
SPV.0060.01	FOAM VOID FILLING B-49-0061	EACH	1
	NON-BID ITEMS		
	NAMEPLATE	EACH	1

NO.	DATE	REVISION	BY
STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION			
STRUCTURE B-49-61			
	DRAWN BY	DCH	PLANS CK'D JRD
TYPICAL SECTION & QUANTITIES			SHEET 2 OF 3


SCALE =

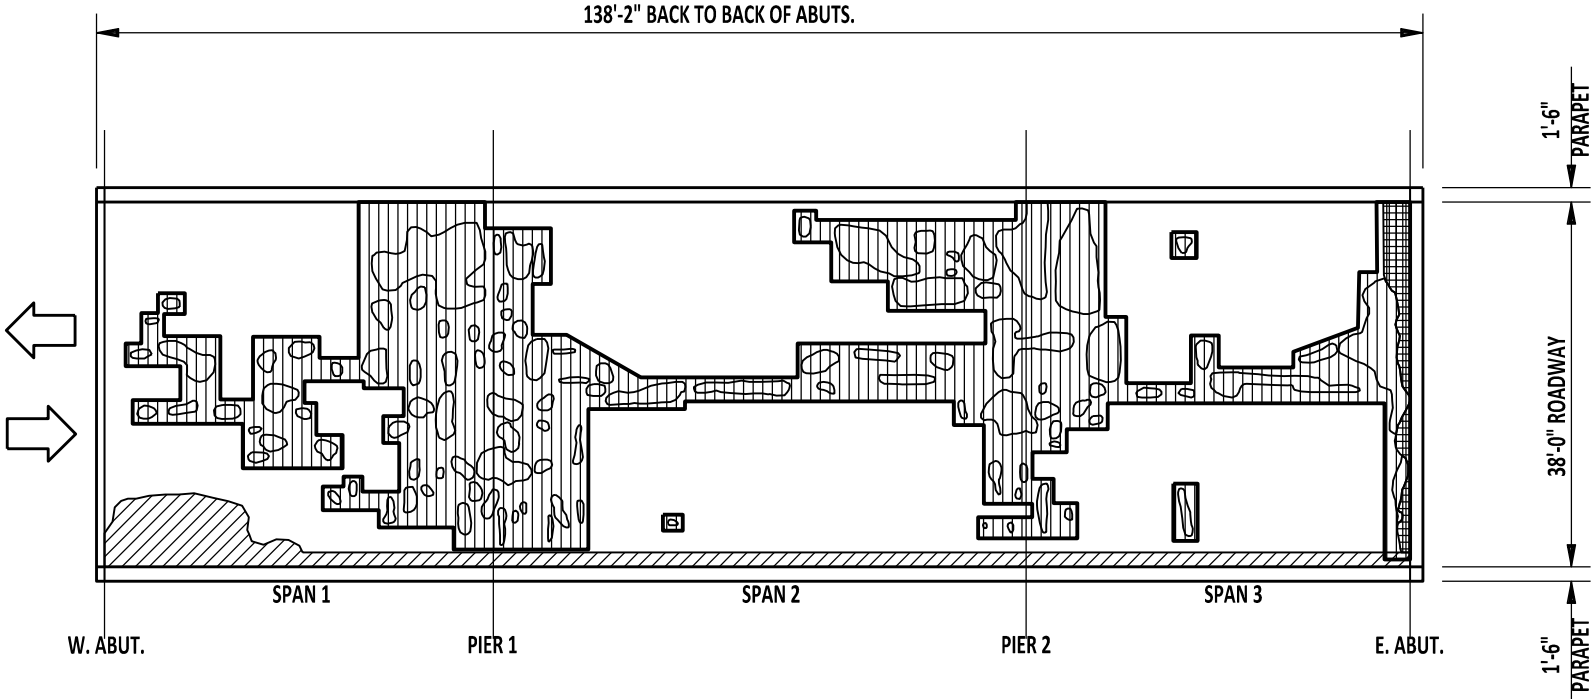

PLAN

PROPOSED REHABILITATION AREAS

FIELD OBSERVATIONS SUMMARY		STRUCTURE NO. B-49-61		LEGEND	
ITEM	UNIT	QUANT.	%		
TOTAL AREA	YD ²	577.6		DECK PREPARATION AREA	DELAMINATION
SHADE/DEBRIS	YD ²	32.2			SPALL
PREPARATION, DECKS, TYPE 1	YD ²	215.2	39.5	SHADE/DEBRIS	DEBOND
PREPARATION, DECKS, TYPE 2	YD ²	161.4	29.6		ASPHALT PATCH
FULL DEPTH DECK REPAIR	YD ²	2.0	0.4		PCC PATCH



SURFACE TYPE: CONCRETE - NO OVERLAY
INFRARED INSPECTION DATE: 8/30/23, 10:30 AM

NO.	DATE	REVISION	BY
STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION			
STRUCTURE B-49-61			
DRAWN BY		UD	PLANS CK'D JRD
INFRARED INSPECTION RESULTS		SHEET 3 OF 3	

SCALE =


WEST ZINDA DRIVE - WEST							
STATION	DISTANCE	AREA (SF)		INCREMENTAL VOL (CY) (UNADJUSTED)		CUMULATIVE VOL (CY)	
		CUT	FILL	CUT	FILL	CUT	EXPANDED FILL
				NOTE 1	NOTE 3	1.00 NOTE 1	1.25 NOTE 8
6+76.47		20.16	0.00	0	0	0	0
7+00.00	24	17.38	0.74	16	0	16	16
7+11.54	12	36.11	0.29	11	0	27	27
7+28.89	17	37.78	0.11	24	0	51	51
7+40.79	12	39.33	0.00	17	0	68	68
7+50.00	9	41.36	0.02	14	0	82	82
7+75.00	25	40.41	0.21	38	0	120	120
8+00.00	25	52.93	0.00	43	0	163	163
8+10.00	10	51.01	2.06	19	0	182	182
8+30.61	21	41.53	15.73	35	7	217	208
8+50.00	19	38.58	8.45	29	9	246	226
8+55.61	6	38.16	6.55	8	2	254	232
8+60.00	4	69.32	5.47	9	1	263	239
8+80.61	21	60.54	7.43	50	5	313	283
9+00.00	19	58.36	23.84	43	11	356	312
9+20.64	21	53.88	54.65	43	30	399	318
				399	65		


NOTES:
1 - CUT INCLUDES SALVAGED/UNUSABLE PAVEMENT MATERIAL
3 - UNEXPANDED FILL VOLUME
8 - THE MASS ORDINATE + OR - QTY CALCULATED BETWEEN STATIONS. PLUS QUANTITY INDICATES AN EXCESS OF MATERIAL. MINUS QUANTITY INDICATES A SHORTAGE OF MATERIAL.


WEST ZINDA DRIVE - EAST


STATION	DISTANCE	AREA (SF)		INCREMENTAL VOL (CY) (UNADJUSTED)		CUMULATIVE VOL (CY)		
		CUT	FILL	CUT	FILL	CUT 1.00 NOTE 1	EXPANDED FILL 1.25	MASS ORDINATE NOTE 8
10+78.80		57.76	30.44	0	0	0	0	0
11+00.00	21	67.30	1.34	49	12	49	15	34
11+18.00	18	67.26	1.10	45	1	94	16	78
11+18.82	1	35.52	1.15	2	0	96	16	80
11+43.82	25	34.26	3.58	32	2	128	19	109
11+50.00	6	34.45	4.98	8	1	136	20	116
11+68.82	19	36.85	12.65	25	6	161	28	134
12+00.00	31	42.80	3.28	46	9	207	39	168
12+12.01	12	44.30	1.58	19	1	226	40	186
12+19.84	8	45.58	1.09	13	0	239	40	199
12+22.53	3	46.44	0.98	5	0	244	40	204
12+50.00	27	20.09	0.00	34	0	278	40	238
12+75.00	25	19.65	0.00	18	0	296	40	256
13+00.00	25	19.75	0.68	18	0	314	40	274
13+12.74	13	19.64	0.47	9	0	323	40	283
				323	32			


NOTES:
1 - CUT INCLUDES SALVAGED/UNUSABLE PAVEMENT MATERIAL
3 - UNEXPANDED FILL VOLUME
8 - THE MASS ORDINATE + OR - QTY CALCULATED BETWEEN STATIONS. PLUS QUANTITY INDICATES AN EXCESS OF MATERIAL. MINUS QUANTITY INDICATES A SHORTAGE OF MATERIAL.

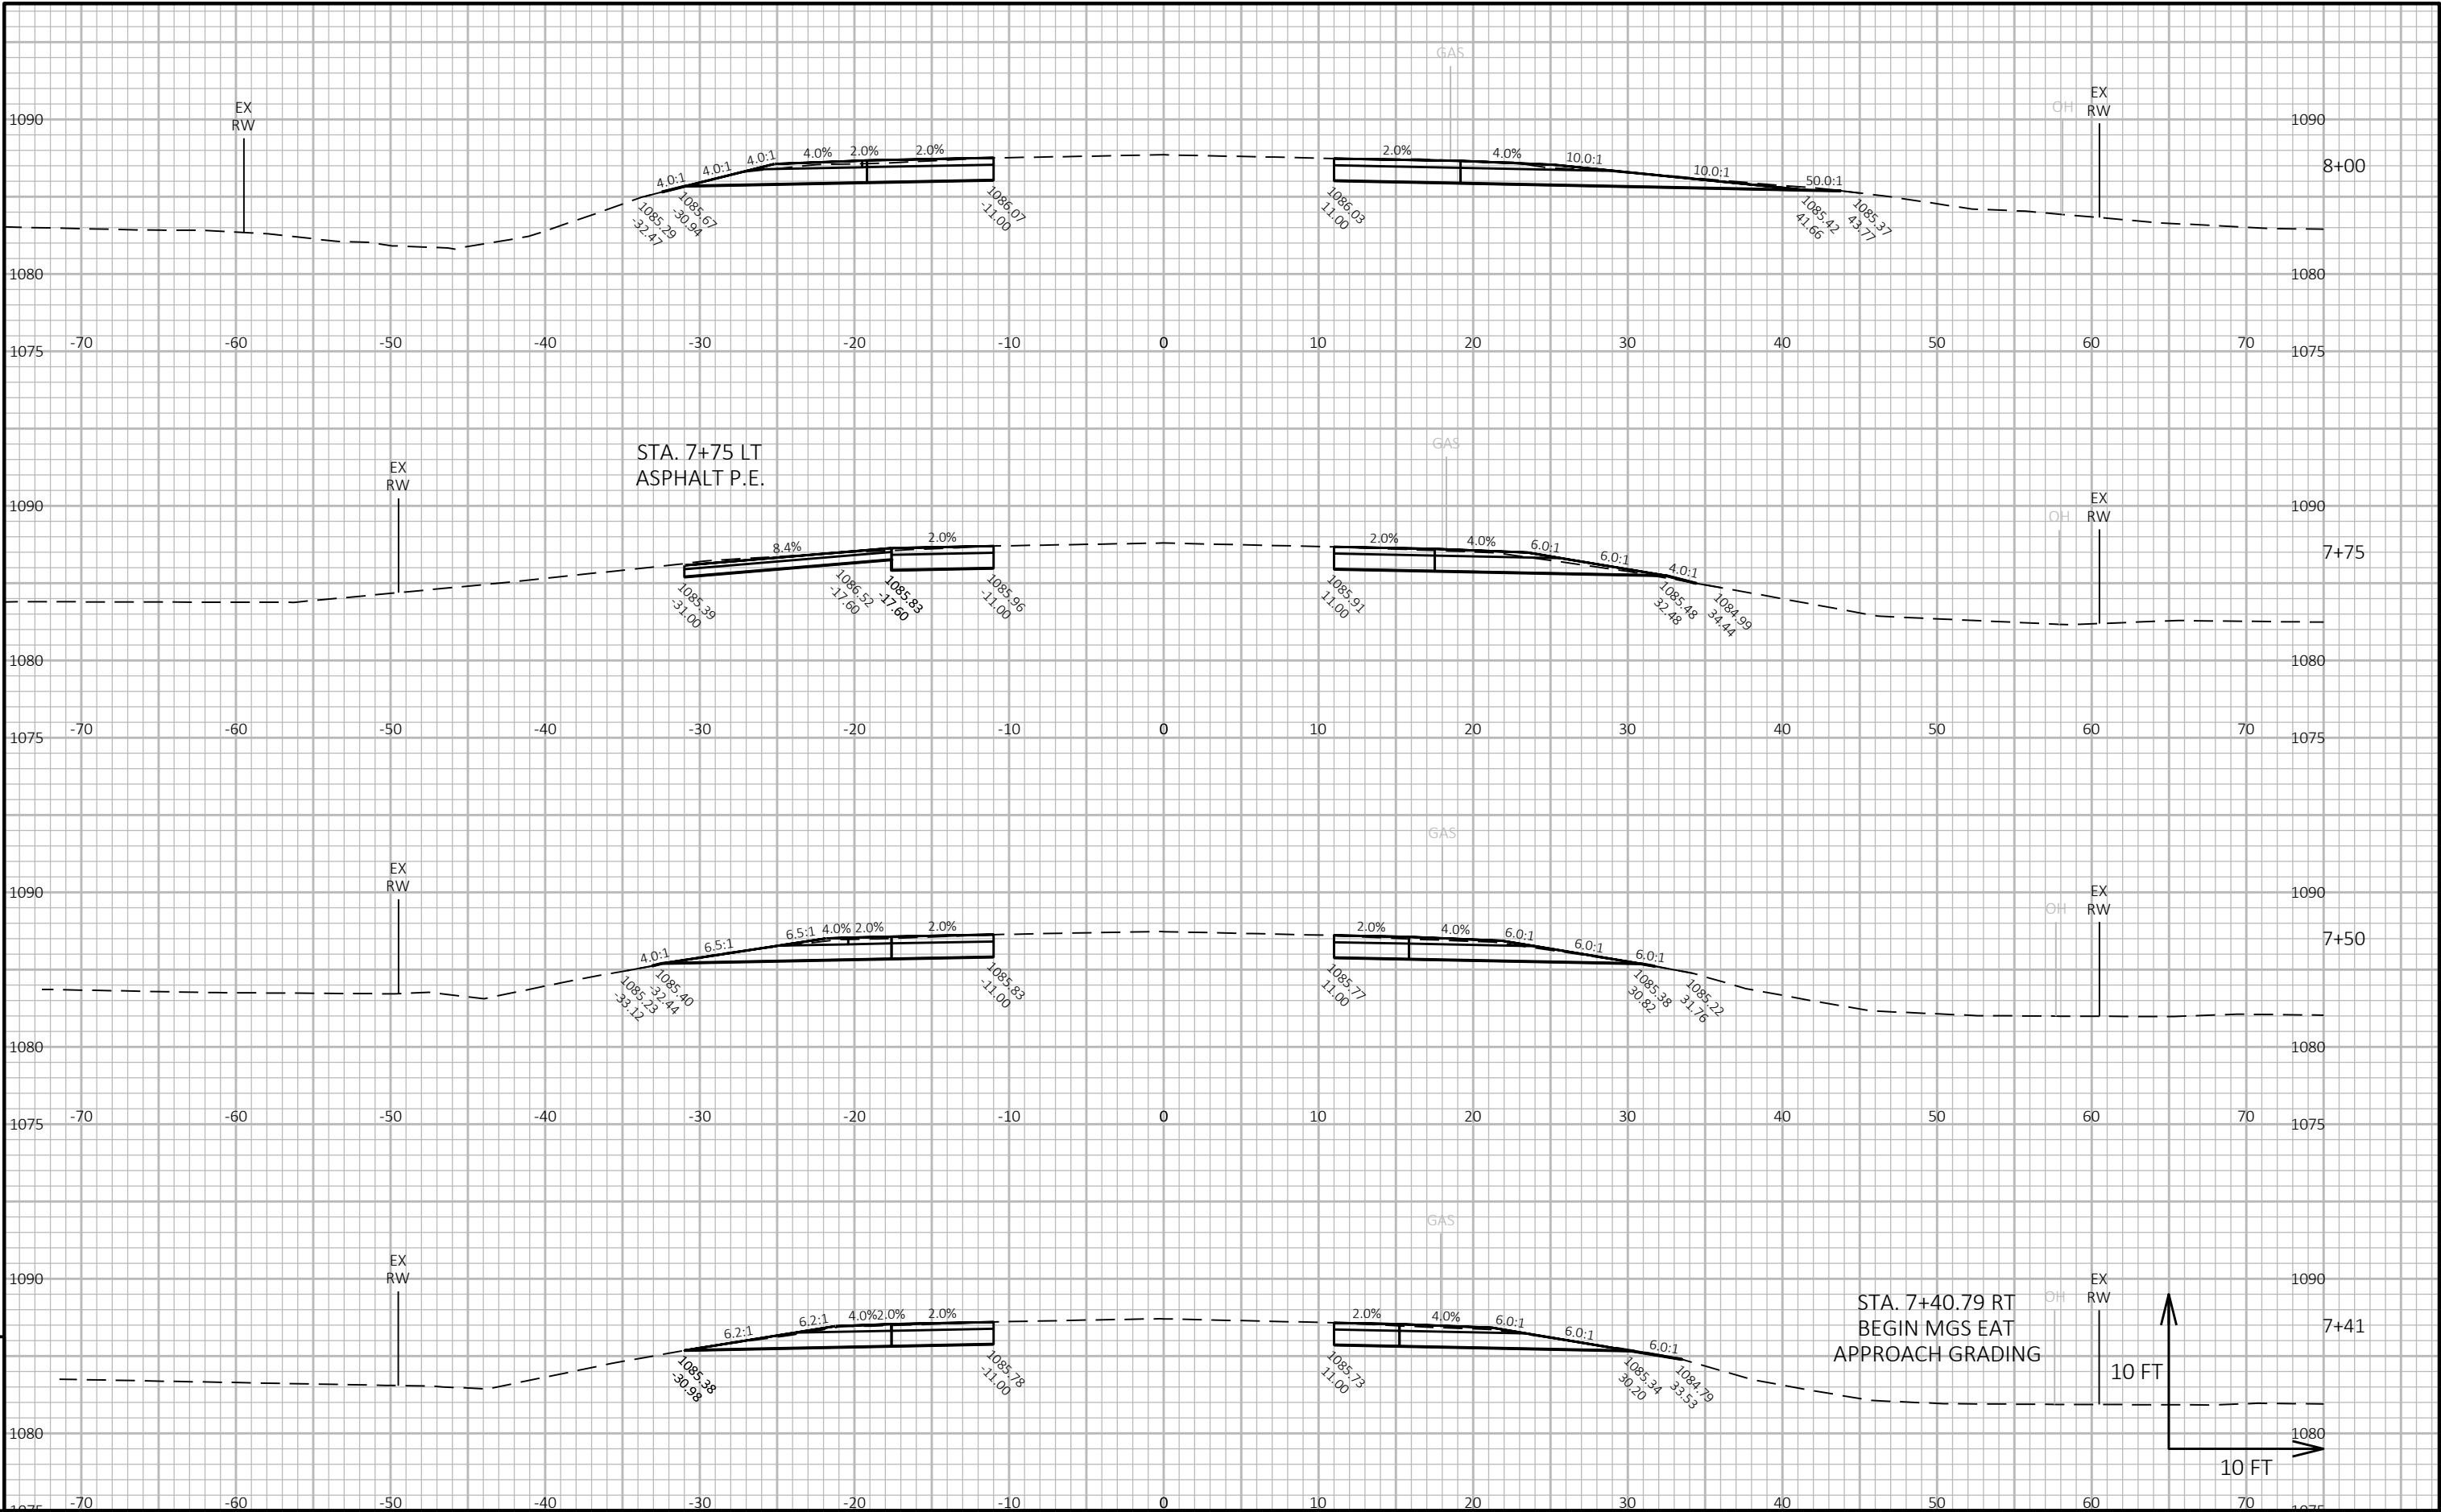

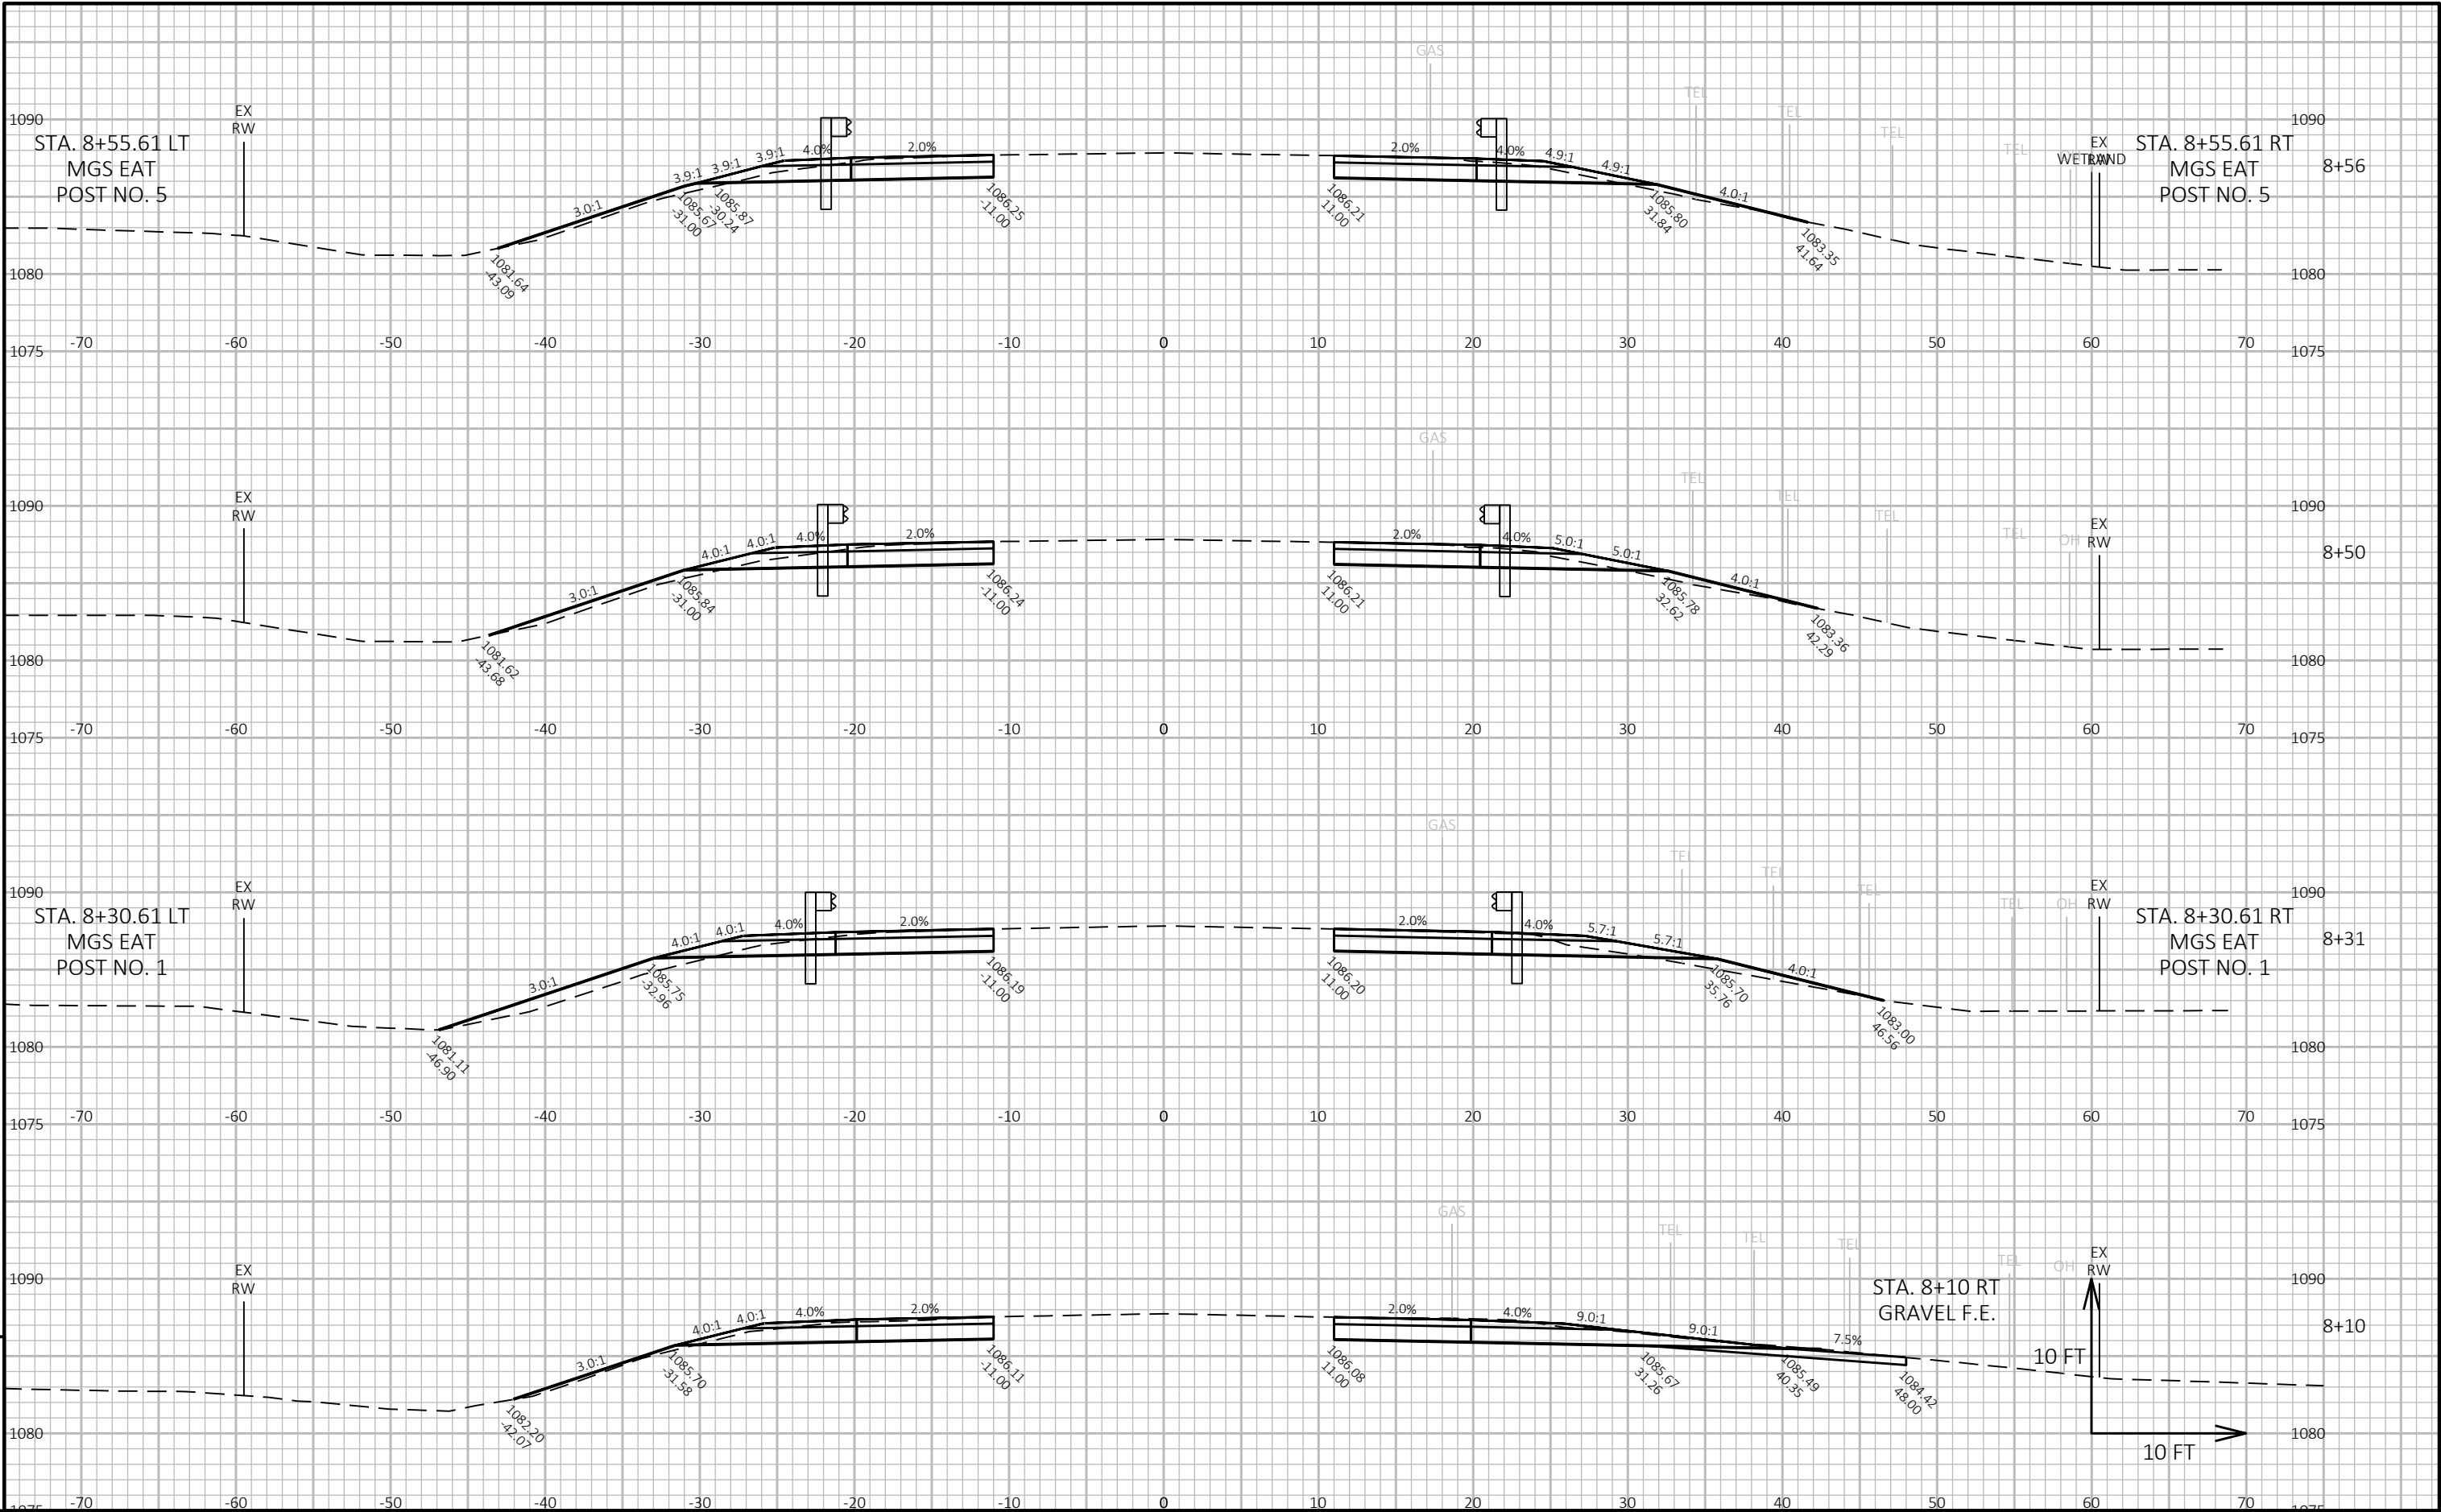

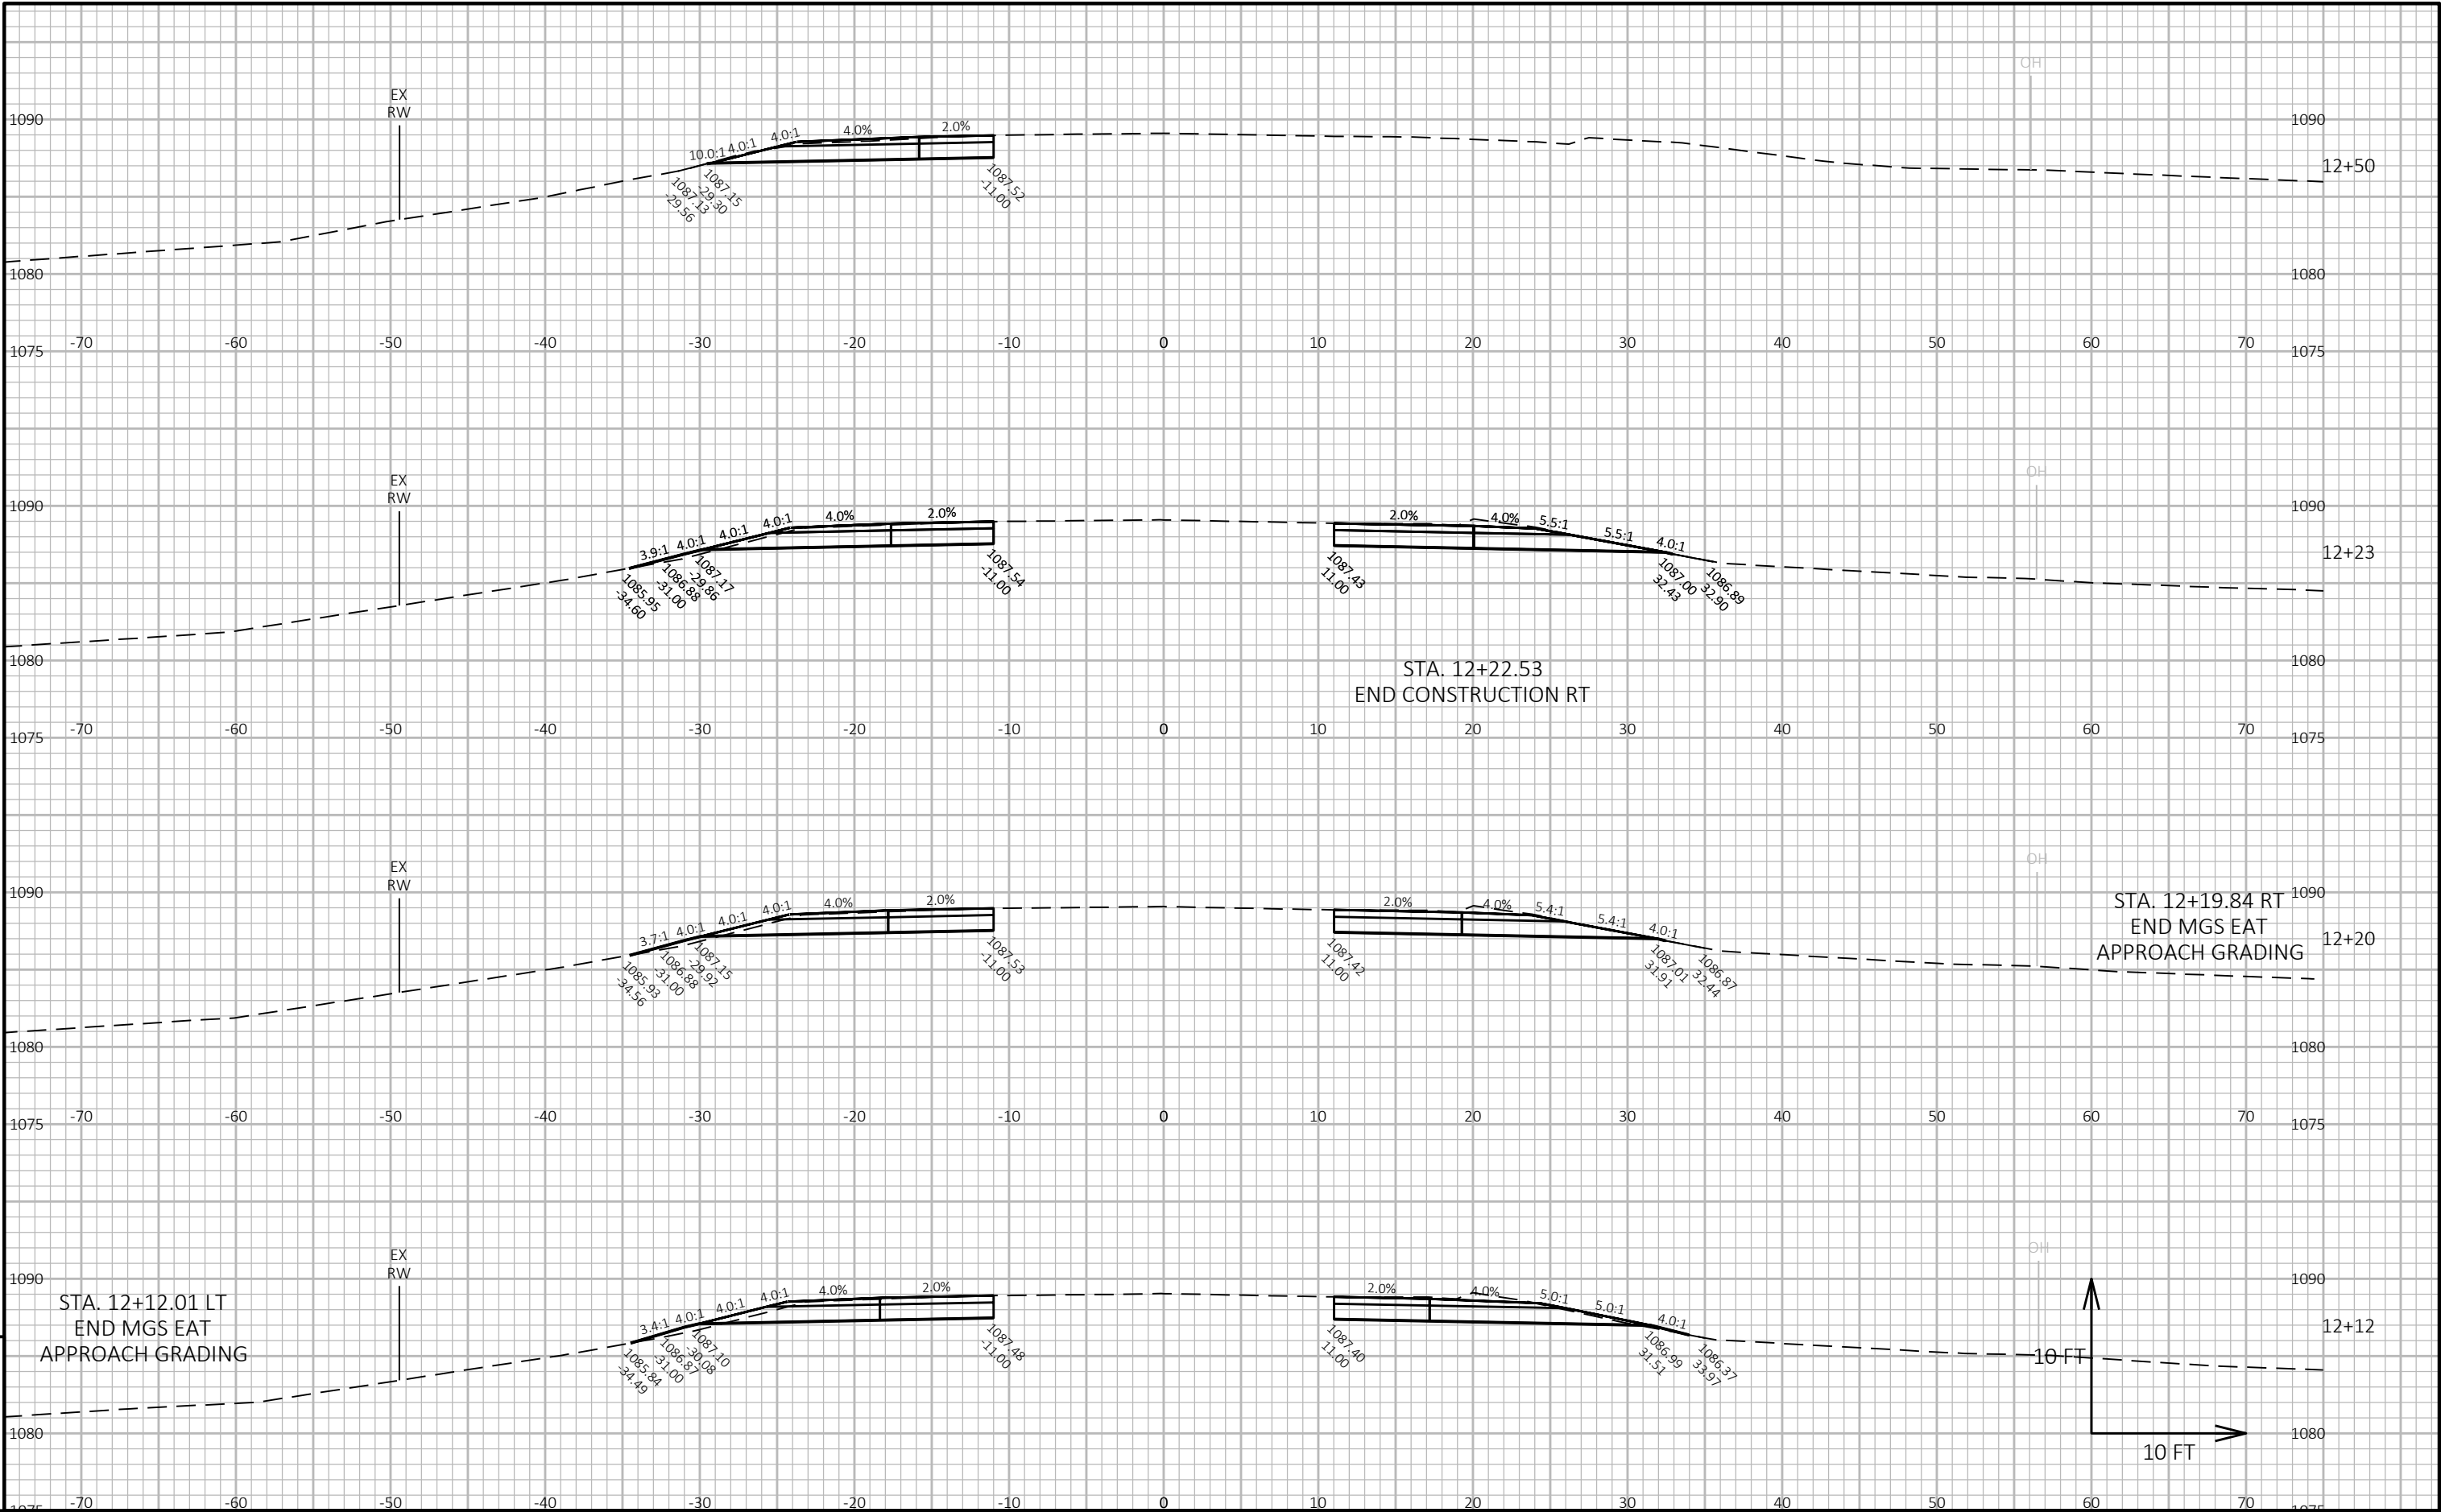

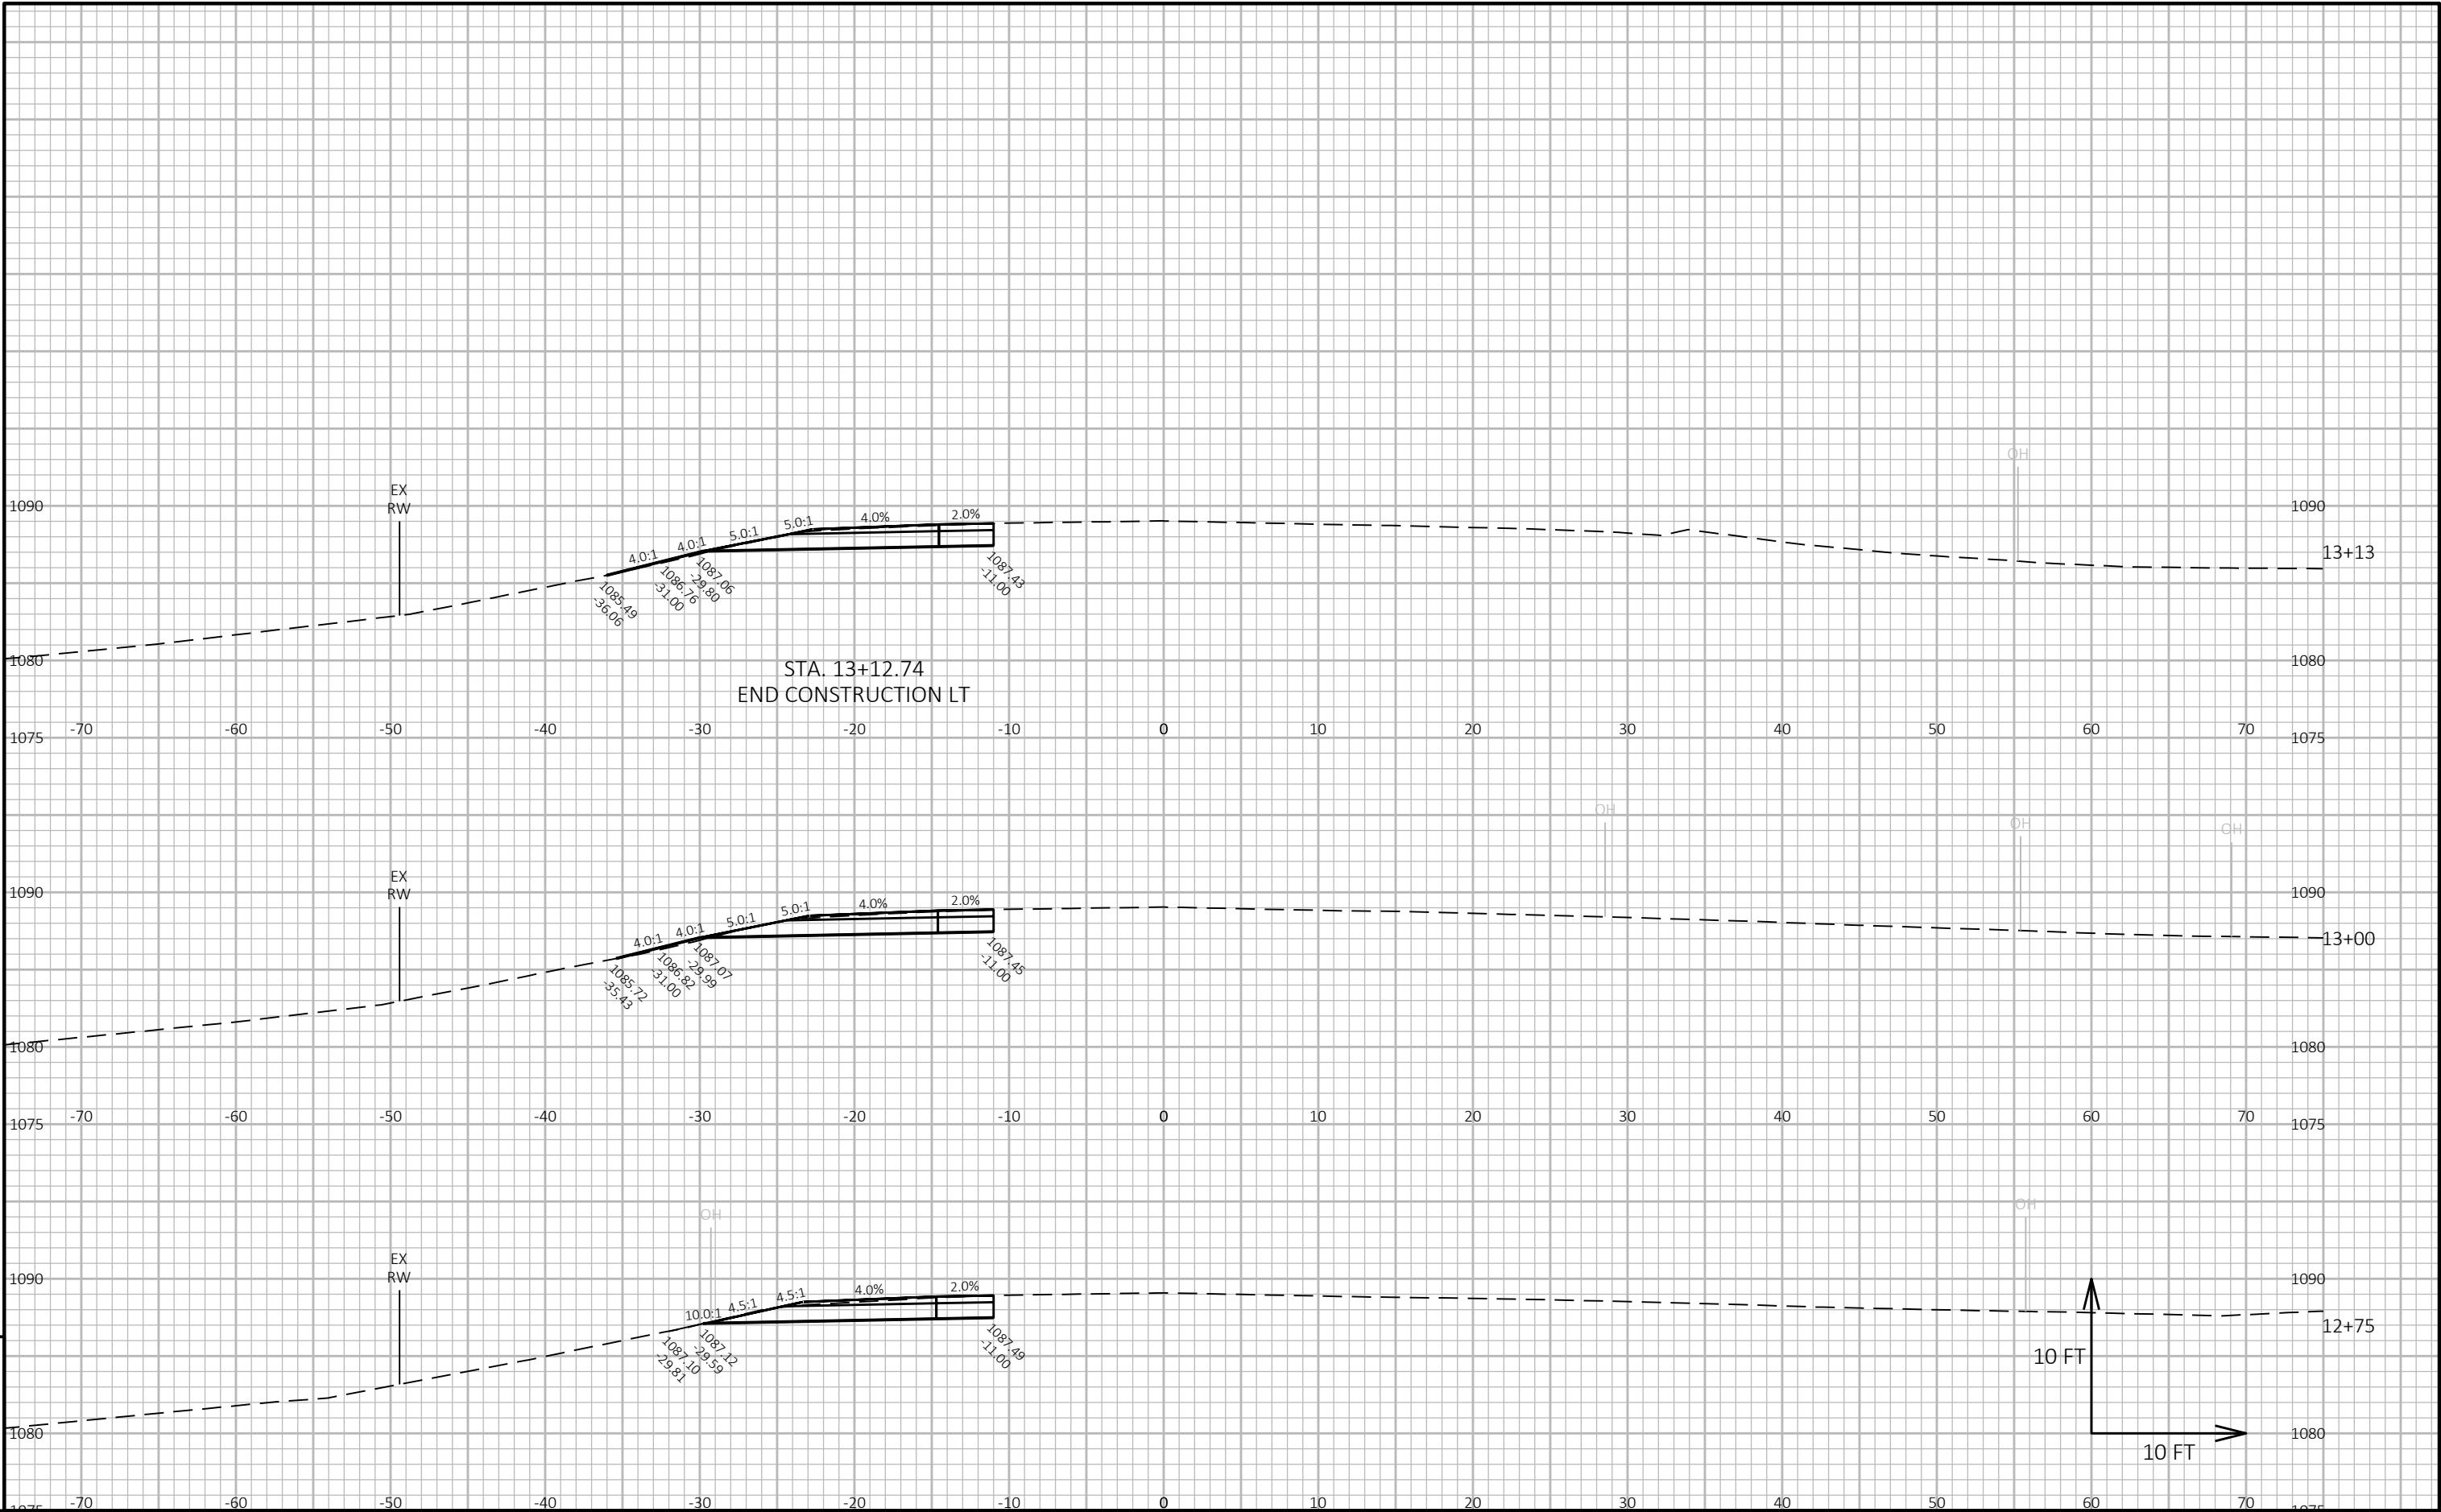

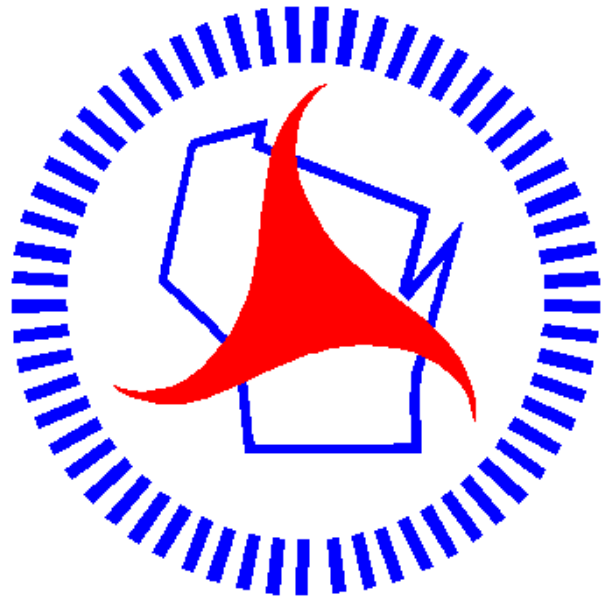

Wisconsin Department of Transportation

Dedicated people creating transportation solutions
through innovation and exceptional service.

<http://www.dot.wisconsin.gov>