

PROJECT ID:
WITH: N/A

8695-03-60

COUNTY:

PRICE

APRIL 2025
ORDER OF SHEETS

Section No.	1	Title
Section No.	2	Typical Sections and Details
Section No.	3	Estimate of Quantities
Section No.	3	Miscellaneous Quantities
Section No.	4	Right of Way Plot
Section No.	5	Plan and Profile
Section No.	6	Standard Detail Drawings
Section No.	7	Sign Plates
Section No.	8	Structure Plans
Section No.	9	Computer Earthwork Data
Section No.	9	Cross Sections

TOTAL SHEETS = 96



DESIGN DESIGNATION 8695-03-30

A.A.D.T. (2027)	=	1120
A.A.D.T. (2047)	=	1120
D.H.V.	=	168
D.D.	=	60/40
T.	=	7.8%
DESIGN SPEED	=	60 MPH
ESALS	=	150,000

CONVENTIONAL SYMBOLS

<u>PLAN</u>	
CORPORATE LIMITS	
PROPERTY LINE	
LOT LINE	
LIMITED HIGHWAY EASEMENT	
EXISTING RIGHT OF WAY	
PROPOSED OR NEW R/W LINE	
SLOPE INTERCEPT	
REFERENCE LINE	
EXISTING CULVERT	
PROPOSED CULVERT (Box or Pipe)	
COMBUSTIBLE FLUIDS	
MARSH AREA	
WOODED OR SHRUB AREA	

PROFILE

GRADE LINE

ORIGINAL GROUND

MARSH OR ROCK PROFILE
(To be noted as such)

SPECIAL DITCH

GRADE ELEVATION

CULVERT (Profile View)

UTILITIES

ELECTRIC

FIBER OPTIC

GAS

SANITARY SEWER

STORM SEWER


TELEPHONE

WATER

UTILITY PEDESTAL

POWER POLE


TELEPHONE POLE



The legend on the right side of the page shows the graphical representation for each symbol listed on the left. It includes a profile view of a culvert with a dashed line for the original ground and a solid line for the grade line, with a vertical dimension line indicating a grade elevation of 95.36. It also shows symbols for various utilities: a solid line for electric, a dashed line for fiber optic, a solid line with a cross-hatch pattern for gas, a solid line with a cross-hatch pattern for sanitary sewer, a solid line with a cross-hatch pattern for storm sewer, a solid line with a cross-hatch pattern for telephone, a solid line with a cross-hatch pattern for water, a solid line with a cross-hatch pattern for utility pedestal, a solid line with a cross-hatch pattern for power pole, and a solid line with a cross-hatch pattern for telephone pole.

NET EXCEPTION TO CL LENGTH
STRUCTURE B-50-87
STA. 75+01.00 - STA. 75+40.00

BEGIN PROJECT
STA. 11+00.00
X = 746876.320
Y = 357526.542

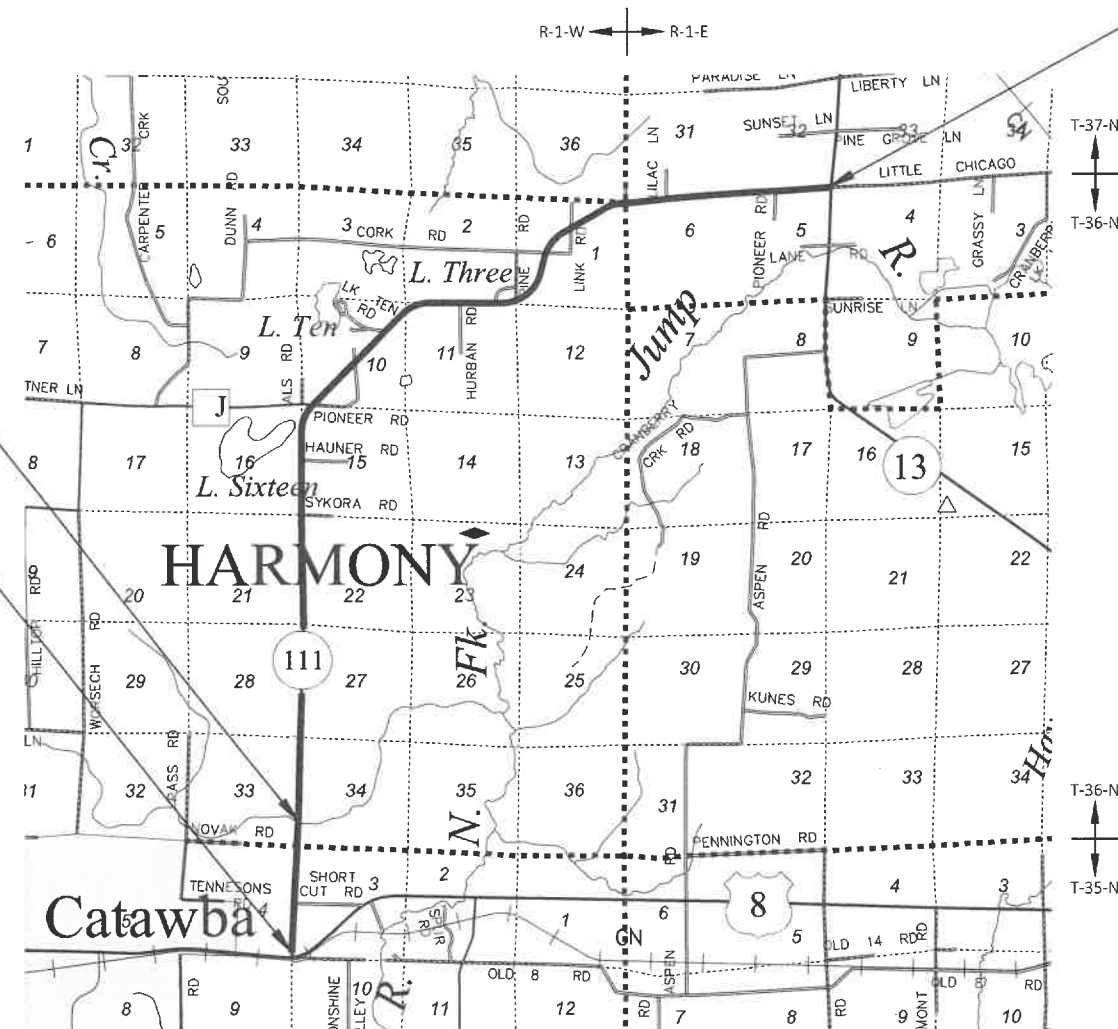

END PROJECT
STA. 570+22.70

LAYOUT
 SCALE 0 1.75 MI
 TOTAL NET LENGTH OF CENTERLINE = 10.584 MILES

HORIZONTAL POSITIONS SHOWN ON THIS PLAN ARE WISCONSIN COORDINATE REFERENCE SYSTEM (WISCRS), PRICE COUNTY, NAD83 (2011), IN U.S. SURVEY FEET. POSITIONS SHOWN ARE GRID COORDINATES, GRID BEARINGS, AND GRID DISTANCES. GRID DISTANCES ARE THE SAME AS GROUND DISTANCES.


ELEVATIONS ARE REFERENCED TO NAVD 88 (2012). GPS DERIVED
ELEVATIONS ARE BASED ON GEOID 18-WI.

STATE PROJECT	FEDERAL PROJECT	
	PROJECT	CONTRACT
8695-03-60		

ORIGINAL PLANS PREPARED BY



MADISON | WAUKESHA | EAU CLAIRE | APPLETON | TOMAH | WITTENBERG

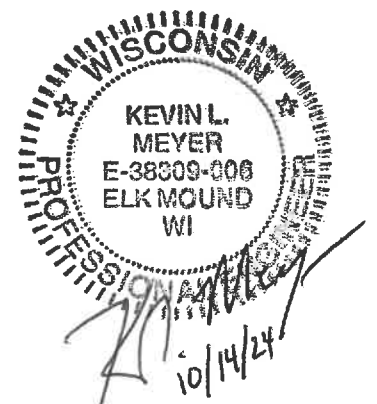

DATE: _____ (Signature)

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

PREPARED BY

Surveyor	CORRE, INC
Designer	CORRE, INC
Project Manager	STACY HAGENBUCHER, P.E.
Regional Examiner	FRED SCHUNKE, P.E.
Regional Supervisor	KAI KILEN, P.E.

APPROVED FOR THE DEPARTMENT

DATE: 10/23/2024

Hay Rappabrook
(Signature)

11

GENERAL NOTES:

THE LOCATION OF EXISTING UTILITIES AS SHOWN ON THE PLANS ARE APPROXIMATE. THERE MAY BE OTHER UTILITY INSTALLATIONS WITHIN THE PROJECT AREA THAT ARE NOT SHOWN.

CONTRACTOR SHALL MAINTAIN ACCESS TO ALL DRIVEWAYS AND BUSINESSES AT ALL TIMES.

HMA PAVEMENT WEIGHT CALCULATIONS ARE BASED ON 112 LB/SY/IN.

IN ORDER TO AVOID IMPACTS TO HABITATS ADJACENT TO THE ROADWAY THERE SHALL BE NO PARKING, STAGING, OR STORAGE OF EQUIPMENT IN UNDISTURBED, NATIVE AREAS. EXISTING SHOULDERS, LOTS, OR DRIVEWAYS SHALL BE UTILIZED FOR SUCH ACTIVITIES, PROVIDED THAT ANY ADJACENT HABITATS ARE SUFFICIENTLY PROTECTED.

ALL EXISTING SUPER ELEVATIONS SHALL BE MAINTAINED.



Dial 811 or (800)242-8511

www.DiggersHotline.com

RUNOFF COEFFICIENT TABLE

	HYDROLOGIC SOIL GROUP											
	A			B			C			D		
	SLOPE RANGE (PERCENT)			SLOPE RANGE (PERCENT)			SLOPE RANGE (PERCENT)			SLOPE RANGE (PERCENT)		
LAND USE:	0-2	2-6	6 & OVER	0-2	2-6	6 & OVER	0-2	2-6	6 & OVER	0-2	2-6	6 & OVER
ROW CROPS	.08 .22	.16 .30	.22 .38	.12 .26	.20 .34	.27 .44	.15 .30	.24 .37	.33 .50	.19 .34	.28 .41	.38 .56
MEDIAN STRIP- TURF	.19 .24	.20 .26	.24 .30	.19 .25	.22 .28	.26 .33	.20 .26	.23 .30	.30 .37	.20 .27	.25 .32	.30 .40
SIDE SLOPE- TURF			.25 .32			.27 .34			.28 .36			.30 .38
PAVEMENT:												
ASPHALT	.70 - .95											
CONCRETE	.80 - .95											
BRICK	.70 - .80											
DRIVES, WALKS	.75 - .85											
ROOFS	.75 - .95											
GRAVEL ROADS, SHOULDERS	.40 - .60											

TOTAL PROJECT AREA = 58.34 ACRES
TOTAL AREA EXPECTED TO BE DISTURBED BY CONSTRUCTION ACTIVITIES = 1.42 ACRES

UTILITY CONTACTS

COMMUNICATION

BRIGHTSPEED OF NORTHERN WISCONSIN, LLC
425 ELLINGSON AVENUE
HAWKINS, WI 54530

BEN BAKER
PHONE: (715) 567-0715
BEN.BAKER@BRIGHTSPEED.COM

COMMUNICATION

PRICE COUNTY TELEPHONE COMPANY
43705 USH 63
CABLE, WI 54821

KIRK BOGDANOVIC
PHONE: (715) 820-0082
KBOGDANOVIC@NORVADO.COM

ELECTRICITY

PRICE ELECTRIC COOPERATIVE INC
W6803 SPRINGS DRIVE
PHILLIPS, WI 54555

BEN ORYSEN
PHONE: (715) 339-2155
MOBILE: (715) 360-2264
BORYSEN@PRICEELECTRIC.COOP

ELECTRICITY

XCEL ENERGY
310 HICKORY HILLS LANE
PHILLIPS, WI 54555

KELLI GAGO
PHONE: (715) 737-8718
KELLI.K.GAGO@XCELENERGY.COM

ELECTRICITY TRANSMISSION


XCEL ENERGY
414 NICOLET MALL
MINEAPOLIS, MN 55401

MITCHELL DIEGER
PHONE: (612) 321-3109
MITCHELL.A.DIENGER@XCELENERGY.COM

DNR CONTACT


DNR NORTHERN REGION HEADQUARTERS
107 SUTLIFF AVENUE
RHINELANDER, WI 54501

WENDY HENNIGES
PHONE: (715) 365-8916
WENDY.HENNIGES@WISCONSIN.GOV

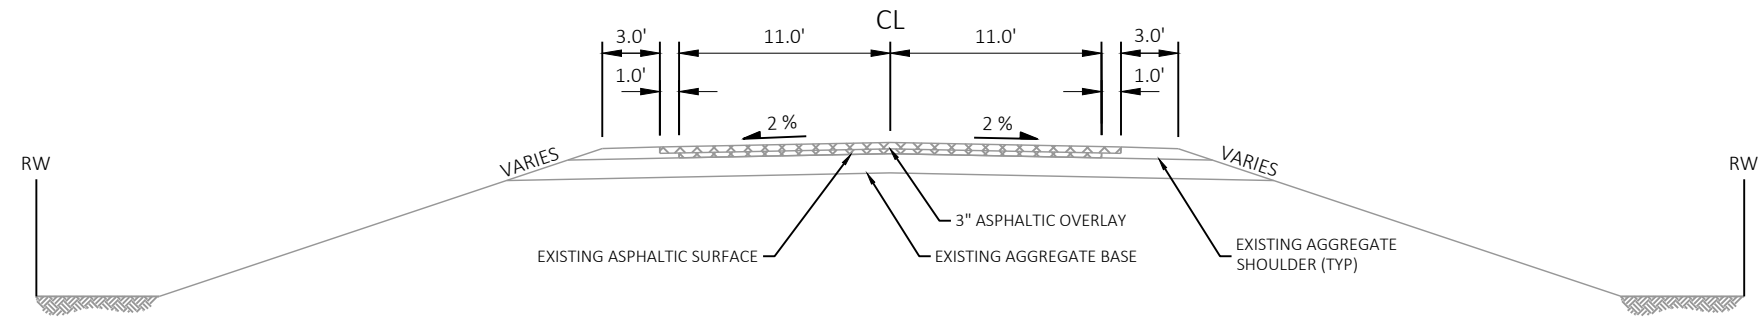



EXISTING TYPICAL SECTION - STH 111


STA. 10+80.00 - 74+97.00
STA. 75+36.00 - 263+00.00

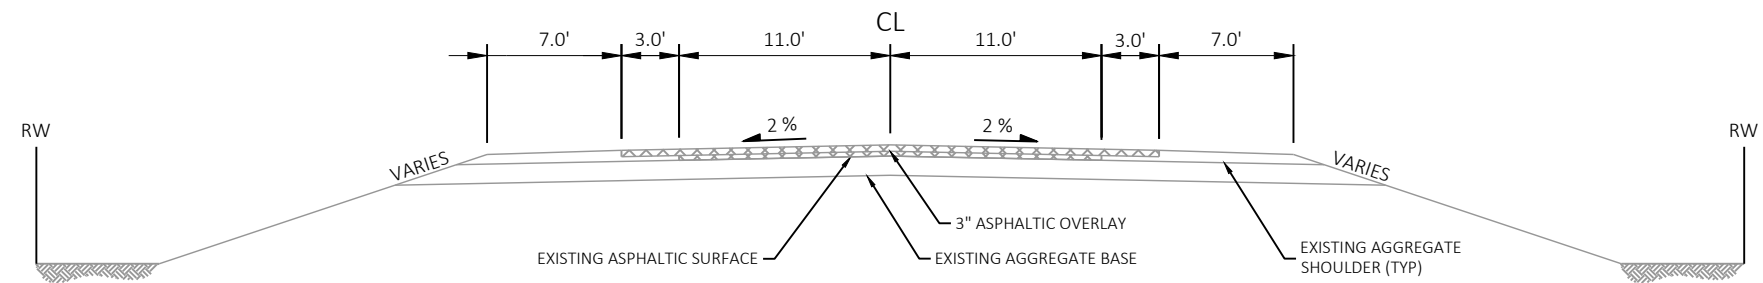

EXISTING TYPICAL SECTION - STH 111



STA. 263+00.00 - 570+23.00

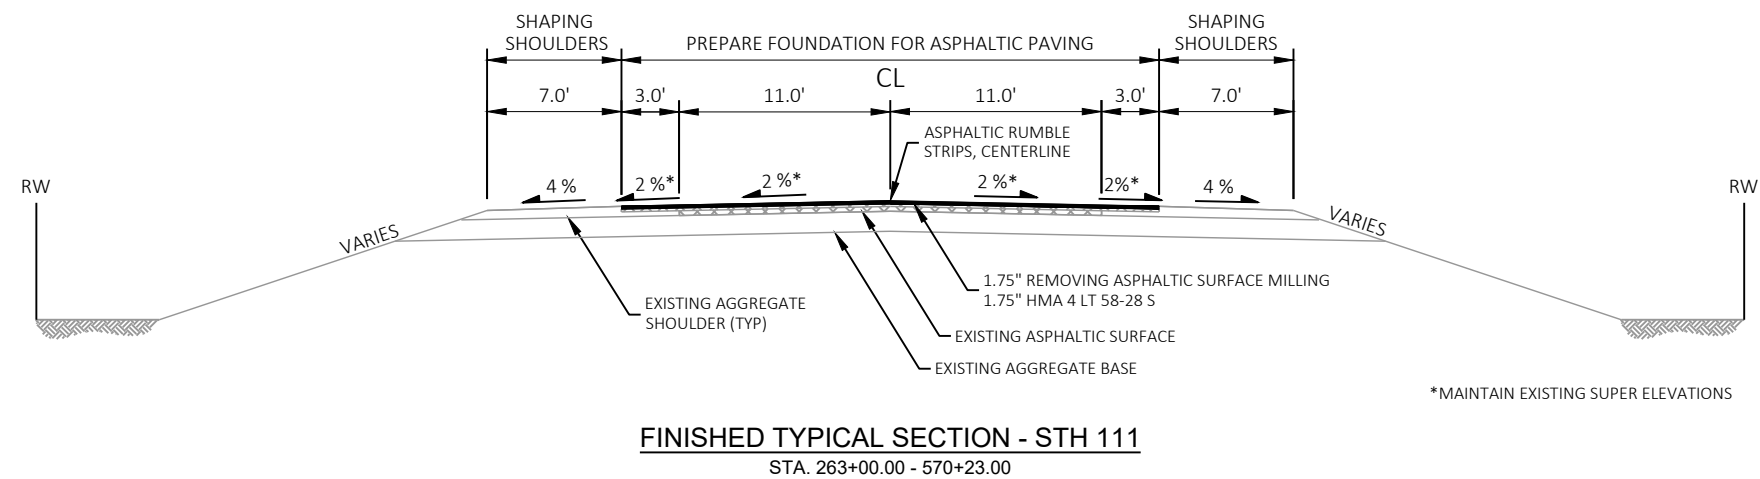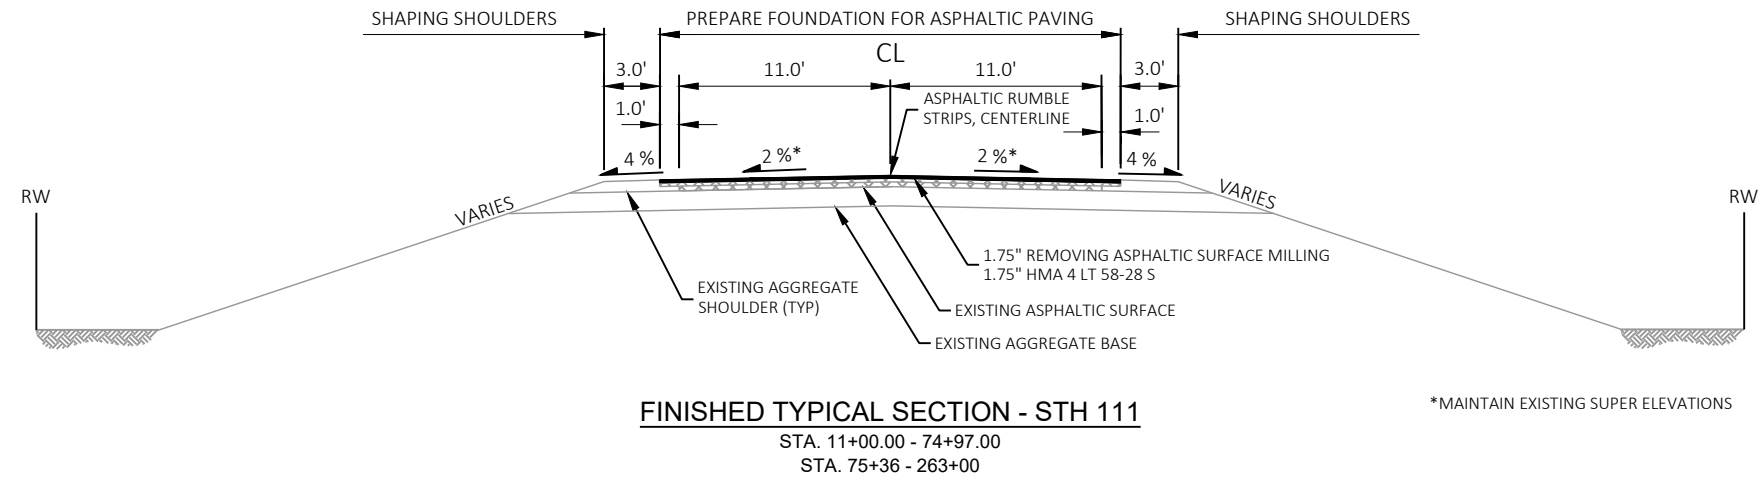

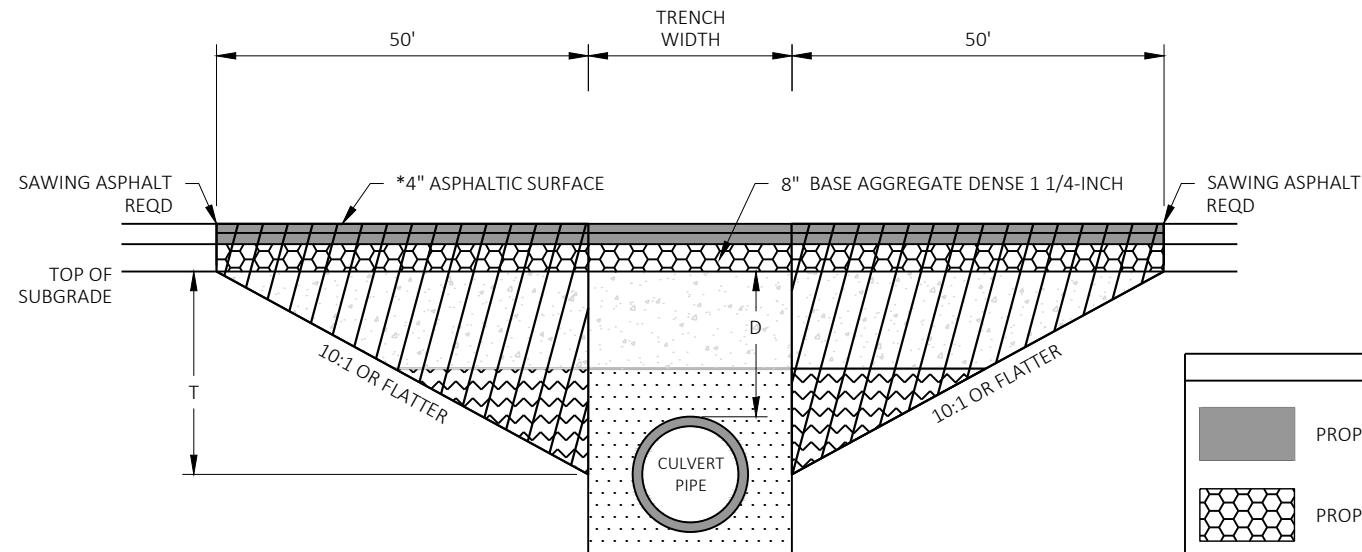

TRANSITION CUT DEPTH (T) = THE LESSER OF DEPTH TO CENTER OF PIPE OR 5 FT.
DO NOT EXTEND TRANSITION CUT BELOW HORIZONTAL CENTER OF PIPE.

DEPTH D < 6 FT

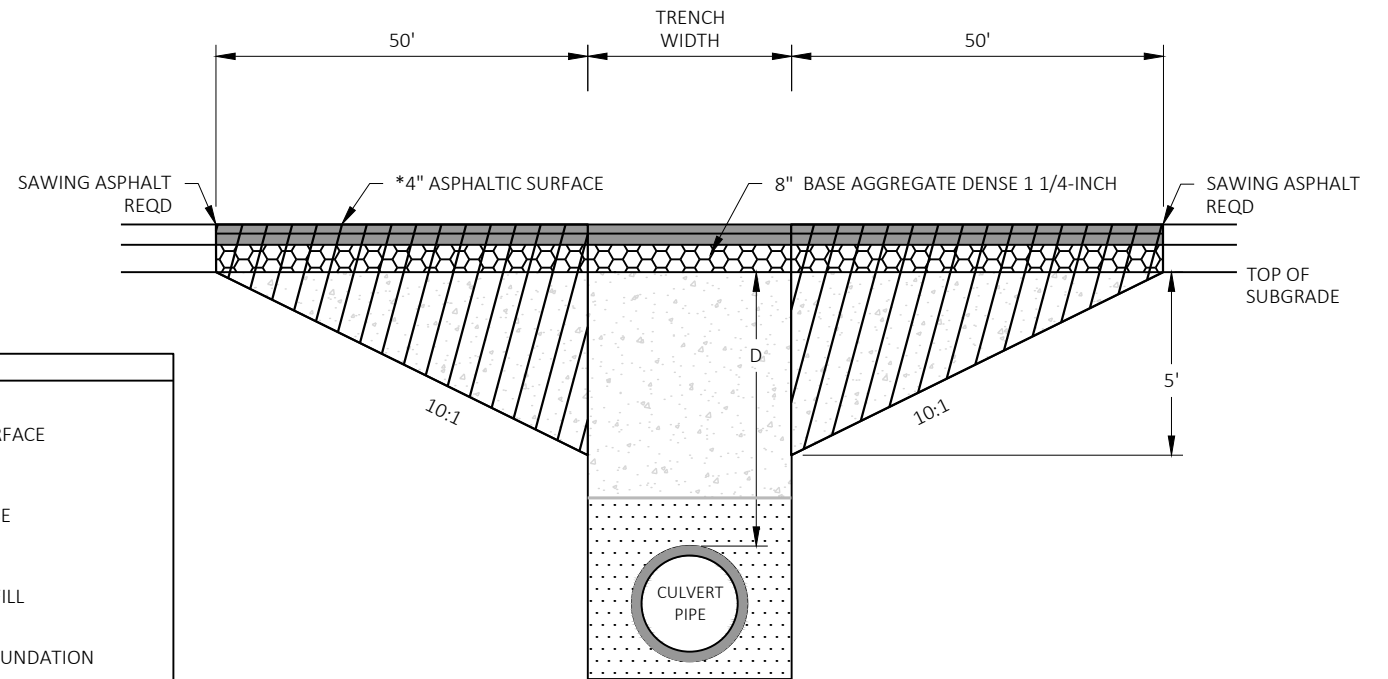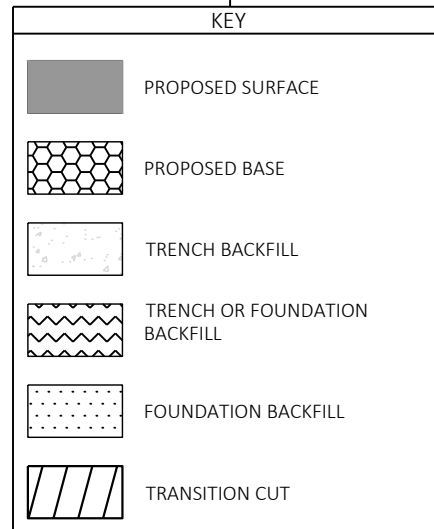

DEPTH D ≥ 6 FT

NOTES

TRANSITION CUT IS PAID AS EXCAVATION COMMON.

TRANSITION CUT WIDTH IS FROM SUBGRADE SHOULDER POINT TO SUBGRADE SHOULDER POINT.

BACKFILL THE TRANSITION CUT AREAS WITH FOUNDATION AND TRENCH BACKFILL AS SPECIFIED IN STANDARD SPEC 520.

PERFORM CULVERT PIPE INSTALLATION BEFORE MILLING AND PAVING OPERATIONS.

PLACE THE LOWER LAYER OF ASPHALTIC SURFACE AFTER CULVERT PIPE INSTALLATION AND BEFORE MILLING AND PAVING OPERATIONS.

*REPLACE CULVERTS PRIOR TO MILL & OVERLAY OPERATIONS OF MAINLINE PAVEMENT. USE ITEM 465.0105 ASPHALTIC SURFACE FOR LOWER LAYER. SURFACE LAYER MAY BE PAVED PRIOR TO MILL AND OVERLAY OPERATION. IF SURFACE LAYER IS PAVED PRIOR TO MILL AND OVERLAY USE ASPHALTIC SURFACE. IF SURFACE LAYER IS PAVED WITH THE MILL AND OVERLAY OPERATION UTILIZE THE MIX SPECIFIED IN THE TYPICAL SECTIONS. LOWER LAYER SHALL BE 2.25 INCHES. UPPER LAYER SHALL BE 1.75 INCHES.

CULVERT PIPE TRANSITION

ROUTE	STA (C/L)	CL DEPTH D (FT)	PIPE DIA (IN)	REMARKS
STH 111	110+51.00	0.9	24 X 38	CULVERT ID: 50111003847
STH 111	173+87.00	1.0	29 X 45	CULVERT ID: 50111003850
STH 111	173+97.00	0.9	29 X 45	CULVERT ID: 50111003851
STH 111	244+49.00	1.2	24	CULVERT ID: 50111003852
STH 111	303+56.00	12.1	24	CULVERT ID: 50111003857
STH 111	356+25.00	6.2	24	CULVERT ID: 50111003861
STH 111	403+49.00	4.3	24	CULVERT ID: 50111003863
STH 111	444+44.00	2.6	24	CULVERT ID: 50111003867
STH 111	550+34.00	0.8	24 X 38	CULVERT ID: 50111003874
STH 111	569+93.00	2.4	18	CULVERT ID: 50111003875

2



SIDEROADS


WITHOUT CURB AND GUTTER

*WHEN MATCHING TO AN UNPAVED SURFACE, BUTT JOINT IS NOT REQUIRED

2




*WHEN MATCHING TO AN UNPAVED SURFACE, BUTT JOINT IS NOT REQUIRED




2


2

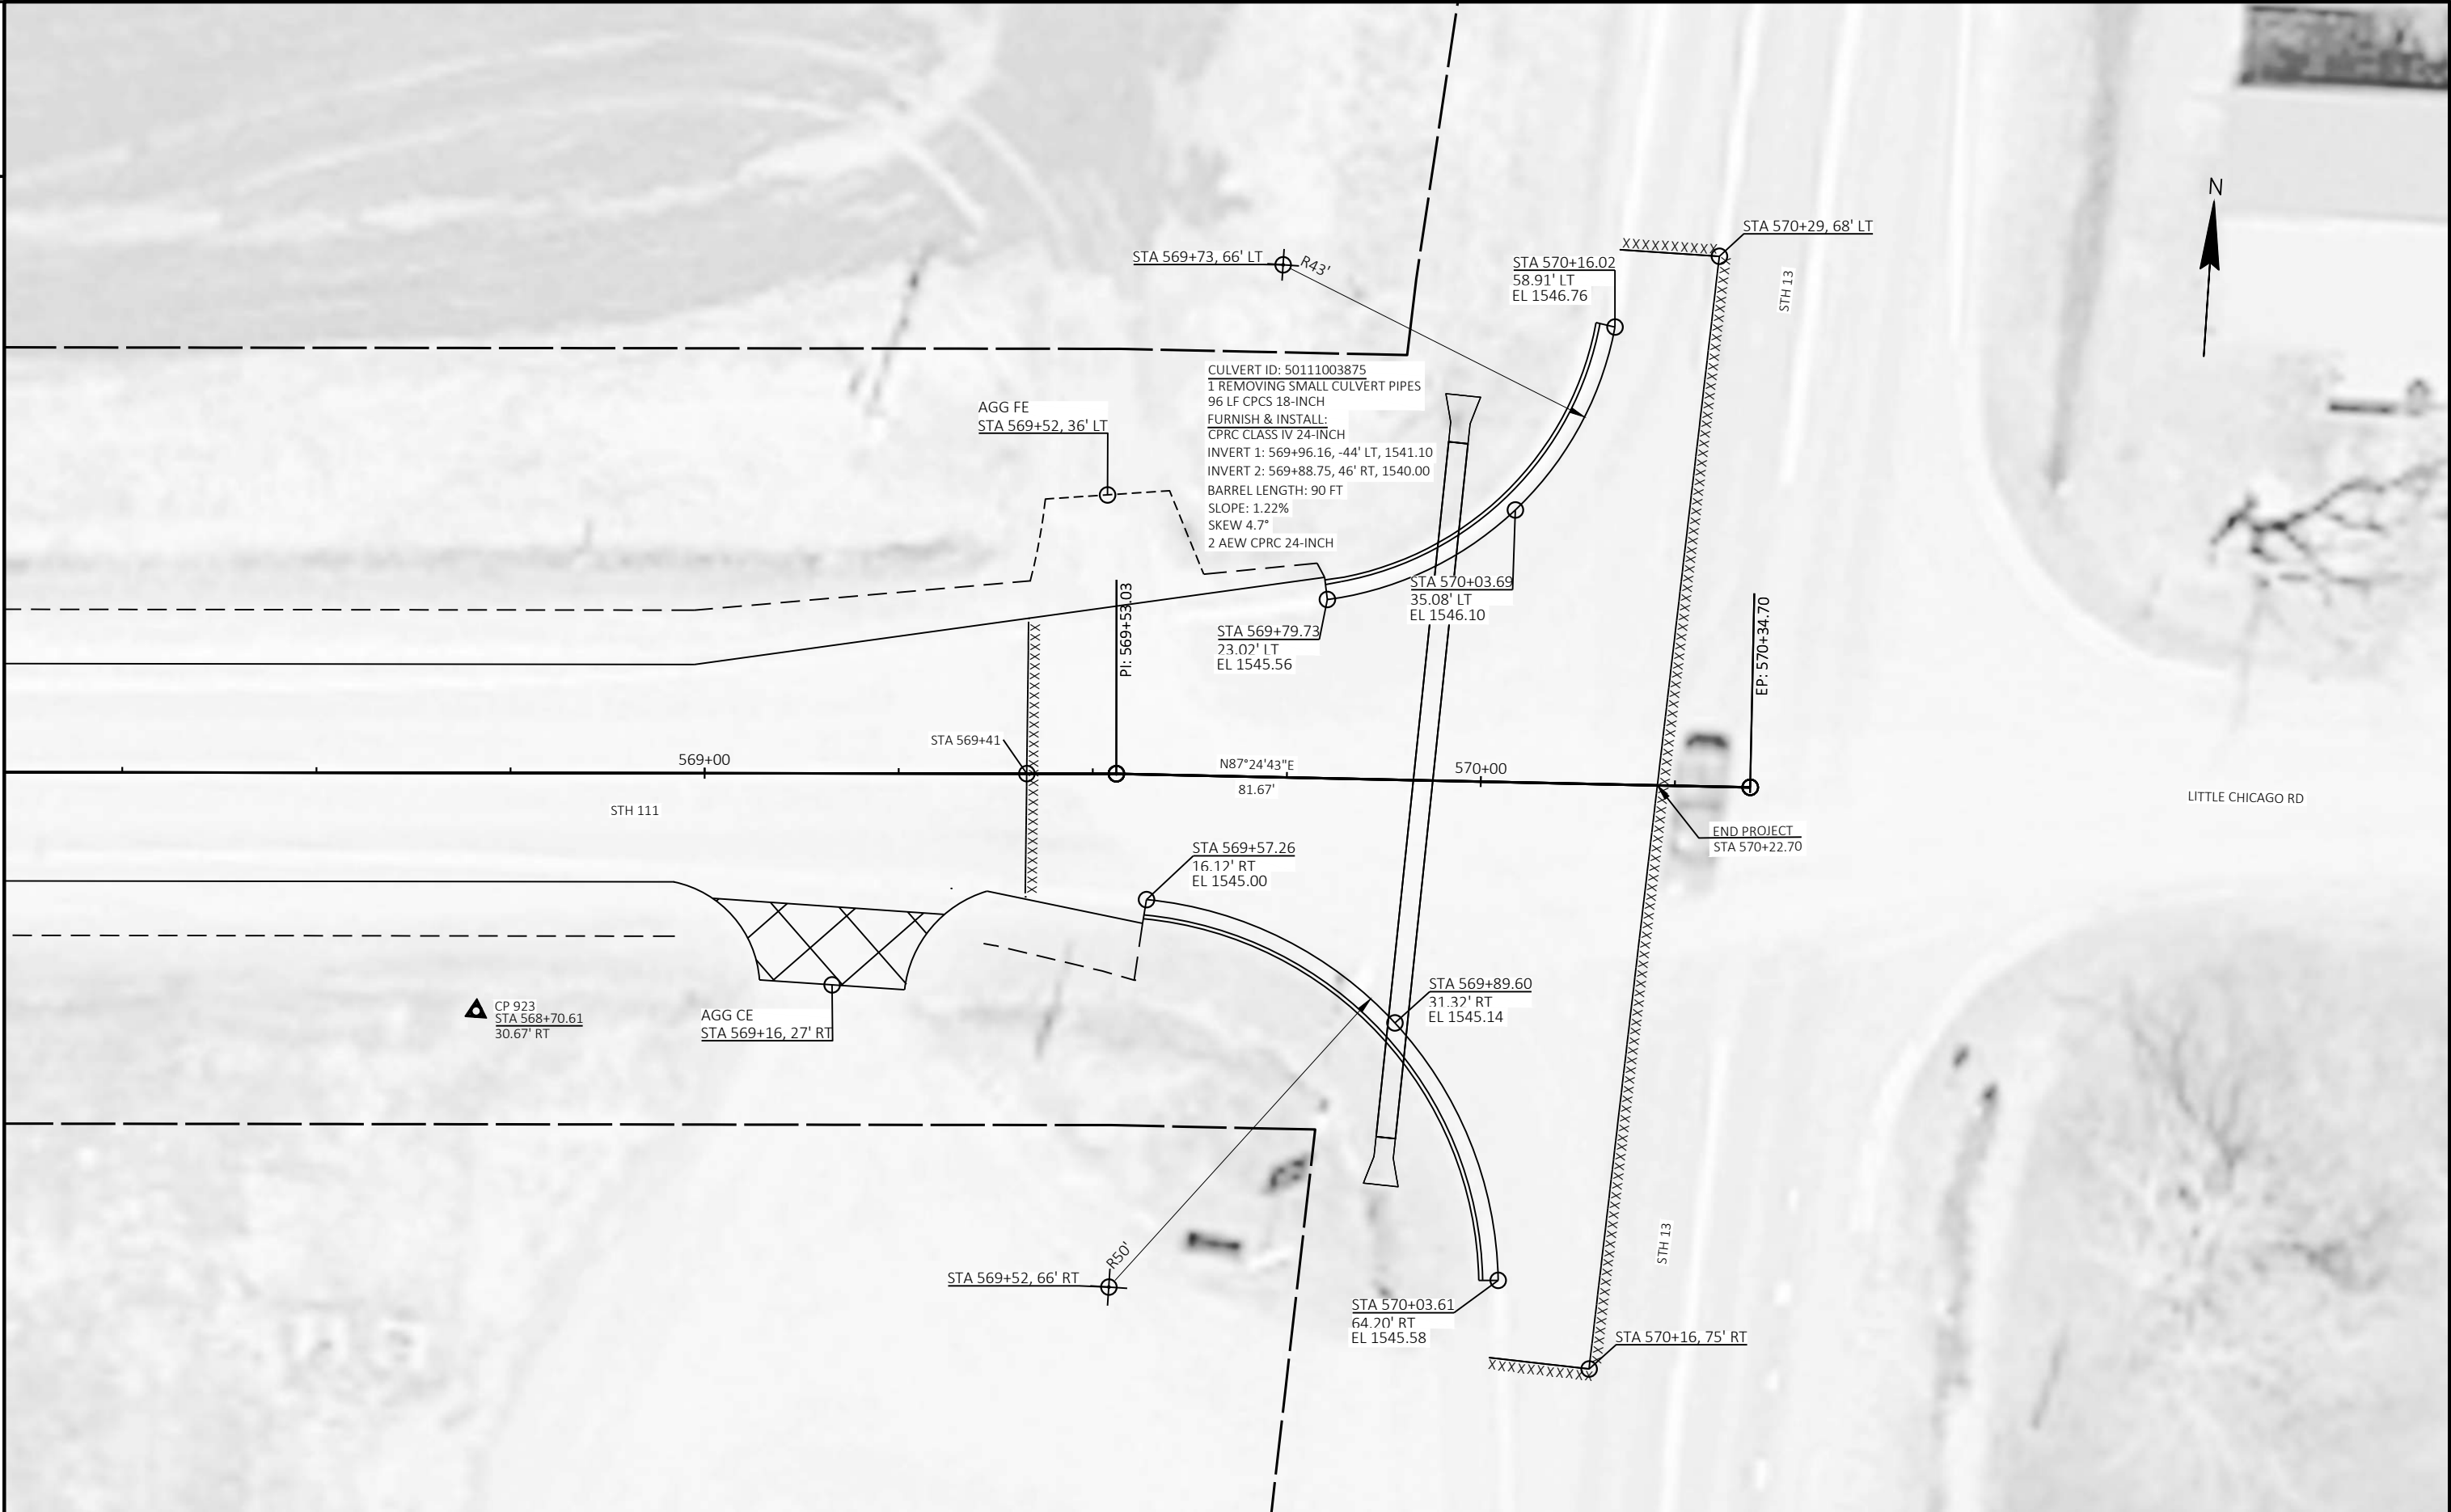

PROJECT NO: 8695-03-60	HWY: STH 111	COUNTY: PRICE	CONSTRUCTION DETAILS	SHEET	E
------------------------	--------------	---------------	----------------------	-------	----------

FILE NAME : C:\OD\CORRE, INC\PROJECTS - WI-NC REGION\8695-03-30_STH 111 PRICE CO\500_CADD\501_C3D_2022\86950330\SHEETS\PLAN\021002-CD.DWG
LAYOUT NAME - 04
PLOT DATE : 2/7/2025 7:27 AM
PLOT BY : MATT KOSKI
PLOT NAME :
PLOT SCALE : #####
WISDOT/CADDs SHEET 42

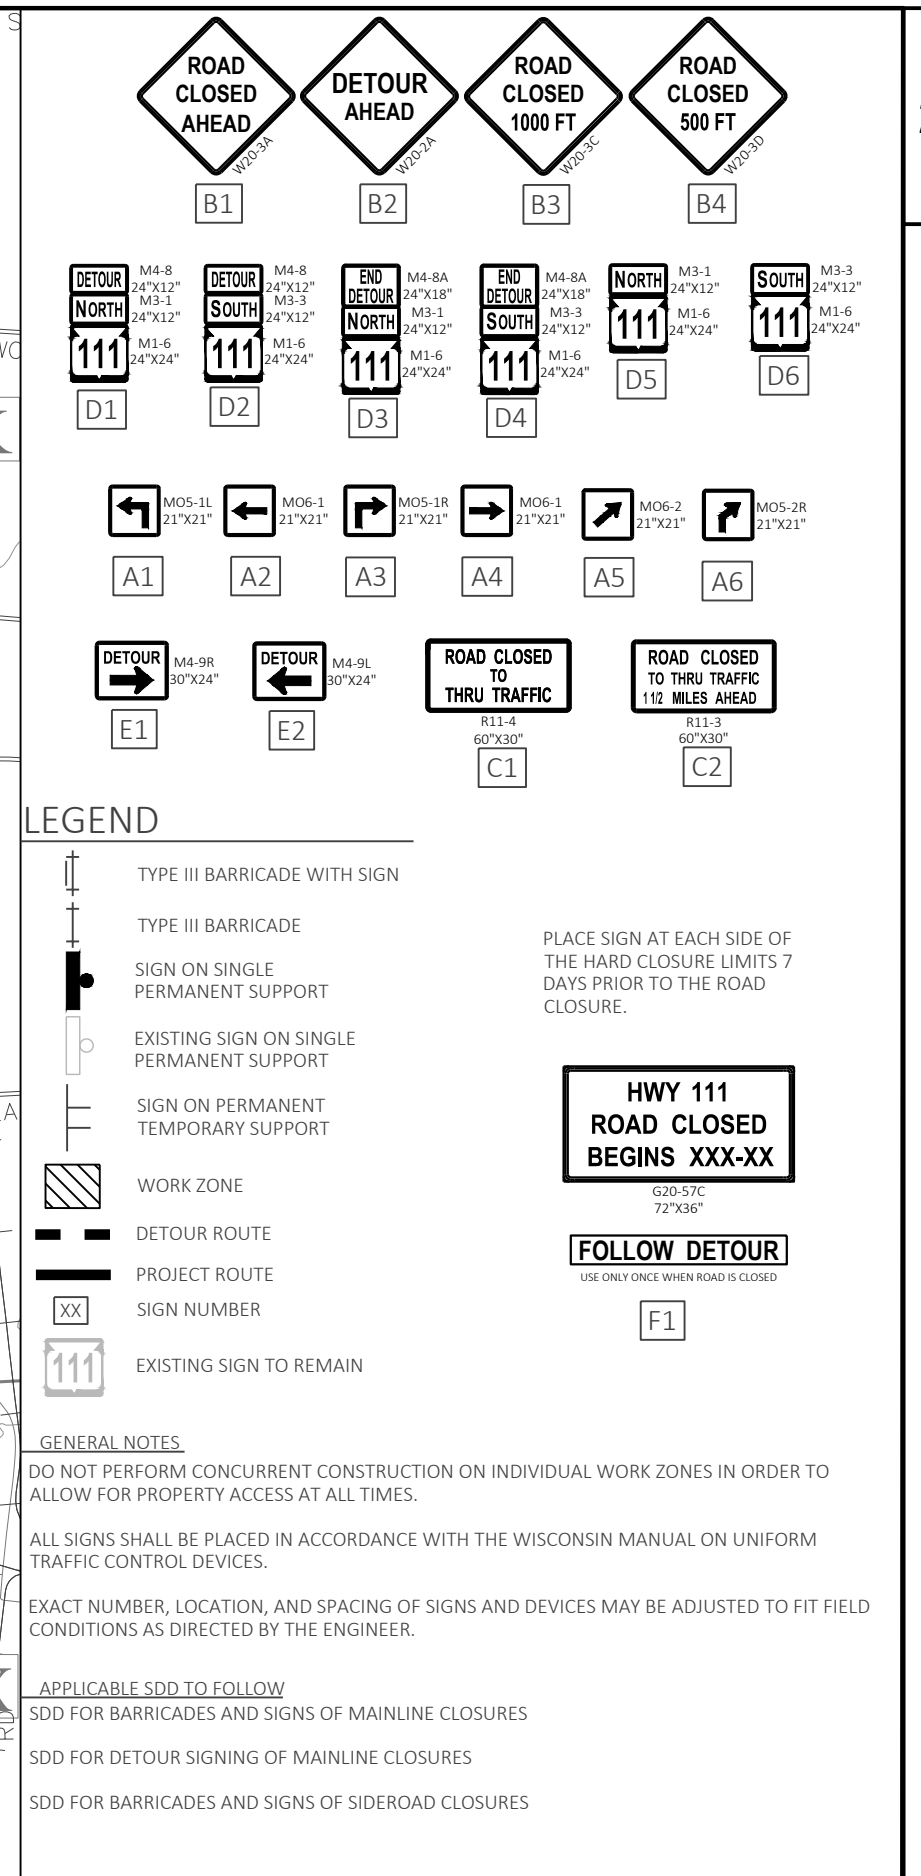

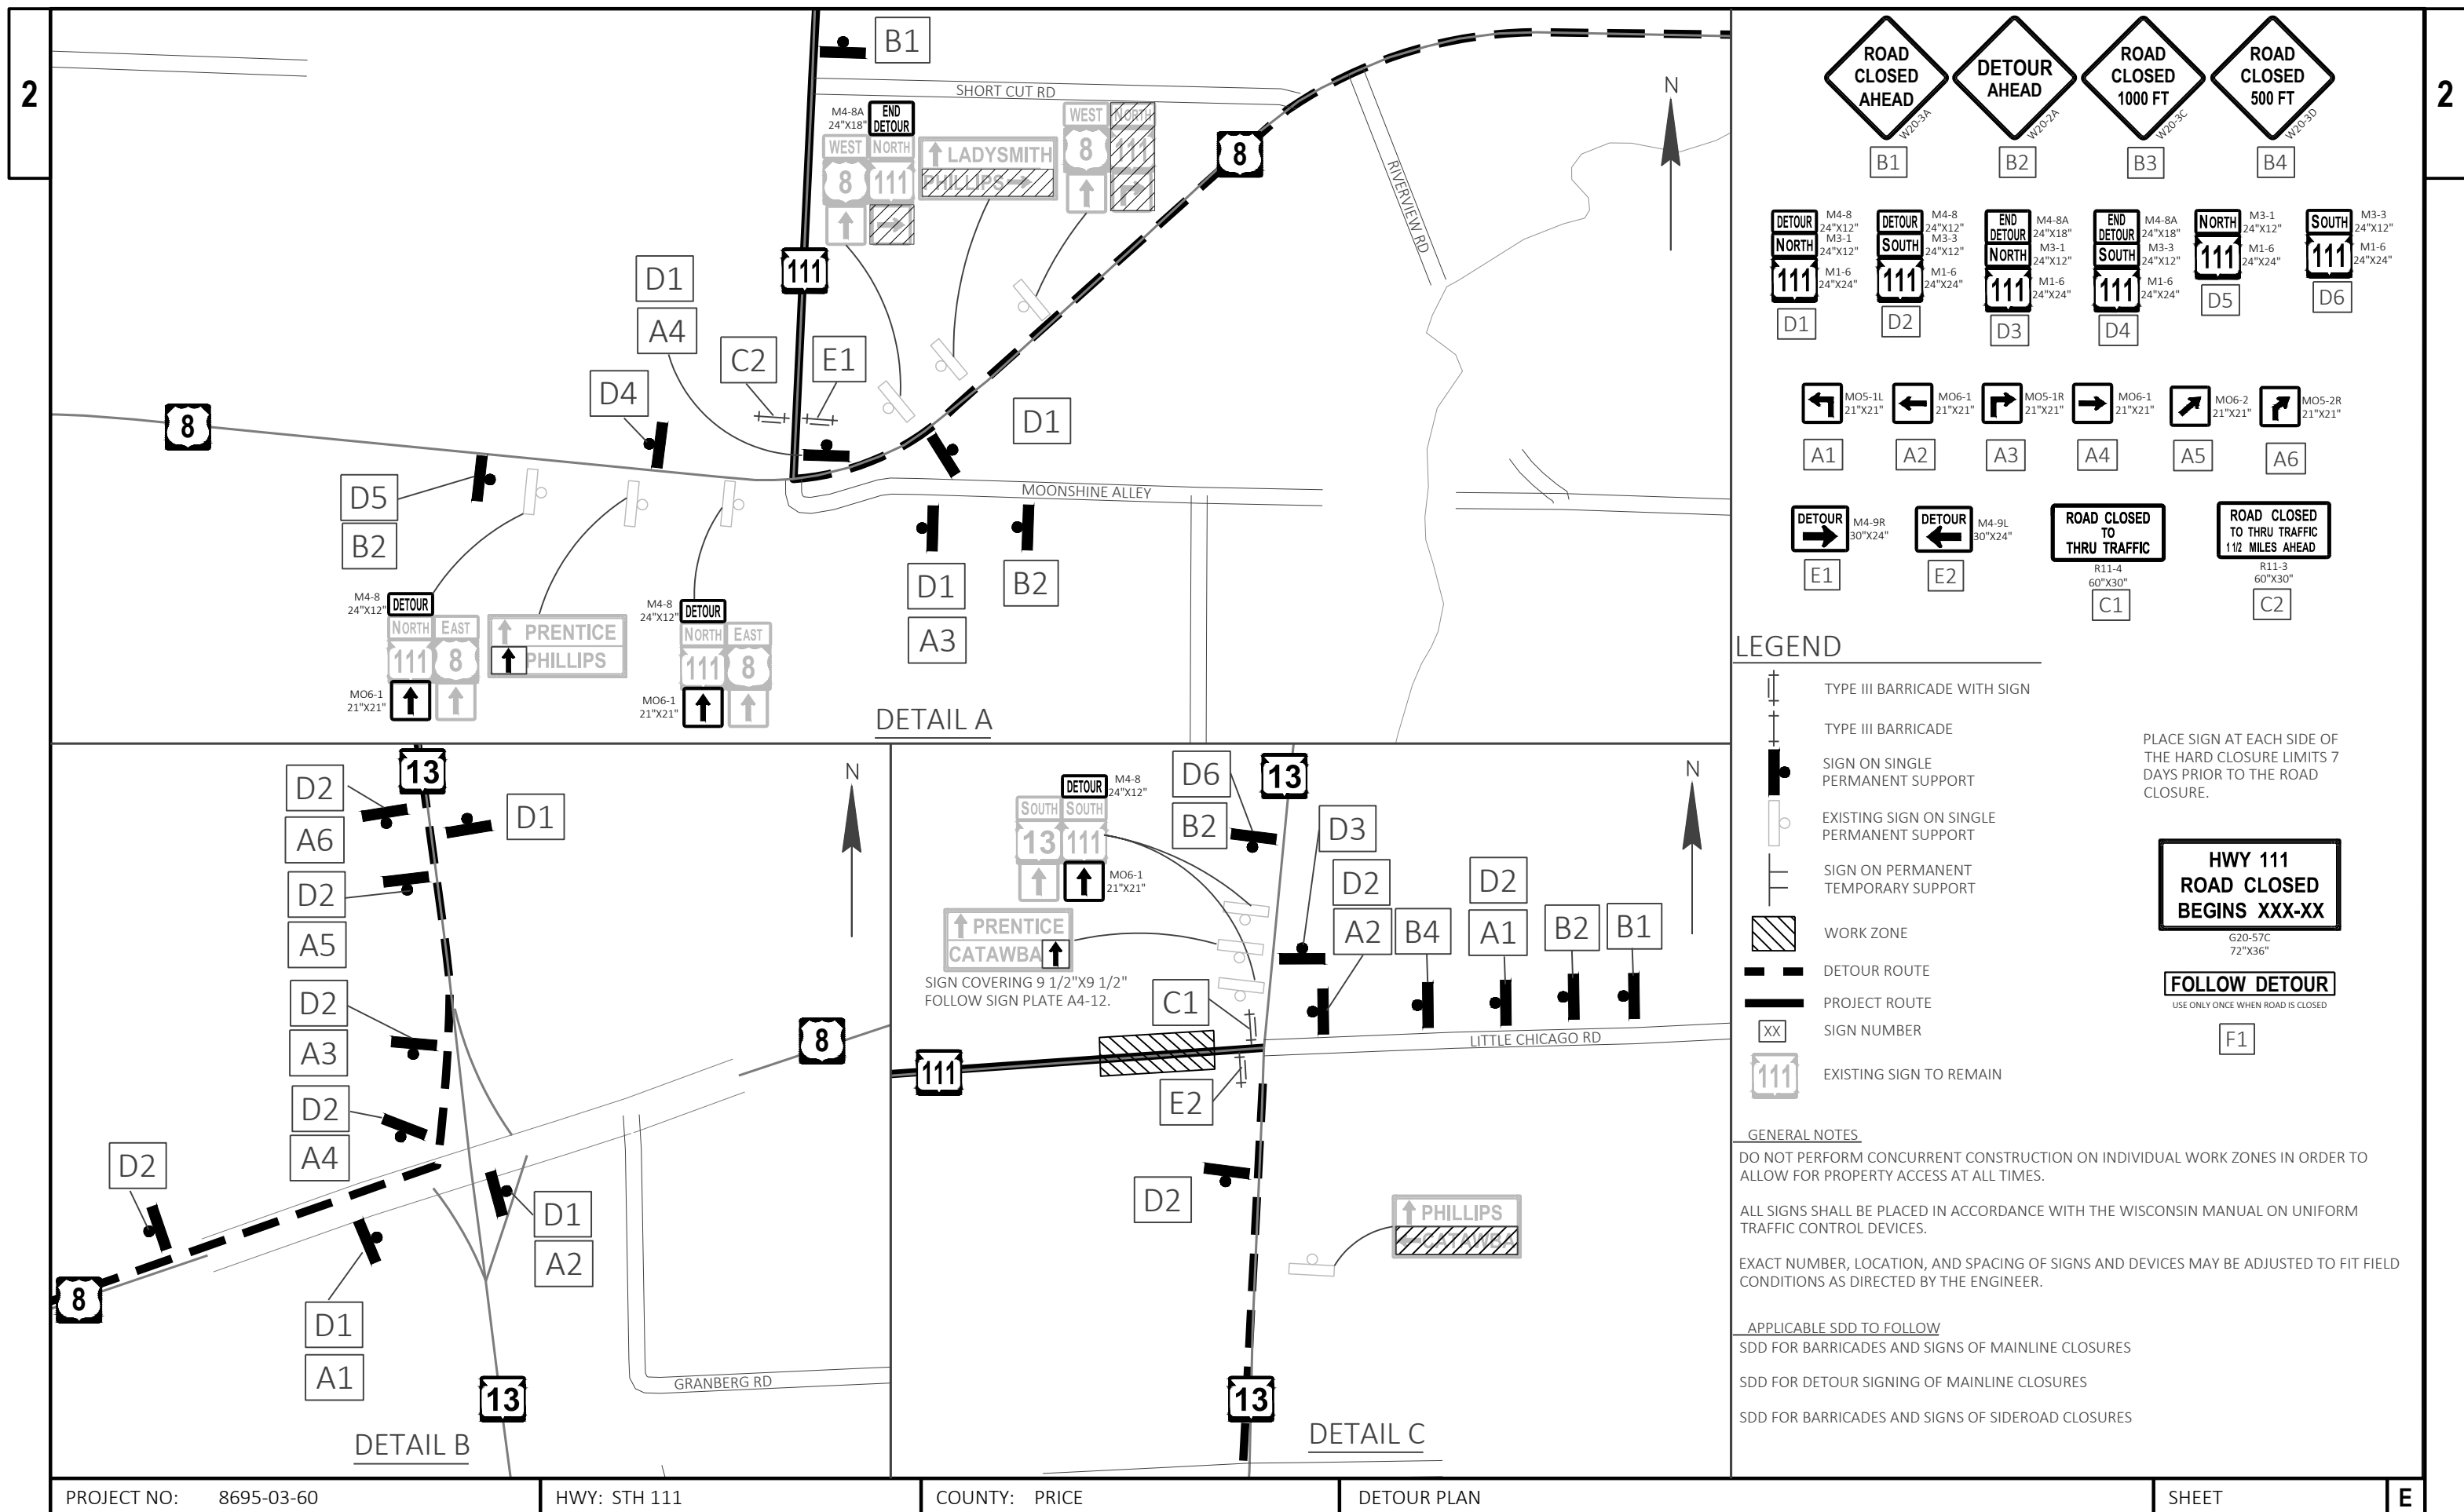

Estimate Of Quantities

8695-03-60

Line	Item	Item Description	Unit	Total	Qty
0002	203.0100	Removing Small Pipe Culverts	EACH	10.000	10.000
0004	204.0115	Removing Asphaltic Surface Butt Joints	SY	530.000	530.000
0006	204.0120	Removing Asphaltic Surface Milling	SY	157,130.000	157,130.000
0008	204.0150	Removing Curb & Gutter	LF	124.000	124.000
0010	205.0100	Excavation Common	CY	3,840.000	3,840.000
0012	211.0101	Prepare Foundation for Asphaltic Paving (project) 01. 8695-03-60	EACH	1.000	1.000
0014	213.0100	Finishing Roadway (project) 01. 8695-03-60	EACH	1.000	1.000
0016	305.0110	Base Aggregate Dense 3/4-Inch	TON	270.000	270.000
0018	305.0120	Base Aggregate Dense 1 1/4-Inch	TON	1,760.000	1,760.000
0020	305.0500	Shaping Shoulders	STA	1,114.000	1,114.000
0022	450.4000	HMA Cold Weather Paving	TON	4,106.000	4,106.000
0024	455.0605	Tack Coat	GAL	11,925.000	11,925.000
0026	460.0105.S	HMA Percent Within Limits (PWL) Test Strip Volumetrics	EACH	1.000	1.000
0028	460.0110.S	HMA Percent Within Limits (PWL) Test Strip Density	EACH	1.000	1.000
0030	460.2005	Incentive Density PWL HMA Pavement	DOL	10,480.000	10,480.000
0032	460.2007	Incentive Density HMA Pavement Longitudinal Joints	DOL	27,950.000	27,950.000
0034	460.2010	Incentive Air Voids HMA Pavement	DOL	16,230.000	16,230.000
0036	460.5224	HMA Pavement 4 LT 58-28 S	TON	16,360.000	16,360.000
0038	465.0105	Asphaltic Surface	TON	770.000	770.000
0040	465.0560	Asphaltic Rumble Strips, Centerline	LF	52,430.000	52,430.000
0042	522.0124	Culvert Pipe Reinforced Concrete Class III 24-Inch	LF	238.000	238.000
0044	522.0130	Culvert Pipe Reinforced Concrete Class III 30-Inch	LF	76.000	76.000
0046	522.0424	Culvert Pipe Reinforced Concrete Class IV 24-Inch	LF	90.000	90.000
0048	522.0430	Culvert Pipe Reinforced Concrete Class IV 30-Inch	LF	78.000	78.000
0050	522.1024	Apron Endwalls for Culvert Pipe Reinforced Concrete 24-Inch	EACH	6.000	6.000
0052	522.1030	Apron Endwalls for Culvert Pipe Reinforced Concrete 30-Inch	EACH	4.000	4.000
0054	522.2324	Culvert Pipe Reinforced Concrete Horizontal Elliptical Class HE-III 24x38-Inch	LF	38.000	38.000
0056	522.2424	Culvert Pipe Reinforced Concrete Horizontal Elliptical Class HE-IV 24x38-Inch	LF	90.000	90.000
0058	522.2429	Culvert Pipe Reinforced Concrete Horizontal Elliptical Class HE-IV 29x45-Inch	LF	88.000	88.000
0060	522.2624	Apron Endwalls for Culvert Pipe Reinforced Concrete Horizontal Elliptical 24x38-Inch	EACH	6.000	6.000
0062	522.2629	Apron Endwalls for Culvert Pipe Reinforced Concrete Horizontal Elliptical 29x45-Inch	EACH	4.000	4.000
0064	601.0557	Concrete Curb & Gutter 6-Inch Sloped 36-Inch Type D	LF	124.000	124.000
0066	618.0100	Maintenance and Repair of Haul Roads (project) 01. 8695-03-60	EACH	1.000	1.000
0068	619.1000	Mobilization	EACH	1.000	1.000
0070	624.0100	Water	MGAL	26.700	26.700
0072	625.0100	Topsoil	SY	1,900.000	1,900.000
0074	628.1504	Silt Fence	LF	1,900.000	1,900.000
0076	628.1520	Silt Fence Maintenance	LF	1,900.000	1,900.000
0078	628.1905	Mobilizations Erosion Control	EACH	4.000	4.000
0080	628.1910	Mobilizations Emergency Erosion Control	EACH	2.000	2.000
0082	628.2008	Erosion Mat Urban Class I Type B	SY	1,900.000	1,900.000
0084	628.7555	Culvert Pipe Checks	EACH	65.000	65.000
0086	628.7570	Rock Bags	EACH	50.000	50.000
0088	629.0210	Fertilizer Type B	CWT	1.600	1.600
0090	630.0120	Seeding Mixture No. 20	LB	100.000	100.000
0092	630.0500	Seed Water	MGAL	76.100	76.100
0094	633.5200	Markers Culvert End	EACH	20.000	20.000
0096	638.2102	Moving Signs Type II	EACH	6.000	6.000
0098	638.4000	Moving Small Sign Supports	EACH	6.000	6.000

Estimate Of Quantities

8695-03-60

Line	Item	Item Description	Unit	Total	Qty
0100	642.5001	Field Office Type B	EACH	1.000	1.000
0102	643.0300	Traffic Control Drums	DAY	1,500.000	1,500.000
0104	643.0420	Traffic Control Barricades Type III	DAY	1,555.000	1,555.000
0106	643.0705	Traffic Control Warning Lights Type A	DAY	2,185.000	2,185.000
0108	643.0900	Traffic Control Signs	DAY	5,230.000	5,230.000
0110	643.0920	Traffic Control Covering Signs Type II	EACH	10.000	10.000
0112	643.1000	Traffic Control Signs Fixed Message	SF	36.000	36.000
0114	643.3165	Temporary Marking Line Paint 6-Inch	LF	45,470.000	45,470.000
0116	643.5000	Traffic Control	EACH	1.000	1.000
0118	646.2040	Marking Line Grooved Wet Ref Epoxy 6-Inch	LF	156,130.000	156,130.000
0120	646.6120	Marking Stop Line Epoxy 18-Inch	LF	37.000	37.000
0122	646.6466	Cold Weather Marking Epoxy 6-Inch	LF	39,035.000	39,035.000
0124	650.5500	Construction Staking Curb Gutter and Curb & Gutter	LF	124.000	124.000
0126	650.6000	Construction Staking Pipe Culverts	EACH	10.000	10.000
0128	650.8000	Construction Staking Resurfacing Reference	LF	55,920.000	55,920.000
0130	650.9911	Construction Staking Supplemental Control (project) 01. 8695-03-60	EACH	1.000	1.000
0132	690.0150	Sawing Asphalt	LF	650.000	650.000
0134	740.0440	Incentive IRI Ride	DOL	42,400.000	42,400.000
0136	SPV.0060	Special 01. Reestablishing Section Corner Monuments	EACH	10.000	10.000
0138	SPV.0180	Special 01. Asphalt Base Patch Partial Depth	SY	9,085.000	9,085.000

REMOVING SMALL PIPE CULVERTS

CATEGORY	STATION	LOCATION	203.0100	205.0100
			REMOVING SMALL PIPE CULVERTS EACH	EXCAVATION COMMON CY
0010	110+51	ML	1	260
0010	173+87	ML	1	145
0010	173+97	ML	1	145
0010	244+49	ML	1	280
0010	303+56	ML	1	560
0010	356+25	ML	1	520
0010	403+49	ML	1	530
0010	444+44	ML	1	520
0010	550+34	ML	1	320
0010	569+93	ML	1	560
TOTAL 0010			10	3,840

REMOVING CURB & GUTTER

CATEGORY	STATION	TO	STATION	LOCATION	204.0150
					REMOVING CURB & GUTTER LF
0010	569+55	-	570+00	RT	71
0010	569+75	-	570+12	LT	53
TOTAL 0010					124

SHAPING SHOULDERS

CATEGORY	STATION	TO	STATION	LOCATION	305.0500
					SHAPING SHOULDERS STA
0010	10+80	-	73+52	RT & LT	126
0010	76+90	-	263+00	RT & LT	374
0010	263+00	-	570+00	RT & LT	614
TOTAL 0010					1,114

BASE AGGREGATE DENSE

CATEGORY	STATION	TO	STATION	LOCATION	305.0110	305.0120	624.0100	REMARKS
					BASE AGGREGATE DENSE 3/4-INCH TON	BASE AGGREGATE DENSE 1 1/4-INCH TON	WATER MGAL	
0010	109+91	-	111+11	ML	30	170	2.6	CULVERT REPLACEMENT
0010	173+35	-	174+57	ML	35	190	2.9	CULVERT REPLACEMENT
0010	243+89	-	245+09	ML	30	170	2.6	CULVERT REPLACEMENT
0010	302+77	-	304+29	ML	35	200	3.0	CULVERT REPLACEMENT
0010	355+65	-	356+85	ML	30	190	2.9	CULVERT REPLACEMENT
0010	402+89	-	404+09	ML	30	190	2.9	CULVERT REPLACEMENT
0010	443+67	-	445+18	ML	40	240	3.6	CULVERT REPLACEMENT
0010	549+74	-	550+94	ML	30	190	2.9	CULVERT REPLACEMENT
0010	569+32	-	570+23	ML	10	220	3.3	CULVERT REPLACEMENT
TOTAL 0010					270	1,760	26.7	

REMOVING ASPHALT

CATEGORY	STATION	TO	STATION	LOCATION	204.0115	204.0120	REMARKS
					REMOVING ASPHALTIC SUREACE BUTT JOINTS SY	REMOVING ASPHALTIC SUREACE MILLING SY	
0010	11+00	-	11+10	ML	30	-	BOP
0010	11+10	-	36+13	ML	-	6,700	BOP - SHORTCUT RD
0010	35+86	-	36+39	RT	-	140	SHORTCUT RD
0010	36+13	-	74+87	ML	-	10,470	SHORT CUT RD - BRIDGE DECK
0010	74+87	-	74+97	ML	30	-	B-50-87
0010	75+36	-	75+46	ML	30	-	B-50-87
0010	75+46	-	223+87	ML	-	39,690	BRIDGE DECK -SYKORA RD
0010	223+62	-	224+12	RT	-	110	SYKORA RD
0010	223+87	-	250+30	ML	-	7,050	SYKORA RD - HAUNER RD
0010	250+07	-	250+53	RT	-	120	HAUNER RD
0010	250+30	-	277+56	ML	-	7,920	HAUNER RD - COUNTY RD J
0010	277+08	-	278+04	LT	30	250	CTH J
0010	277+56	-	306+88	ML	-	9,120	COUNTY RD J - PIONEER RD
0010	278+11	-	278+97	RT	30	200	PIONEER RD
0010	305+42	-	306+18	RT	30	160	PIONEER RD
0010	306+88	-	327+21	ML	-	6,330	PIONEER RD - LAKE 10 RD
0010	307+15	-	307+78	LT	-	150	PIONEER RD
0010	326+83	-	327+59	LT	30	140	LAKE 10 RD
0010	327+21	-	368+65	ML	-	12,900	LAKE 10 RD - HURBAN RD
0010	341+16	-	341+17	RT	-	60	DRIVEWAY
0010	368+46	-	368+85	RT	-	70	HURBAN RD
0010	368+65	-	396+12	ML	-	8,550	HURBAN RD - PINE RD
0010	385+35	-	385+95	LT	30	80	KATIE LN
0010	395+83	-	396+42	LT	30	100	PINE RD
0010	396+12	-	424+34	ML	-	8,790	PINE RD - CORK RD
0010	424+04	-	424+63	LT	30	100	CORK RD
0010	424+34	-	442+26	ML	-	5,590	CORK RD - LINK RD
0010	424+31	-	424+92	RT	-	130	LINK RD
0010	430+46	-	430+86	LT	-	30	DRIVEWAY
0010	441+15	-	441+76	RT	30	110	LINK RD
0010	442+22	-	442+82	LT	30	90	LINK RD
0010	442+26	-	471+84	ML	-	9,200	LINK RD - LOST LN
0010	471+62	-	472+07	LT	-	90	LOST LN
0010	471+84	-	491+96	ML	-	6,260	LOST LN - LILAC LN
0010	491+71	-	492+29	LT	-	110	LILAC LN
0010	491+96	-	544+07	ML	-	16,210	LILAC LN - PIONEER LN
0011	543+76	-	544+36	RT	-	110	PIONEER LN
0012	544+07	-	570+13	ML	-	8,370	PIONEER LN - EOP
0013	568+55	-	568+95	RT	-	10	DRIVEWAY
0014	570+13	-	570+23	ML	170	0	EOP
TOTAL 0010					530	157,130	

*ADDITIONAL QUANTITY SHOWN ELSEWHERE

HMA PAVEMENT								
450.4000 HMA COLD WEATHER PAVING								
455.0605 TACK COAT								
460.5224 HMA PAVEMENT 4 LT 58-28 S								
CATEGORY	STATION	TO	STATION	LOCATION	TON	GAL	TON	REMARKS
0010	11+00	-	11+10	ML	2	5	5	BOP
0010	11+10	-	36+13	ML	165	470	660	BOP - SHORTCUT RD
0010	35+86	-	36+39	RT	4	10	15	SHORTCUT RD
0010	36+13	-	74+87	ML	258	735	1030	SHORT CUT RD - BRIDGE DECK
0010	74+87	-	74+97	ML	2	5	5	B-50-87
0010	75+36	-	75+46	ML	2	5	5	B-50-87
0010	75+46	-	223+87	ML	973	2780	3890	BRIDGE DECK - SYKORA RD
0010	223+62	-	224+12	RT	3	10	10	SYKORA RD
0010	223+87	-	250+30	ML	174	495	695	SYKORA RD - HAUNER RD
0010	250+07	-	250+53	RT	4	10	15	HAUNER RD
0010	250+30	-	277+56	ML	195	555	780	HAUNER RD - COUNTY RD J
0010	277+08	-	278+04	LT	8	20	30	CTH J
0010	277+56	-	306+88	ML	224	640	895	COUNTY RD J - PIONEER RD
0010	278+11	-	278+97	RT	7	20	25	PIONEER RD
0010	305+42	-	306+18	RT	5	15	20	PIONEER RD
0010	306+88	-	327+21	ML	157	445	625	PIONEER RD - LAKE 10 RD
0010	307+15	-	307+78	LT	4	10	15	PIONEER RD
0010	326+83	-	327+59	LT	5	15	20	LAKE 10 RD
0010	327+21	-	368+65	ML	317	905	1265	LAKE 10 RD - HURBAN RD
0010	341+16	-	341+17	RT	3	10	10	DRIVEWAY
0010	368+46	-	368+85	RT	3	5	10	HURBAN RD
0010	368+65	-	396+12	ML	210	600	840	HURBAN RD - PINE RD
0010	385+35	-	385+95	LT	3	10	10	KATIE LN
0010	395+83	-	396+42	LT	4	10	15	PINE RD
0010	396+12	-	424+34	ML	217	615	865	PINE RD - CORK RD
0010	424+04	-	424+63	LT	4	10	15	CORK RD
0010	424+34	-	442+26	ML	138	395	550	CORK RD - LINK RD
0010	424+31	-	424+92	RT	4	10	15	LINK RD
0010	430+46	-	430+86	LT	2	5	5	DRIVEWAY
0010	441+15	-	441+76	RT	4	10	15	LINK RD
0010	442+22	-	442+82	LT	4	10	15	LINK RD
0010	442+26	-	471+84	ML	227	645	905	LINK RD - LOST LN
0010	471+62	-	472+07	LT	3	10	10	LOST LN
0010	471+84	-	491+96	ML	154	440	615	LOST LN - LILAC LN
0010	491+71	-	492+29	LT	4	10	15	LILAC LN
0010	491+96	-	544+07	ML	398	1135	1590	LILAC LN - PIONEER LN
0010	543+76	-	544+36	RT	3	10	10	PIONEER LN
0010	544+07	-	570+13	ML	205	590	820	PIONEER LN - EOP
0010	568+55	-	568+95	RT	2	5	5	DRIVEWAY
0010	570+13	-	570+23	ML	5	15	20	EOP
TOTAL 0010					4,106	11,700	16,360	

ASPHALTIC SURFACE						
455.0605 TACK COAT GAL						
465.0105 ASPHALTIC SURFACE TON						
CATEGORY	STATION	TO	STATION	LOCATION	GAL	TON
0010	109+91	-	111+11	CULVERT REPLACEMENT	20	70
0010	173+35	-	174+57	CULVERT REPLACEMENT	25	80
0010	243+89	-	245+09	CULVERT REPLACEMENT	20	70
0010	302+77	-	304+29	CULVERT REPLACEMENT	25	90
0010	355+65	-	356+85	CULVERT REPLACEMENT	25	85
0010	402+89	-	404+09	CULVERT REPLACEMENT	25	80
0010	443+67	-	445+18	CULVERT REPLACEMENT	30	105
0010	549+74	-	550+94	CULVERT REPLACEMENT	25	85
0010	569+32	-	570+23	CULVERT REPLACEMENT	30	105
TOTAL 0010					225	770

CENTERLINE RUMBLE STRIPS					
465.0560 ASPHALTIC RUMBLE STRIPS, CENTERLINE LE					
CATEGORY	STATION	TO	STATION	LOCATION	LE
0010	11+00	-	570+22	ML	52,430
TOTAL 0010					52,430

ASPHALTIC BASE PATCH PARTIAL DEPTH				
SPV.0180.01 SPECIAL (01. ASPHALTIC BASE PATCH PARTIAL DEPTH) SY				
CATEGORY	STATION	TO	STATION	LANE
0010	55+00	-	68+50	BOTH
0010	122+00	-	126+50	BOTH
0010	176+70	-	177+70	RT
0010	182+70	-	183+70	BOTH
0010	186+45	-	186+95	LT
0010	190+35	-	190+85	LT
0010	199+16	-	202+16	BOTH
0010	285+70	-	286+70	RT
0010	307+75	-	309+25	BOTH
0010	378+05	-	380+05	BOTH
0010	449+50	-	452+50	RT
0010	450+50	-	451+50	LT
0010	466+60	-	467+60	RT
0010	495+75	-	498+25	RT
0010	533+00	-	535+00	LT
0010	533+33	-	533+58	RT
0010	555+40	-	555+70	LT
0010	558+95	-	559+25	LT
0010	560+75	-	561+05	LT
TOTAL 0010				

3

EROSION CONTROL

			625.0100	628.1504	628.1520	628.2008	628.7555	628.7570	629.0210	630.0120	630.0500
						EROSION MAT					
					SILT FENCE	URBAN CLASS I	CULVERT PIPE		FERTILIZER TYPE	SEEDING	
CATEGORY	STATION	LOCATION	TOPSOIL	SILT FENCE	MAINTENANCE	TYPE B	CHECKS	ROCK BAGS	B	MIXTURE NO. 20	SEED WATER
			SY	LF	LF	SY	EACH	EACH	CWT	LB	MGAL
0010	110+51	RT & LT	85	145	145	85	8	-	0.1	5.0	1.9
0010	173+92	RT & LT	105	150	150	105	20	-	0.1	6.0	2.3
0010	244+49	RT & LT	100	150	150	100	3	-	0.1	5.0	2.2
0010	303+56	RT & LT	450	240	240	450	3	-	0.3	21.0	10.1
0010	356+25	RT & LT	215	245	245	215	3	-	0.2	11.0	2.2
0010	403+49	RT & LT	170	210	210	170	3	-	0.1	9.0	10.1
0010	444+44	RT & LT	175	210	210	175	3	-	0.1	9.0	4.9
0010	550+34	RT & LT	165	215	215	165	8	-	0.1	8.0	3.8
0010	569+93	RT & LT	115	100	100	115	2	-	0.1	6.0	4.9
		UNDISTRIBUTED	320	235	235	320	12	50	0.4	20.0	33.7
TOTAL 0010			1,900	1,900	1,900	1,900	65	50	1.6	100	76.1

PROJECT NO:	8695-03-60	HWY: STH 111	COUNTY: PRICE	MISCELLANEOUS QUANTITIES	SHEET	E
-------------	------------	--------------	---------------	--------------------------	-------	----------

CONCRETE CURB & GUTTER

601.0557 CONCRETE CURB & GUTTER 6-INCH SLOPED 36-INCH TYPE D LF					
CATEGORY	STATION	TO	STATION	LOCATION	
0010	569+55	-	570+00	EOP RT	71
0010	569+75	-	570+12	EOP LT	53
TOTAL 0010					124

SIGNING

638.2102 MOVING SIGNS TYPE II EACH						638.4000 MOVING SMALL SIGN SUPPORTS EACH	
CATEGORY	STATION	TO	STATION	LOCATION			
0010	402+89	-	404+09	ML	1		1
0010	443+67	-	445+18	ML	1		1
0010	569+32	-	570+23	ML	4		4
TOTAL 0010					6		6

SAWING ASPHALT

690.0150 SAWING ASPHALT LF						REMARKS
CATEGORY	STATION	TO	STATION	LOCATION		
0010	10+80	-	570+00	PROJECT	650	CULVERTS
TOTAL 0010					650	

MOBILIZATIONS EROSION CONTROL

628.1905 MOBILIZATIONS EROSION CONTROL EACH				628.1910 MOBILIZATIONS EMERGENCY EROSION CONTROL EACH	
CATEGORY	LOCATION				
0010	PROJECT		4		2
TOTAL 0010			4		2

REESTABLISH SECTION CORNER MONUMENTS

SPV.0060.01 SPECIAL (01. REESTABLISH SECTION CORNER MONUMENTS) EACH			
CATEGORY	STATION	LOCATION	
0010	36+10	LT	1
0010	64+97	LT	1
0010	144+67	RT	1
0010	168+13	LT	1
0010	223+87	LT	1
0010	250+30	LT	1
0010	368+64	LT	1
0010	471+85	LT	1
0010	517+93	LT	1
0010	544+17	LT	1
TOTAL 0010			10


PAVEMENT MARKING ITEMS

CATEGORY	STATION	TO	STATION	LOCATION	646.6120	646.6466	646.2040	643.3165	REMARKS
					MARKING STOP LINE EPOXY 18- INCH LF	COLD WEATHER MARKING EPOXY 6-INCH LF	GROOVED WET REF EPOXY 6- INCH LF	TEMPORARY MARKING LINE PAINT 6-INCH LF	
0010	10+80	-	570+00	CL	-	11,370	45,470	-	YELLOW CENTERLINE
0010	10+80	-	570+00	RT & LT	-	27,665	110,660	-	WHITE EDGELINE
0010	10+80	-	570+00	CL	-	-	-	45,470	TO BE PLACED PRIOR TO RUMBLE STRIPS
0010	569+75			RT	23	-	-	-	EOP
0010	277+45			LT	14	-	-	-	CTH J
TOTAL 0010					37	39,035	156,130	45,470	

CONSTRUCTION STAKING ITEMS


CATEGORY	STATION	TO	STATION	LOCATION	650.5500	650.6000	650.8000	650.9911.01
					CONSTRUCTION STAKING CURB GUTTER AND CURB & GUTTER LF	CONSTRUCTION STAKING PIPE CULVERTS EACH	CONSTRUCTION STAKING RESURFACING REFERENCE LF	CONSTRUCTION SUPPLEMENTAL CONTROL (PROJECT) (01. 8695-03-60) EACH
0010	10+80	-	570+00	PROJECT	-	10	55,920	1
0010	569+55	-	570+00	EOP RT	71	-	-	-
0010	569+75	-	570+12	EOP LT	53	-	-	-
TOTAL 0010					124	10	55,920	1

Location	Station	Mixture Use	Underlying Surface	Bid Item	Tons	Thickness	Quality Management Program to be used for:	
							Mixture Acceptance	Density Acceptance
11 foot Driving Lane	11+00 to 263+00	Upper Layer	Milled Existing HMA Surface	4 LT 58-28 S	5961	1 3/4"	PWL Incentive Air Voids HMA Pavement 460.2010	Incentive Density PWL HMA Pavement 460.2005
11 foot Driving Lane	263+00 to 570+23	Upper Layer	Milled Existing HMA Surface	4 LT 58-28 S	8504	1 3/4"	PWL Incentive Air Voids HMA Pavement 460.2010	Incentive Density PWL HMA Pavement 460.2005
1 foot shoulder	11+00 to 263+00	Upper Layer	Milled Existing HMA Surface	4 LT 58-28 S	542	1 3/4"	PWL Incentive Air Voids HMA Pavement 460.2010	Acceptance testing by the department; Not eligible for incentive
3 foot shoulder	263+00 to 570+23	Upper Layer	Milled Existing HMA Surface	4 LT 58-28 S	773	1 3/4"	PWL Incentive Air Voids HMA Pavement 460.2010	Acceptance testing by the department; Not eligible for incentive
Sideroads and Driveways	11+00 to 570+23	Upper Layer	Milled Existing HMA Surface	4 LT 58-28 S	580	1 3/4"	QMP as per SS 460.	Incentive Density HMA Pavement 460.2000
Various		Culvert Patches	Base Aggregate	Asphaltic Surface	770	4" Total	SS 465	Acceptance by ordinary compaction

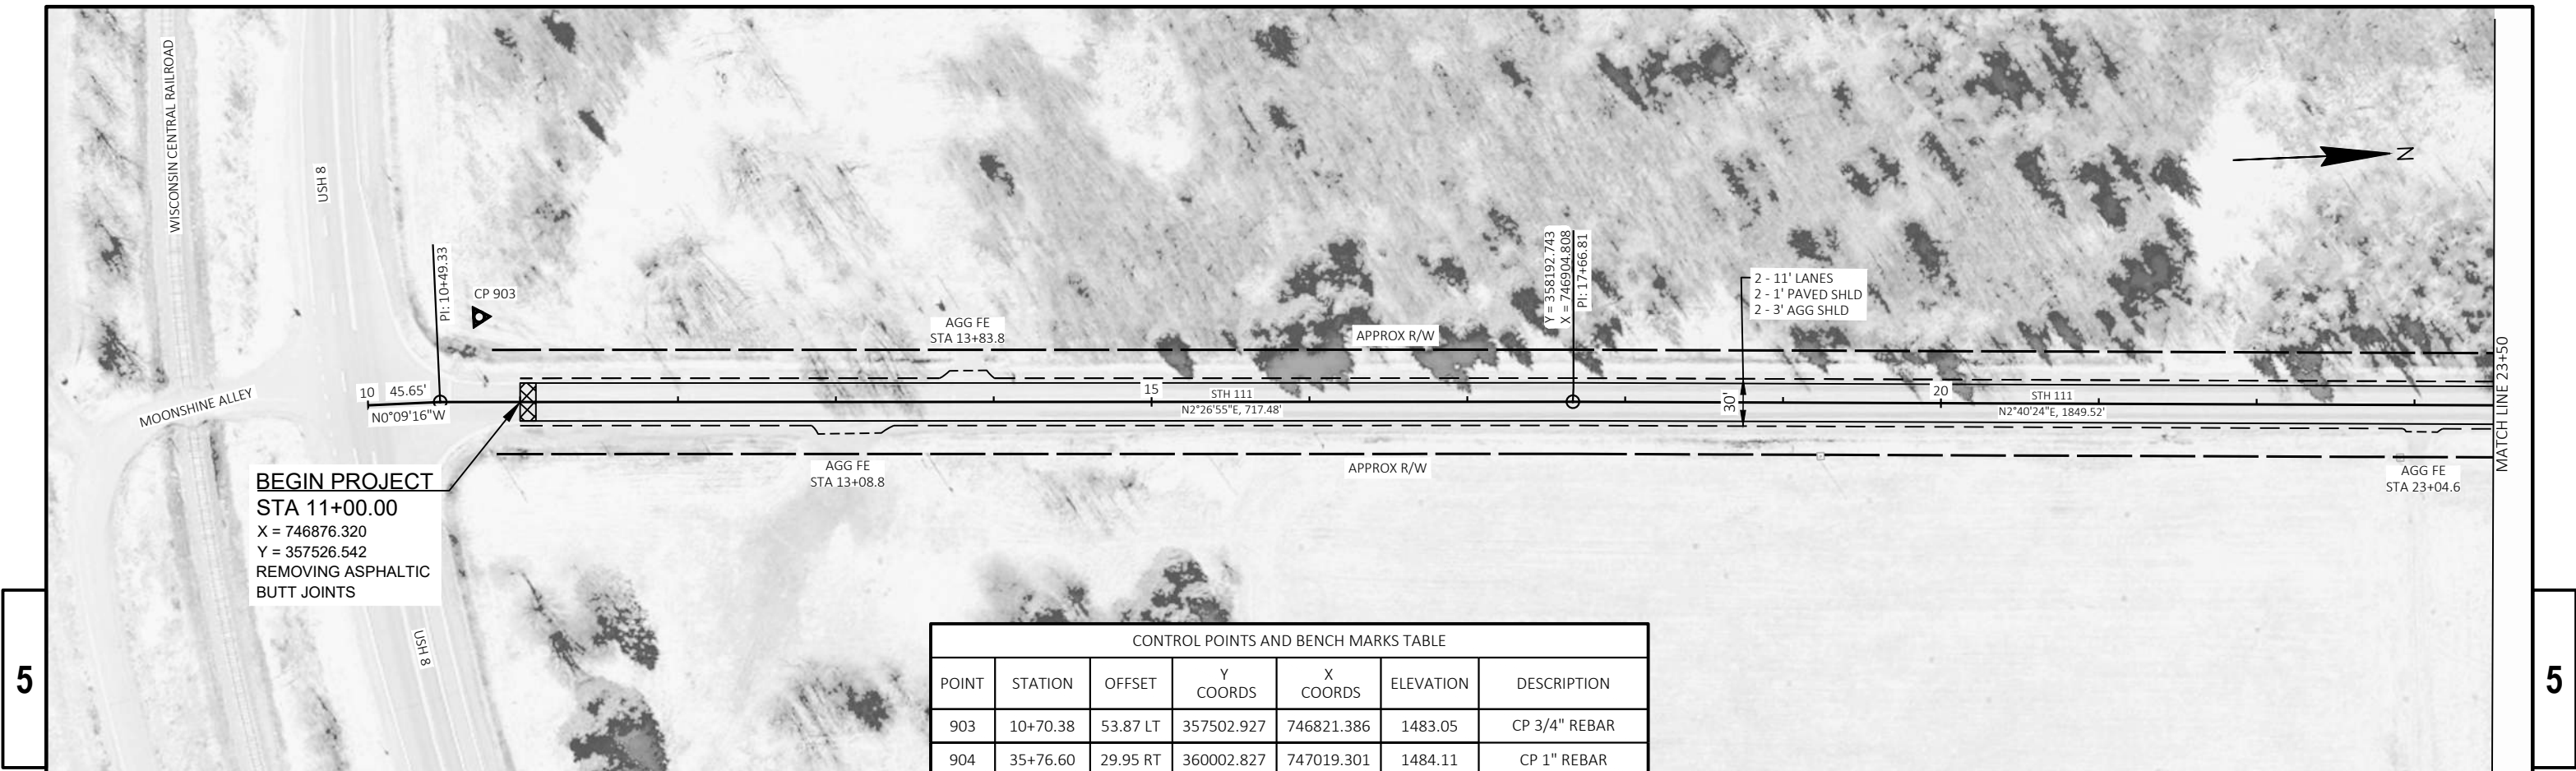








CONTROL POINTS AND BENCH MARKS TABLE						
POINT	STATION	OFFSET	Y COORDS	X COORDS	ELEVATION	DESCRIPTION
905	64+43.66	28.97 RT	362866.935	747148.773	1474.59	CP 1" IRON PIPE

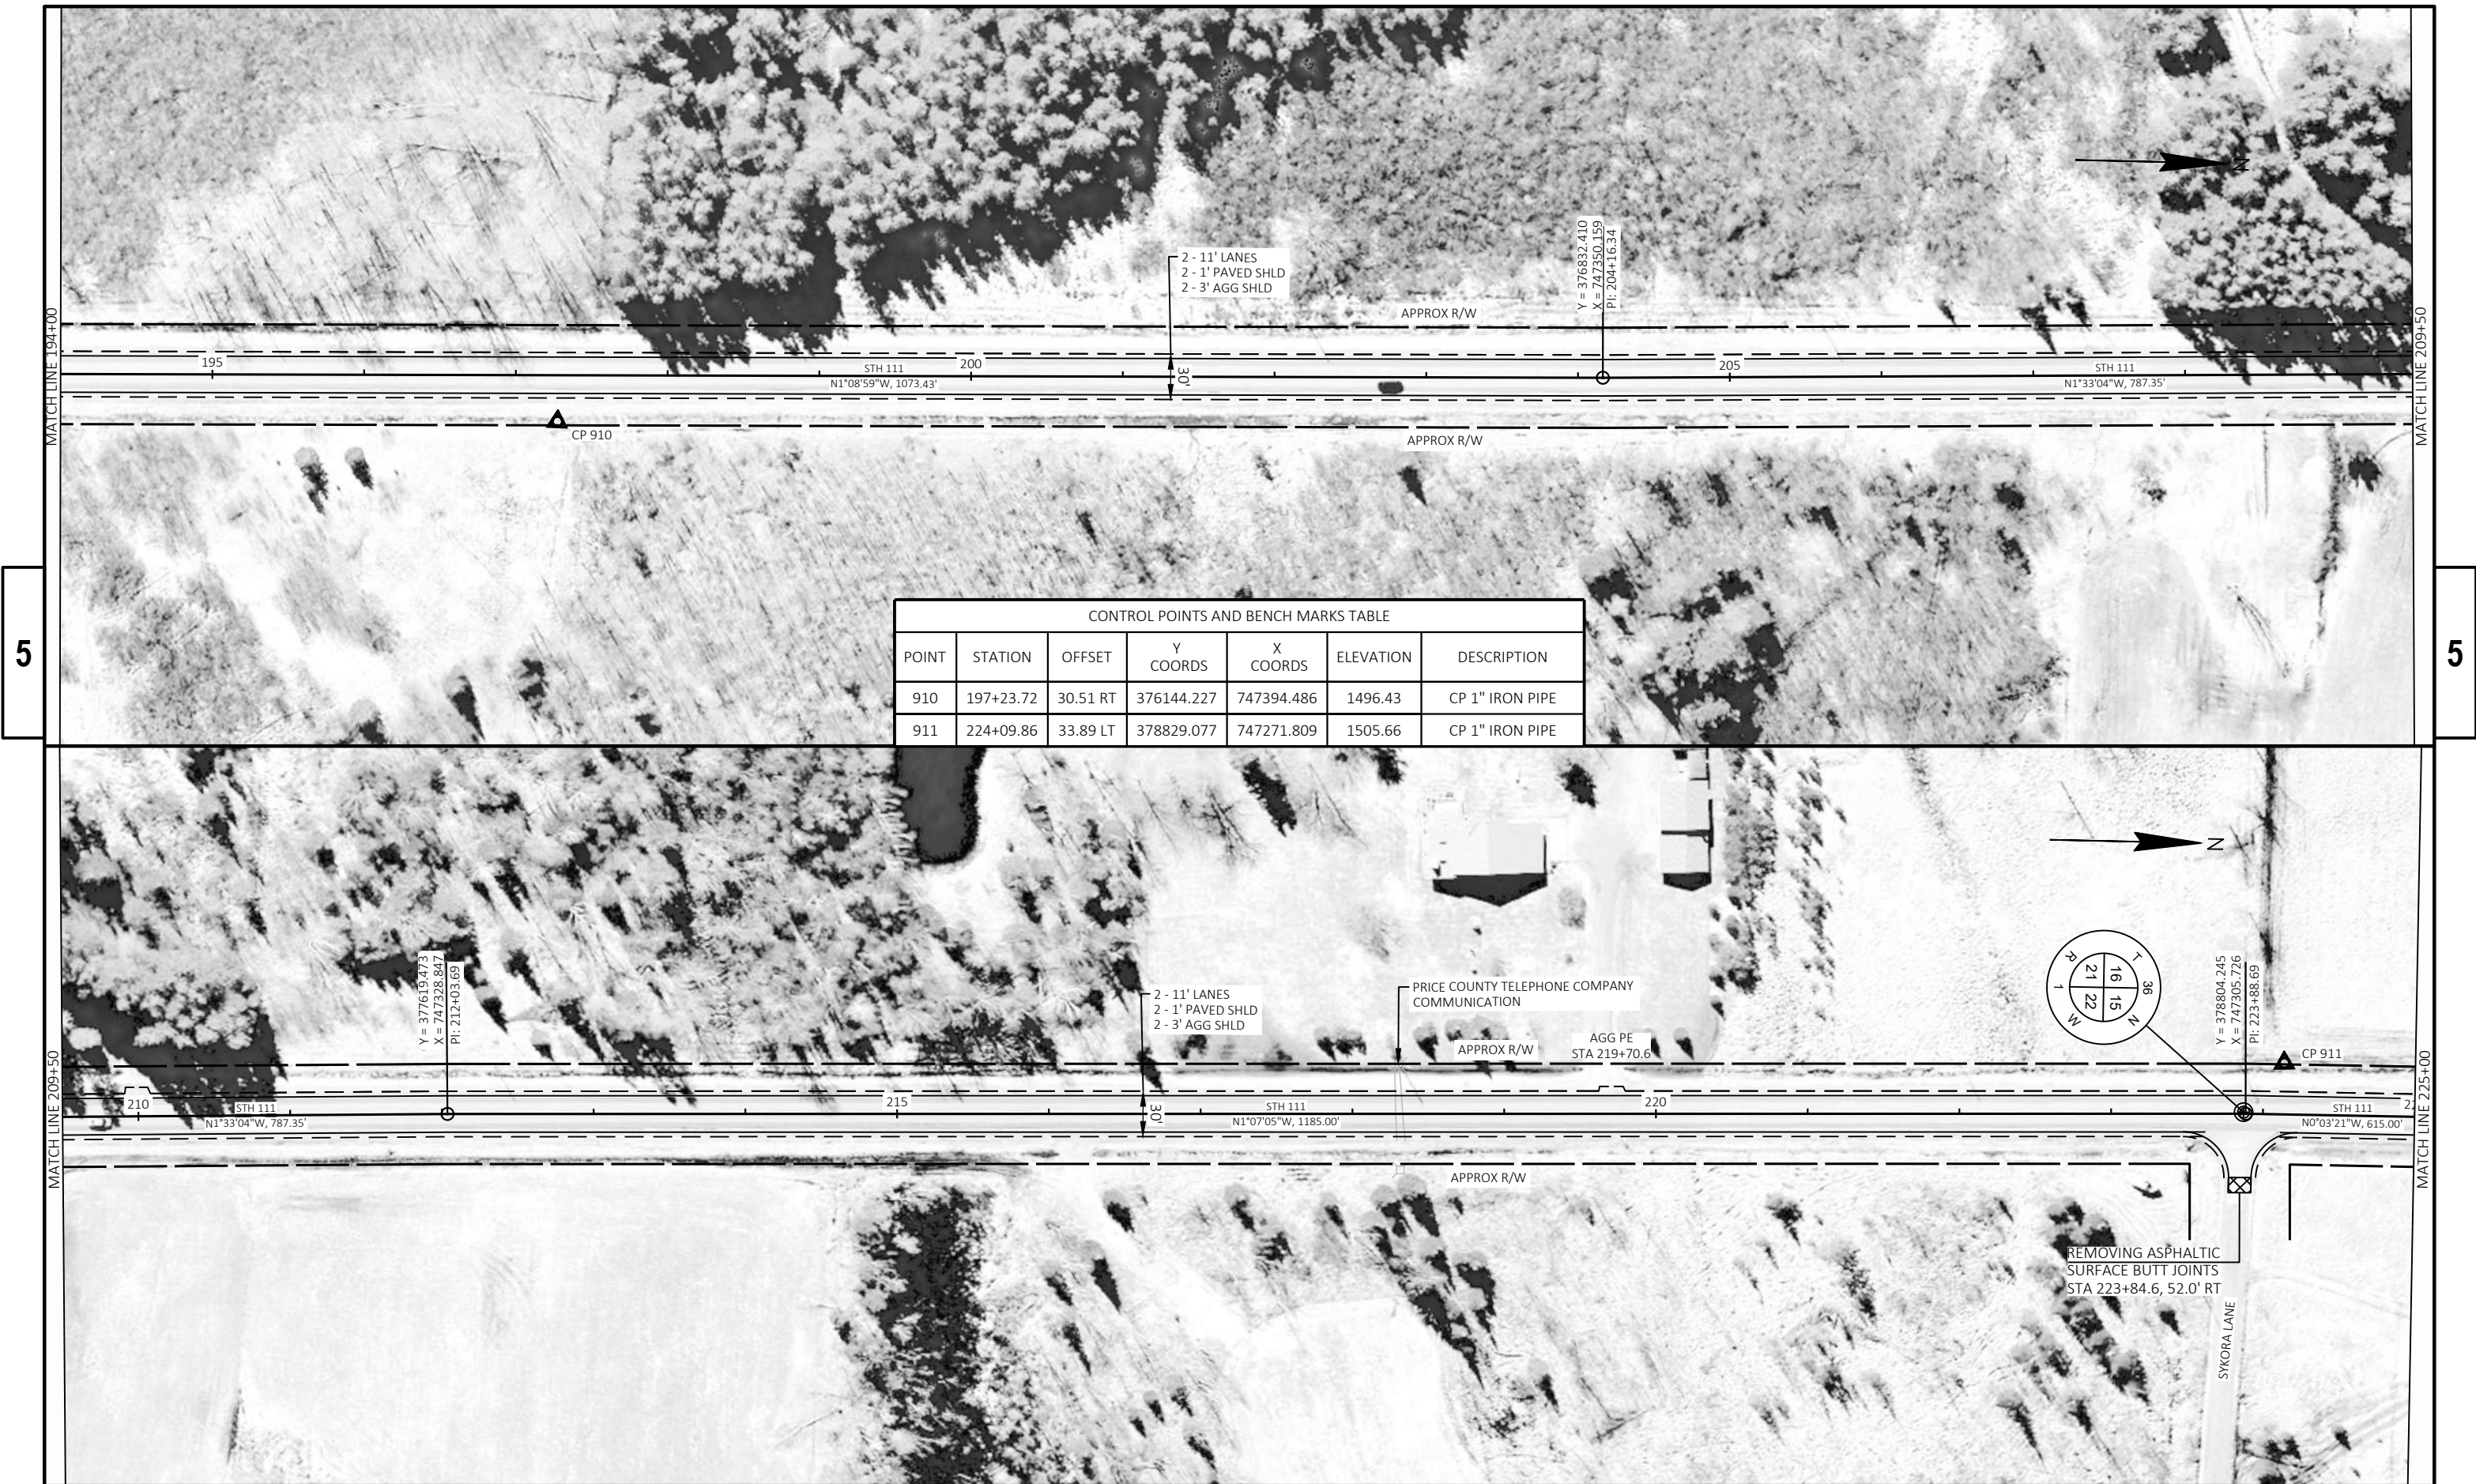


CONTROL POINTS AND BENCH MARKS TABLE						
POINT	STATION	OFFSET	Y COORDS	X COORDS	ELEVATION	DESCRIPTION
910	197+23.72	30.51 RT	376144.227	747394.486	1496.43	CP 1" IRON PIPE
911	224+09.86	33.89 LT	378829.077	747271.809	1505.66	CP 1" IRON PIPE

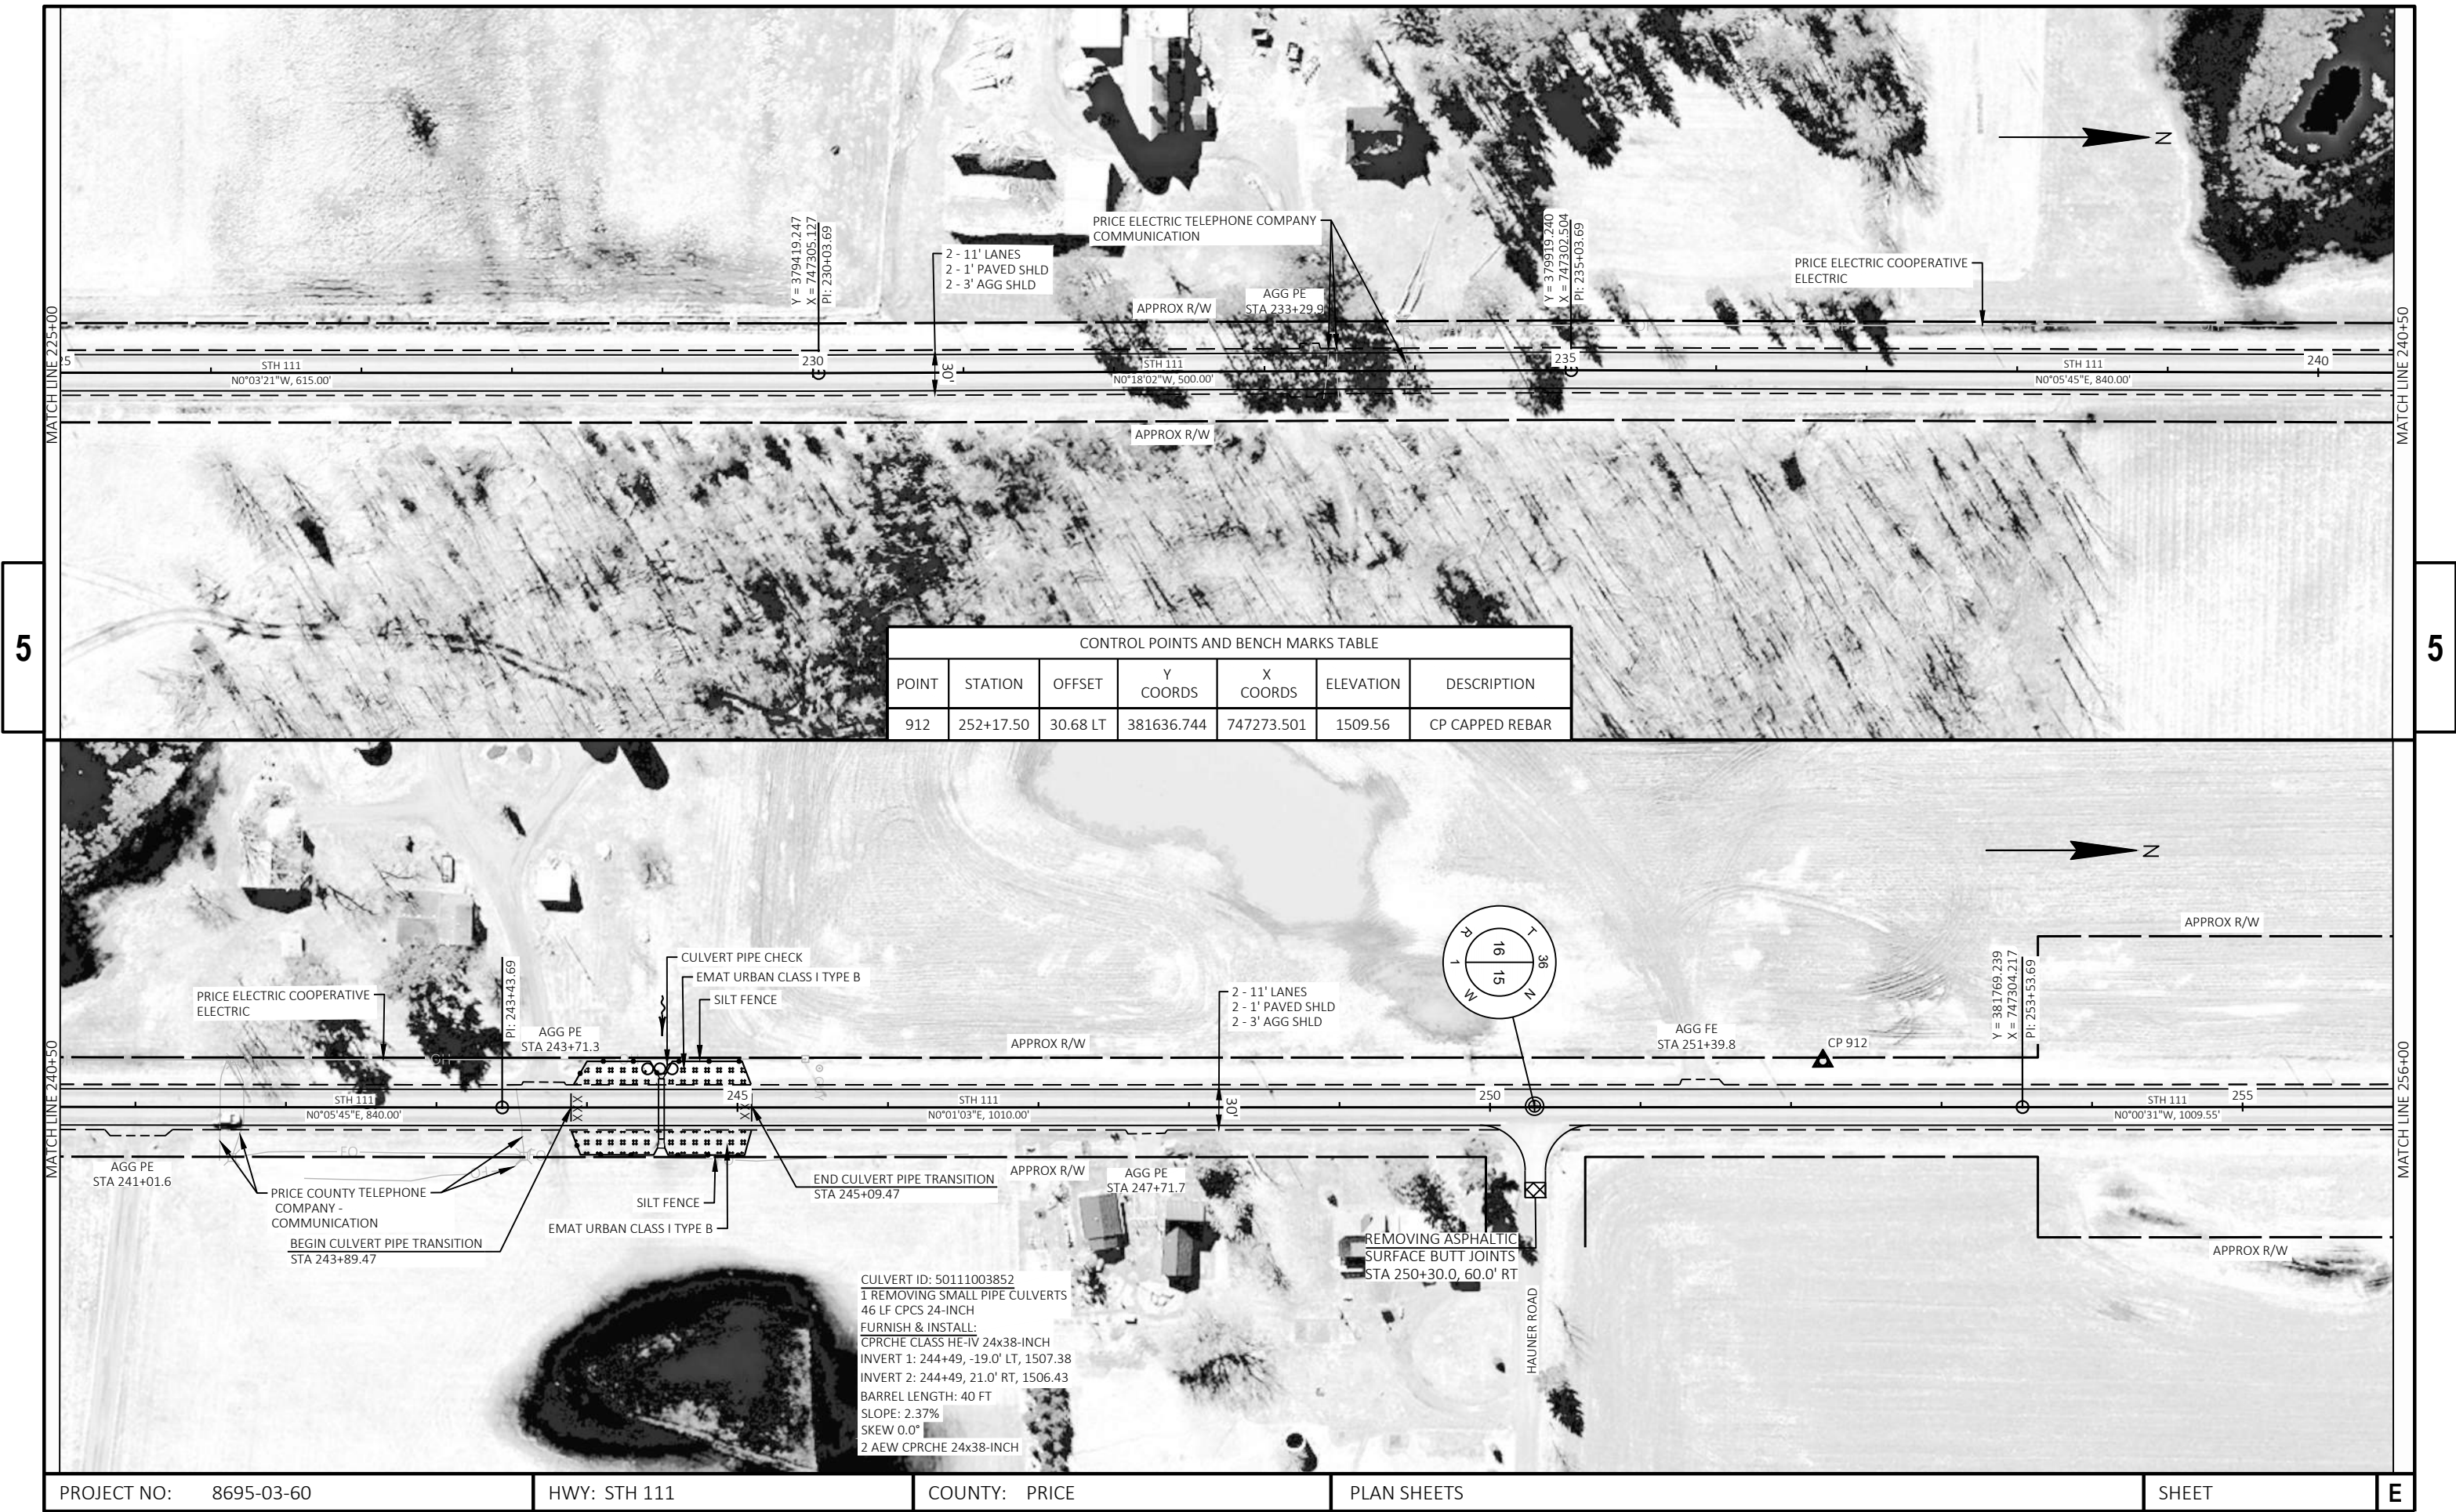

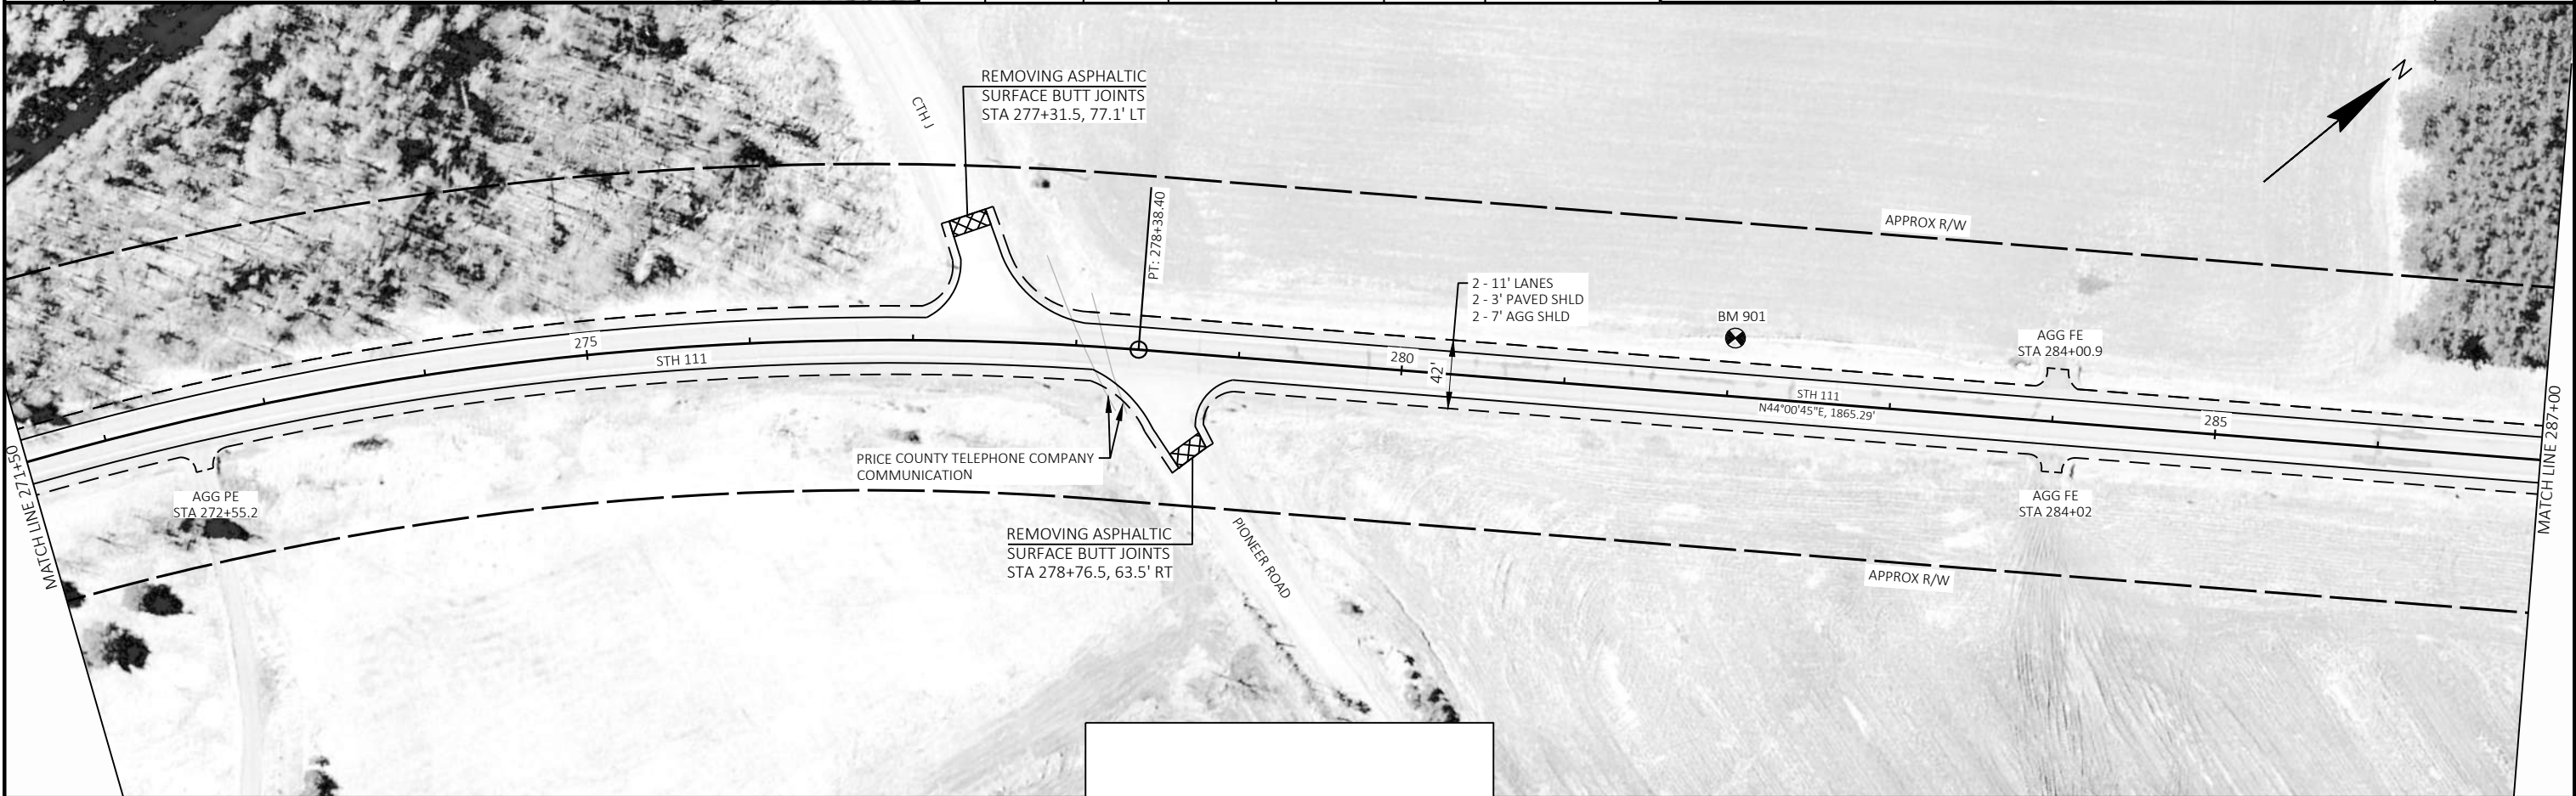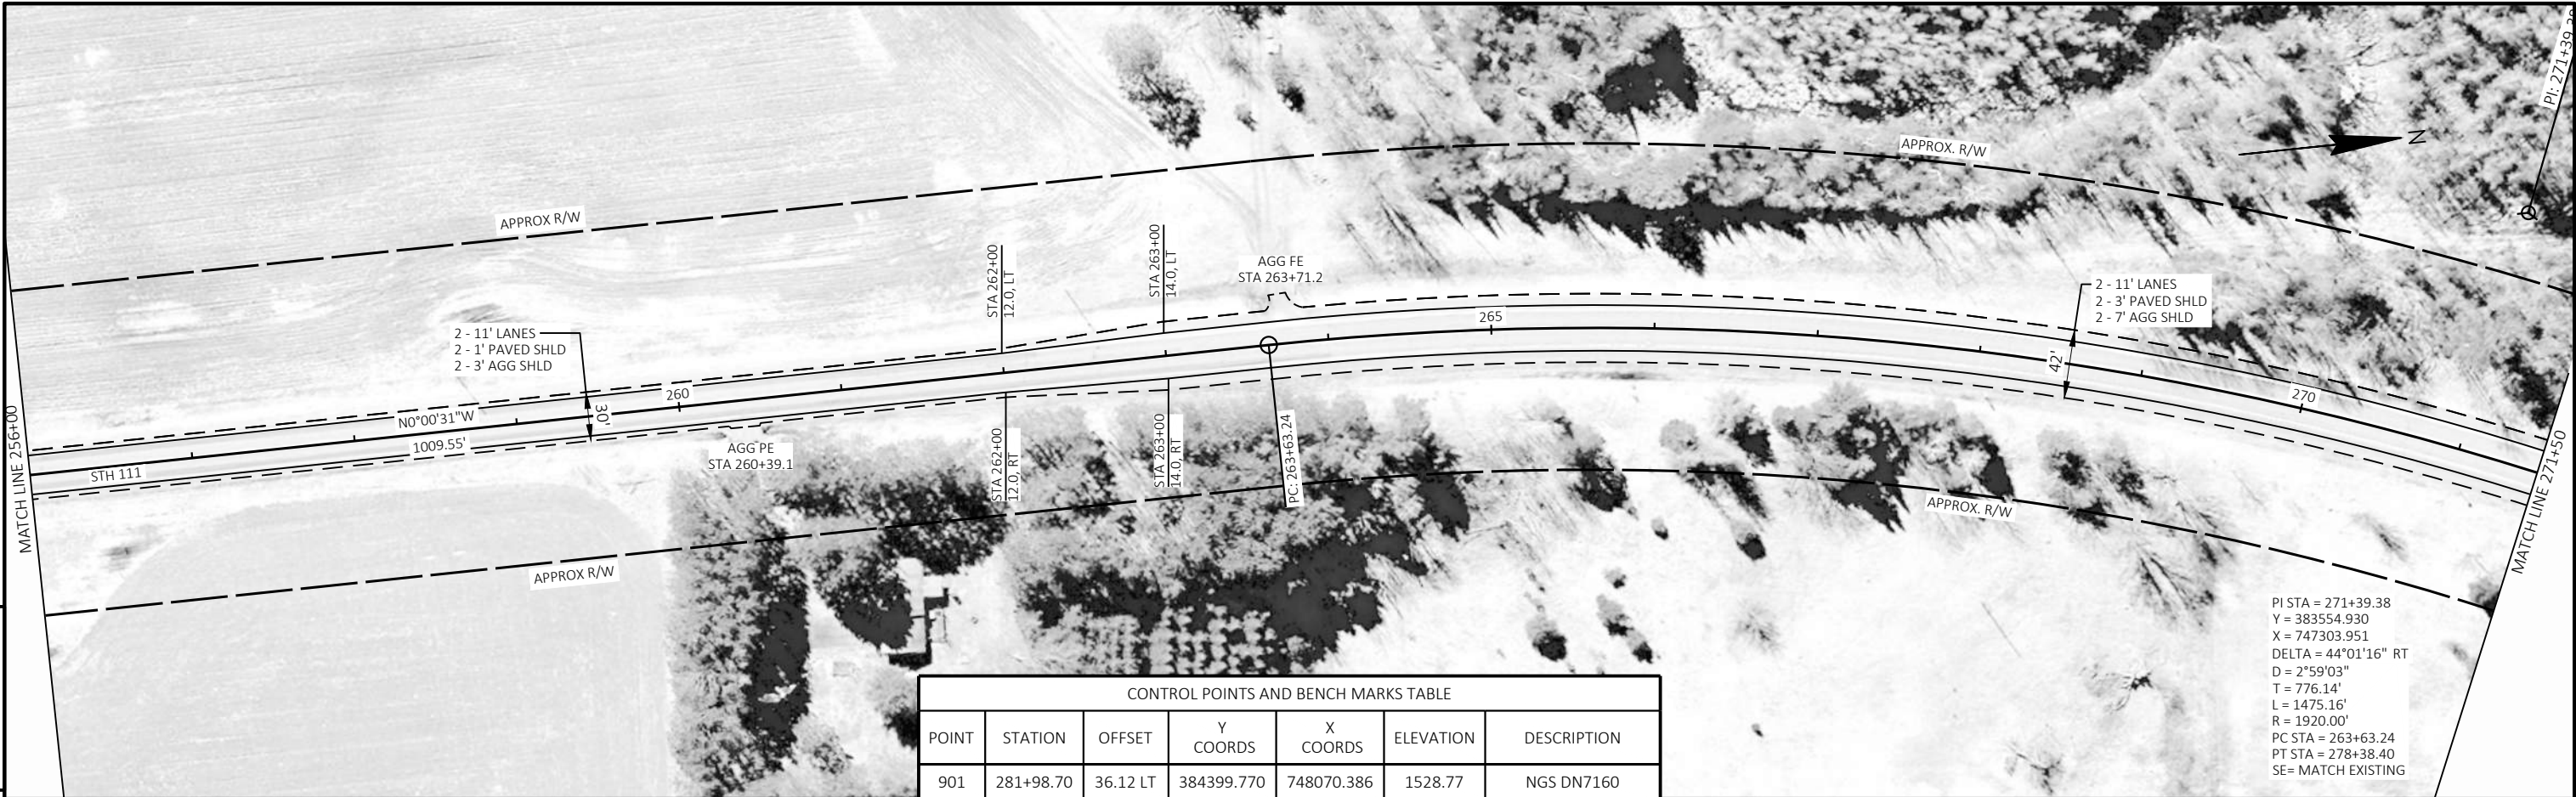

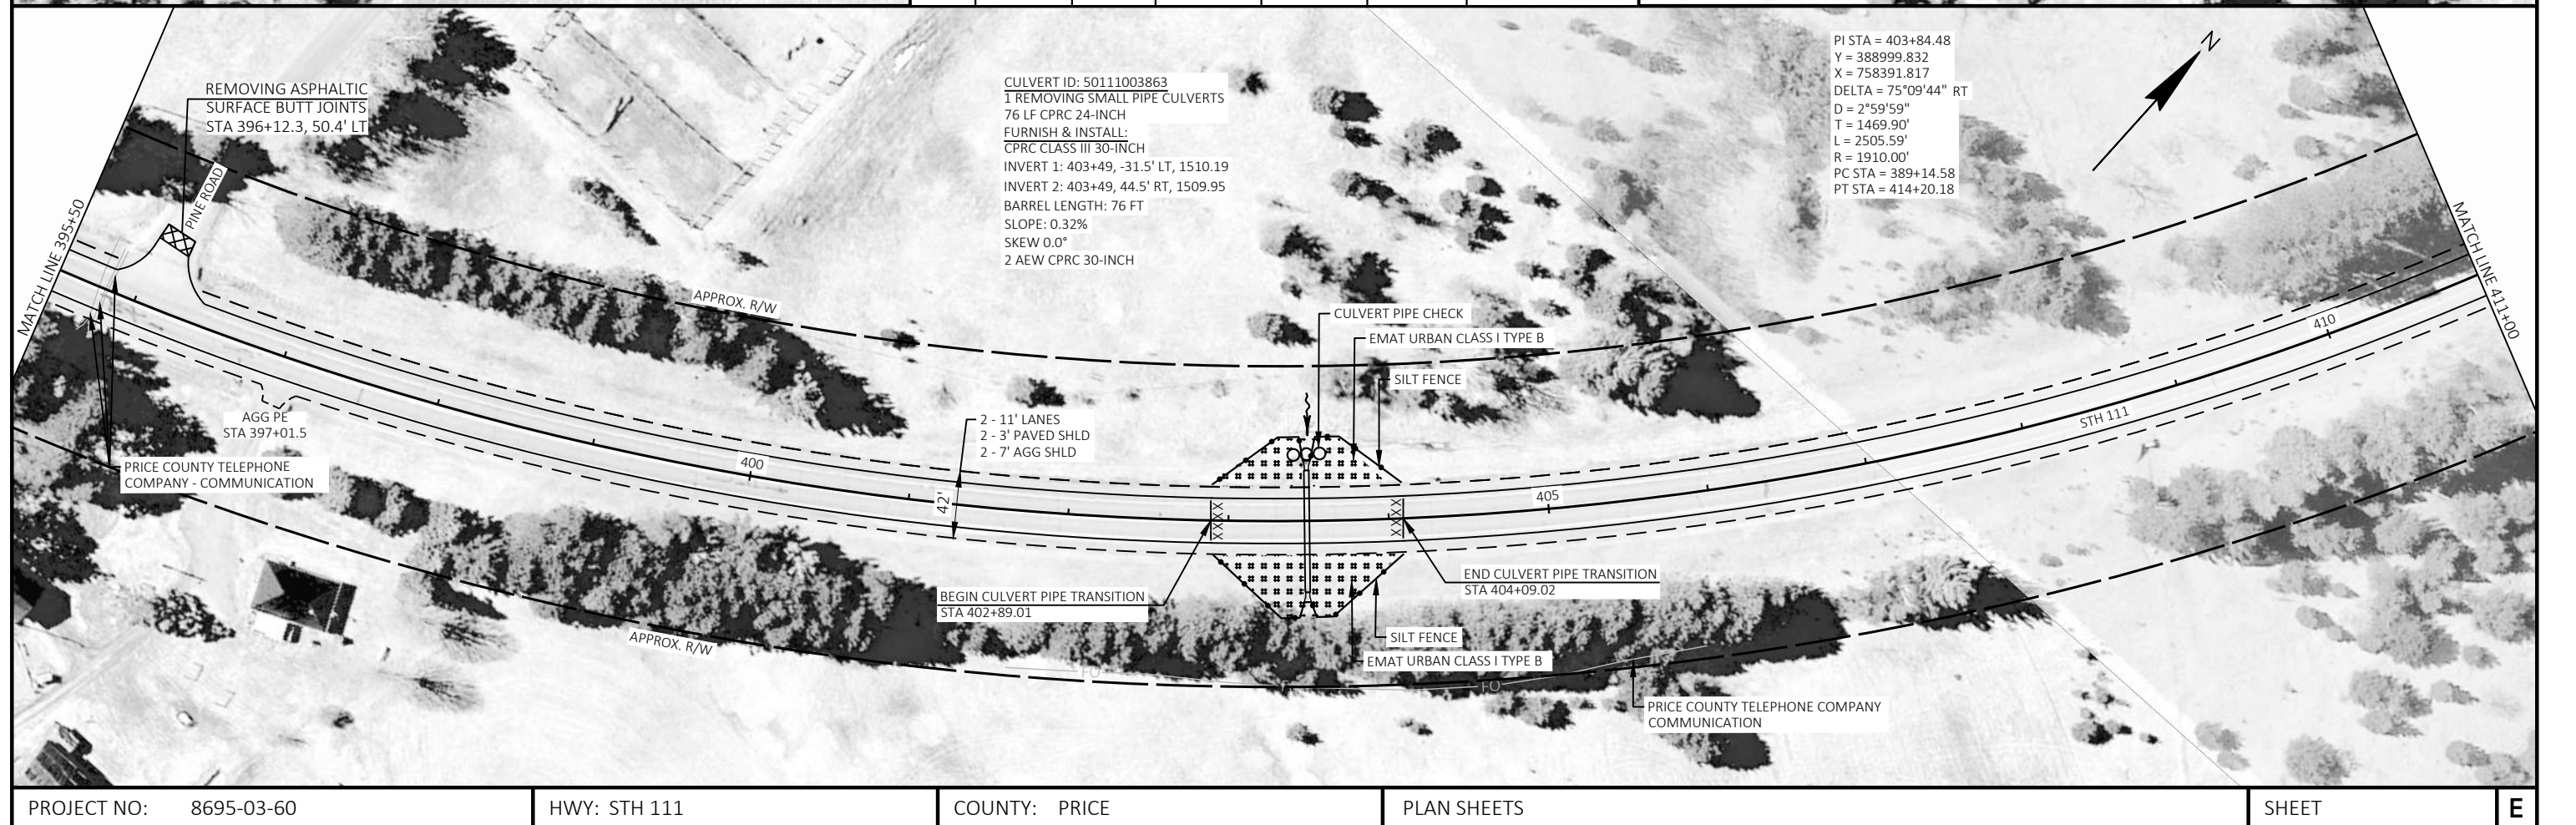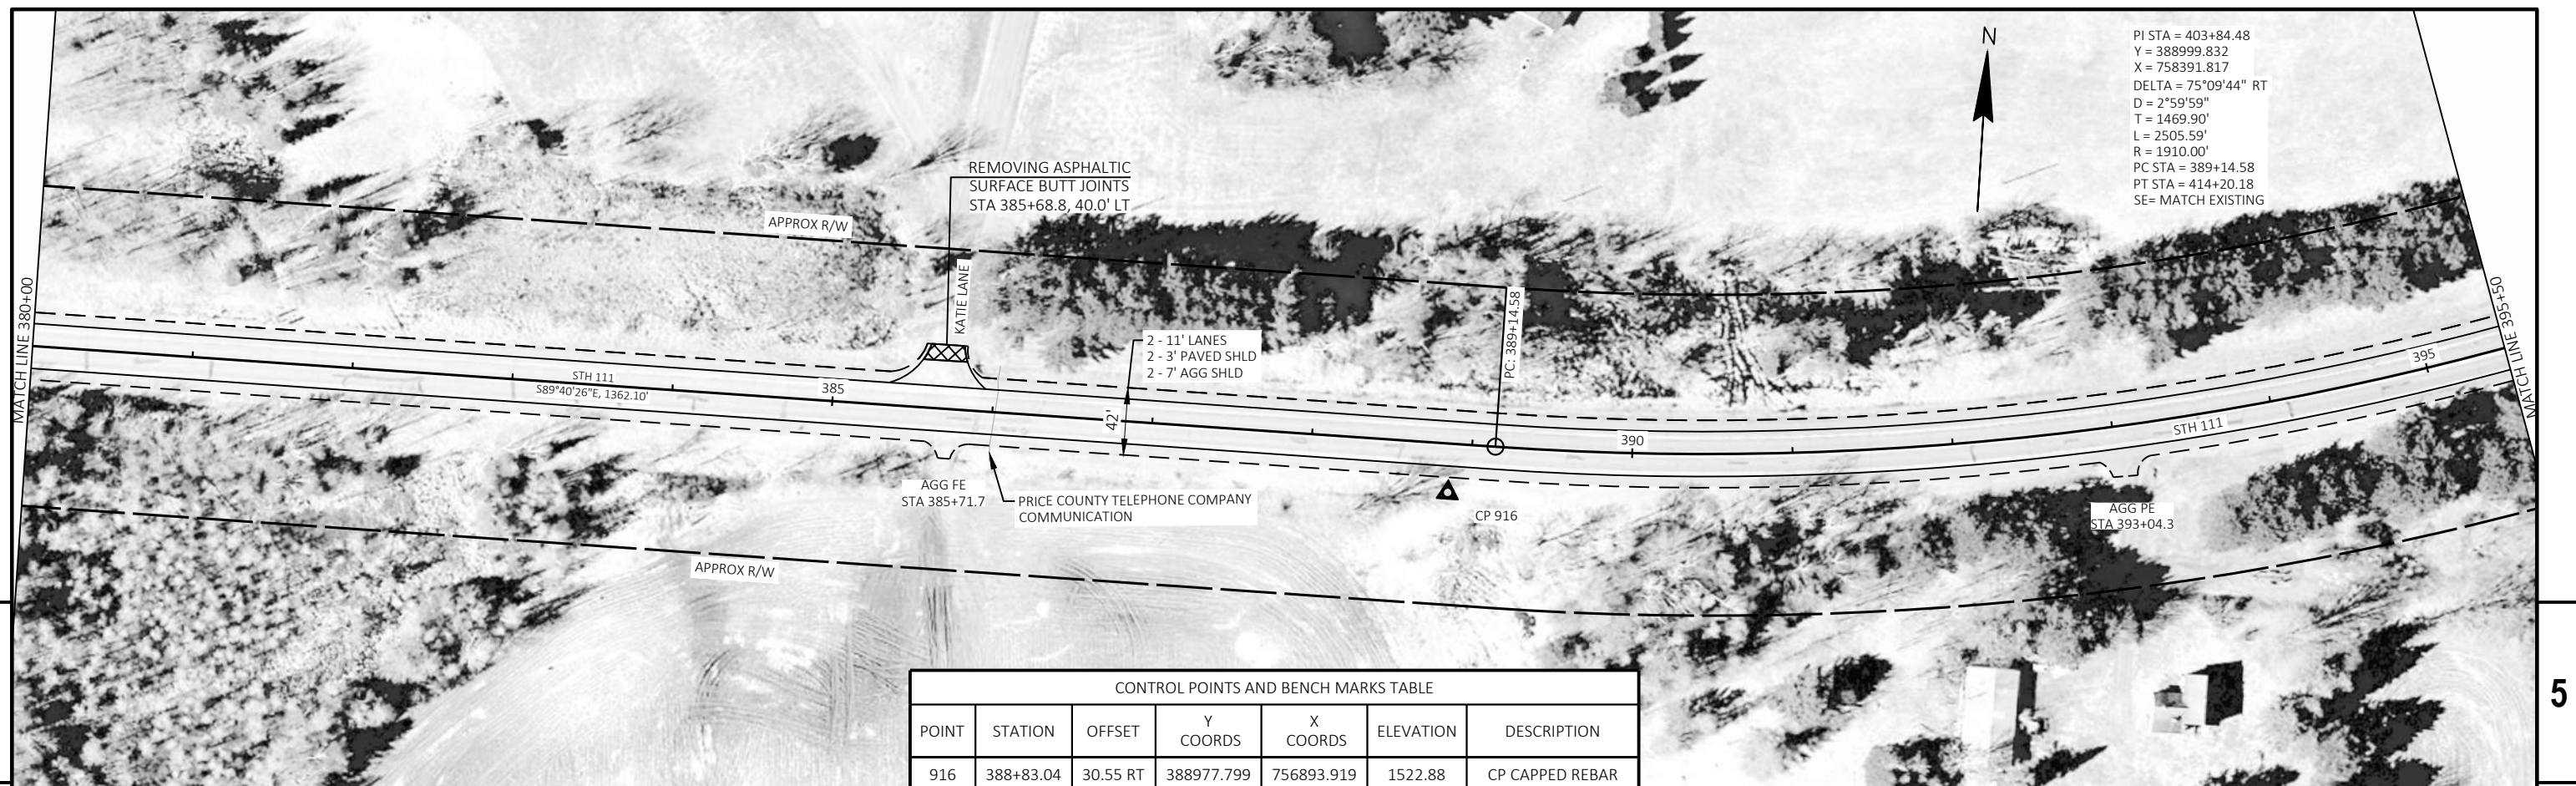

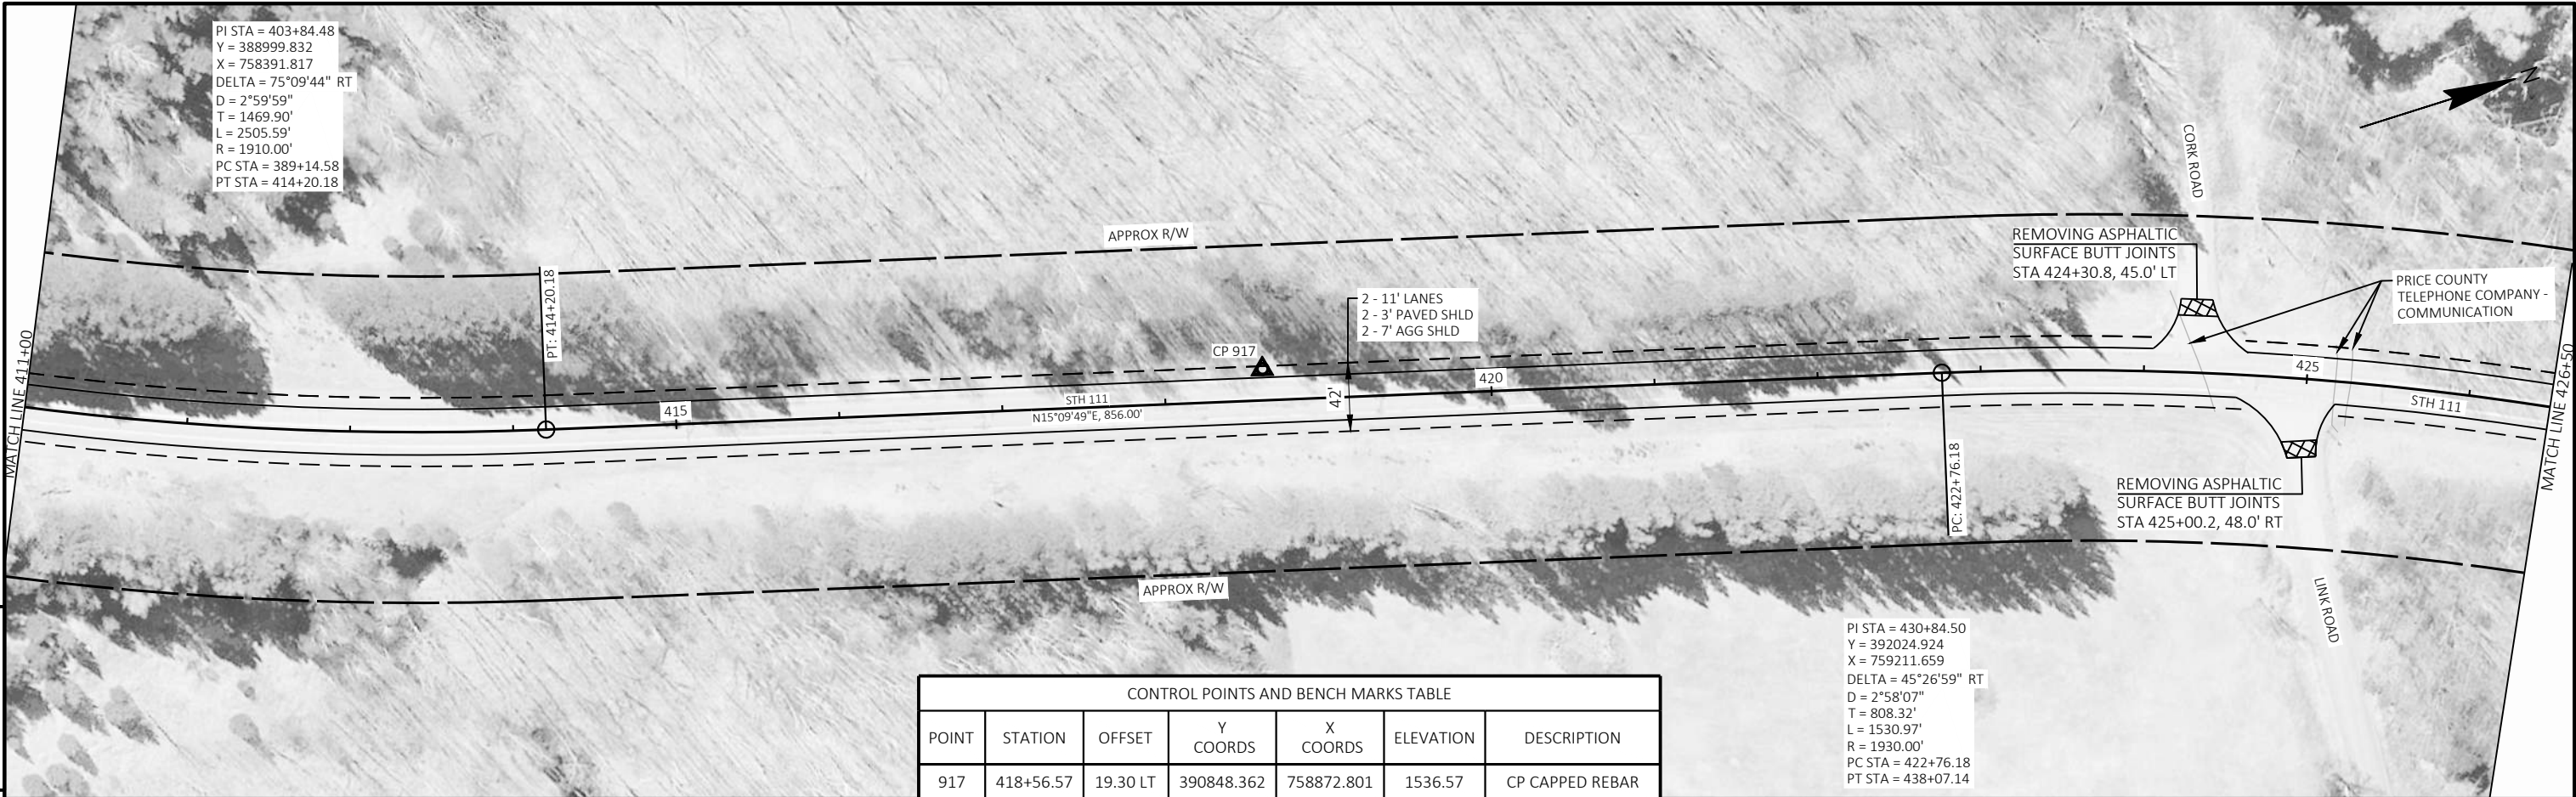

CONTROL POINTS AND BENCH MARKS TABLE						
POINT	STATION	OFFSET	Y COORDS	X COORDS	ELEVATION	DESCRIPTION
917	418+56.57	19.30 LT	390848.362	758872.801	1536.57	CP CAPPED REBAR




PROJECT NO: 8695-03-60	HWY: STH 111	COUNTY: PRICE	PLAN SHEETS	SHEET	E
------------------------	--------------	---------------	-------------	-------	---




Standard Detail Drawing List


08D01-23A	CONCRETE CURB & GUTTER
08D01-23B	CONCRETE CURB, TIES AND CURB AND GUTTER APPLICATIONS
08D22-01	DRIVEWAYS WITHOUT CURB & GUTTER RESURFACING PROJECTS RURAL
08E09-06	SILT FENCE
08E15-01	CULVERT PIPE CHECK
08F01-11	APRON ENDWALLS FOR CULVERT PIPE
08F02-01	APRON ENDWALLS FOR PIPE ARCH AND ELLIPTICAL PIPE
08F04-08	JOINT TIES FOR CONCRETE PIPE AND CONCRETE COLLAR DETAIL
09A01-14A	AT-GRADE SIDE ROAD INTERSECTION, TYPES "B1", "B2", "C" AND D AND TEE INTERSECTION BYPASS LANE
09A01-14B	AT-GRADE SIDE ROAD INTERSECTION, TYPE "A1" & "A2"
13A11-04A	CENTERLINE RUMBLE STRIPS - ASPHALT
13A11-04D	CENTERLINE RUMBLE STRIPS - INTERSECTIONS, DRIVEWAYS, BRIDGES, RAILROADS
13C19-03	HMA LONGITUDINAL JOINTS
15A03-02A	FLEXIBLE MARKER POST FOR CULVERT END
15A03-02B	FLEXIBLE MARKER POST FOR CULVERT END
15C02-09A	BARRICADES AND SIGNS FOR MAINLINE CLOSURES
15C02-09B	BARRICADES AND SIGNS FOR VARIOUS CLOSURES
15C02-09C	DETOUR SIGNING FOR MAINLINE CLOSURES
15C02-09H	MODIFIED ROUTE ASSEMBLY FOR DETOUR SIGNING
15C03-05	BARRICADES AND SIGNS FOR SIDEROAD CLOSURES
15C04-05	TRAFFIC CONTROL, ADVANCE WARNING SIGNS 45 M.P.H. OR GREATER TWO-WAY UNDIVIDED ROAD OPEN TO TRAFFIC
15C08-23A	PERMANENT LONGITUDINAL PAVEMENT MARKINGS
15C08-23B	TEMPORARY LONGITUDINAL PAVEMENT MARKING
15C11-10B	CHANNELIZING DEVICES DRUMS, CONES, BARRICADES AND VERTICAL PANELS
15C12-09A	TRAFFIC CONTROL FOR LANE CLOSURE WITH FLAGGING OPERATION
15C19-09A	MOVING PAVEMENT MARKING OPERATION TWO-LANE TWO-WAY ROADWAY
15C33-05	STOP LINE AND CROSSWALK PAVEMENT MARKING
15C35-06A	PAVEMENT MARKING (INTERSECTIONS)
15D39-02	TRAFFIC CONTROL, DROP-OFF SIGNING
15D44-02	TRAFFIC CONTROL, SIGNING ON ROADWAYS WITH MILLED SURFACES
15D51-01	TRAFFIC CONTROL, MOBILE OPERATIONS ON AN UNDIVIDED ROADWAY

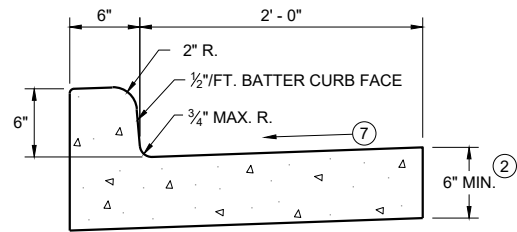


TYPES A^① & D

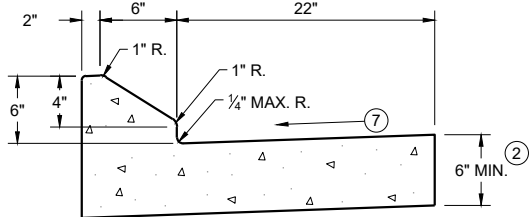


6" SLOPED CURB TYPES G^① & J

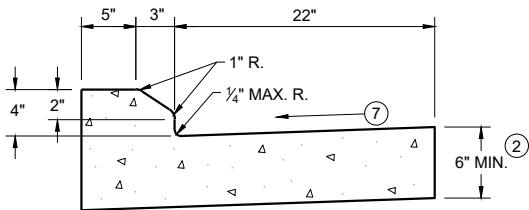

4" SLOPED CURB TYPES G^① & J




TYPES K^① & L
(OPTIONAL CURB SHAPE)

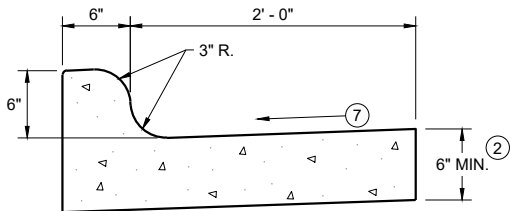


TYPES K^① & L

CONCRETE CURB AND GUTTER 30"

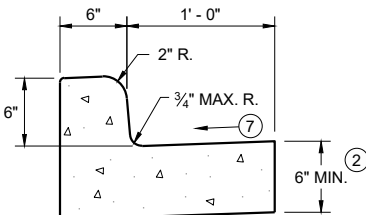


TYPES A^① & D

CONCRETE CURB AND GUTTER 18"

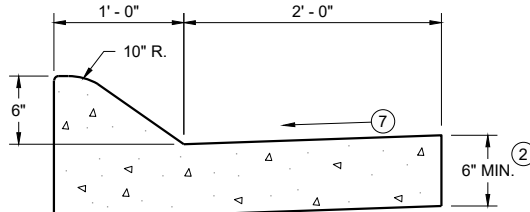


6" SLOPED CURB TYPES A^① & D

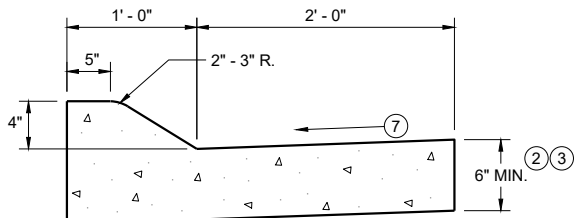


4" SLOPED CURB TYPES A^① & D

CONCRETE CURB AND GUTTER 36"

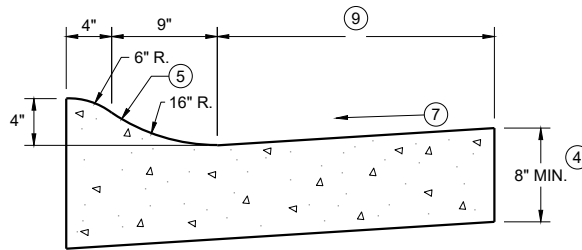

4" SLOPED CURB TYPES R^① & T

TBT & TBTT	X
30"	22"
36"	28"

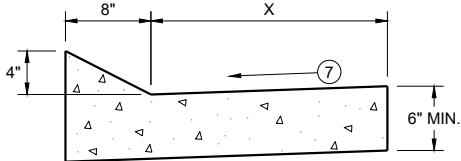


TYPES TBT & TBTT^①

CONCRETE CURB AND GUTTER


PAVEMENT THICKNESS
AND MAXIMUM CONCRETE
PANEL WIDTH TABLE

PAVEMENT THICKNESS	MAXIMUM PANEL WIDTH
LESS THAN 10"	12'
10" & ABOVE	15'

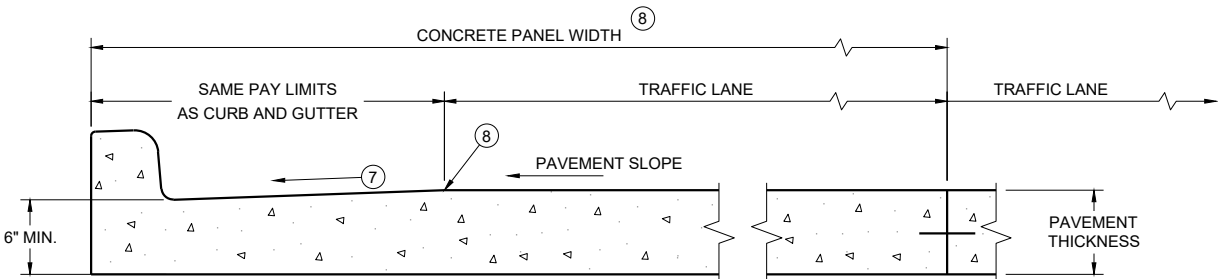

PARTIAL SECTION OF PAVEMENT
WITH INTEGRAL CURB AND GUTTER *

* BIKE LANE IS NOT SHOWN

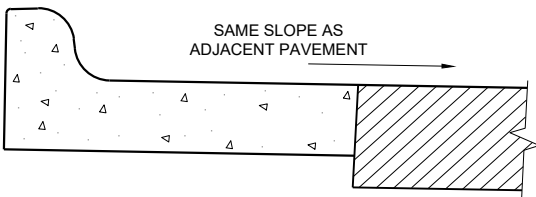

REVERSE SLOPE GUTTER^⑥
(TYPICAL FOR ALL CURB & GUTTER TYPES)

GENERAL NOTES

DETAILS OF CONSTRUCTION AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE CONTRACT.

PAVEMENT TIES AND TIE BARS SHALL BE EPOXY COATED IN CONFORMANCE WITH SUBSECTION 505.2.6.2 OF THE STANDARD SPECIFICATIONS.


INTEGRAL CURB AND GUTTER SHALL CONFORM TO THE DETAILS SHOWN FOR CONCRETE CURB AND GUTTER INCLUDING THE TRANSVERSE GUTTER SLOPE.

UNLESS OTHERWISE SHOWN ON THE TYPICAL CROSS SECTIONS, THE BASE AGGREGATE AND COMMON EXCAVATION LIMITS ARE 2' - 0" BEHIND THE BACK OF CURBS.


- ① TIE BARS ARE REQUIRED FOR CURB AND GUTTERS TYPES A, G, K, R, AND TBTT.
- ② THE BOTTOM OF CURB AND GUTTER MAY BE CONSTRUCTED EITHER LEVEL OR PARALLEL TO THE SLOPE OF THE SUBGRADE OR BASE AGGREGATE PROVIDED A 6" MINIMUM GUTTER THICKNESS IS MAINTAINED.
- ③ USE 8" MINIMUM GUTTER THICKNESS WHEN USED WITH AN ADJACENT CONCRETE TRUCK APRON PLACED BEHIND BACK OF CURB.
- ④ THE BOTTOM OF CURB AND GUTTER MAY BE CONSTRUCTED EITHER LEVEL OR PARALLEL TO THE SLOPE OF THE SUBGRADE OR BASE AGGREGATE PROVIDED A 8" MINIMUM GUTTER THICKNESS IS MAINTAINED.
- ⑤ UNLESS OTHERWISE NOTED, FOR STAKING PURPOSES THE FACE OF CURB IS 6" FROM THE BACK OF CURB.
- ⑥ WHEN REVERSE SLOPE GUTTER IS REQUIRED, THE LOCATION(S) WILL BE SHOWN ELSEWHERE IN THE PLAN.
- ⑦ USE 4% GUTTER CROSS SLOPE UNLESS OTHERWISE NOTED IN THE PLANS.
- ⑧ INCLUDE LONGITUDINAL JOINT AND TIE BARS ALONG LANE EDGE WHEN CONCRETE PANEL WIDTH EXCEEDS THE MAXIMUM WIDTH PER TABLE BELOW. LONGITUDINAL JOINT(S) ARE NOT ALLOWED WITHIN TRAFFIC LANES AND BIKE LANES. LONGITUDINAL JOINT MAY BE SAWED.
- ⑨ CONCRETE CURB AND GUTTER 4-INCH SLOPED 30-INCH TYPE "R" AND "T" = 17 INCHES
CONCRETE CURB AND GUTTER 4-INCH SLOPED 36-INCH TYPE "R" AND "T" = 23 INCHES

CONCRETE CURB AND GUTTER

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

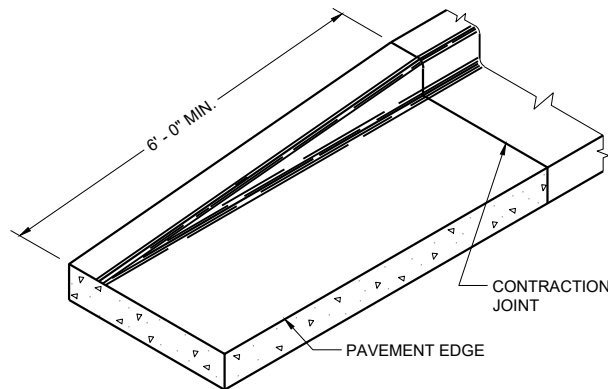


END SECTION CURB AND GUTTER

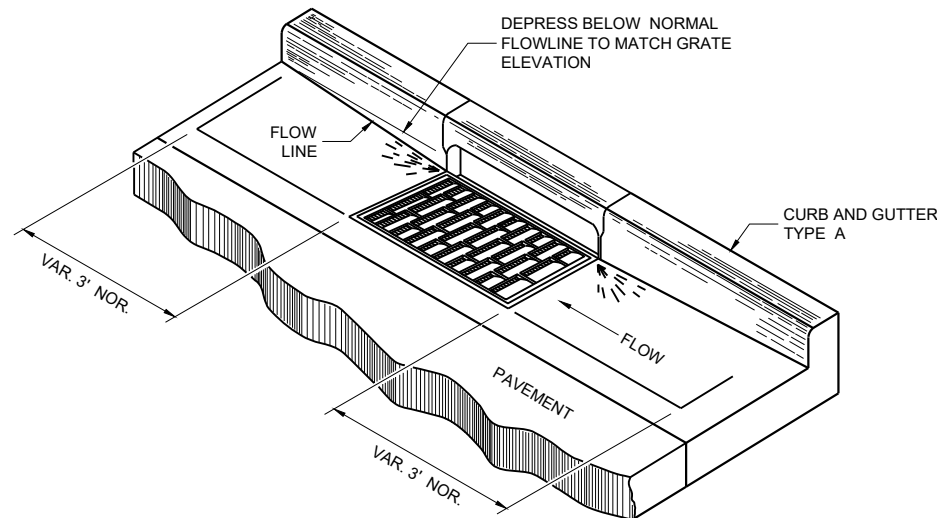


DETAIL OF CURB AND GUTTER AT INLETS


(TYPICAL H INLET COVER SHOWN)

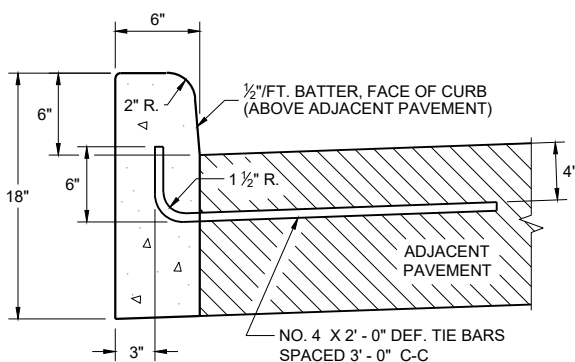


TYPES A^① & D

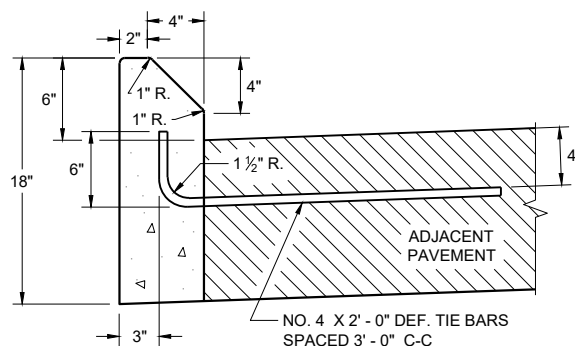

**TYPES G^① & J
CONCRETE CURB**

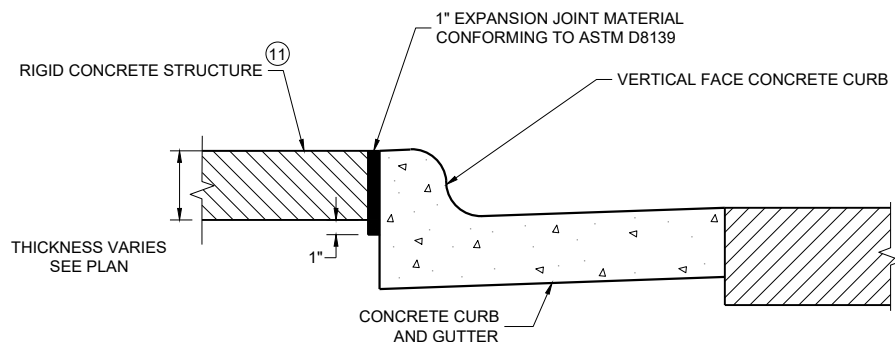

EXPANSION JOINT DETAIL FOR VERTICAL CURB ABUTTING A RIGID STRUCTURE^⑪

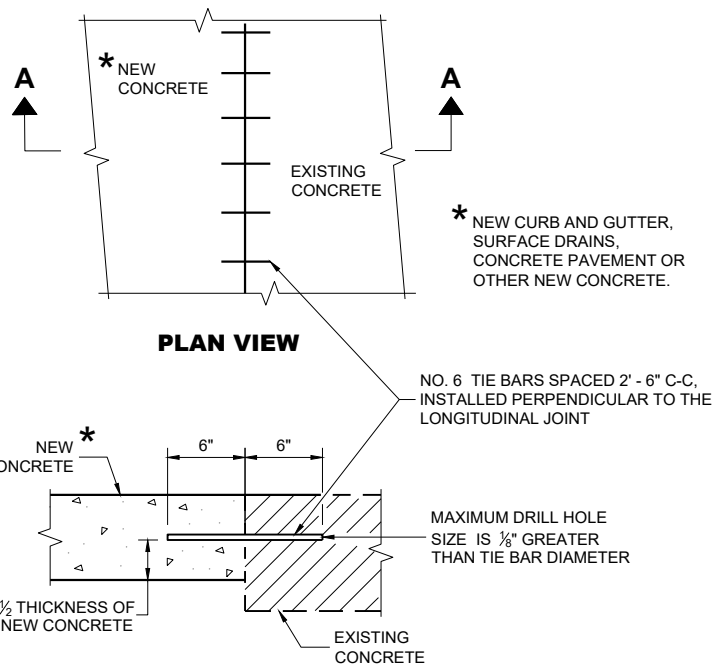

**SECTION A - A
TIE BARS DRILLED INTO EXISTING PAVEMENT**


GENERAL NOTES

DETAILS OF CONSTRUCTION AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE CONTRACT.


PAVEMENT TIES AND TIE BARS SHALL BE EPOXY COATED IN CONFORMANCE WITH SUBSECTION 505.2.6.2 OF THE STANDARD SPECIFICATIONS.

UNLESS OTHERWISE SHOWN ON THE TYPICAL CROSS SECTIONS, THE BASE AGGREGATE AND COMMON EXCAVATION LIMITS ARE 2' - 0" BEHIND THE BACK OF CURBS.

- ① TIE BARS ARE REQUIRED FOR CURB AND GUTTERS TYPES A, G, K, R, AND TBTT.
- ② THE BOTTOM OF CURB AND GUTTER MAY BE CONSTRUCTED EITHER LEVEL OR PARALLEL TO THE SLOPE OF THE SUBGRADE OR BASE AGGREGATE PROVIDED A 6" MINIMUM GUTTER THICKNESS IS MAINTAINED.
- ⑩ REFER TO SDD 08D18 AND 08D19 FOR ADDITIONAL DRIVEWAY ENTRANCE CURB DETAILS.
- ⑪ PLACE 1" THICK EXPANSION JOINT MATERIAL BETWEEN VERTICAL FACE CURB TYPES EXTENDING FROM THE TOP OF CURB TO 1 INCH BELOW THE ADJOINING CONCRETE SURFACE. RIGID CONCRETE STRUCTURES INCLUDE RAISED CONCRETE MEDIANS, CONCRETE SAFETY ISLANDS, SPLITTER ISLANDS, OR LOCATIONS IDENTIFIED ON THE PLANS.

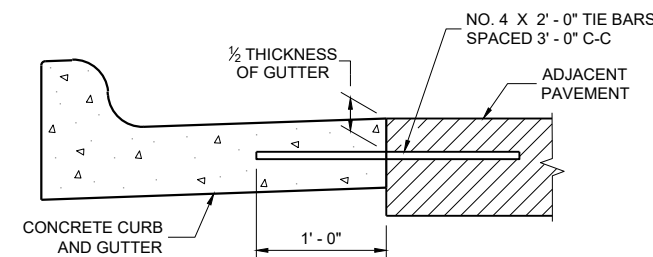

TYPICAL TIE BAR LOCATION^①




**DRIVEWAY ENTRANCE CURB^⑩
(WHEN DIRECTED BY THE ENGINEER)**

**CONCRETE CURB, TIES
AND CURB AND GUTTER
APPLICATIONS**


STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
May 2023 /S/ Rodney Taylor
DATE ROADWAY STANDARDS DEVELOPMENT
FHWA UNIT SUPERVISOR

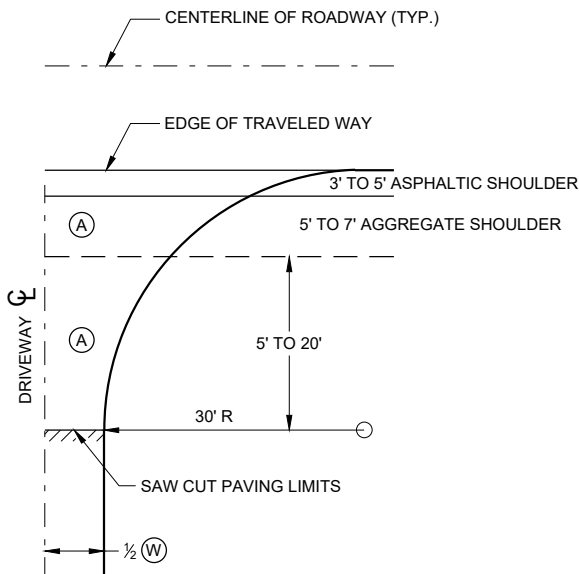


**PLAN VIEW
HALF SECTION**


- (A) : PAID FOR AS ASPHALTIC SURFACE DRIVEWAYS AND FIELD ENTRANCES. (TON)
- (B) : PAID FOR AS BASE AGGREGATE DENSE 1 1/4" (TON)
- (W) : DRIVEWAY WIDTH 16' MIN. - 24' MAX.

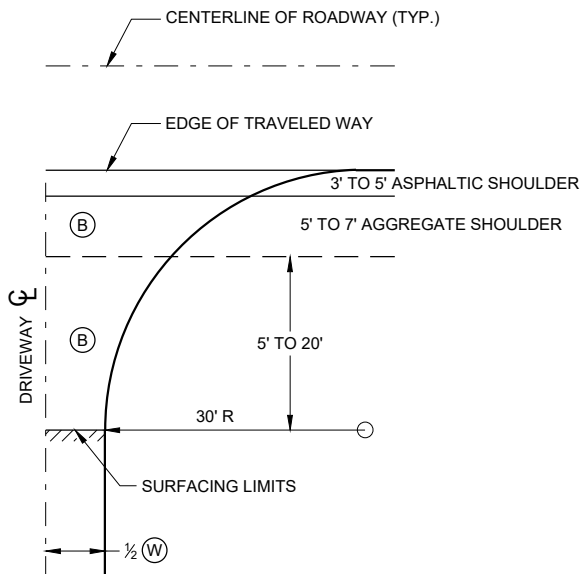

**PLAN VIEW
HALF SECTION**

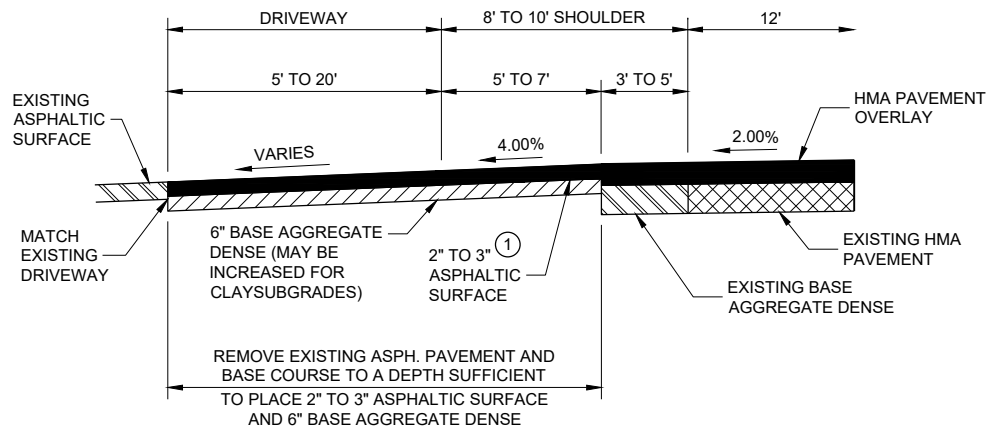

**PROFILE VIEW
RURAL ENTRANCE
WITH ASPHALTIC SURFACE
RESURFACING PROJECTS**

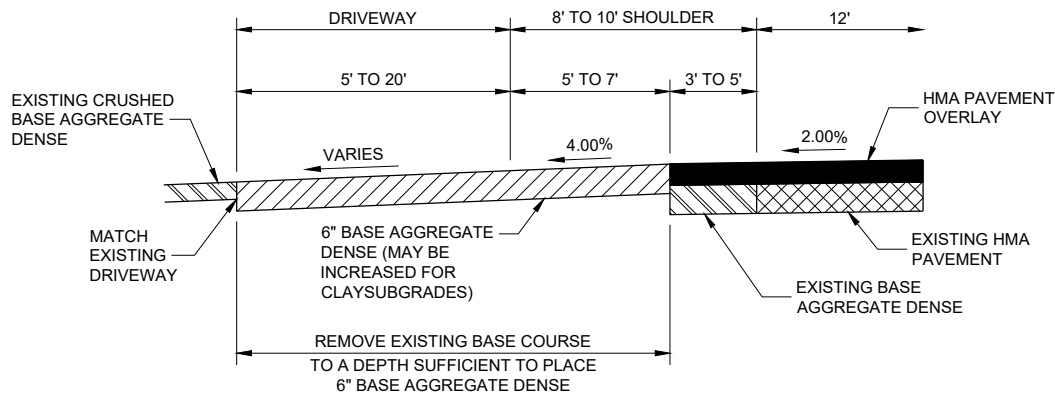

**PROFILE VIEW
RURAL ENTRANCE
WITH AGGREGATE SURFACE
6" BASE AGGREGATE DENSE
RESURFACING PROJECTS**

GENERAL NOTES

- ① DESIGN WILL DETERMINE FINAL DRIVEWAY ASPHALTIC THICKNESS BASED ON TYPE OF USAGE AND LOADINGS.

**DRIVEWAYS WITHOUT CURB
AND GUTTER RESURFACING
PROJECTS RURAL**

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION


APPROVED
December 2016 /S/ Rodney Taylor
DATE ROADWAY STANDARDS DEVELOPMENT
FHWA ENGINEER




- ① HORIZONTAL BRACE REQUIRED WITH 2" X 4" WOODEN FRAME OR EQUIVALENT AT TOP OF POSTS.
- ② FOR MANUAL INSTALLATIONS THE TRENCH SHALL BE A MINIMUM OF 4" WIDE & 6" DEEP TO BURY AND ANCHOR THE GEOTEXTILE FABRIC. FOLD MATERIAL TO FIT TRENCH AND BACKFILL & COMPACT TRENCH WITH EXCAVATED SOIL.
- ③ WOOD POSTS SHALL BE A MINIMUM SIZE OF 1½" X 1½" OF OAK OR HICKORY.
- ④ SILT FENCE TO EXTEND ACROSS THE TOP OF THE PIPE.
- ⑤ CONSTRUCT SILT FENCE FROM A CONTINUOUS ROLL IF POSSIBLE BY CUTTING LENGTHS TO AVOID JOINTS. IF A JOINT IS NECESSARY USE ONE OF THE FOLLOWING TWO METHODS; A) OVERLAP THE END POSTS AND TWIST, OR ROTATE, AT LEAST 180 DEGREES, B) HOOK THE END OF EACH SILT FENCE LENGTH.



SILT FENCE	
STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION	
APPROVED 4-29-05 DATE	/s/ Beth Cannestra CHIEF ROADWAY DEVELOPMENT ENGINEER

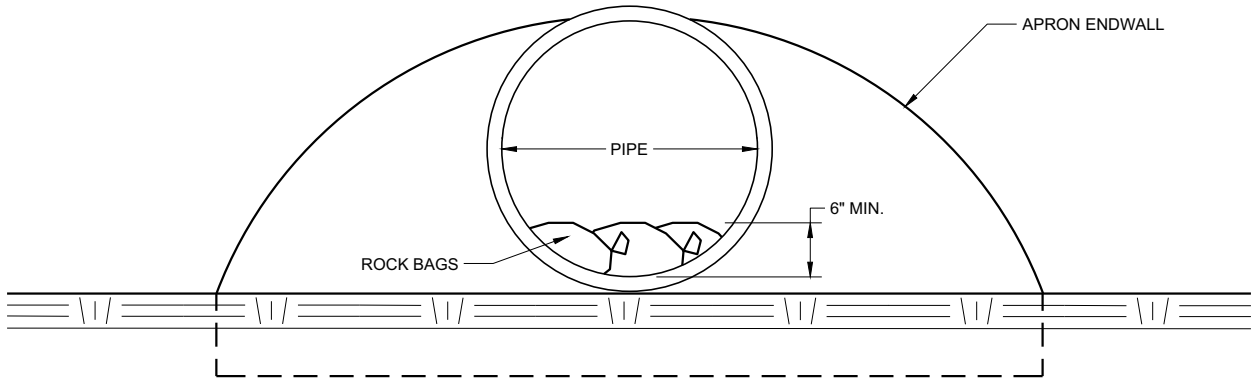

END VIEW

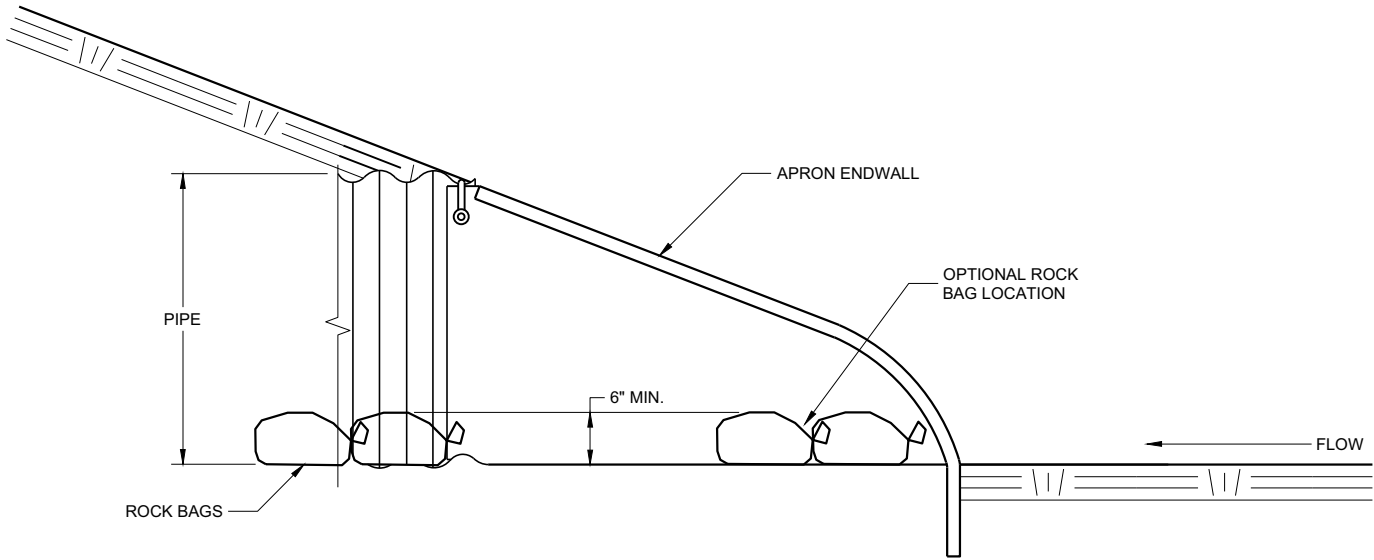




SIDE VIEW

CULVERT PIPE CHECK
(INSTALL ON INLET END ONLY)

CULVERT PIPE CHECK	
STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION	
APPROVED May 2019 DATE	/S/ Daniel Schave EROSION CONTROL ENGINEER
FHWA	




METAL APRON ENDWALLS												
PIPE DIA. (IN.)	MIN. THICK. (Inches)		DIMENSIONS (Inches)							APPROX. SLOPE		BODY
	STEEL	ALUM.	A (±1")	B (MAX.)	H (±1")	L (±1 1/2")	L1 ①	L2 ①	W (±2")			
12	.064	.060	6	6	6	21	12	17 1/2	24	2 1/2 to 1	1	1 Pc.
15	.064	.060	7	8	6	26	14	21 3/4	30	2 1/2 to 1	1	1 Pc.
18	.064	.060	8	10	6	31	15	28 1/4	36	2 1/2 to 1	1	1 Pc.
21	.064	.060	9	12	6	36	18	29 5/8	42	2 1/2 to 1	1	1 Pc.
24	.064	.075	10	13	6	41	18	37 1/4	48	2 1/2 to 1	1	1 Pc.
30	.079	.075	12	16	8	51	18	52 1/4	60	2 1/2 to 1	1	1 Pc.
36	.079	.105	14	19	9	60	24	59 3/4	72	2 1/2 to 1	2	2 Pc.
42	.109	.105	16	22	11	69	24	75 5/8	84	2 1/2 to 1	2	2 Pc.
48	.109	.105	18	27	12	78	24	81	90	2 1/4 to 1	3	3 Pc.
54	.109	.105	18	30	12	84	30	85 1/2	102	2 1/4 to 1	3	3 Pc.
60	.109x	.105x	18	33	12	87	—	—	114	2 to 1	3	3 Pc.
66	.109x	.105x	18	36	12	87	—	—	120	2 to 1	3	3 Pc.
72	.109x	.105x	18	39	12	87	—	—	126	2 to 1	3	3 Pc.
78	.109x	.105x	18	42	12	87	—	—	132	1 1/2 to 1	3	3 Pc.
84	.109x	.105x	18	45	12	87	—	—	138	1 1/2 to 1	3	3 Pc.
90	.109x	.105x	18	37	12	87	—	—	144	1 1/2 to 1	3	3 Pc.
96	.109x	.105x	18	35	12	87	—	—	150	1 1/2 to 1	3	3 Pc.

* EXCEPT CENTER PANEL
SEE GENERAL NOTES

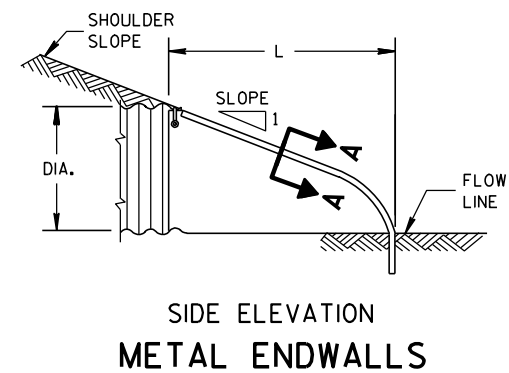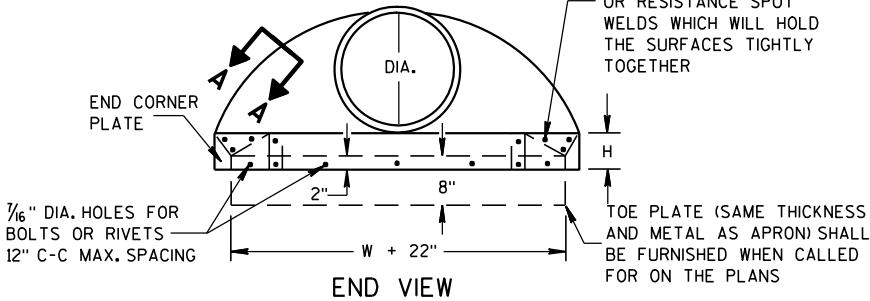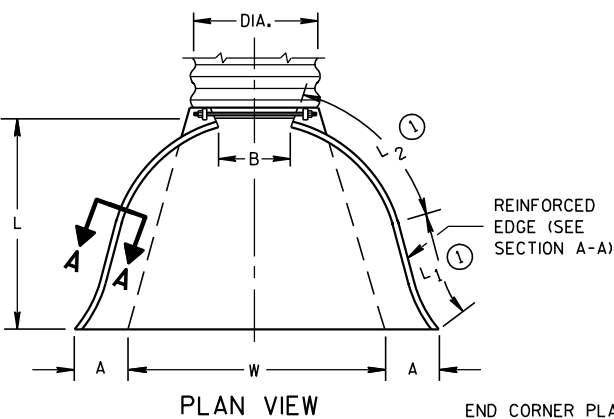


REINFORCED CONCRETE APRON ENDWALLS												
PIPE DIA. (IN.)	DIMENSIONS (Inches)							APPROX. SLOPE				
	T	A	B	C	D	E	G					
12	2	4	24	48 7/8	72 7/8	24	2	3 to 1				
15	2 1/4	6	27	46	73	30	2 1/4	3 to 1				
18	2 1/2	9	27	46	73	36	2 1/2	3 to 1				
21	2 3/4	9	36	37 1/2	73 1/2	42	2 3/4	3 to 1				
24	3	9 1/2	43 1/2	30	73 1/2	48	3	3 to 1				
27	3 1/4	10 1/2	49 1/2	24	73 1/2	54	3 1/4	3 to 1				
30	3 1/2	12	54	19 3/4	73 1/2	60	3 1/2	3 to 1				
36	4	15	63	34 3/4	97 3/4	72	4	3 to 1				
42	4 1/2	21	63	35	98	78	4 1/2	3 to 1				
48	5	24	72	26	98	84	5	3 to 1				
54	5 1/2	27	65	33 1/4-35	98 1/4-100	90	5 1/2	2 2/5 to 1				
60	6	30-35	60	39	99	96	5	2 to 1				
66	6 1/2	24-30	72-78	21-27	99	102	5 1/2	2 to 1				
72	7	24-36	78	21	99	108	6	2 to 1				
78	7 1/2	24-36	78	21	99	114	6 1/2	2 to 1				
84	8	36	90 1/2	21	111 1/2	120	6 1/2	1 1/2 to 1				
90	8 1/2	41	87 1/2	24	111 1/2	132	6 1/2	1 1/2 to 1				


* MINIMUM
** MAXIMUM

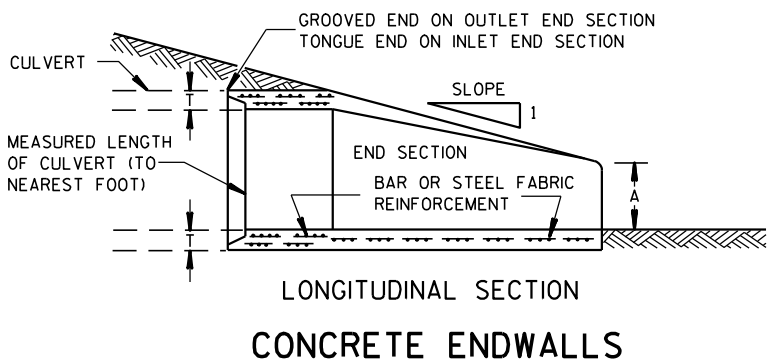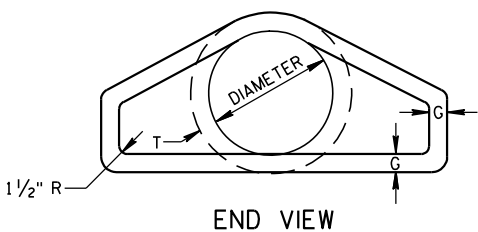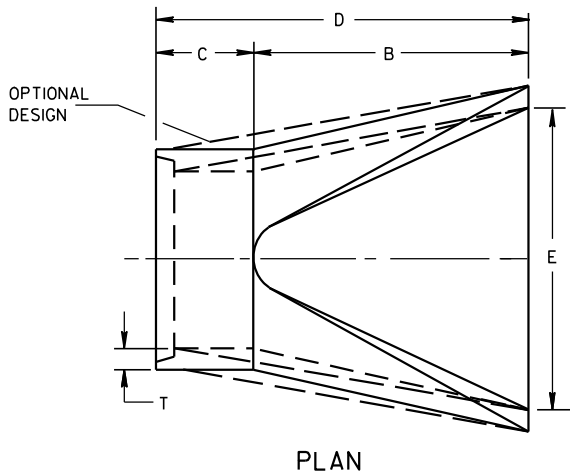


1" WIDE, 12 GA. (0.109" THICK) GALVANIZED STRAP WITH STANDARD 6" X 1/2" BAND BOLT AND NUT




ALTERNATE FOR TYPE 1 CONNECTION
END SECTION CONNECTOR STRAP

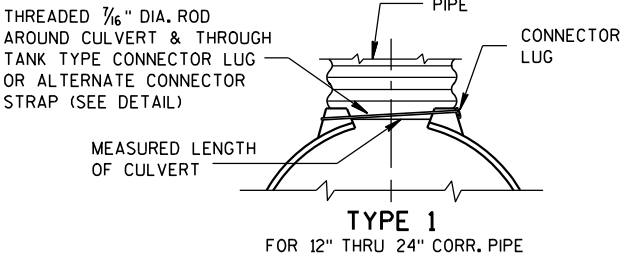


TYPE 1
FOR 12" THRU 24" CORR. PIPE

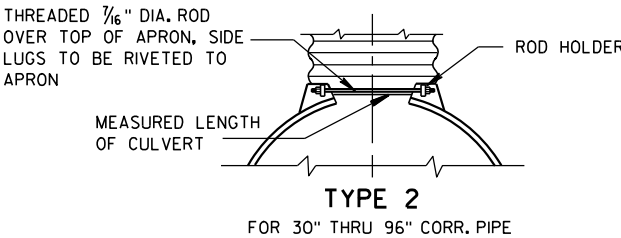

TYPE 2
FOR 30" THRU 96" CORR. PIPE

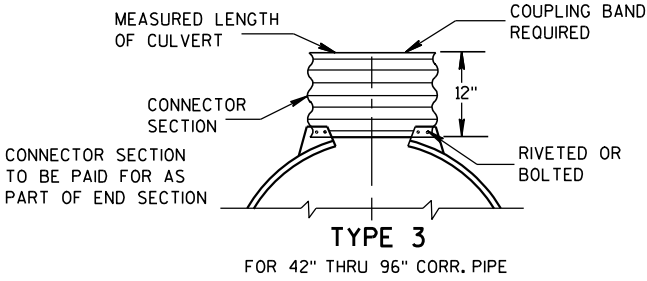

TYPE 3
FOR 42" THRU 96" CORR. PIPE

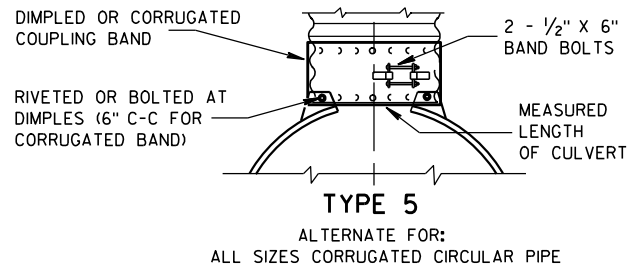


NOTE: DIMPLED BAND FITS OVER OUTSIDE OF ENDWALL, AND CORRUGATED BAND FITS INSIDE ENDWALL. DIMPLED BAND MAY BE USED WITH HELICALLY CORRUGATED PIPE.

FOR CIRCUMFERENTIALLY CORRUGATED PIPE USE ENDWALL CONNECTION DETAILS 1, 2, 3 OR 5 AS APPLICABLE.

FOR HELICALLY CORRUGATED PIPE USE ENDWALL CONNECTION DETAILS 1, 2 OR 5.

FOR HELICALLY CORRUGATED PIPES WITH TWO CIRCUMFERENTIAL CORRUGATIONS AT EACH END USE ENDWALL CONNECTION DETAILS 1, 2 OR 3.

CONNECTION DETAILS

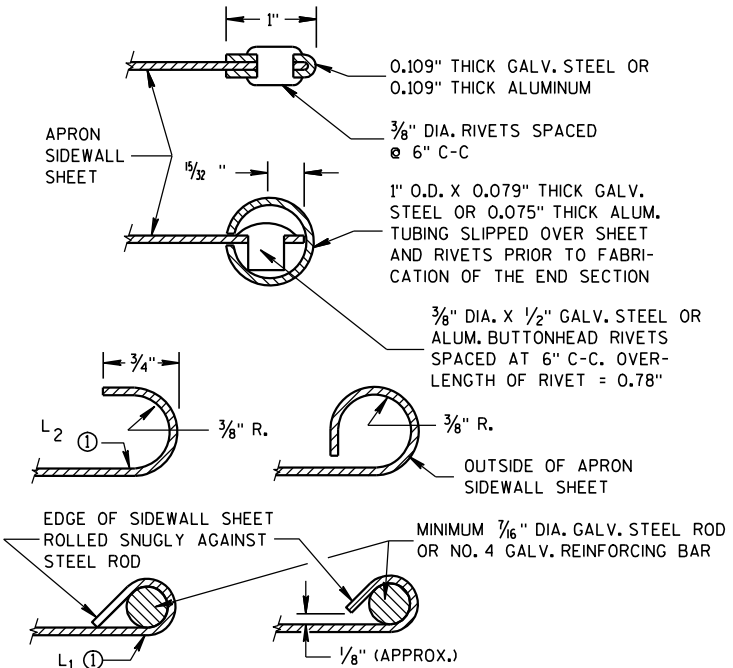

SECTION A-A

GENERAL NOTES

DETAILS OF CONSTRUCTION, MATERIALS AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE STANDARD SPECIFICATIONS AND THE APPLICABLE SPECIAL PROVISIONS.

CONCRETE CULVERT ENDWALLS MAY NOT BE USED WITH GALVANIZED STEEL OR ALUMINUM CULVERT PIPE OR VISE VERSA. GALVANIZED STEEL OR ALUMINUM ENDWALLS SHALL NORMALLY BE INSTALLED ON CULVERT PIPE OF THE SAME METAL.

ALL THREE PIECE STEEL APRON ENDWALLS FOR 60" DIAMETER PIPE AND LARGER SHALL HAVE 0.109" SIDES AND 0.138" CENTER PANELS. ALL THREE PIECE ALUMINUM APRON ENDWALLS FOR 60" DIAMETER PIPE AND LARGER SHALL HAVE 0.105" SIDES AND 0.134" CENTER PANELS. THE WIDTH OF CENTER PANELS SHALL BE GREATER THAN 20 PERCENT OF THE PIPE PERIMETER.

LAP SEAMS SHALL BE TIGHTLY JOINED BY GALVANIZED RIVETS OR BOLTS FOR STEEL UNITS AND ALUMINUM RIVETS AND BOLTS FOR ALUMINUM UNITS. FOR THE 60" THROUGH 96" DIAMETER APRON ENDWALL SIZES, THE REINFORCED EDGES AND CENTER PANEL SEAMS SHALL BE FURTHER REINFORCED WITH GALVANIZED STEEL OR ALUMINUM STIFFENER ANGLES. THE ANGLES SHALL BE ATTACHED BY GALVANIZED NUTS AND BOLTS FOR STEEL UNITS AND ALUMINUM NUTS AND BOLTS FOR ALUMINUM UNITS.


WHERE TWO OR MORE PIPES WITH APRON ENDWALLS ARE LAID ADJACENT TO EACH OTHER, THEY SHALL BE SEPARATED BY A DISTANCE SUFFICIENT TO PROVIDE A MINIMUM CLEARANCE OF 6 INCHES BETWEEN APRON ENDWALLS.

① FOR PIPE SIZES UP TO 60" DIAMETER, A 180° ROLLED EDGE MAY BE USED INSTEAD OF STEEL ROD REINFORCEMENT. SEE SECTION A-A.


APRON ENDWALLS FOR
CULVERT PIPE

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
11/30/94
DATE
/S/ Rory L. Rhinesmith
CHIEF ROADWAY DEVELOPMENT ENGINEER
FHWA

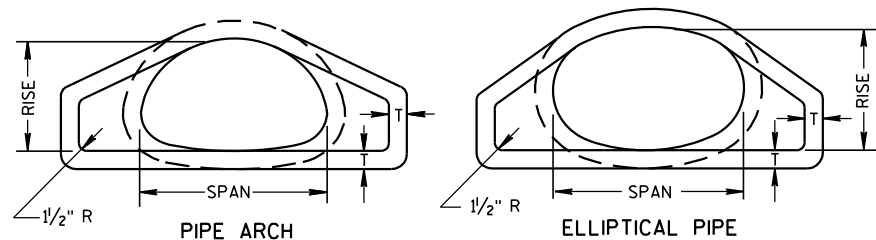


END VIEW

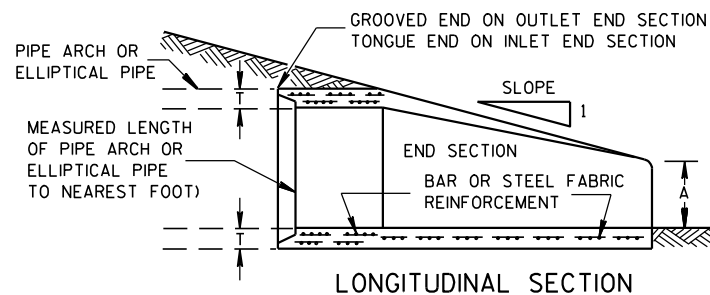


LONGITUDINAL SECTION

CONCRETE ENDWALLS


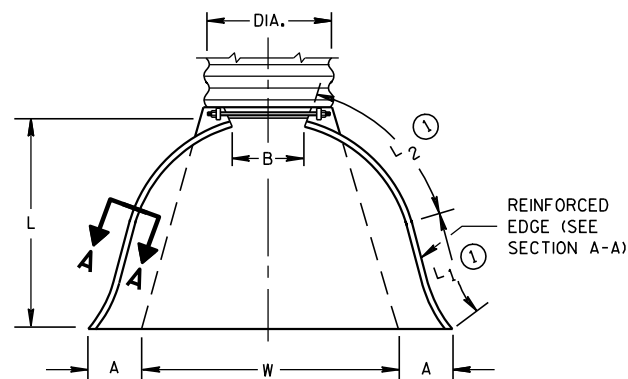


PLAN VIEW


END CORNER PLATES MAY BE FASTENED TO APRON PROPER BY BOLTS, RIVETS, OR RESISTANCE SPOT WELDS WHICH WILL HOLD THE SURFACES TIGHTLY TOGETHER

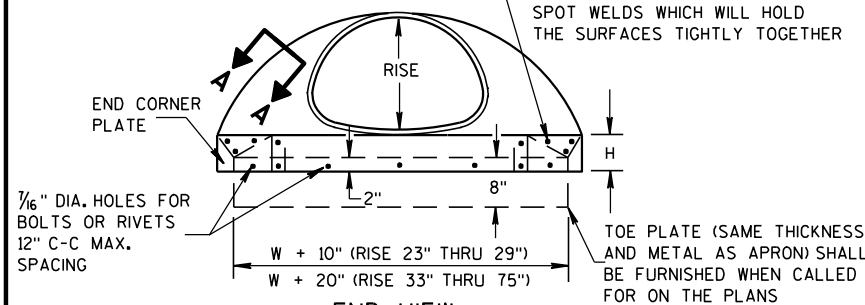

END VIEW

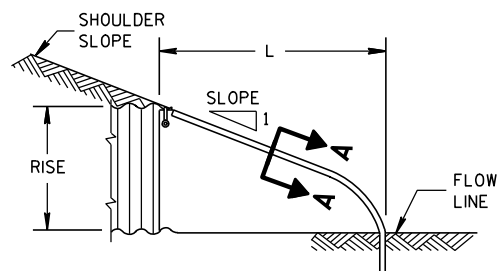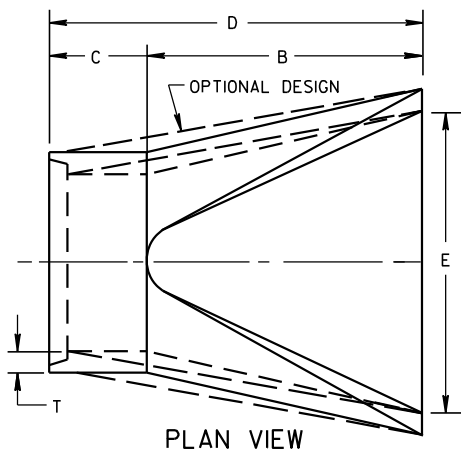SIDE ELEVATION
METAL ENDWALLS

PLAN VIEW

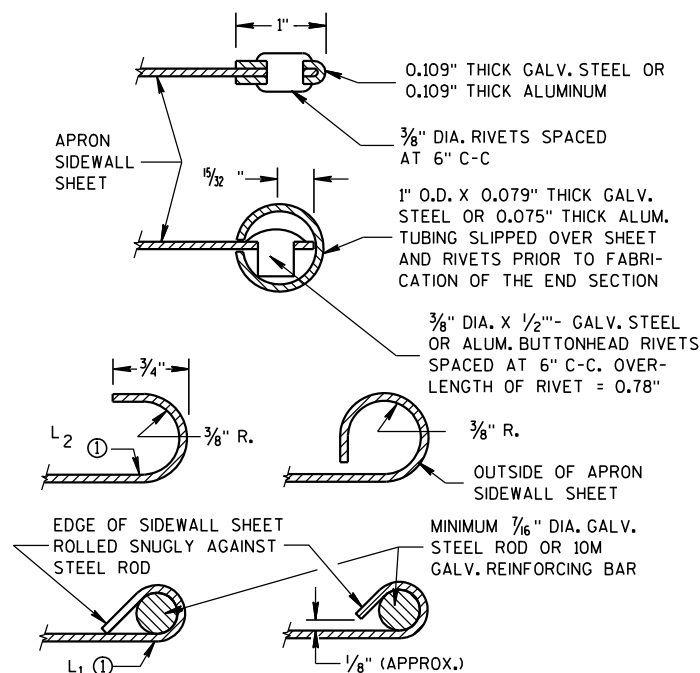

SECTION A-A

2- 2 ² / ₃ " x 1 ¹ / ₂ " CORRUGATIONS													
EQUIV. DIA. (Inches)	(Inches)		MIN. THICK. (Inches)		DIMENSIONS (Inches)							APPROX. SLOPE	BODY
	SPAN	RISE	STEEL	ALUM.	A (±1")	B (MAX.)	H (±1")	L (±1 ¹ / ₂ ")	L ₁ ①	L ₂ ①	W (±2")		
15	17	13	.064	.060	7	9	6	19	14	16	30	2 ¹ / ₂ to 1	1 Pc.
18	21	15	.064	.060	7	10	6	23	14	19 ³ / ₈	36	2 ¹ / ₂ to 1	1 Pc.
21	24	18	.064	.060	8	12	6	28	18	21 ³ / ₄	42	2 ¹ / ₂ to 1	1 Pc.
24	28	20	.064	.060	9	14	6	32	18	27 ¹ / ₂	48	2 ¹ / ₂ to 1	1 Pc.
30	35	24	.079	.075	10	16	6	39	18	37 ⁵ / ₈	60	2 ¹ / ₂ to 1	1 Pc.
36	42	29	.079	.075	12	18	8	46	24	45 ³ / ₈	75	2 ¹ / ₂ to 1	1 Pc.
42	49	33	.109	.105	13	21	9	53	24	54 ³ / ₄	85	2 ¹ / ₂ to 1	2 Pc.
48	57	38	.109	.105	18	26	12	63	24	68	90	2 ¹ / ₂ to 1	3 Pc.
54	64	43	.109	.105	18	30	12	70	24	72 ³ / ₄	102	2 ¹ / ₄ to 1	3 Pc.
60	71	47	.109*	.105*	18	33	12	77	30	82 ¹ / ₄	114	2 ¹ / ₄ to 1	3 Pc.
66	77	52	.109*	.105*	18	36	12	77	—	—	126	2 to 1	3 Pc.
72	83	57	.109*	.105*	18	39	12	77	—	—	138	2 to 1	3 Pc.


3" X 1" CORRUGATIONS													
EQUIV. DIA. (Inches)	(Inches)		MIN. THICK. (Inches)		DIMENSIONS (Inches)							APPROX. SLOPE	BODY
	SPAN	RISE	STEEL	ALUM.	A (±1")	B (MAX.)	H (±1")	L (±1 1/2")	L1 ⓪	L2 ⓪	W (±2")		
48	53	41	.109	.105	18	26	12	63	24	72¾	90	2½ to 1	2 Pc.
54	60	46	.109	.105	18	30	12	70	30	82¼	102	2 to 1	2 Pc.
60	66	51	.109*	.105*	18	33	12	77	—	—	114	1½ to 1	3 Pc.
66	73	55	.109*	.105*	18	36	12	77	—	—	126	1½ to 1	3 Pc.
72	81	59	.109*	.105*	18	39	12	77	—	—	138	2 to 1	3 Pc.
78	87	63	.109*	.105*	22	38	12	77	—	—	148	1½ to 1	3 Pc.
84	95	67	.109*	.105*	22	34	12	77	—	—	162	1½ to 1	3 Pc.
90	103	71	.109*	.105*	22	38	12	77	—	—	174	1½ to 1	3 Pc.
96	112	75	.109*	.105*	24	40	12	77	—	—	174	1½ to 1	3 Pc.

NOTE: ALL SPLICES TO BE LAP RIVETED OR BOLTED.

* EXCEPT CENTER PANEL
SEE GENERAL NOTES


TYPE 2

FOR 17" X 13" THRU 112" X 75" PIPE ARCH

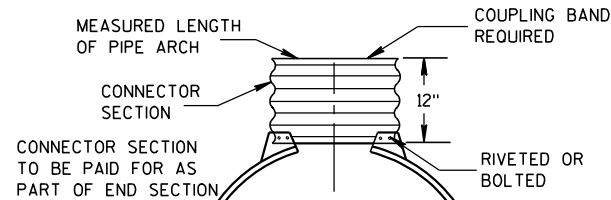

TYPE 3

FOR 64" X 43" THRU 112" X 75" PIPE ARCH

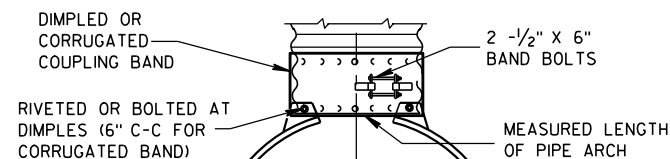

TYPE 5

ALTERNATE FOR:
ALL SIZES CORRUGATED PIPE ARCHESNOTE: DIMPLED BAND FITS OVER OUTSIDE OF ENDWALL,
AND CORRUGATED BAND FITS INSIDE ENDWALL.

CONNECTION DETAILS

REINFORCED CONCRETE PIPE ARCH

EQUIV. DIA. (Inches)	DIMENSIONS (Inches)								APPROX. SLOPE
	** SPAN	** RISE	T	A	B	C	D	E	
24	29	18	3	8 1/2	39	33	72	48	3 to 1
30	36	22	3 1/2	9 1/2	50	46	96	60	3 to 1
36	44	27	4	11 1/8	60	36	96	72	3 to 1
42	51	31	4 1/2	15 1/16	60	36	96	78	3 to 1
48	58	36	5	21	60	36	96	84	3 to 1
54	65	40	5 1/2	25 1/2	60	36	96	90	3 to 1
60	73	45	6	31	60	36	96	96	3 to 1
72	88	54	7	31	60	39	99	120	2 to 1
84	102	62	8	28 1/2	83	19	102	144	2 to 1

REINFORCED CONCRETE ELLIPTICAL PIPE

EQUIV. DIA. (Inches)	DIMENSIONS (Inches)								APPROX. SLOPE
	** SPAN	** RISE	T	A	B	C	D	E	
24	30	19	3 1/4	8 1/2	39	33	72	48	3 to 1
30	38	24	3 3/4	9 1/2	54	18	72	60	3 to 1
36	45	29	4 1/2	11 1/8	60	24	84	72	2 1/2 to 1
42	53	34	5	15 1/4	60	36	96	78	2 1/2 to 1
48	60	38	5 1/2	21	60	36	96	84	2 1/2 to 1
54	68	43	6	25 1/2	60	36	96	90	2 1/2 to 1
60	76	48	6 1/2	30	60	36	96	96	2 1/2 to 1

**NOMINAL SIZE

GENERAL NOTES

DETAILS OF CONSTRUCTION, MATERIALS AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE STANDARD SPECIFICATIONS AND THE APPLICABLE SPECIAL PROVISIONS.

CONCRETE APRON ENDWALLS MAY NOT BE USED WITH GALVANIZED STEEL OR ALUMINUM CULVERT PIPE OR VISE VERSA. GALVANIZED STEEL OR ALUMINUM APRON ENDWALLS SHALL NORMALLY BE INSTALLED ON CULVERT PIPE OF THE SAME METAL.

ALL THREE PIECE STEEL APRON ENDWALLS FOR 66" X 51" PIPE ARCH AND LARGER SHALL HAVE 0.109" SIDES AND 0.138" CENTER PANELS. ALL THREE PIECE ALUMINUM APRON ENDWALLS FOR 66" X 51" PIPE ARCH AND LARGER SHALL HAVE 0.105" SIDES AND 0.134" CENTER PANELS. THE WIDTH OF CENTER PANELS SHALL BE GREATER THAN 20 PERCENT OF THE PIPE ARCH PERIMETER.

LAP SEAMS SHALL BE TIGHTLY JOINED BY GALVANIZED RIVETS OR BOLTS FOR STEEL UNITS AND ALUMINUM RIVETS AND BOLTS FOR ALUMINUM UNITS. FOR THE 77" X 52" THROUGH 112" X 75" APRON ENDWALL SIZES, THE REINFORCED EDGES AND CENTER PANEL SEAMS SHALL BE FURTHER REINFORCED WITH GALVANIZED STEEL OR ALUMINUM STIFFENER ANGLES. THE ANGLES SHALL BE ATTACHED BY GALVANIZED NUTS AND BOLTS FOR STEEL UNITS AND ALUMINUM NUTS AND BOLTS FOR ALUMINUM UNITS.

WHERE TWO OR MORE PIPES WITH APRON ENDWALLS ARE LAID ADJACENT TO EACH OTHER, THEY SHALL BE SEPARATED BY A DISTANCE SUFFICIENT TO PROVIDE A MINIMUM CLEARANCE OF 6 INCHES BETWEEN APRON ENDWALLS.

① FOR PIPE ARCH SIZES UP TO 73" X 55" A 180° ROLLED EDGE MAY BE USED INSTEAD OF STEEL ROD REINFORCEMENT. SEE SECTION A-A.

APRON ENDWALLS FOR
PIPE ARCH AND
ELLIPTICAL PIPESTATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED


11/30/94

DATE

/S/ Rory L. Rhinesmith


CHIEF ROADWAY DEVELOPMENT ENGINEER

FHWA

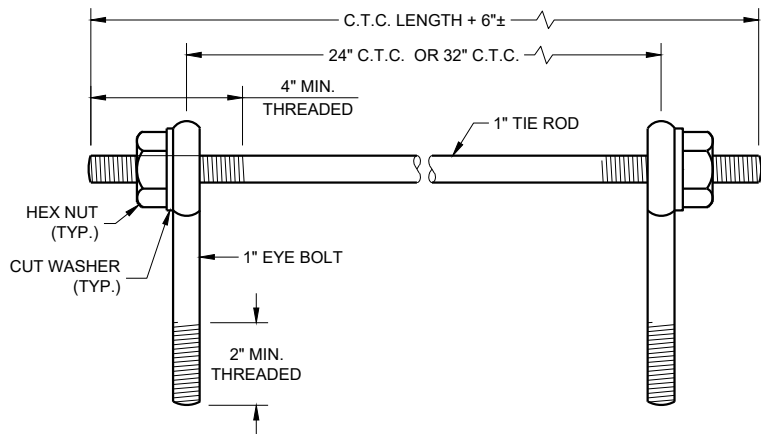

EYE BOLTS AND TIE ROD

EYE BOLT AND TIE ROD ASSEMBLY (ALTERNATE NO. 1)

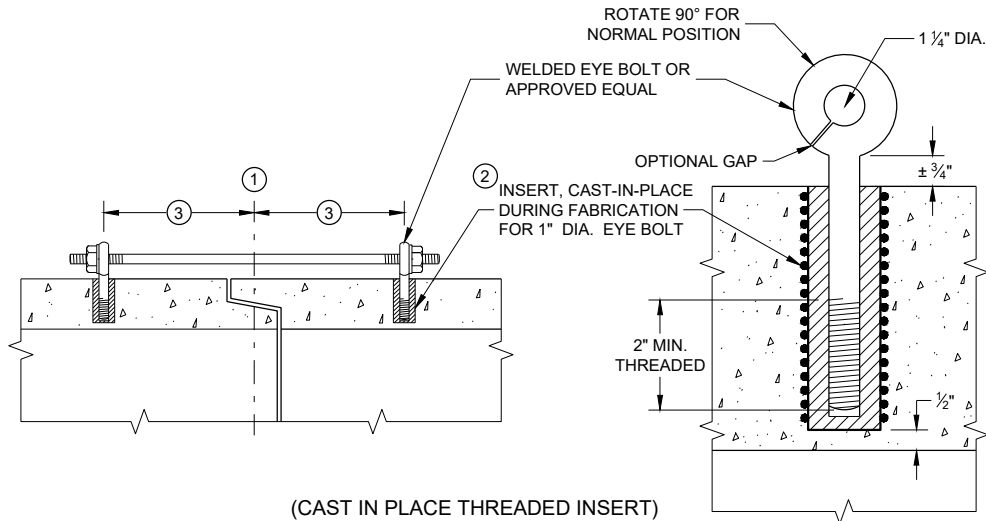

(CAST IN PLACE THREADED INSERT)
LONGITUDINAL SECTIONS

GENERAL NOTES


DETAILS OF CONSTRUCTION, MATERIALS, AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE STANDARD SPECIFICATIONS AND APPLICABLE SPECIAL PROVISIONS.

CONCRETE CULVERT AND STORM SEWER PIPE SHALL BE TIED TOGETHER IN THE MANNER ILLUSTRATED BY THIS DETAIL AT LOCATIONS DESIGNATED IN THE STANDARD SPECIFICATIONS AND THE PLAN. THE CONTRACTOR MAY USE EITHER ALTERNATE 1, 2 OR 3 FOR DRAINAGE STRUCTURES. ONLY ALTERNATE 1 AND 3 MAY BE USED FOR CATTLE PASSES, UNLESS OTHERWISE STATED IN THE CONTRACT. THE MATERIALS, FABRICATION AND WORK NECESSARY TO TIE THE PIPE BY THIS DETAIL WILL BE CONSIDERED INCIDENTAL TO THE PIPE AND APRON ENDWALLS IF REQUIRED.

DETAILED DRAWINGS FOR PROPOSED ALTERNATE DESIGNS FOR JOINT TIES SHALL BE SUBMITTED TO THE ENGINEER FOR APPROVAL.


JOINT TIES TO BE HOT-DIP GALVANIZED PER ASTM A 153.

- 1 CENTER LINE OF TONGUE AND GROOVE OR BELL AND SPIGOT JOINTS.
- 2 THE INSIDE OF THE THREADED INSERTS SHALL BE CLEAN TO ALLOW THE INSERTION OF THREADED EYE BOLTS.
- 3 HOLES SHALL BE CAST-IN-PLACE OR DRILLED PER THE APPLICABLE DETAIL, AND EQUAL DISTANCE FROM THE CENTERLINE OF THE JOINT.
- 4 BOLT PROJECTION INSIDE OF PIPE SHALL NOT EXCEED 2 INCHES.
- 5 OPENING TO BE ROD DIAMETER PLUS 1 INCH.
- 6 LENGTH ADEQUATE TO EXTEND TO WITHIN 1/2 INCH OF THE INNER SURFACE OF THE PIPE.
- 7 EYE BOLT LENGTH DETERMINED BY WALL THICKNESS, BELL THICKNESS AND BOLT PROJECTION INSIDE PIPE.

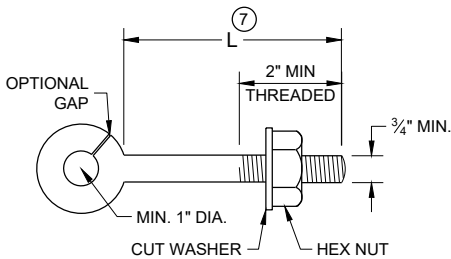


EYE BOLT 7

NOTE: TWO EYE BOLTS MAY BE USED WITH A 30" OR 38" LONG THREADED ROD IN LIEU OF THE 90° BENT TIE ROD.

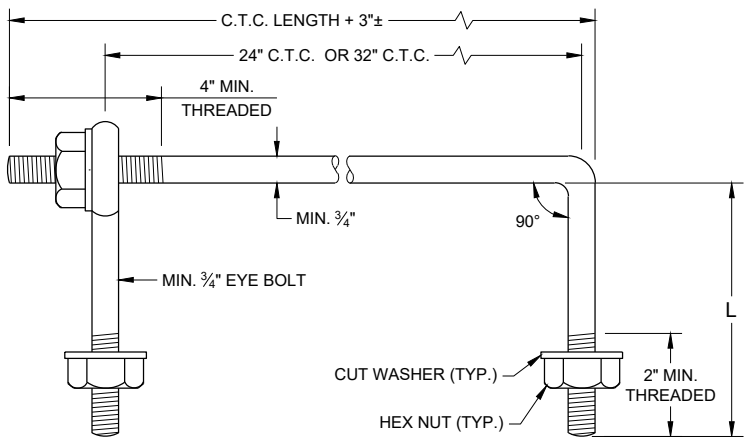


EYE BOLT AND TIE ROD

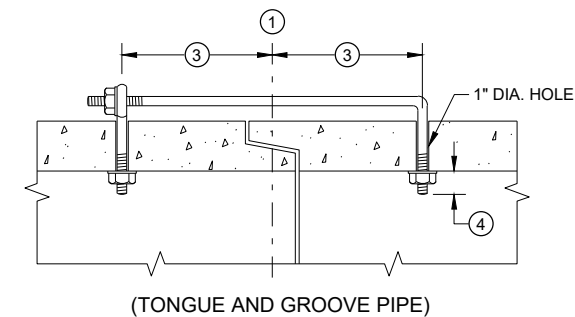

LONGITUDINAL SECTION

(JOINT TIES FOR 18" TO 66" DIA. CONCRETE PIPE)

EYE BOLT AND TIE ROD ASSEMBLY (ALTERNATE NO. 2)

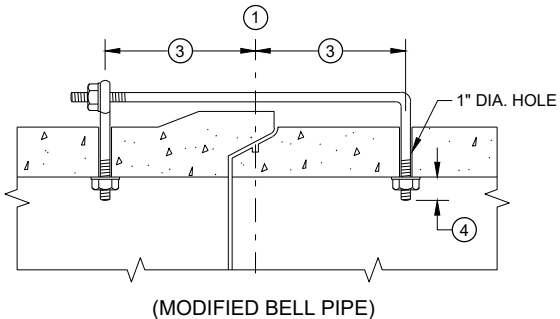


(MODIFIED BELL PIPE)


ADJUSTABLE TIE ROD TABLE

PIPE DIAMETER	TIE ROD DIAMETER	D	L ₁	N
12 - 60	5/8	5/8	5	1/2
66 - 84	3/4	3/4	5	1/2
90 - 144	1	1	7	1 1/16

DIMENSIONS SHOWN ARE IN INCHES




TAPERED




PLAIN

RIGHT AND LEFT THREADS
SLEEVE NUTS

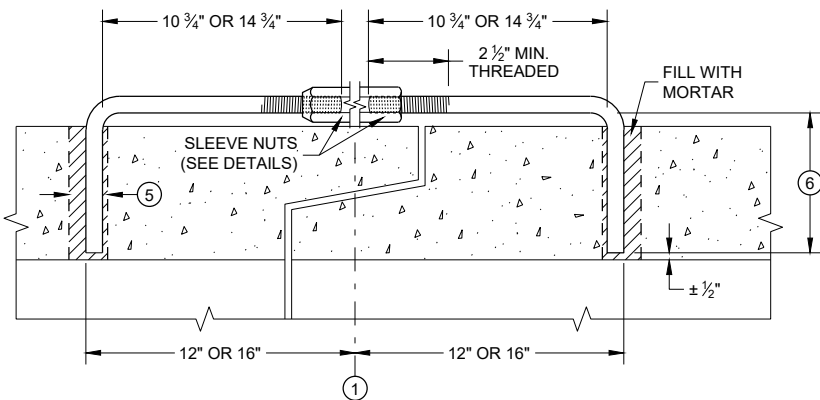


LONGITUDINAL SECTION

ADJUSTABLE TIE ROD (ALTERNATE NO. 3)



PLACEMENT OF (2) CAST-IN-PLACE INSERTS OR HOLES DURING FABRICATION FOR PIPE SECTIONS REQUIRING TIE RODS

TRANSVERSE SECTION

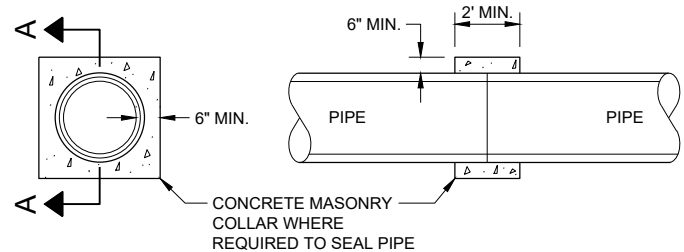


SECTION A - A

CONCRETE COLLAR DETAIL


JOINT TIES FOR CONCRETE PIPE AND CONCRETE COLLAR DETAIL

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION


APPROVED
November 2021 /S/ Rodney Taylor
DATE ROADWAY STANDARDS DEVELOPMENT
ENGINEER
FHWA

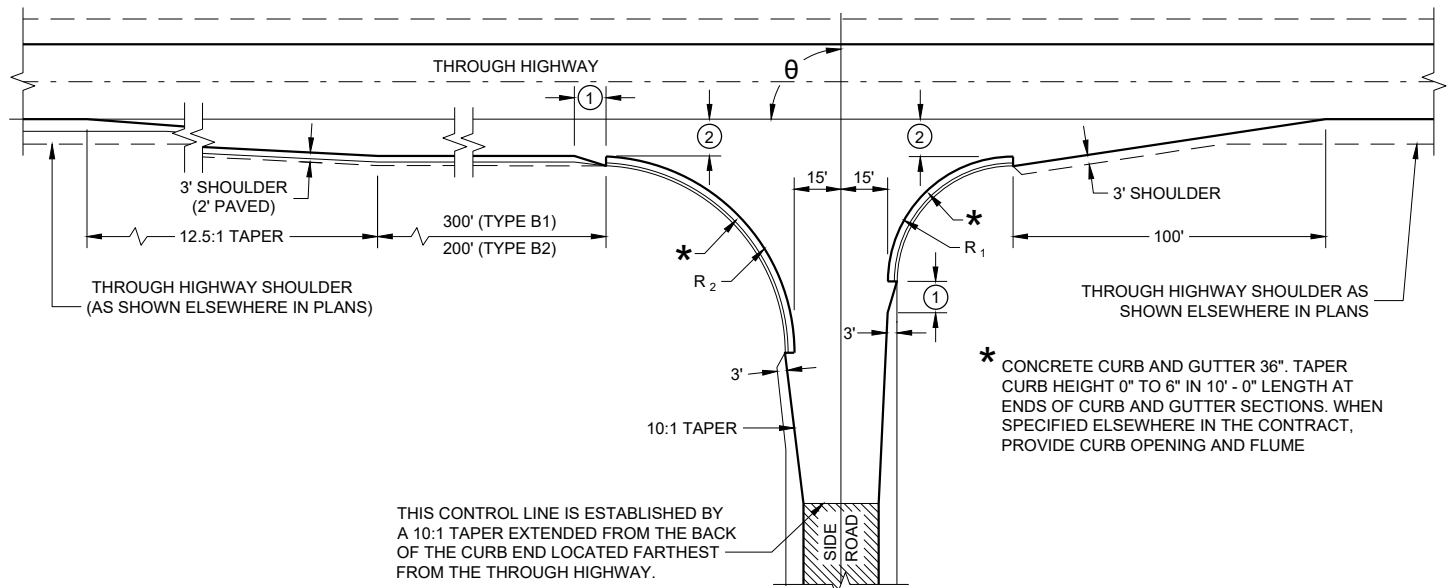


TYPE "B1" AND "B2"

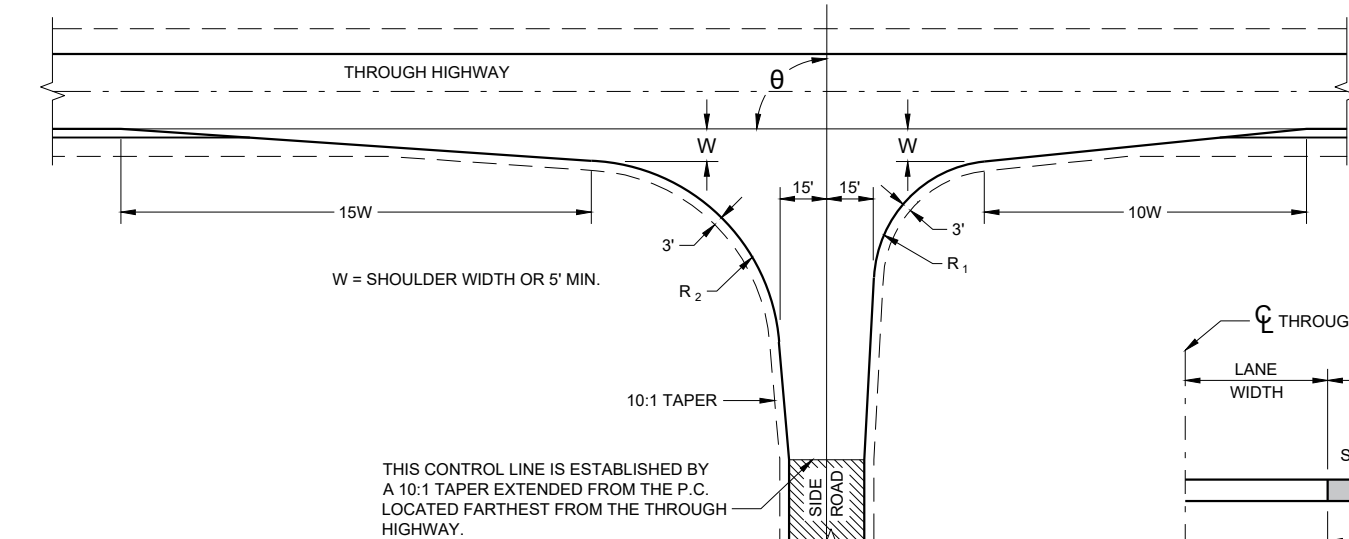

TYPE "C"

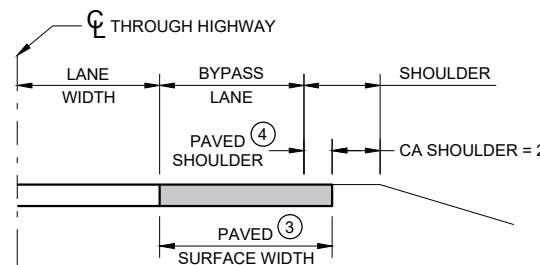

SECTION A - A
(SHOWING BYPASS LANE AND SHOULDER)

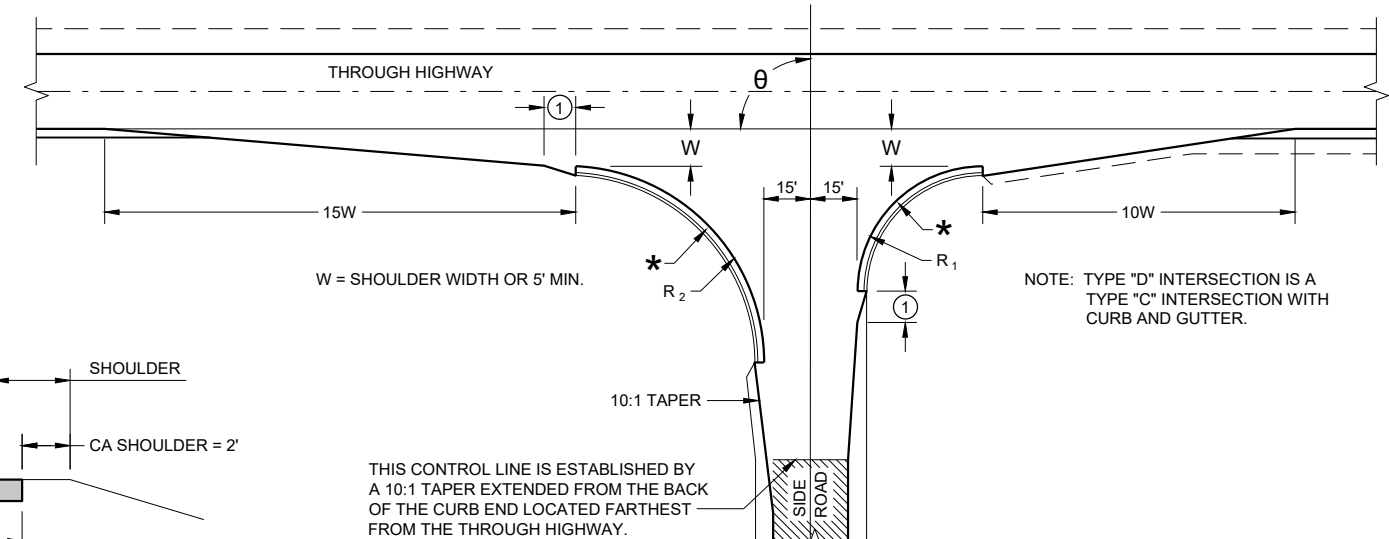

TYPE "D"

RADII DIMENSIONS FOR TYPES "B1",
"B2", "C" AND "D" INTERSECTIONS

θ	R_1	R_2
65 - 70	35	70
71 - 80	40	70
81 - 90	40	60
91 - 100	50	55
101 - 110	60	45

GENERAL NOTES

DESIGNS MAY BE USED INTERCHANGEABLY IN COMBINATION OR SEPARATELY FOR ANY ONE COMPLETE INTERSECTION DEPENDING UPON INTERSECTION ANGLE AND SURFACING OF EACH APPROACH ROADWAY.

SIDE ROAD SURFACING NOTE


WHEN THE SIDE ROAD IS NOT PRESENTLY PAVED, PAVEMENT SHALL BE PLACED TO THE LIMITS SHOWN UNLESS OTHERWISE PROVIDED IN THE CONTRACT. WHERE THE CONSTRUCTION LIMITS ARE BEYOND THE PAVING LIMITS, CRUSHED AGGREGATE SURFACING SHALL BE PLACED BETWEEN THE PAVING LIMITS AND CONSTRUCTION LIMITS.

WHEN THE SIDE ROAD IS PRESENTLY PAVED, NEW PAVEMENT SHALL BE PLACED TO THE LIMITS OF DESIGN AS SHOWN AND BEYOND, IF NECESSARY, TO MEET EXISTING PAVEMENT.


WHEN THE SIDE ROAD IS THE CONSTRUCTION PROJECT, THE INTERSECTION SURFACING SHALL BE THE SAME AS FOR THE PROJECT.

- ① 10-FT TYPICAL.
- ② 12-FT** PLUS ADDITIONAL WIDTH FOR BIKE LANE IF SHOWN ELSEWHERE IN THE PLAN.
** 10-FT MAY BE USED ON TYPE B2 ON RESURFACING PROJECTS IF SPECIFIED IN THE CONTRACT.
- ③ BYPASS LANE PAVED SURFACE WIDTH OUTSIDE OF TRAVEL LANE
- ASPHALT = 12-FT PLUS PAVED SHOULDER WIDTH
- PC CONCRETE = 13-FT PLUS PAVED SHOULDER WIDTH
- ④ BYPASS LANE PAVED SHOULDER WIDTH = THE GREATER OF 1-FT OR THE PAVED SHOULDER WIDTH OF THE THROUGH HIGHWAY.

NOTE: TYPE "D" INTERSECTION IS A TYPE "C" INTERSECTION WITH CURB AND GUTTER.

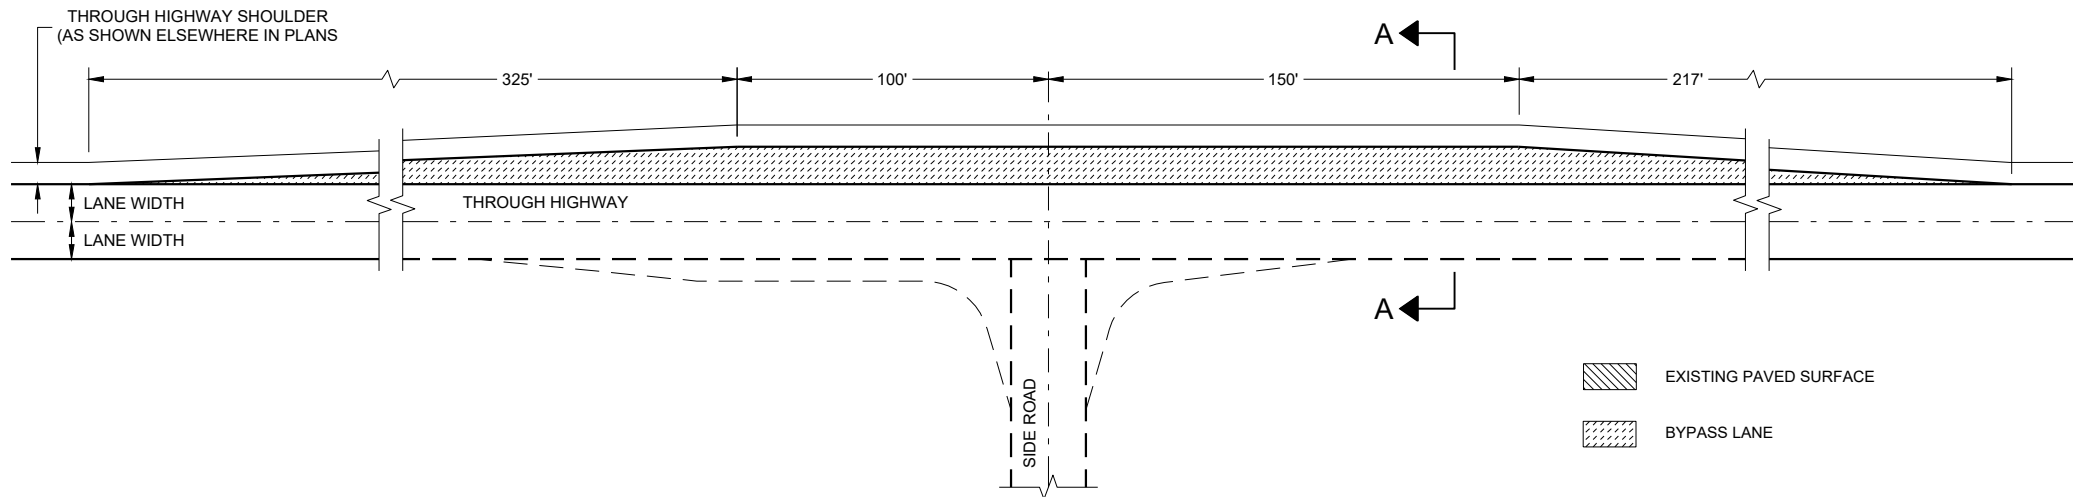


TEE INTERSECTION BYPASS LANE DETAIL




AT GRADE SIDE ROAD
INTERSECTION TYPES "B1",
"B2", "C", "D" AND TEE
INTERSECTION BYPASS LANE

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

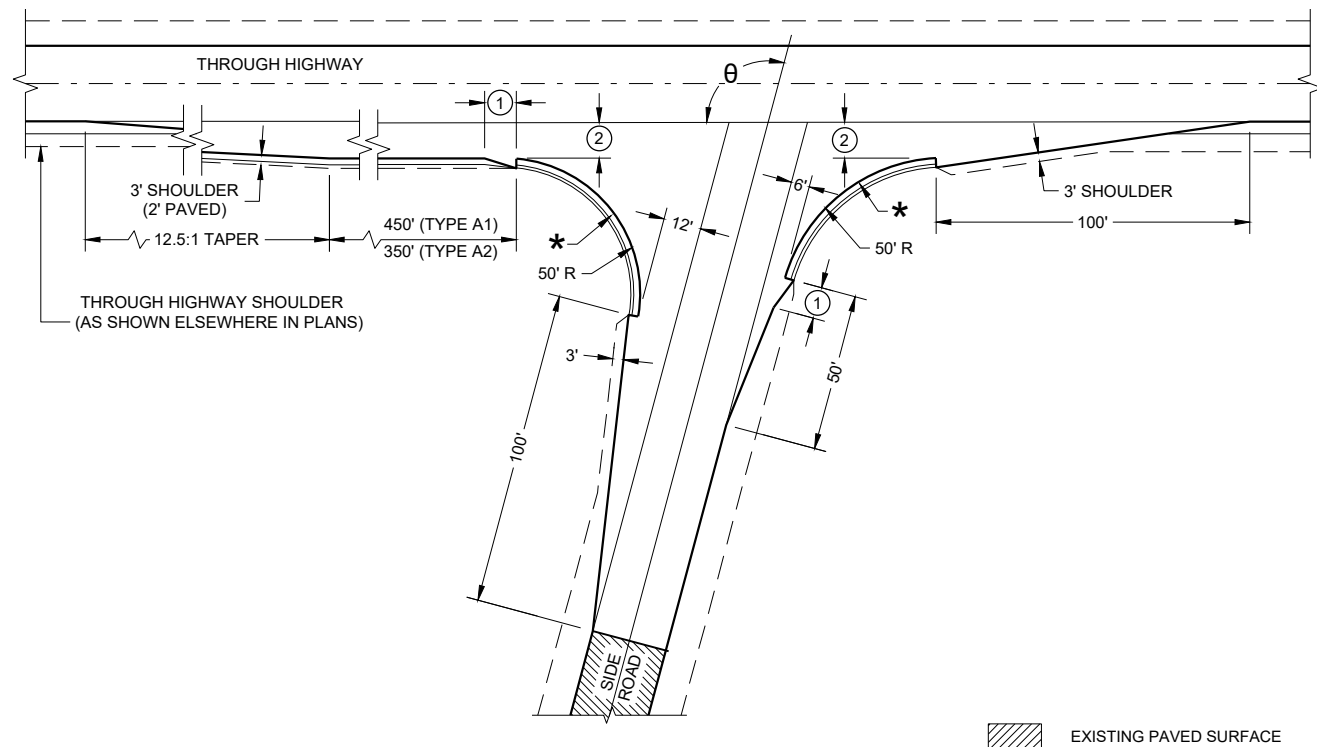


$\theta = \text{MORE THAN } 80^\circ$

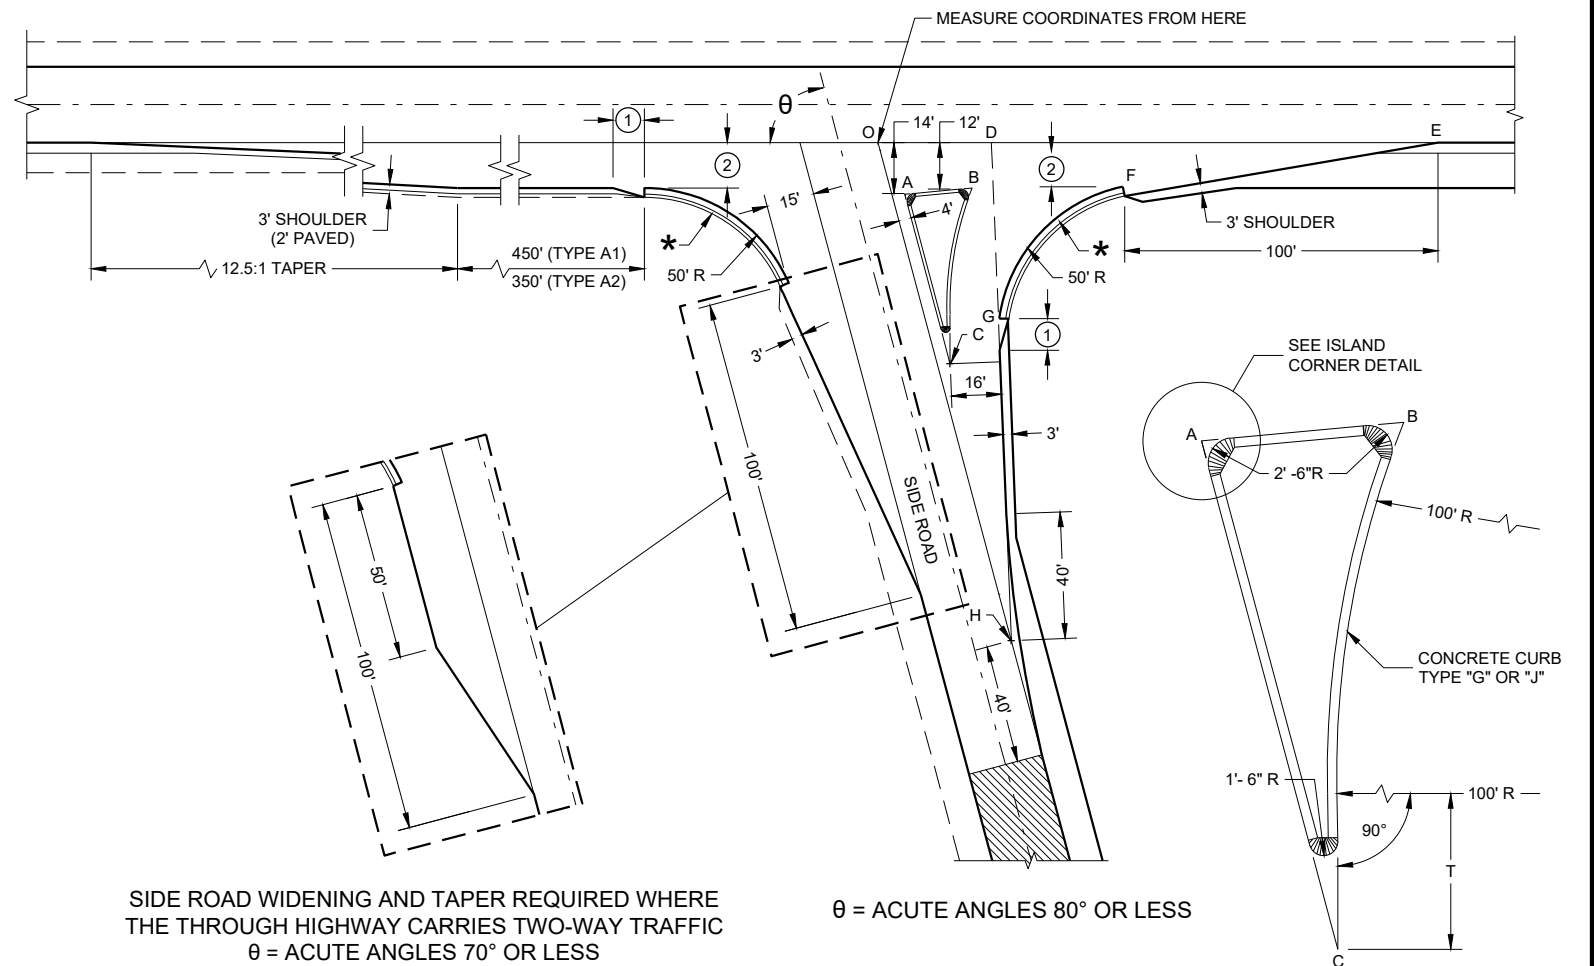


SIDE ROAD WIDENING AND TAPER REQUIRED WHERE THE THROUGH HIGHWAY CARRIES TWO-WAY TRAFFIC
 $\theta = \text{ACUTE ANGLES } 70^\circ \text{ OR LESS}$

$\theta = \text{ACUTE ANGLES } 80^\circ \text{ OR LESS}$

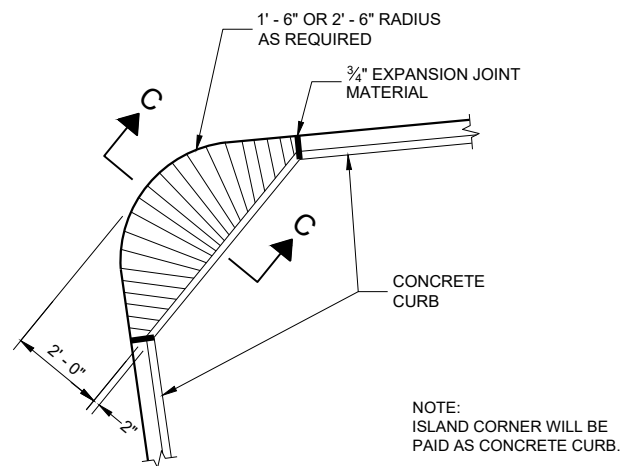

PLAN VIEW

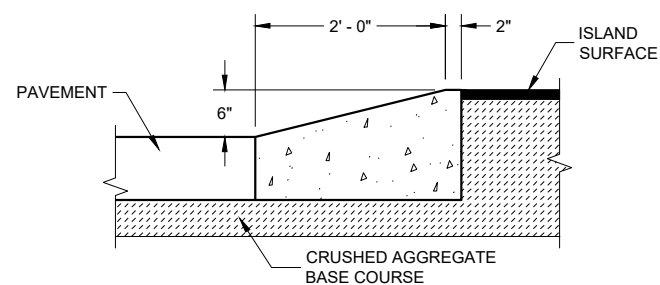

SECTION C - C

ISLAND CORNER DETAIL
(TO BE CONSTRUCTED AT ALL ISLAND CORNERS)

TABLE OF DIMENSIONS FOR VARIABLE SIDE ROAD INTERSECTION ANGLES
(INTERPOLATE VALUES FOR ANGLES NOT SHOWN)


ANGLE θ DEGREES	COORDINATES IN FEET (MEASURED FROM POINT 'O')								LENGTH IN FEET				
	A	B	C	D	E	F	G	H	AB	AC	T	OJ	OH
60	12.7 -14.0	44.9 -12.0	46.4 -72.4	41.9 0.0	205.0 0.0	104.6 -12.0	64.0 -75.5	85.0 -147.1	32.3	67.4	4.9	85.9	169.9
65	10.9 -14.0	39.0 -12.0	37.8 -71.6	39.4 0.0	196.1 0.0	95.7 -12.0	54.1 -71.5	70.5 -151.3	28.2	63.6	8.5	80.9	166.9
70	9.4 -14.0	33.9 -12.0	29.8 -70.1	37.4 0.0	188.3 0.0	87.8 -12.0	45.6 -67.5	56.1 -154.2	24.6	59.7	11.5	76.1	164.1
75	7.9 -14.0	29.3 -12.0	22.3 -67.9	35.7 0.0	181.2 0.0	80.7 -12.0	38.2 -63.4	41.8 -155.9	21.5	55.8	13.8	71.4	161.4
80	6.5 -14.0	25.4 -12.0	15.6 -65.2	34.4 0.0	174.8 0.0	74.4 -12.0	31.8 -59.3	27.6 -156.5	18.9	52.0	15.6	66.9	158.9

TYPE 'A1" AND "A2" SIDE ROAD INTERSECTION DETAILS


AT GRADE SIDE ROAD
INTERSECTIONS
TYPES "A1" AND "A2"

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
November 2022
DATE
/S/ John Jenkins
ROADWAY STANDARDS DEVELOPMENT
ENGINEER
FHWA

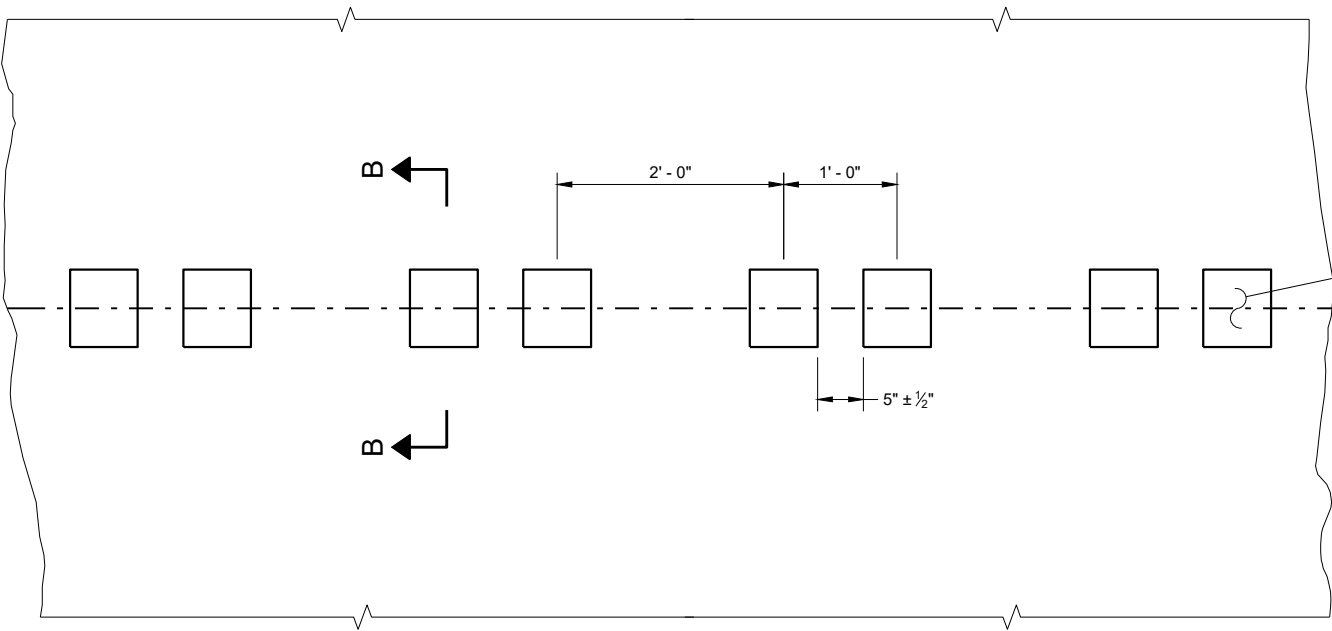


PLAN DETAIL VIEW

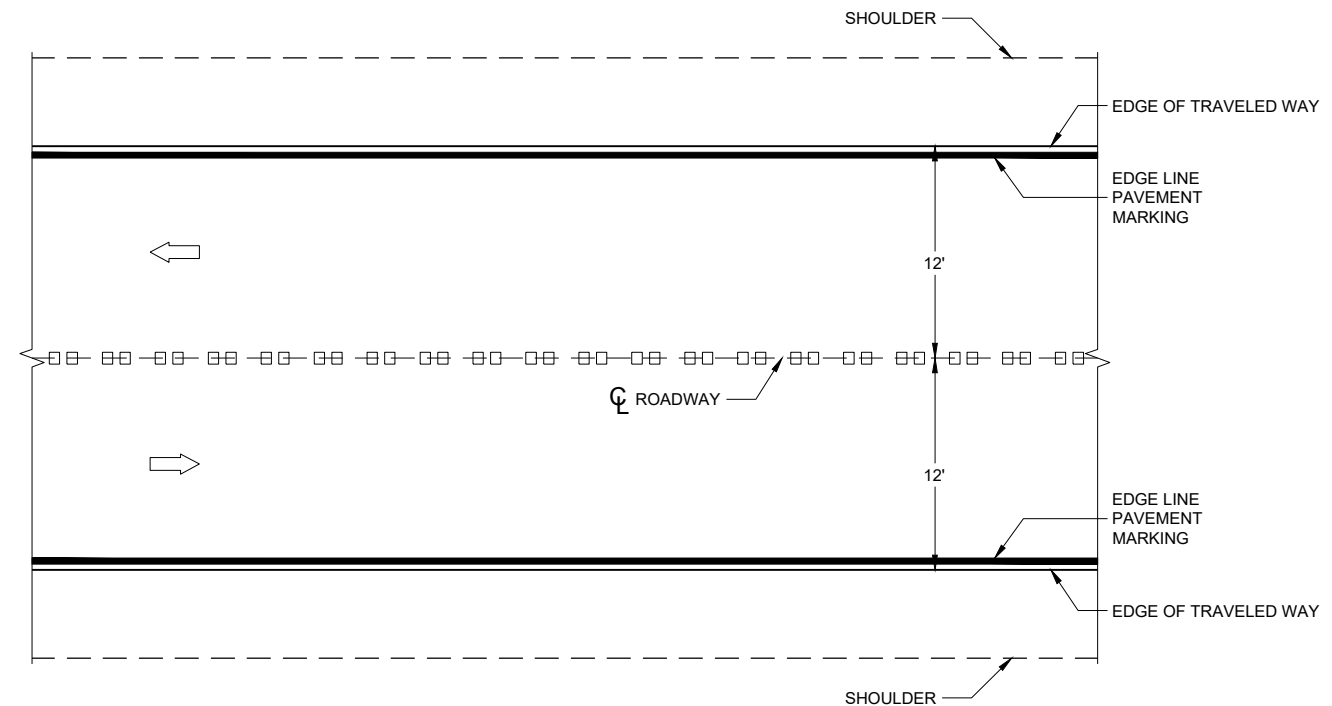


PLAN VIEW


CENTERLINE RUMBLE STRIPS - ASPHALT

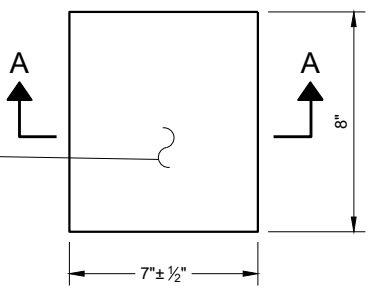


PLAN VIEW (SINGLE GROOVE)

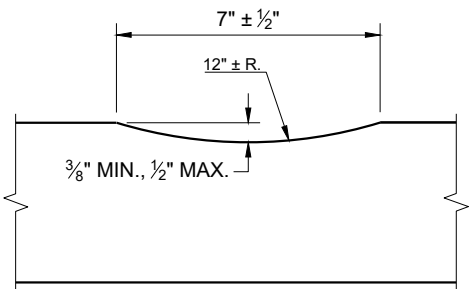

SECTION A - A

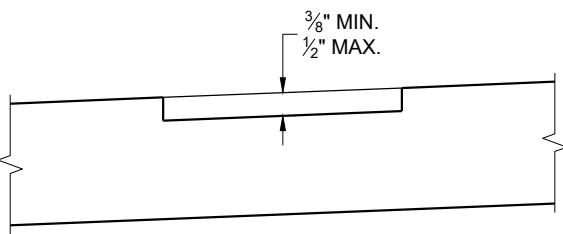

SECTION B - B
SUPERELEVATED ROADWAY

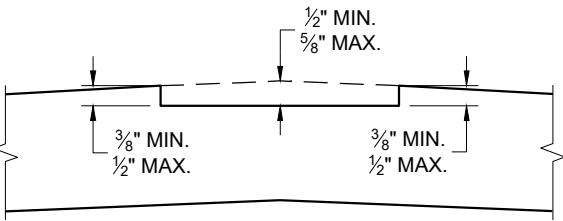


SECTION B - B
CROWNED ROADWAY

GENERAL NOTES


DO NOT MILL SHOULDER GROOVES THROUGH INTERSECTIONS, MARKED CROSSWALKS, NON-MOTORIZED PATH CROSSINGS, ETC. REFER TO SDD 13A11 SHEETS "d" AND "e".

CENTERLINE GROOVES MAY BE OMITTED IN AREAS WITH HIGH CONCENTRATIONS OF DRIVEWAYS WHEN DIRECTED BY THE ENGINEER.

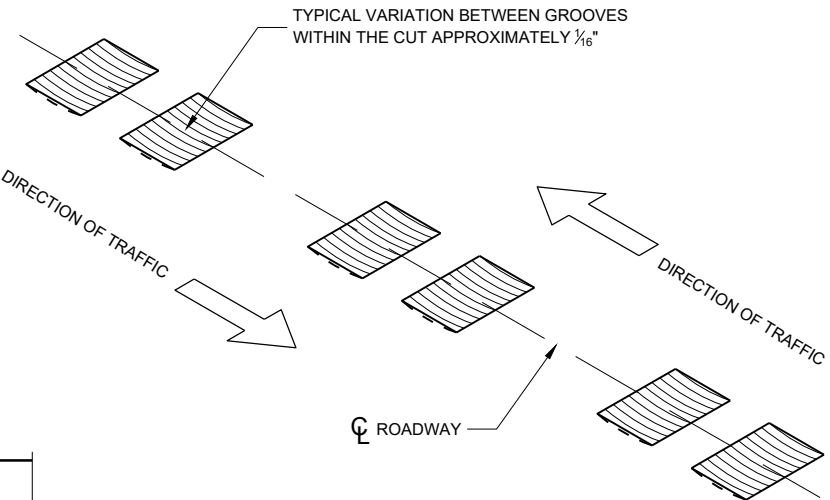


CENTERLINE RUMBLE STRIPS - ASPHALT


STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

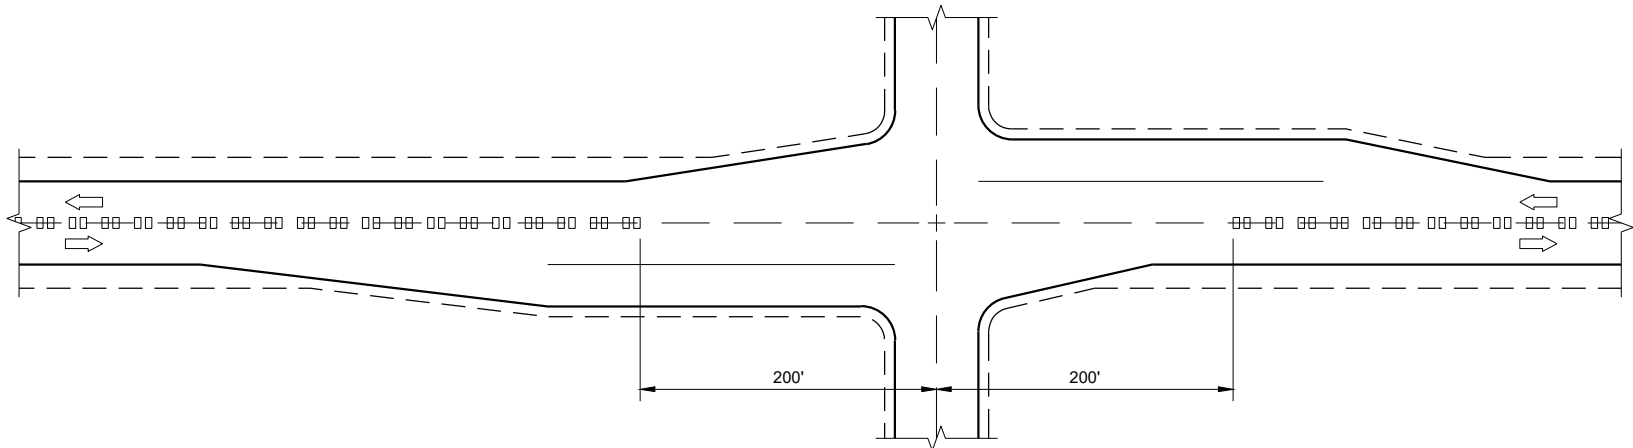

CENTERLINE GROOVES AT INTERSECTIONS

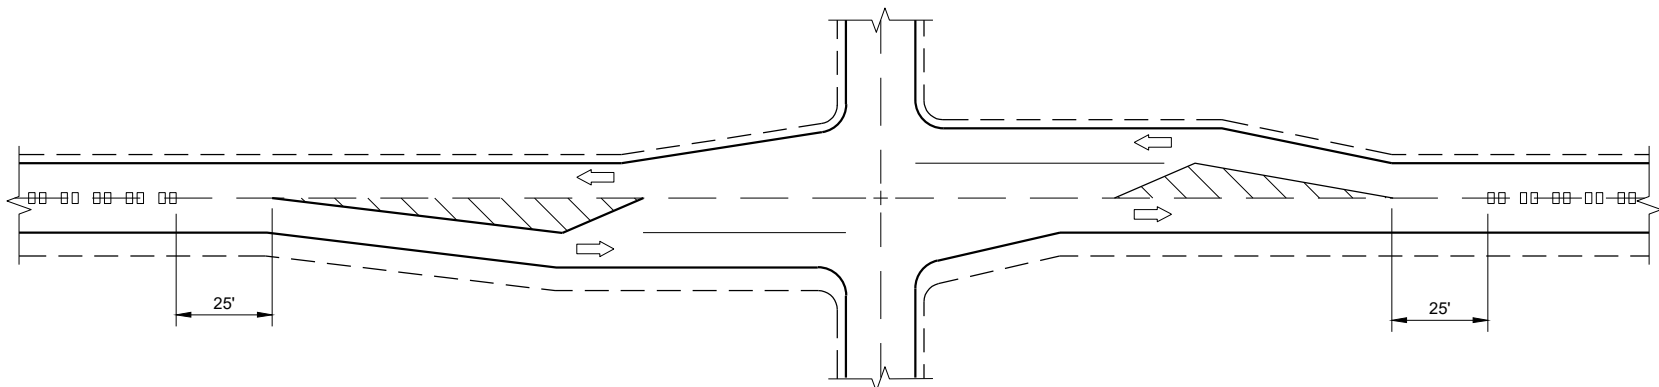


CENTERLINE GROOVES AT INTERSECTIONS
(WITH LEFT TURN LANES)

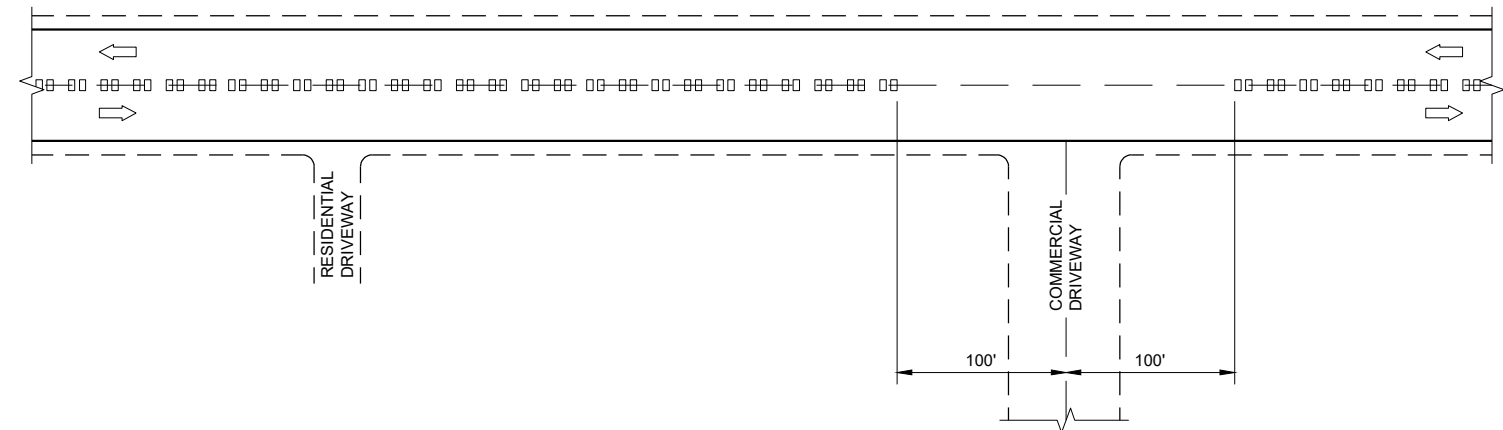


CENTERLINE GROOVES AT DRIVEWAYS^①

GENERAL NOTES

- ① CENTERLINE GROOVES MAY BE OMITTED IN AREAS WITH HIGH CONCENTRATIONS OF DRIVEWAYS WHEN DIRECTED BY THE ENGINEER.

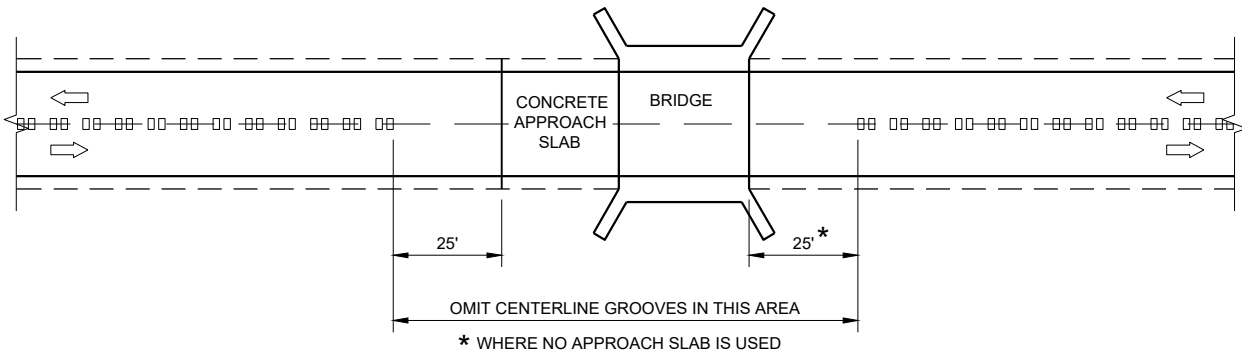

CENTERLINE GROOVES AT BRIDGES

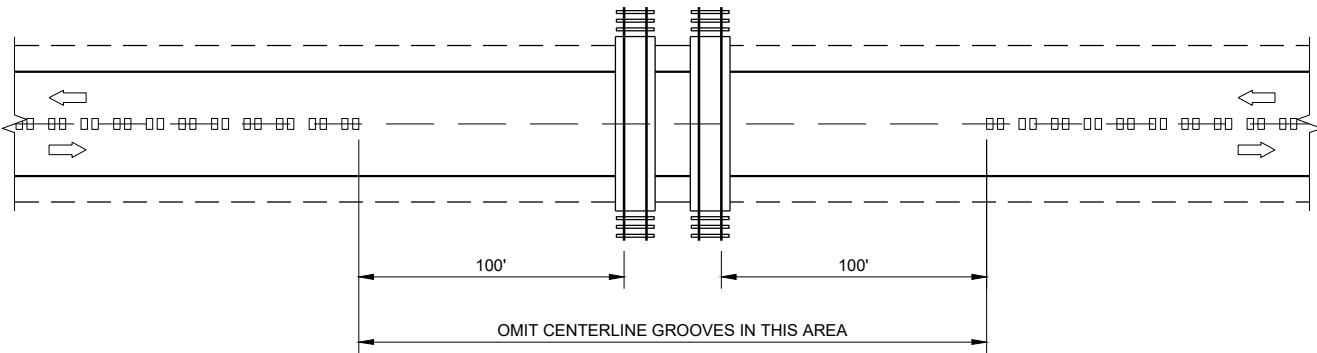


CENTERLINE GROOVES AT RAILROADS


CENTER LINE
RUMBLE STRIPS -
INTERSECTIONS, DRIVEWAYS,
BRIDGES, RAIL ROADS

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION


APPROVED
May 2023
DATE
/S/ John Jenkins
ROADWAY STANDARDS DEVELOPMENT
ENGINEER
FHWA

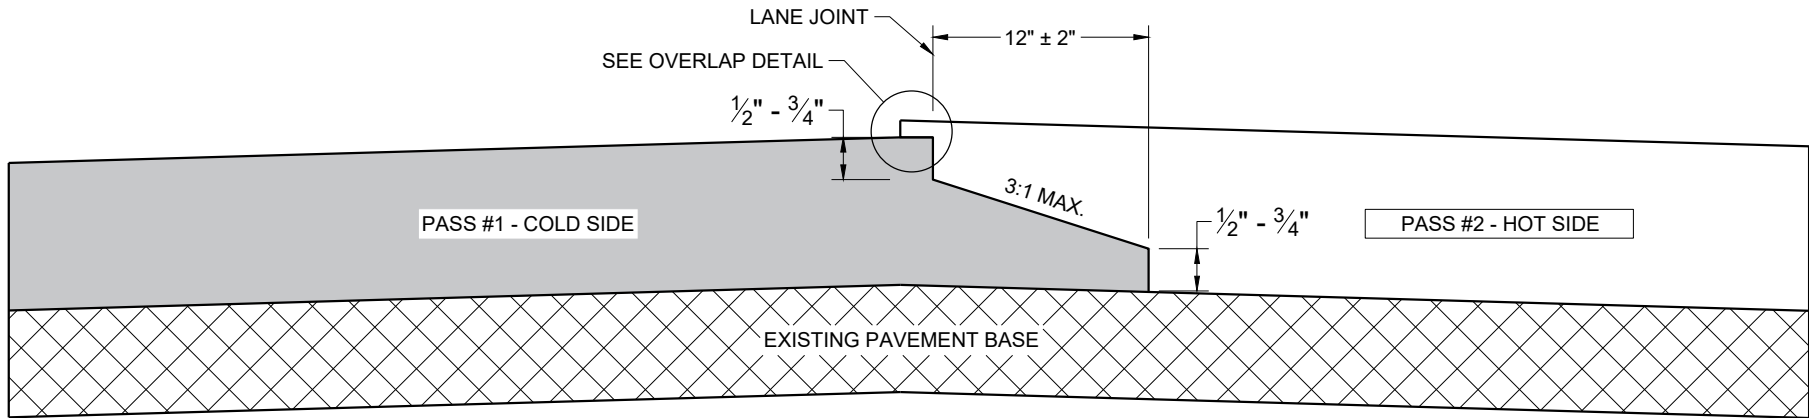

TYPICAL PAVEMENT CROSS SECTION
NOTCHED WEDGE JOINT

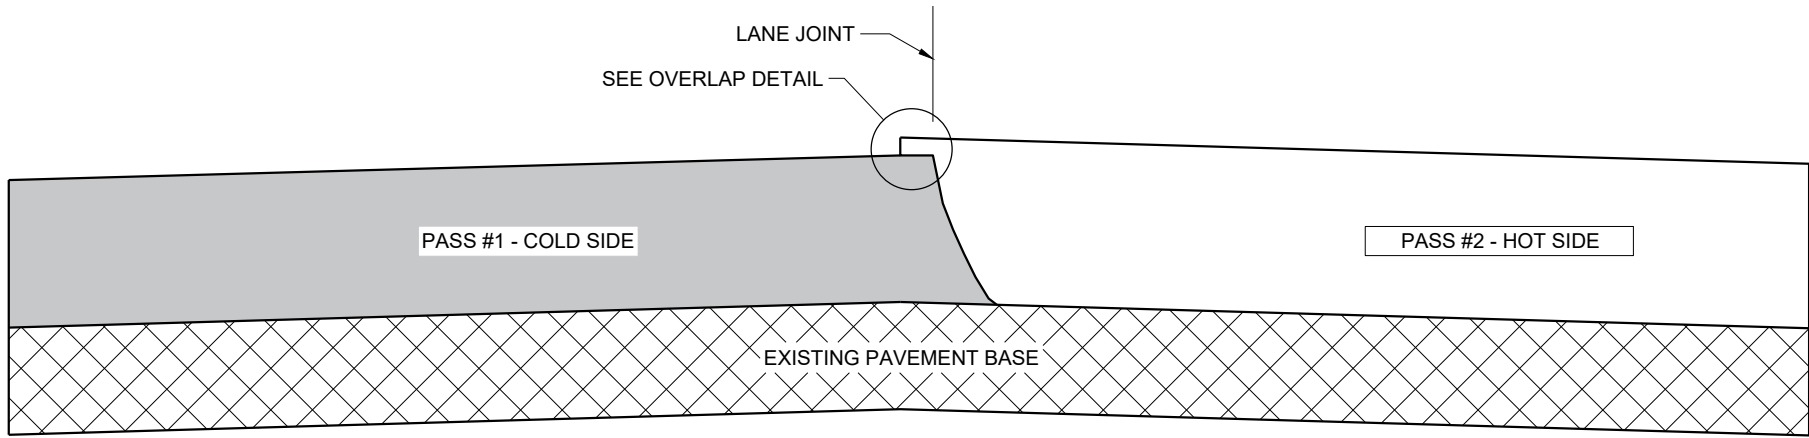

TYPICAL PAVEMENT CROSS SECTION
VERTICAL JOINT

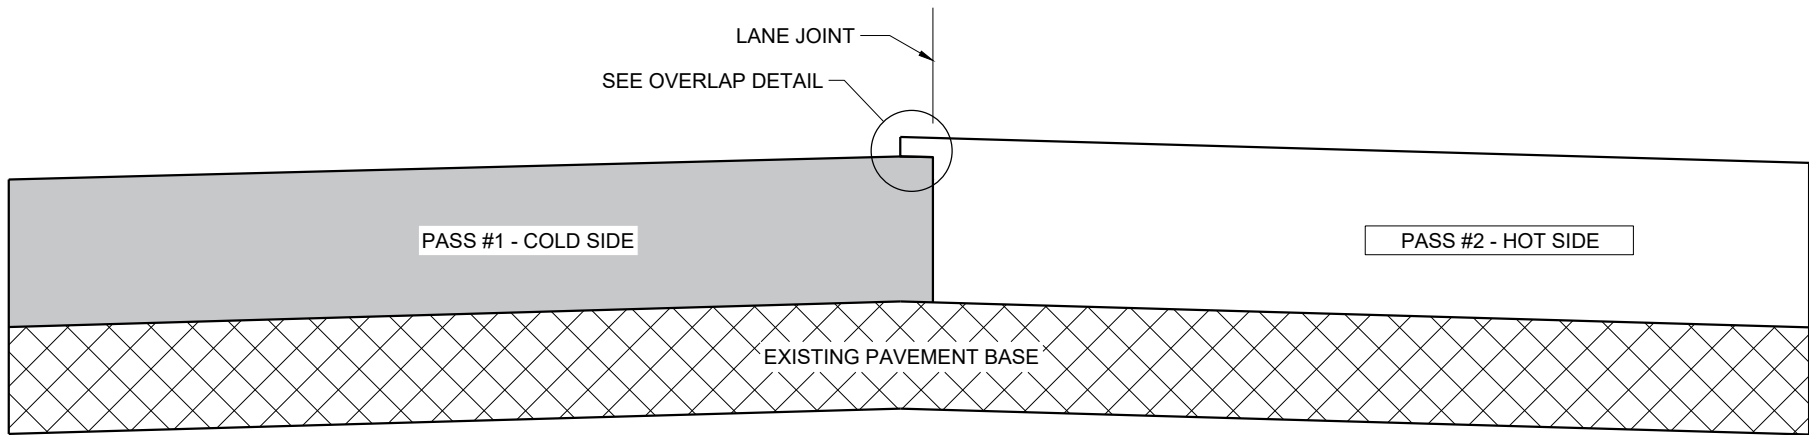

TYPICAL PAVEMENT CROSS SECTION
VERTICAL JOINT (MILLED)

GENERAL NOTES


IN ADDITION TO THE DETAILS PROVIDED IN THIS DRAWING, CONFORM TO STANDARD SPECIFICATION 450.3.2.8 FOR WHEN A NOTCHED WEDGE JOINT IS REQUIRED AND FOR GENERAL JOINT CONSTRUCTION REQUIREMENTS.

FOR ALL LONGITUDINAL JOINTS, ENSURE THE PAVER SCREED OVERLAPS THE PREVIOUSLY PLACED PAVEMENT BY 1" ± 0.5" AND THE HOT SIDE OF THE JOINT REMAINS HIGHER THAN THE COLD SIDE BY APPROXIMATELY 0.1" AFTER FINAL COMPACTION. (IT WILL BE FLUSH WHEN PAVING IN ECHELON.)

ONLY REMOVE THE LONGITUDINAL NOTCHED WEDGE JOINT FOR SMA PAVEMENT OR AS DIRECTED BY THE ENGINEER TO ADDRESS SPECIFIC LENGTHS OF JOINT DAMAGED BY TRAFFIC.

WHEN MILLING BACK OR REMOVING ANY LONGITUDINAL JOINT, LIMIT THE MATERIAL REMOVED TO 2" FROM THE TOP NOTCH OR FROM THE VERTICAL JOINT EDGE ON THE COLD SIDE OF THE JOINT.

USE LONGITUDINAL MILLED JOINT AS PLANS SHOW OR THE AS THE ENGINEER DIRECTS.

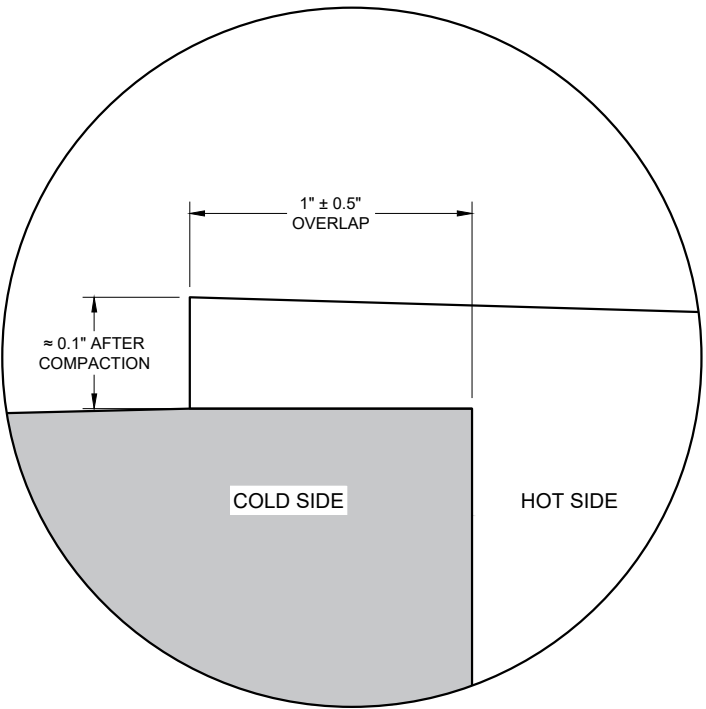


OVERLAP DETAIL (TYPICAL)



HMA LONGITUDINAL JOINTS

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
November 2020 /S/ Steven Hefel
DATE HMA PAVEMENT ENGINEER
FHWA

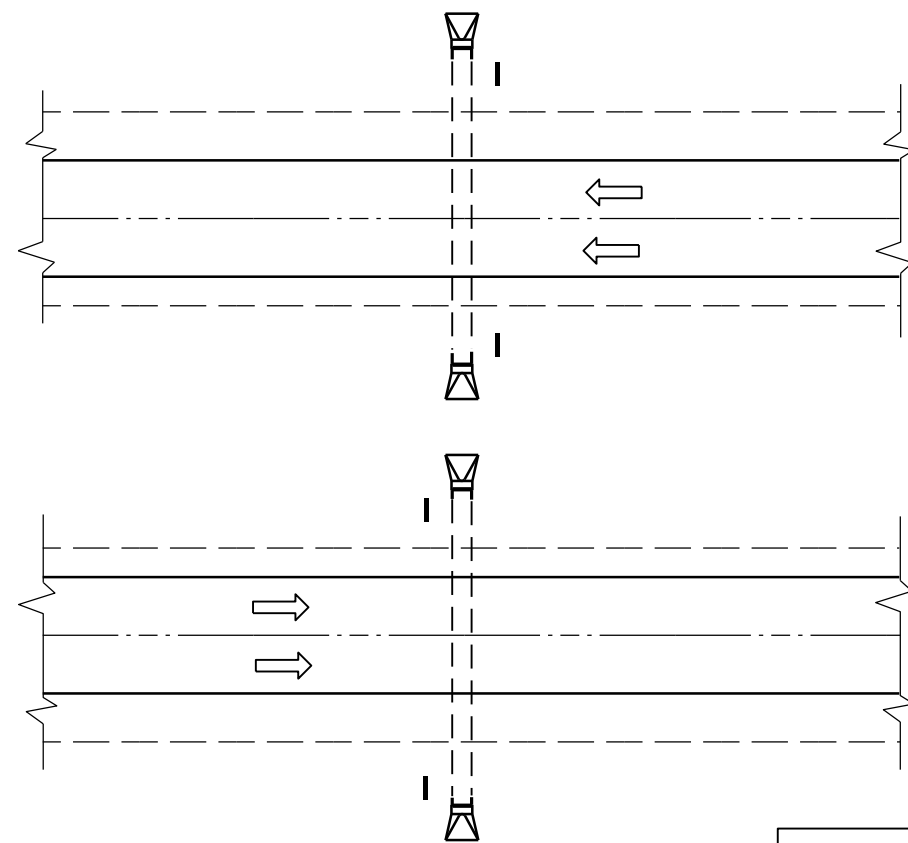

PLAN VIEW
DIVIDED HIGHWAY

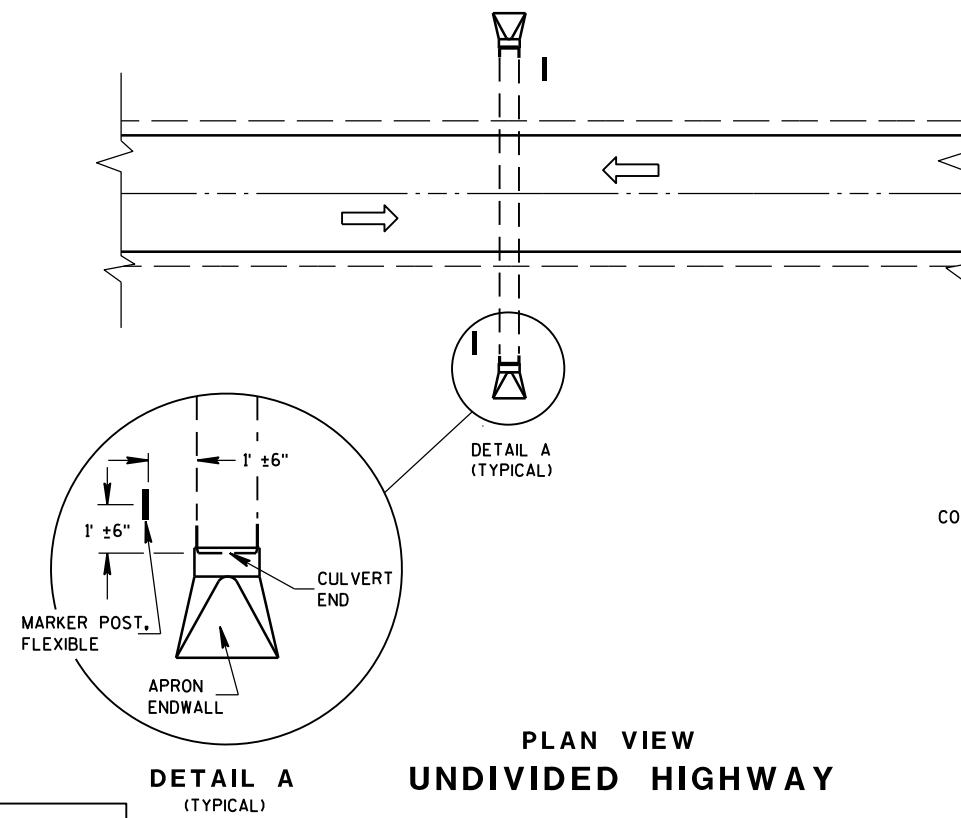


PLAN VIEW
UNDIVIDED HIGHWAY


FLEXIBLE MARKER POST LOCATION

GENERAL NOTES

DETAILS OF CONSTRUCTION, MATERIALS AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE STANDARD SPECIFICATIONS AND THE APPLICABLE SPECIAL PROVISIONS.

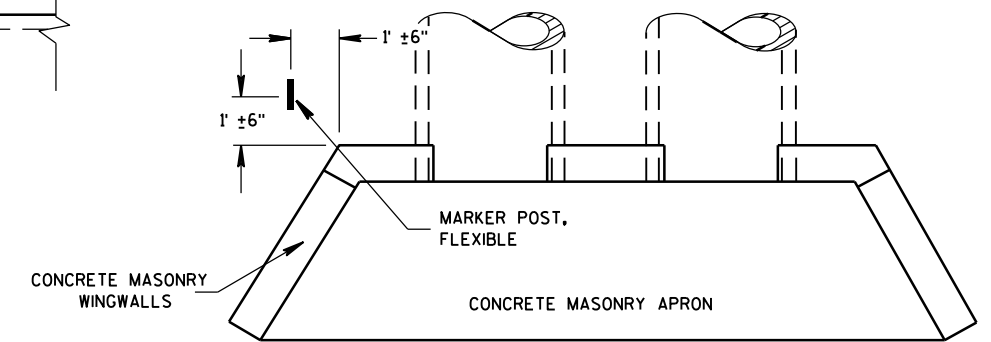




PLAN VIEW
CONCRETE MASONRY ENDWALLS FOR
CULVERT PIPE AND PIPE ARCH

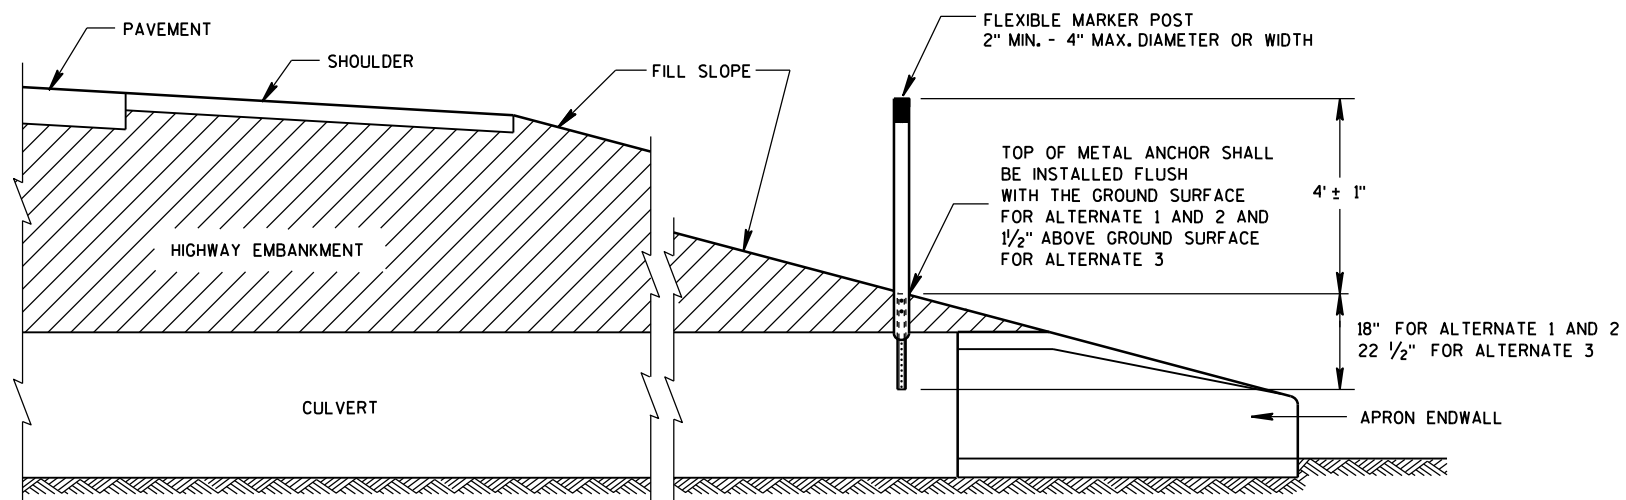





CROSS SECTION
FLEXIBLE MARKER POST

FLEXIBLE MARKER POST
FOR CULVERT END






STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

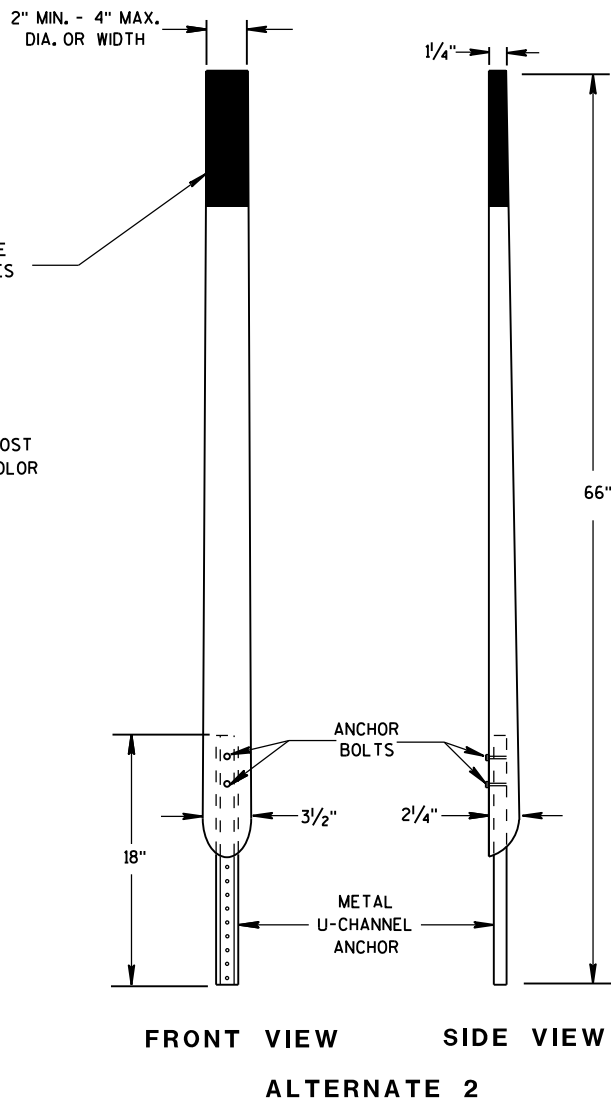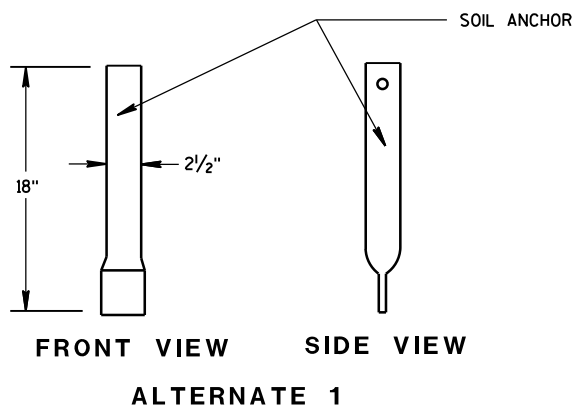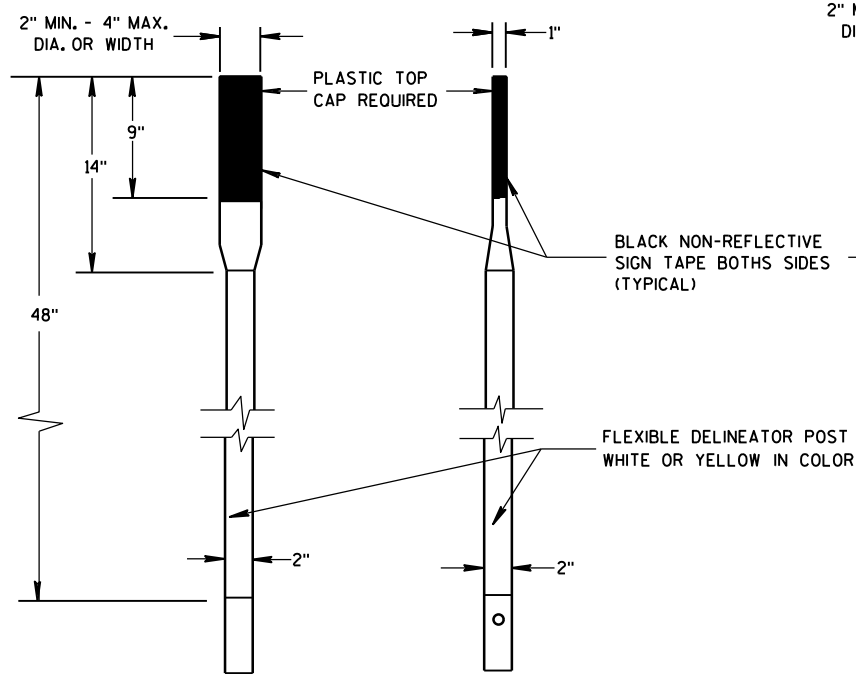


FLEXIBLE MARKER POSTS

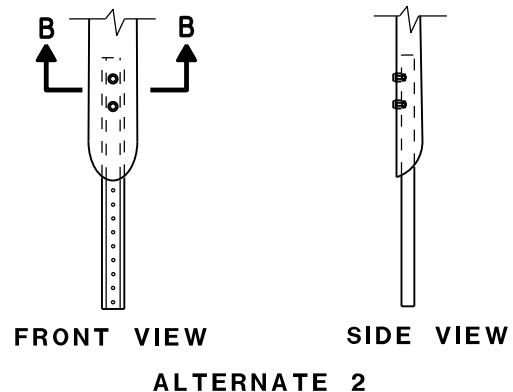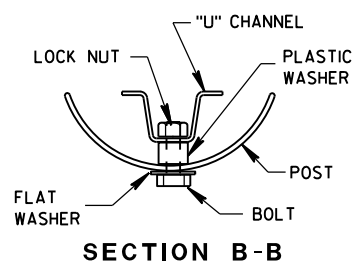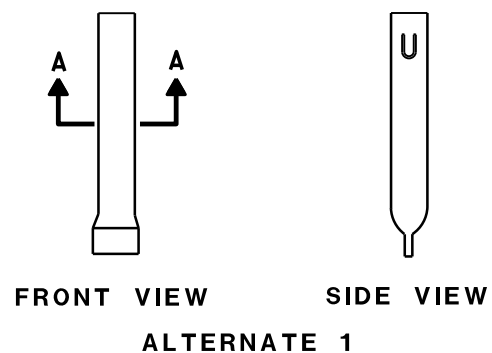


FLEXIBLE MARKER POST ANCHORS

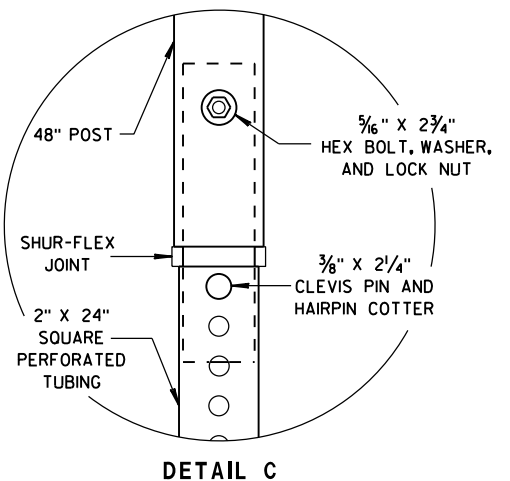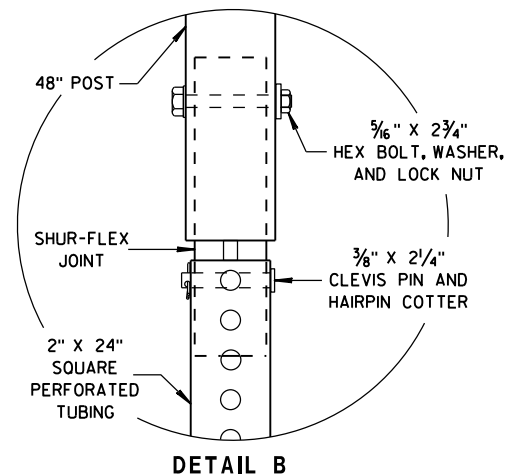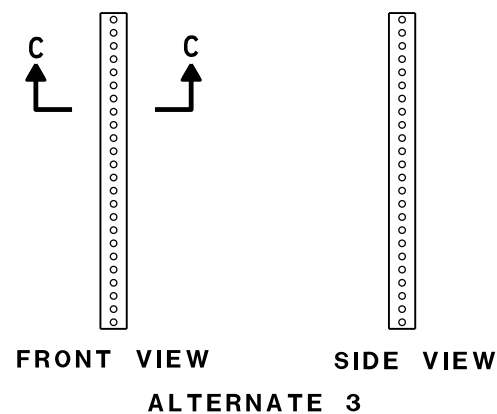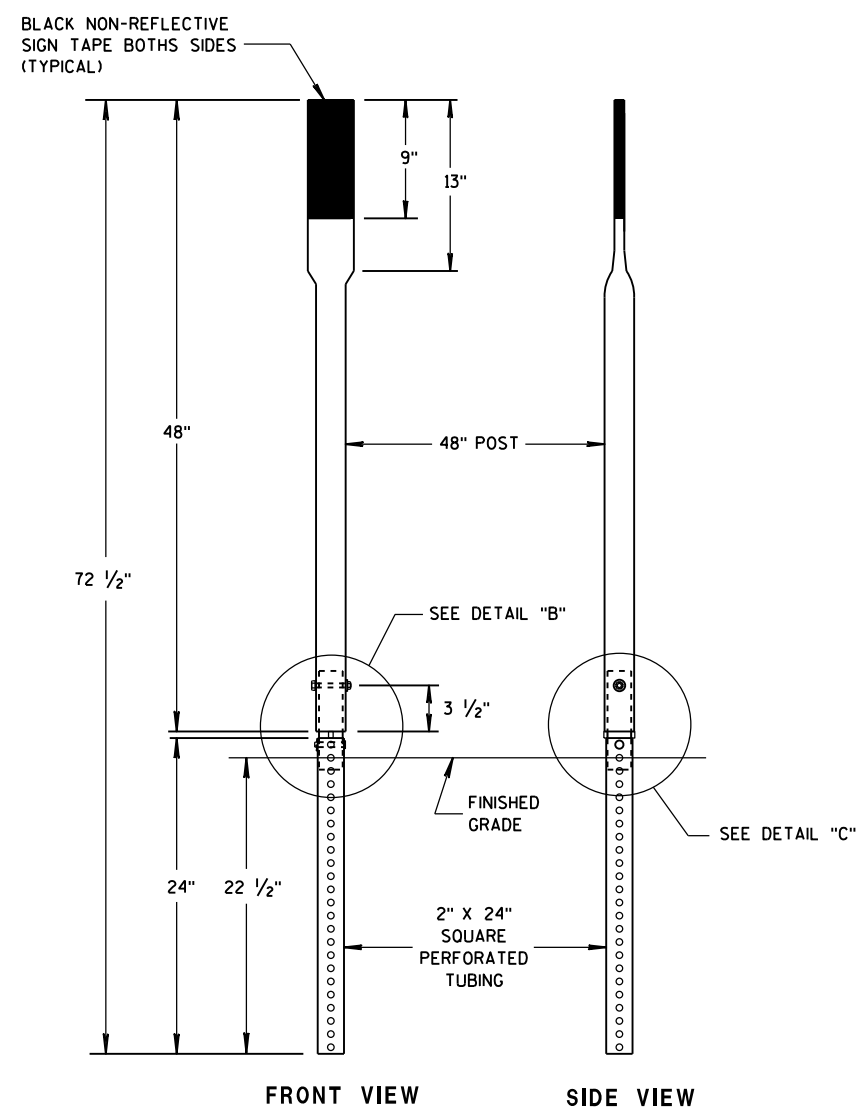

FLEXIBLE MARKER POST FOR CULVERT END	
STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION	
APPROVED 10/1/2012 DATE	/S/ Travis Feltes STATE TRAFFIC ENGINEER OF DESIGN
FHWA	

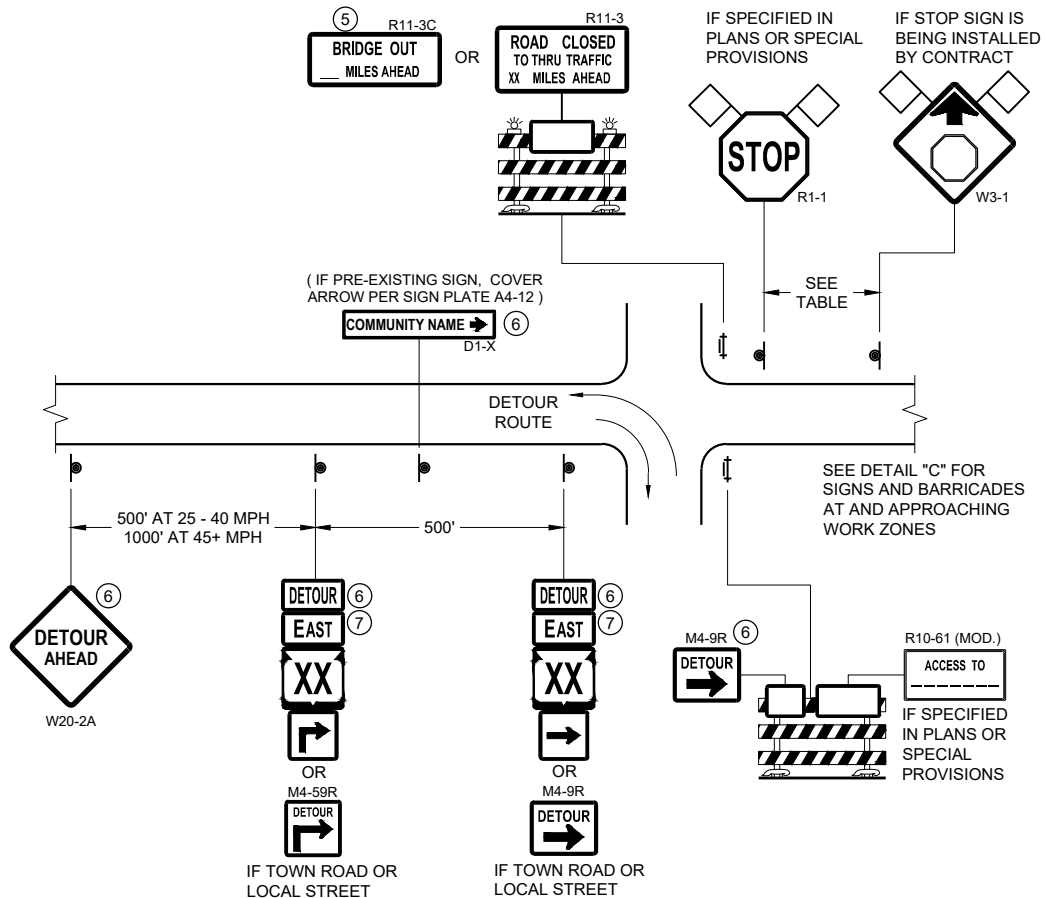


DETAIL A
MAINLINE CLOSURE WITH POSTED DETOUR
WORK ZONE GREATER THAN OR EQUAL TO ½ MILE FROM
DETOUR ROUTE (1000 FEET IF URBAN)

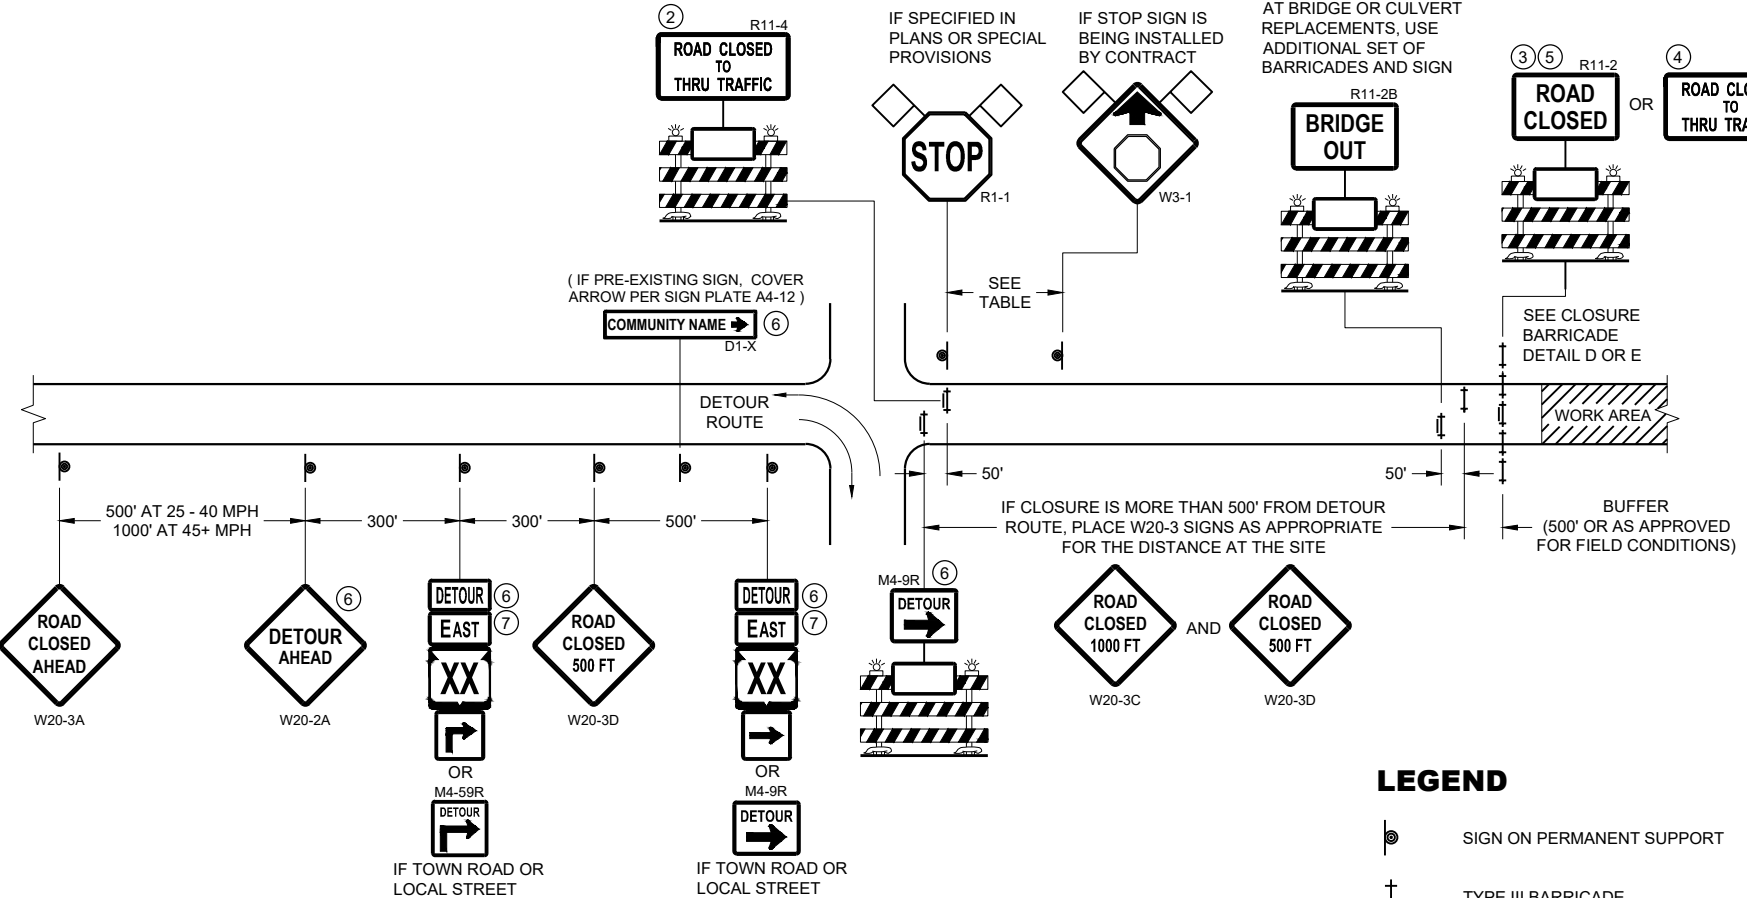

DETAIL B
MAINLINE CLOSURE WITH POSTED DETOUR
WORK ZONE LESS THAN ½ MILE FROM
DETOUR ROUTE (1000 FEET IF URBAN)

SPEED LIMIT (MPH)	"STOP AHEAD" ADVANCE WARNING DISTANCE (FT)
25	200
30	200
35	350
40	350
45	500
50	550
55	750

SEE SDD 15C2-SHEET "b"
FOR GENERAL NOTES
AND FOOTNOTES ① THROUGH ⑦

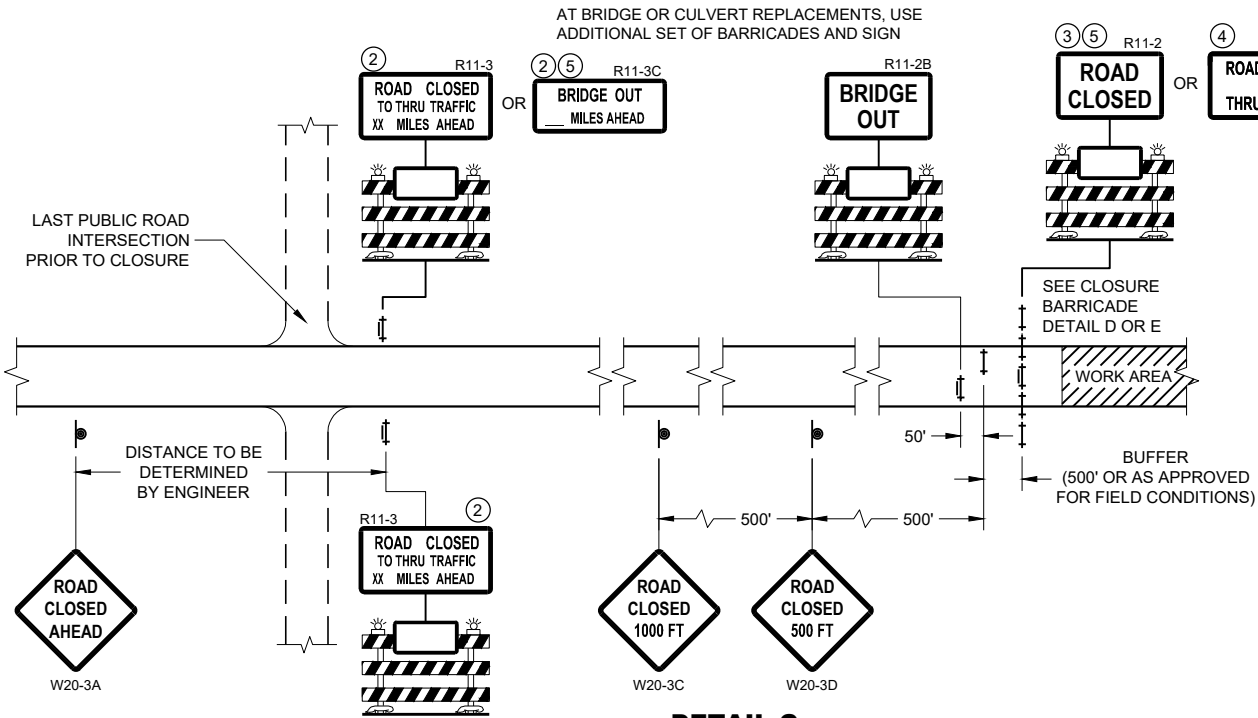


DETAIL C
MAINLINE CLOSURE, NO POSTED DETOUR

**BARRICADES AND SIGNS
FOR MAINLINE CLOSURES**


STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
May 2023 /S/ Andrew Heidtke
DATE WORK ZONE ENGINEER

FHWA

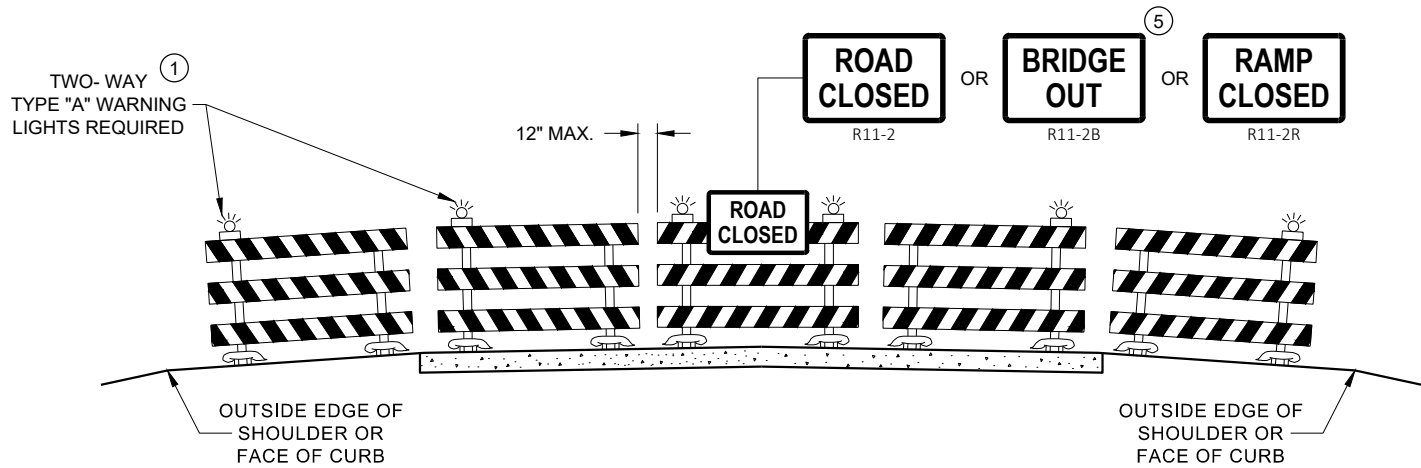

DETAIL D
ROAD CLOSURE BARRICADE DETAIL
APPROACH VIEW

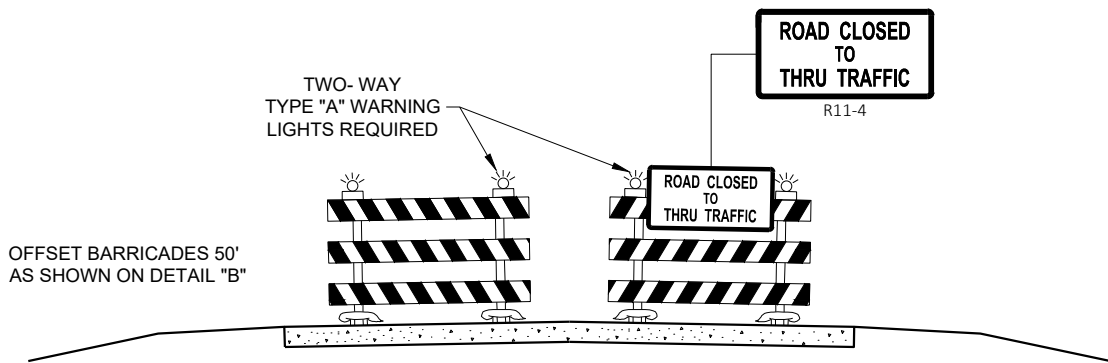

DETAIL E
LANE CLOSURE BARRICADE DETAIL
APPROACH VIEW

SEE SDD 15C2 - SHEET "a" FOR LEGEND

GENERAL NOTES

THE EXACT NUMBER, LOCATION, AND SPACING OF ALL SIGNS AND BARRICADES SHALL BE ADJUSTED TO FIT FIELD CONDITIONS AS APPROVED BY THE ENGINEER.

ANY SIGNS TEMPORARY OR EXISTING, WHICH CONFLICT WITH TRAFFIC CONTROL "IN USE", SHALL BE REMOVED OR COVERED AS NEEDED AND AS APPROVED BY THE ENGINEER.

THE SPACING BETWEEN TRAFFIC CONTROL SIGNS SHOULD BE ADJUSTED TO NOT CONFLICT WITH AND SHOULD PROVIDE A DESIRABLE MINIMUM OF 200 FEET CLEARANCE TO EXISTING SIGNS THAT WILL REMAIN IN PLACE.

BARRICADES THAT MUST BE MOVED FOR A WORK OPERATION SHALL BE IMMEDIATELY RE-ESTABLISHED UPON COMPLETION OF THE OPERATION, OR FOR CONTINUING OPERATIONS, AT THE END OF EACH WORKING DAY.

SIGNS THAT WILL BE IN PLACE LESS THAN 7 CONTINUOUS DAYS AND NIGHTS MAY BE MOUNTED ON PORTABLE SUPPORTS.

ALL TYPE III BARRICADES SHALL HAVE RAILS REFLECTORIZED ON BOTH FACES. STRIPES SHALL BE PROPERLY SLOPED DOWN TOWARD THE TRAFFIC SIDE OR AS SHOWN IN THE ROAD CLOSURE BARRICADE DETAIL "D" FOR FULL ROAD CLOSURES.

TYPE "A" LOW - INTENSITY FLASHING WARNING LIGHTS SHALL BE VISIBLE ON BOTH SIDES OF THE BARRICADE.

THE R11 - 2, R11 - 3, M4 - 9, R11 - 4, AND R10 - 61 SIGNS PLACED ON THE BARRICADES SHALL COVER NO MORE THAN THE TOP RAIL. THE SIGNS SHALL NOT COVER ANY PORTION OF THE MIDDLE RAIL OR BOTTOM RAILS.

"WO" AND "MO" SIGNS ARE THE SAME AS "W" AND "M" SIGNS EXCEPT THE BACKGROUND IS ORANGE.

ALL SIGNS SHALL BE 48" X 48" UNLESS OTHERWISE NOTED BELOW:

- R11 - 2 SHALL BE 48" X 30"
- R11 - 3 SHALL, R11 - 4 AND R10 - 61 SHALL BE 60 " X 30"
- M4 - 9 SHALL BE 30" X 24"
- M3 - X SHALL BE 24" X 12" (36" X 18" IF NEEDED TO MATCH EXISTING SIGNS)
- M4 - 8 SHALL BE 24" X 12" (36" X 18" IF NEEDED TO MATCH EXISTING SIGNS)
- M1 - 4, M1 - 5A AND M1 - 6 SHALL BE 24" X 24" (36" X 36" IF NEEDED TO MATCH EXISTING SIGNS)
- MO5 - 1 AND MO6 - 1 SHALL BE 21" X 21" (30" X 30" IF NEEDED TO MATCH EXISTING SIGNS)
- D1 - X SHALL BE AS SHOWN ON SPECIFIC PROJECT SIGNING DETAIL SHEETS.
- R1 - 1 SHALL BE 36" X 36"


- 1 TWO WARNING LIGHTS SHALL BE PROVIDED ON THE CENTER BARRICADE AND A MINIMUM OF ONE WARNING LIGHT SHALL BE PROVIDED ON EACH OF THE OTHER BARRICADES WITHIN THE ROADWAY LIMITS. SPACING OF THE WARNING LIGHTS SHALL BE UNIFORM TO THE EDGE OF ROADWAY AS SHOWN (APPROX. 8 FOOT LIGHT SPACING).
- 2 THESE SIGNS AND BARRICADES ARE NOT REQUIRED IF ROAD CLOSURE BEGINS AT AN INTERSECTION.
- 3 FOR ROAD CLOSURE WITHOUT LOCAL ACCESS TO PROJECT, SEE ROAD CLOSURE BARRICADE DETAIL "D".
- 4 FOR ROAD CLOSURE WITH LOCAL ACCESS TO PROJECT, SEE ROAD CLOSURE BARRICADE DETAIL "E".
- 5 FOR BRIDGE OR CULVERT REPLACEMENTS, SUBSTITUTE "BRIDGE OUT" INSTEAD OF "ROAD CLOSED" ON R11 - 2 AND R11 - 3 SIGNS.
- 6 INSTALL DETOUR AND COMMUNITY GUIDE SIGNS AND ARROWS ONLY IF SPECIFIED IN THE CONTRACT. IF THERE ARE EXISTING ROUTE MARKER ASSEMBLIES THAT WILL REMAIN IN PLACE, ADJUST THE LOCATION OF THE DETOUR ROUTE SIGNS TO CORRESPOND WITH THE EXISTING ASSEMBLIES. MODIFY EXISTING SIGNS WHERE POSSIBLE. SEE SPECIFIC PROJECT DETOUR SIGNING DETAIL SHEETS. IF DETOUR SIGNS ARE BEING INSTALLED BY OTHERS, PLACE THE CONTRACTED TRAFFIC CONTROL SIGNS TO ALLOW FOR PLACEMENT OF ALL WARNING, DETOUR AND GUIDE SIGNS AS SHOWN.
- 7 "EAST" CARDINAL DIRECTION MARKERS AND RIGHT TURN ARROWS ARE SHOWN. USE OTHER CARDINAL DIRECTIONS AND ARROWS AS APPROPRIATE.

BARRICADES AND SIGNS
FOR
VARIOUS CLOSURES

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
May 2023 /S/ Andrew Heidtke
DATE WORK ZONE ENGINEER


FHWA

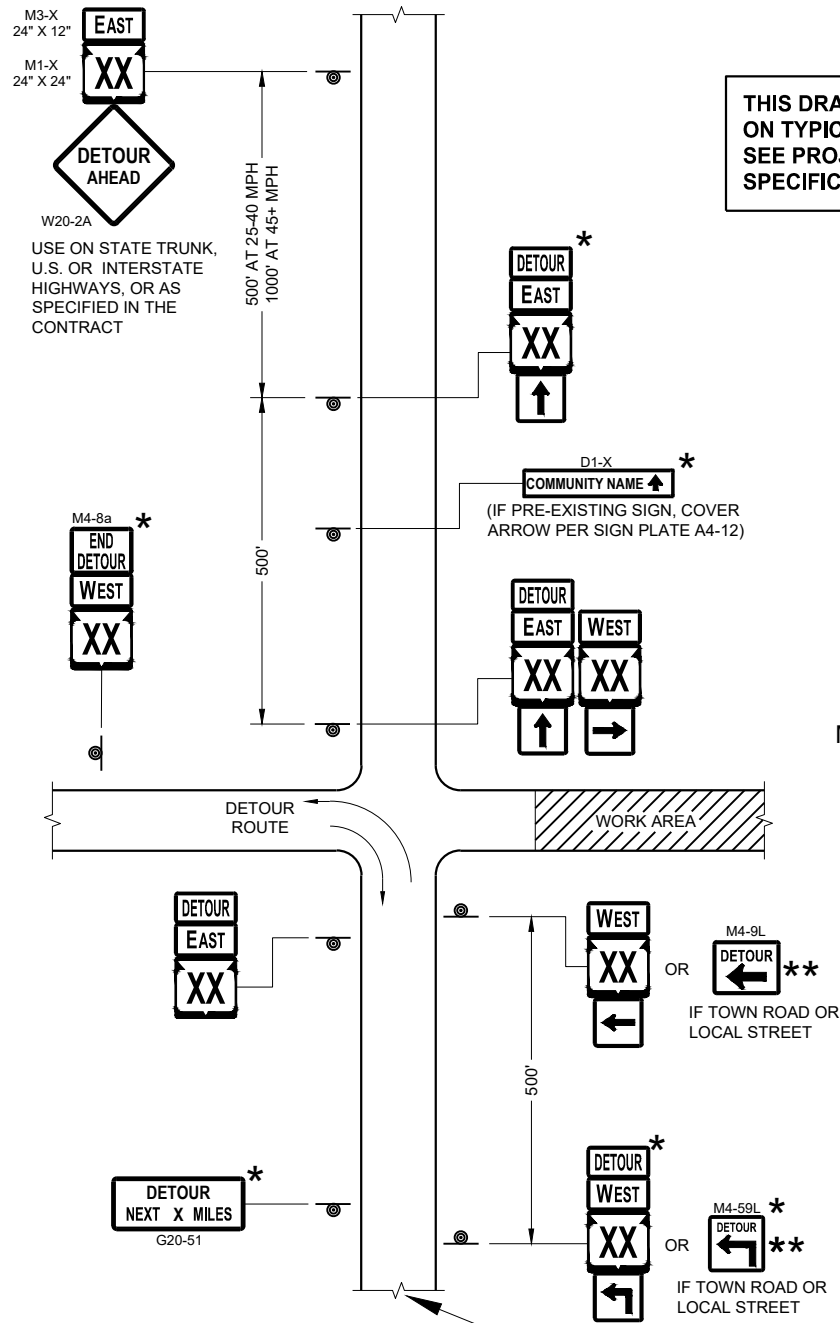

SEE SPECIFIC PROJECT DETOUR
SIGNING DETAIL SHEETS AND
DETAIL A OR B ON SDD SHEET 15C02 - SHEET "a"

THIS DRAWING PROVIDES GENERAL GUIDANCE
ON TYPICAL DETOUR SIGN LAYOUT AND SPACING.
SEE PROJECT DETOUR SIGNING SHEETS FOR
SPECIFIC DETAILS FOR EACH PROJECT.

MATCH POINT

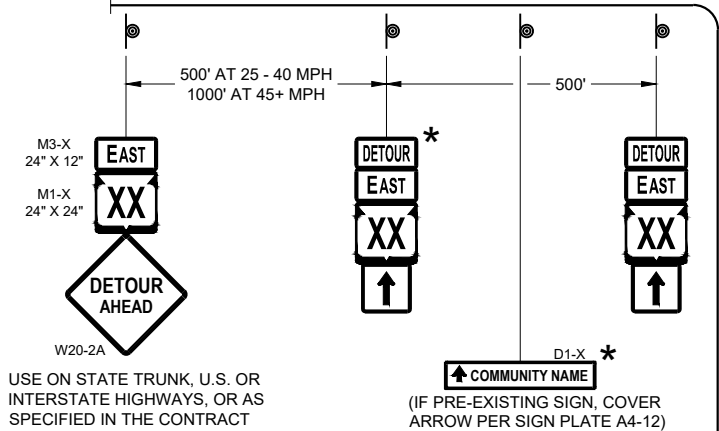

DETAIL F
DETOUR SIGNING

LEGEND

- SIGN ON PERMANENT SUPPORT
- WORK AREA
- DETOUR EAST (M4 - 8)
- DETOUR WEST (M4 - 8)
- DETOUR AHEAD (M1 - 4)
- DETOUR NEXT X MILES (M1 - 6)
- DETOUR END (M1 - 5A)
- DETOUR RIGHT (M05 - 1)
- DETOUR LEFT (M06 - 1)
- DETOUR UP (M06 - 1)

GENERAL NOTES

THE EXACT NUMBER, LOCATION AND SPACING OF ALL SIGNS SHALL BE ADJUSTED TO FIT FIELD CONDITIONS AS APPROVED BY THE ENGINEER.

IF THERE ARE EXISTING ROUTE MARKER ASSEMBLIES THAT WILL REMAIN IN PLACE, ADJUST THE LOCATION OF THE DETOUR ROUTE SIGNS TO CORRESPOND WITH THE EXISTING ASSEMBLIES. SEE SPECIFIC PROJECT DETOUR SIGNING DETAIL SHEETS. MODIFY EXISTING SIGNS WHERE POSSIBLE.

THE SPACING BETWEEN TRAFFIC CONTROL AND DETOUR SIGNS SHOULD BE ADJUSTED TO NOT CONFLICT WITH AND TO PROVIDE A DESIRABLE MINIMUM OF 200 FEET CLEARANCE TO EXISTING SIGNS THAT WILL REMAIN IN PLACE.

ANY SIGNS TEMPORARY OR EXISTING, WHICH CONFLICT WITH TRAFFIC CONTROL "IN USE" SHALL BE REMOVED OR COVERED AS NEEDED AND AS APPROVED BY THE ENGINEER.


SIGNS THAT WILL BE IN PLACE LESS THAN 7 CONTINUOUS DAYS AND NIGHTS MAY BE MOUNTED ON PORTABLE SUPPORTS.

"MO" SIGNS ARE THE SAME AS "M" SIGNS EXCEPT THE BACKGROUND IS ORANGE.

SIGN SIZES SHALL BE AS FOLLOWS:

- M3-X SHALL BE 24" X 12" (36" X 18" IF NEEDED TO MATCH EXISTING SIGNS)
- M4-8 SHALL BE 24" X 12" (36" X 18" IF NEEDED TO MATCH EXISTING SIGNS)
- M1-4, M1-5A AND M1-6 SHALL BE 24" X 24" (36" X 36" IF NEEDED TO MATCH EXISTING SIGNS)
- M05-1 AND M06-1 SHALL BE 21" X 21" (30" X 30" IF NEEDED TO MATCH EXISTING SIGNS)
- M4-9 AND M4-59 SHALL BE 30" X 24"
- M4-8a SHALL BE 24" X 18"
- G20-51 SHALL BE 60" X 24"
- W20-2A SHALL BE 48" X 48"
- D1-X SHALL BE AS SHOWN ON SPECIFIC PROJECT SIGNING DETAIL SHEETS.

- * OPTIONAL SIGNS. SEE SPECIFIC PROJECT DETOUR SIGNING DETAIL SHEETS.
- ** FOR A TOWN ROAD OR LOCAL STREET DETOURED ONTO A STATE TRUNK HIGHWAY, PLACE A ROAD NAME PLAQUE ABOVE THE M4-9 SIGN AS SPECIFIED IN THE CONTRACT.

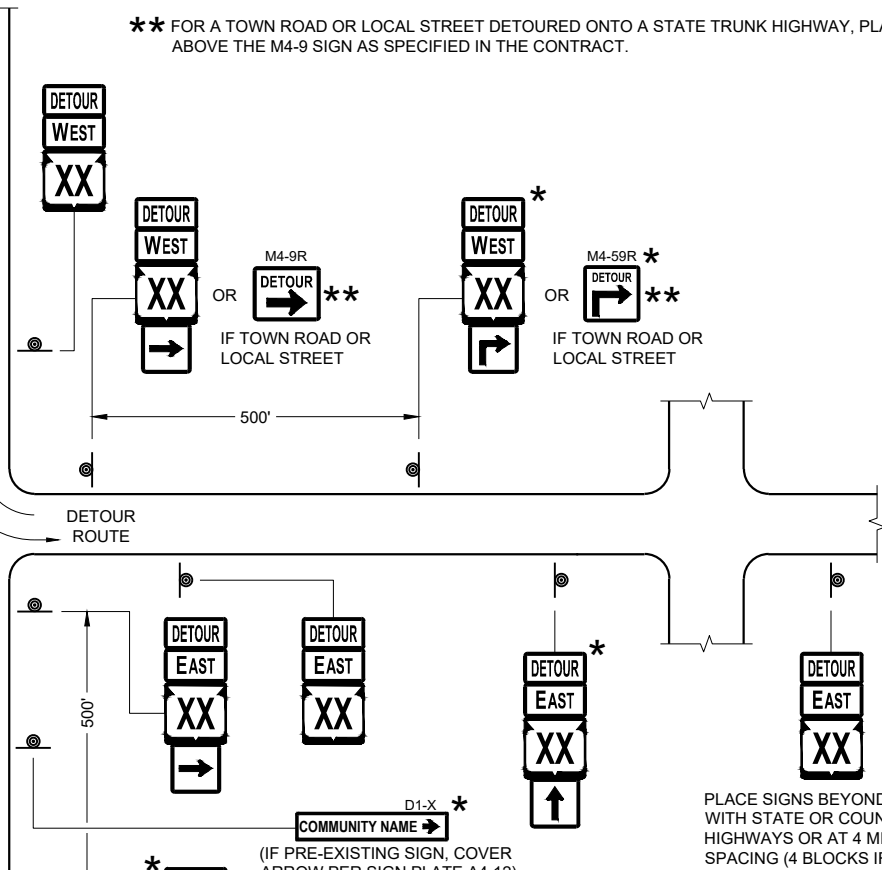


PLACE SIGNS BEYOND INTERSECTIONS
WITH STATE OR COUNTY TRUNK
HIGHWAYS OR AT 4 MILE MAXIMUM
SPACING (4 BLOCKS IF URBAN AREA)

DETOUR SIGNING
FOR MAINLINE CLOSURES

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
May 2023 /S/ Andrew Heidtke
DATE WORK ZONE ENGINEER

FHWA

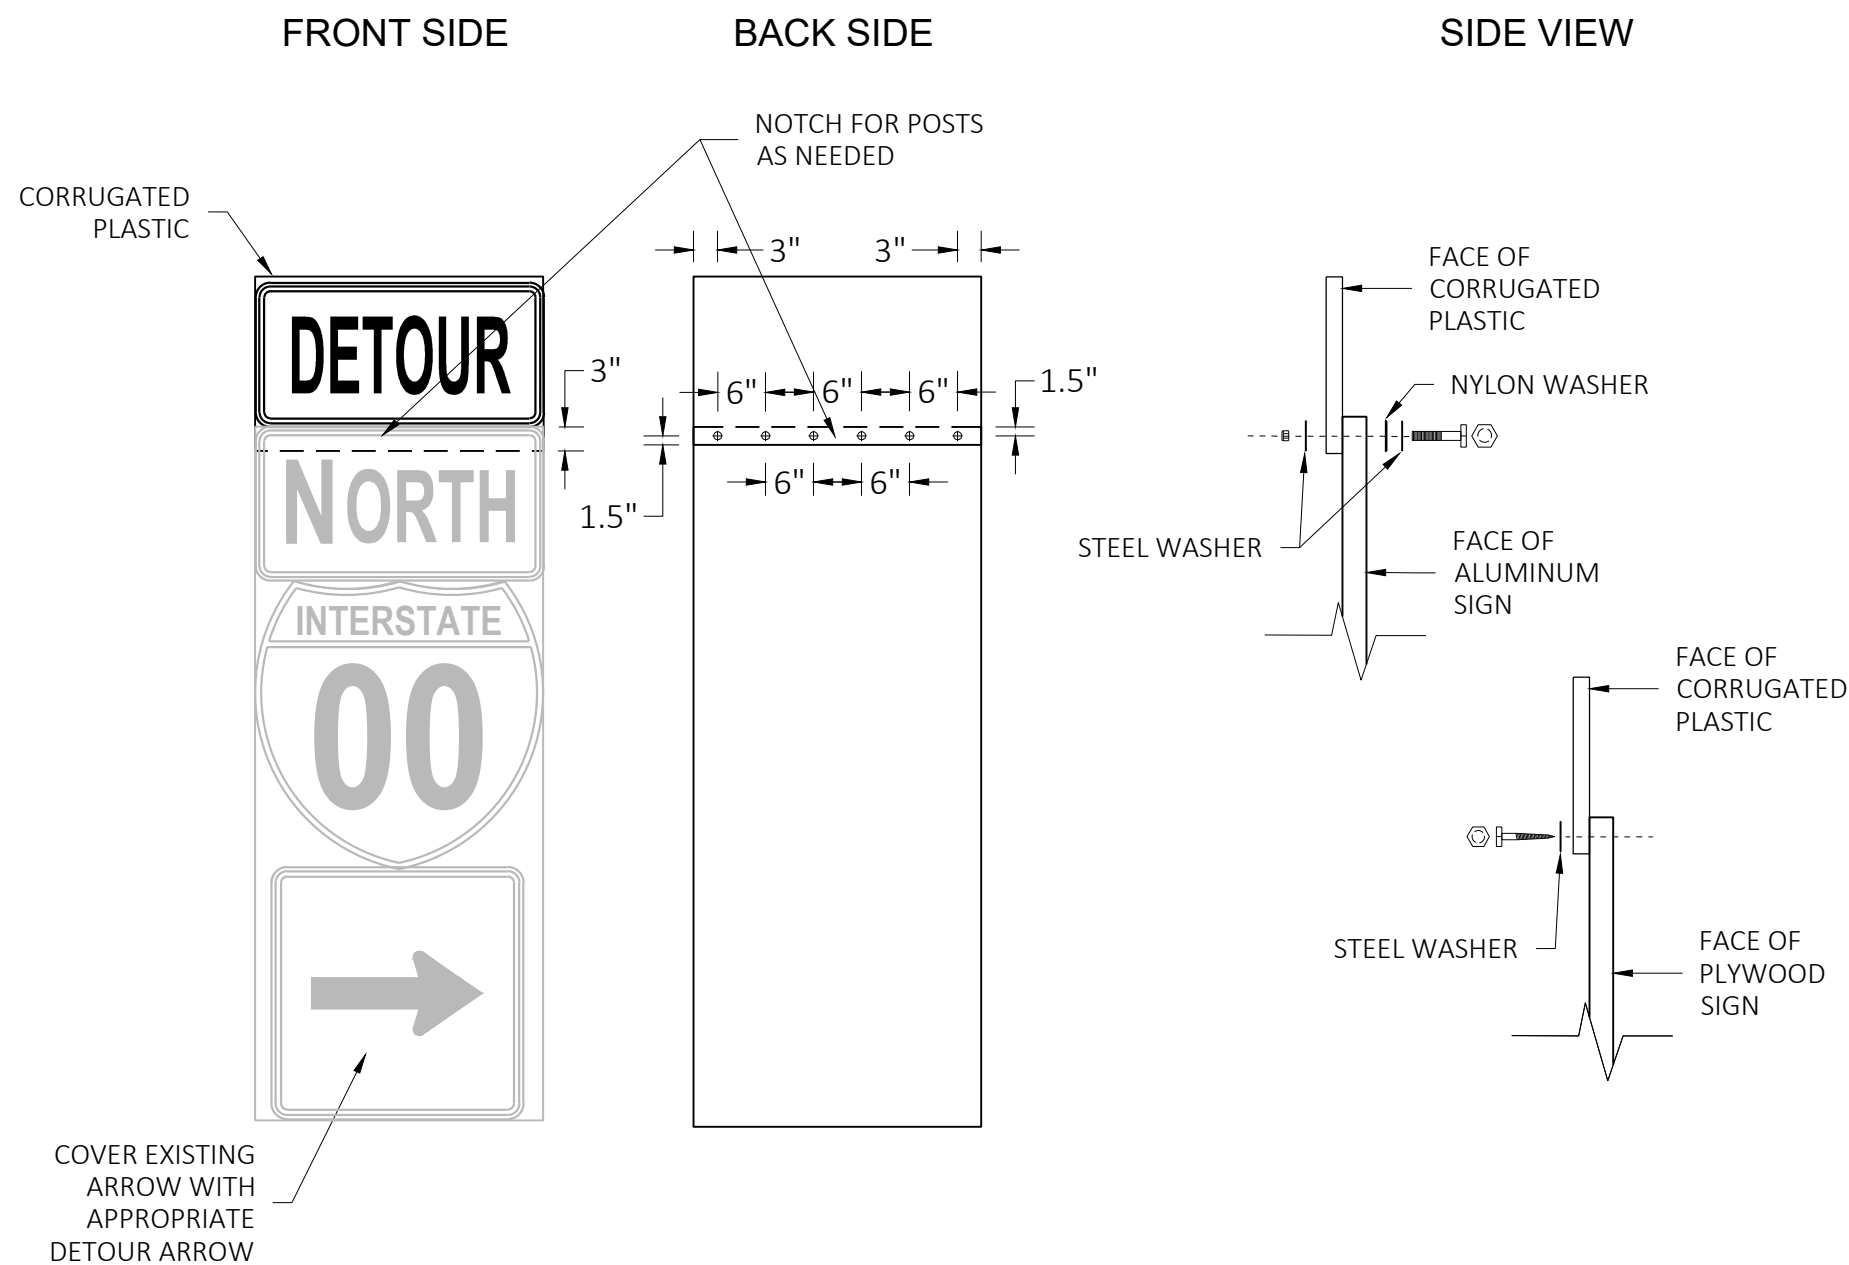

GENERAL NOTES

CELLS OF CORRUGATED PLASTIC SHALL BE VERTICALLY ORIENTED.

PROVIDE A 0.4-INCH THICK BASE CORRUGATED PLASTIC WITH A 0.035-INCH WALL THICKNESS AND 0.4-INCH CELL SIZE.

FOR 36" WIDE SIGNS: USE 6 FASTENERS AS SHOWN.

FOR 24" WIDE SIGNS: USE 4 FASTENERS WITH EDGE SPACING AS SHOWN AND 6" SPACING BETWEEN FASTENERS.

METAL WASHERS, NUTS, BOLTS AND LAGS SHALL HAVE HEXAGONAL HEADS AND SHALL BE EITHER:

- A. HOT DIP GALVANIZED IN ACCORDANCE WITH ASTM DESIGNATION: A 153, CLASS D, OR SC 3.
- B. ELECTRO-GALVANIZED IN ACCORDANCE WITH ASTM DESIGNATION: B 633, TYPE III, SC3

THREADS ON BOLTS AND NUTS SHALL BE MANUFACTURED WITH SUFFICIENT ALLOWANCE FOR THE CADMIUM PLATE OR GALVANIZED COATING TO PERMIT THE NUTS TO RUN FREELY ON THE BOLTS.

PLYWOOD SIGNS:

LAG SCREWS - 5/16" x 1"

ALUMINUM SIGNS:

MACHINE BOLTS - 5/16" x 1-1/4" LENGTH W/NUTS

WASHERS:

1-1/4" O.D. x 3/8" I.D. x 1/16" STEEL

1-1/4" O.D. x 3/8" I.D. x .080 NYLON

MODIFIED ROUTE ASSEMBLY FOR DETOUR SIGNING

MODIFIED ROUTE ASSEMBLY FOR DETOUR SIGNING

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED


May 2023

DATE


/S/ Andrew Heidtke

ROADWAY STANDARDS DEVELOPMENT
ENGINEER


FHWA

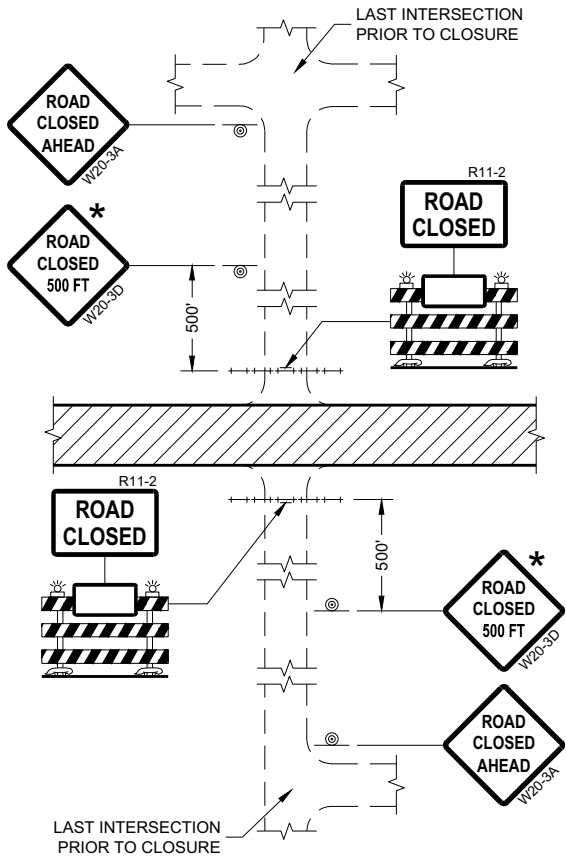


DETAIL 1
(NO ACCESS TO PROJECT)

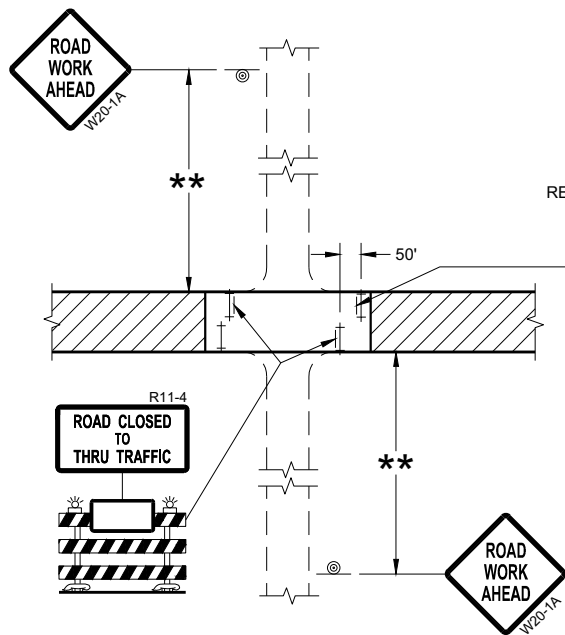

DETAIL 3
(PUBLIC CROSS-TRAFFIC MAINTAINED.
CONTRACTOR, LOCAL BUSINESS AND
RESIDENT ACCESS TO PROJECT)

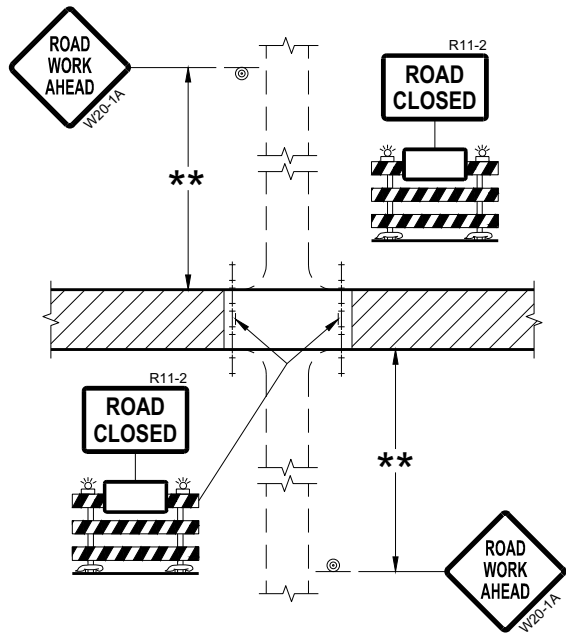

DETAIL 2
(PUBLIC CROSS-TRAFFIC MAINTAINED.
NO ACCESS TO PROJECT)

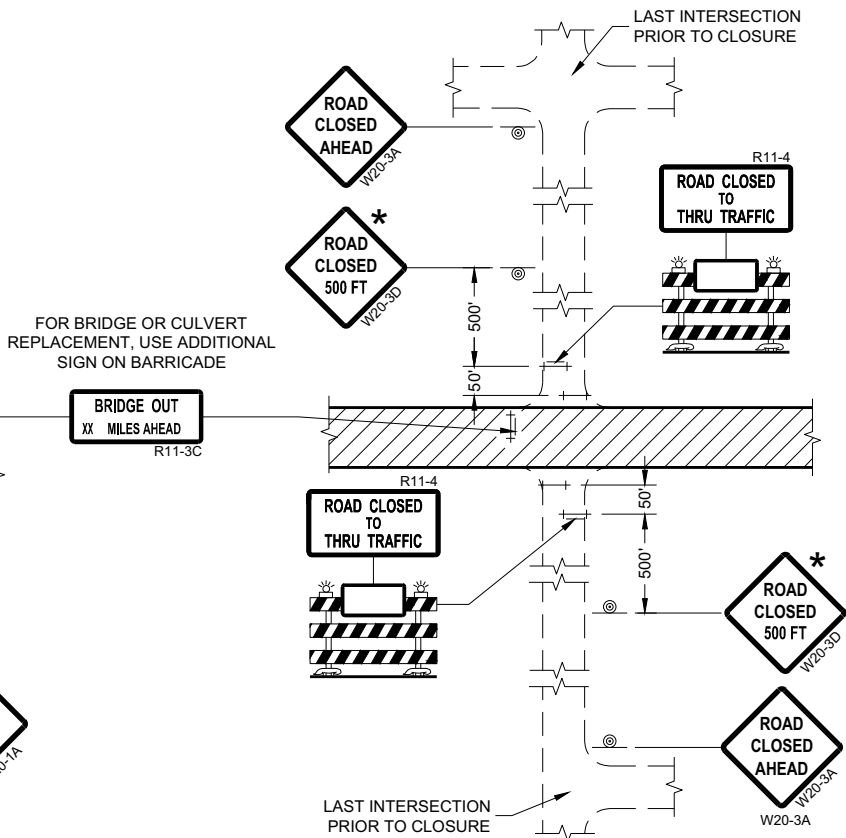

DETAIL 4
(CONTRACTOR, LOCAL BUSINESS AND
RESIDENT ACCESS TO PROJECT)

GENERAL NOTES

THE EXACT NUMBER, LOCATION, AND SPACING OF ALL SIGNS AND BARRICADES SHALL BE ADJUSTED TO FIT FIELD CONDITIONS AS APPROVED BY THE ENGINEER.

ANY SIGNS TEMPORARY OR EXISTING, WHICH CONFLICT WITH TRAFFIC CONTROL "IN USE" SHALL BE REMOVED OR COVERED AS NEEDED AND AS APPROVED BY THE ENGINEER.

THE SPACING BETWEEN TRAFFIC CONTROL SIGNS SHOULD BE ADJUSTED TO NOT CONFLICT WITH AND SHOULD PROVIDE A DESIRABLE MINIMUM OF 200 FEET CLEARANCE (500 FEET DESIRABLE) TO EXISTING SIGNS THAT WILL REMAIN IN PLACE.

IF A "STOP" SIGN MUST BE REMOVED FOR A WORK OPERATION, A TEMPORARY "STOP" SIGN SHALL BE PLACED PRIOR TO THE SIGN REMOVAL, OR A FLAGGER SHALL BE PROVIDED UNTIL THE SIGN IS REESTABLISHED.

BARRICADES THAT MUST BE MOVED FOR A WORK OPERATION SHALL BE IMMEDIATELY REESTABLISHED UPON COMPLETION OF THE OPERATION OR FOR CONTINUING OPERATIONS, AT THE END OF EACH WORKING DAY.

SIGNS THAT WILL BE IN PLACE LESS THAN SEVEN CONTINUOUS DAYS AND NIGHTS MAY BE MOUNTED ON PORTABLE SUPPORTS.

ALL TYPE III BARRICADES SHALL HAVE RAILS REFLECTORIZED ON BOTH FACES. STRIPES SHALL BE PROPERLY SLOPED DOWN TOWARD THE TRAFFIC SIDE OR AS SHOWN IN THE ROAD CLOSURE BARRICADE DETAIL "D" FOR FULL ROAD CLOSURES.

TYPE "A" LOW-INTENSITY FLASHING WARNING LIGHTS SHALL BE VISIBLE ON BOTH SIDES OF THE BARRICADE.

THE R11-2, R11-3, AND R11-4 SIGNS PLACED ON BARRICADES SHALL COVER NO MORE THAN THE TOP RAIL. THE SIGNS SHALL NOT COVER ANY PORTION OF THE MIDDLE OR BOTTOM RAILS.

ALL SIGNS SHALL BE 48" X 48" UNLESS OTHERWISE NOTED BELOW:
R11-2 SHALL BE 48" X 30".
R11-4 AND R11-3 SHALL BE 60" X 30".

- * OMIT THE "ROAD CLOSED 500 FT." SIGN IF THE LAST INTERSECTION IS 500 FEET OR LESS FROM THE WORK ZONE.
- ** 500' MAX. OR AT LAST INTERSECTION, WHICHEVER IS CLOSEST.

LEGEND

- SIGN ON PERMANENT SUPPORT
- TYPE III BARRICADE
- TYPE III BARRICADE WITH ATTACHED SIGN
- TYPE "A" WARNING LIGHT (FLASHING)
- WORK AREA

**BARRICADES AND SIGNS
FOR
SIDEROAD CLOSURES**

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
July 2018 /S/ Andrew Heidtke
DATE WORK ZONE ENGINEER

FHWA

GENERAL NOTES

THE EXACT NUMBER, LOCATION, AND SPACING OF ALL SIGNS AND DEVICES SHALL BE ADJUSTED TO FIT FIELD CONDITIONS.

THE SPACING BETWEEN TRAFFIC CONTROL SIGNS SHOULD BE ADJUSTED TO NOT CONFLICT WITH AND SHOULD PROVIDE A MINIMUM OF 200 FEET (500 FEET DESIRABLE) CLEARANCE TO EXISTING SIGNS THAT WILL REMAIN IN PLACE.

ALL SIGNS ARE 48" X 48" UNLESS OTHERWISE NOTED.


SIGNS THAT WILL BE IN PLACE LESS THAN SEVEN CONTINUOUS DAYS AND NIGHTS MAY BE MOUNTED ON PORTABLE SUPPORTS.

IF A "STOP" SIGN MUST BE REMOVED FOR A WORK OPERATION, A TEMPORARY "STOP" SIGN SHALL BE PLACED PRIOR TO THE SIGN REMOVAL, OR A FLAGGER SHALL BE PROVIDED UNTIL THE SIGN IS REESTABLISHED.


- * OMIT G20-1 SIGNS IF LENGTH OF WORK AREA IS 2 MILES OR LESS
- ** PLACE AN ADDITIONAL W20-1A "ROAD WORK AHEAD" SIGN IF WORK AREA WITHIN THE PROJECT IS SEPARATED BY MORE THAN 2 MILES FROM PREVIOUS WORK AREA.

LEGEND

-  SIGN ON PERMANENT SUPPORT
-  DIRECTION OF TRAFFIC
-  WORK AREA

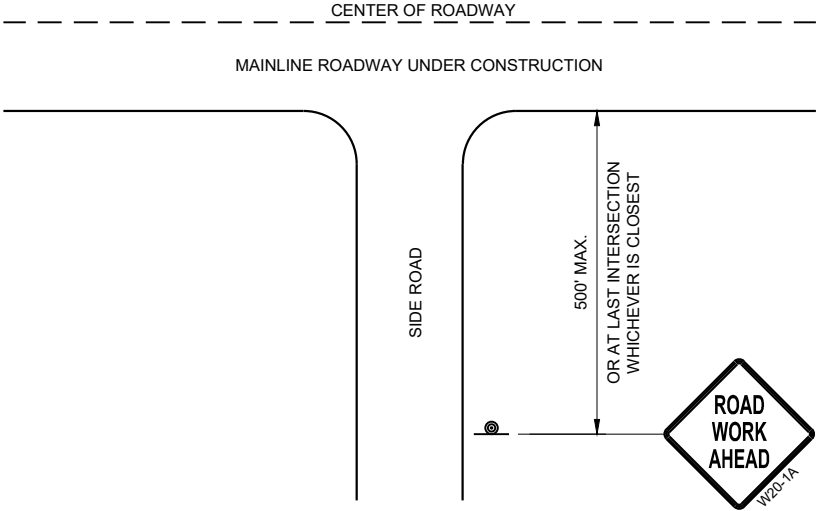

TYPICAL SIDE ROAD APPROACH
WARNING SIGN DETAIL

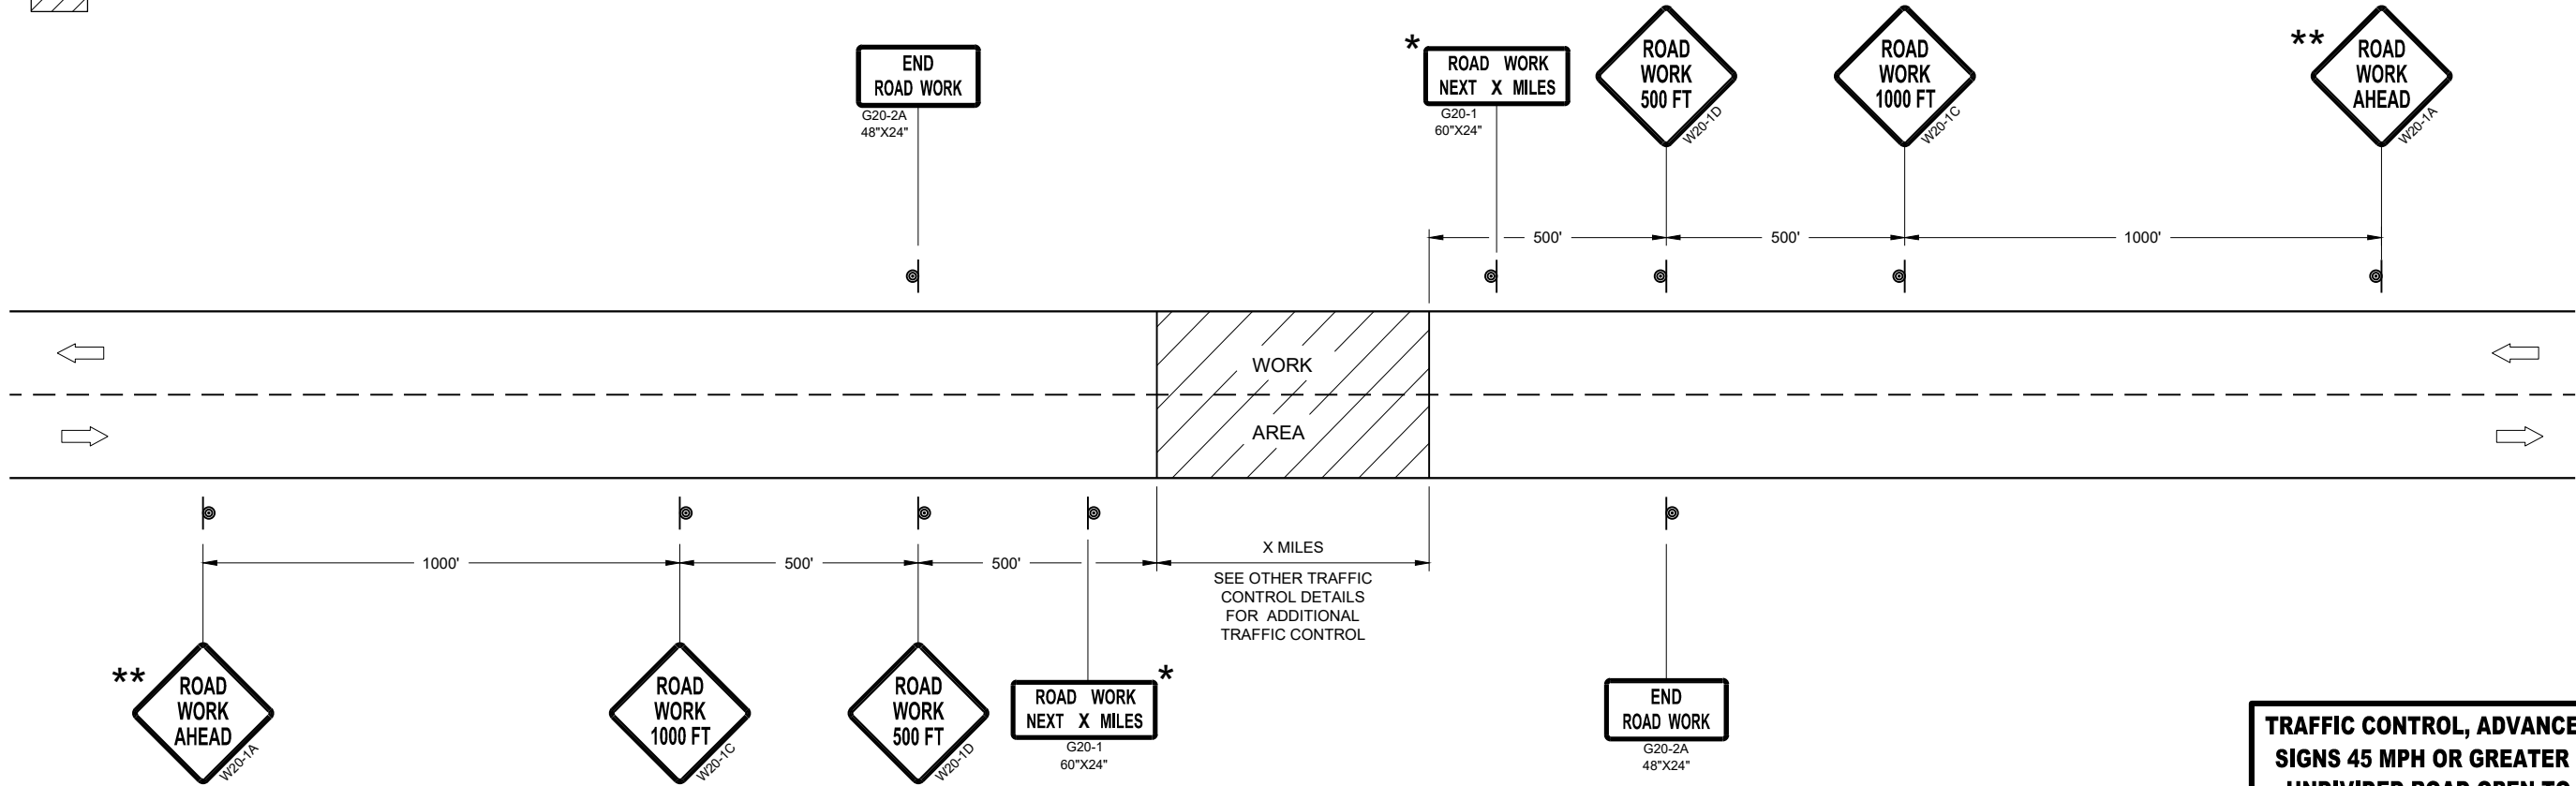


TRAFFIC CONTROL, ADVANCE WARNING SIGNS 45MPH OR GREATER


TRAFFIC CONTROL, ADVANCE WARNING
SIGNS 45 MPH OR GREATER TWO-WAY
UNDIVIDED ROAD OPEN TO TRAFFIC

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
July 2018 /S/ Andrew Heidtke
DATE WORK ZONE ENGINEER
FHWA

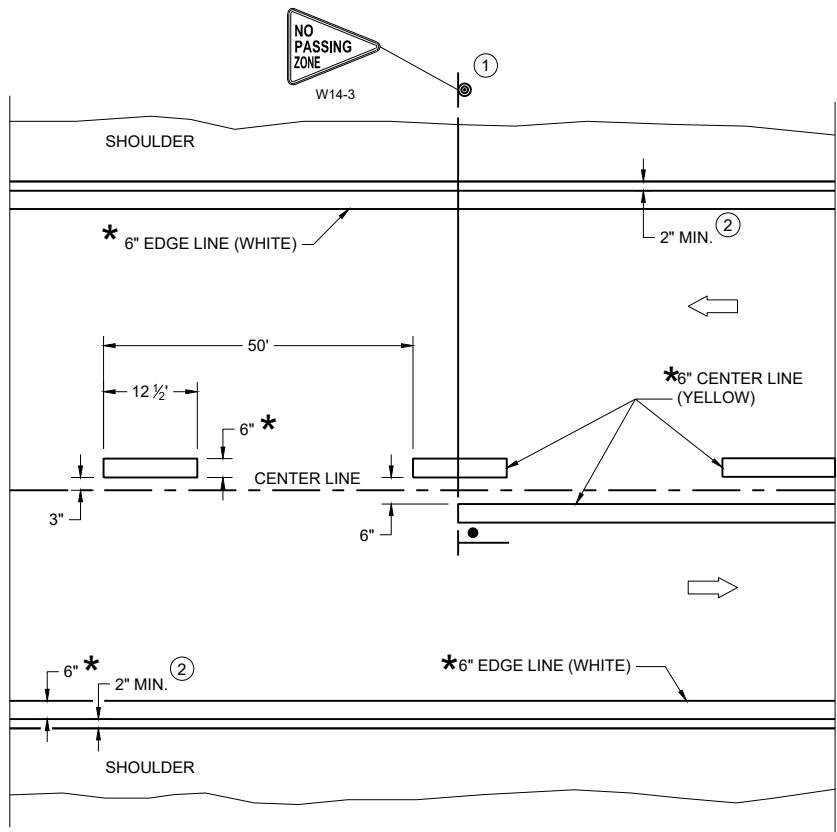

TWO WAY TRAFFIC

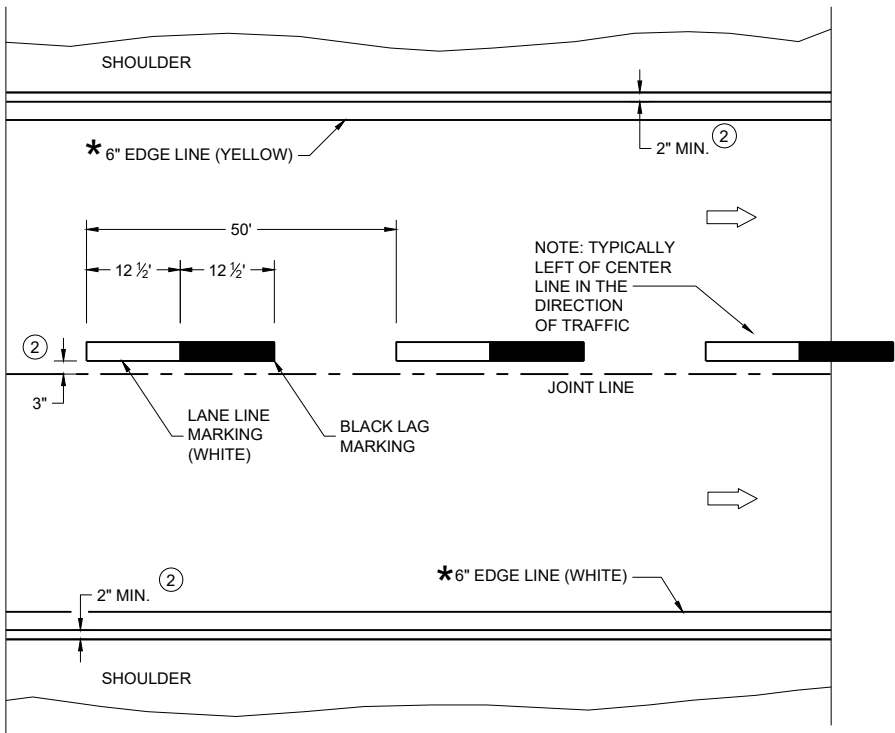

ONE WAY TRAFFIC

PERMANENT PAVEMENT MARKING

* CONFIRM MARKING LINE WIDTH WITH THE MISCELLANEOUS QUANTITIES

GENERAL NOTES

DETAILS OF CONSTRUCTION NOT SHOWN ON THIS DRAWING SHALL CONFORM TO STANDARD SPECIFICATIONS AND SPECIAL PROVISIONS.


- ① LOCATE THE NO PASSING ZONE W14-3 SIGN WITHIN 50 FEET OF THE "T" MARKING
- ② MEASURE FROM EDGE OF MARKING TO JOINT LINE. THIS DOES NOT INCLUDE SPACE NEEDED FOR GROOVING OPERATIONS.

LEGEND

- "T" MARKING
- SIGN ON PERMANENT SUPPORT
- DIRECTION OF TRAFFIC

PERMANENT LONGITUDINAL PAVEMENT MARKINGS	
STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION	
APPROVED May 2023 DATE	/S/ Jeannie Silver Statewide Pavement Marking Engineer

FHWA

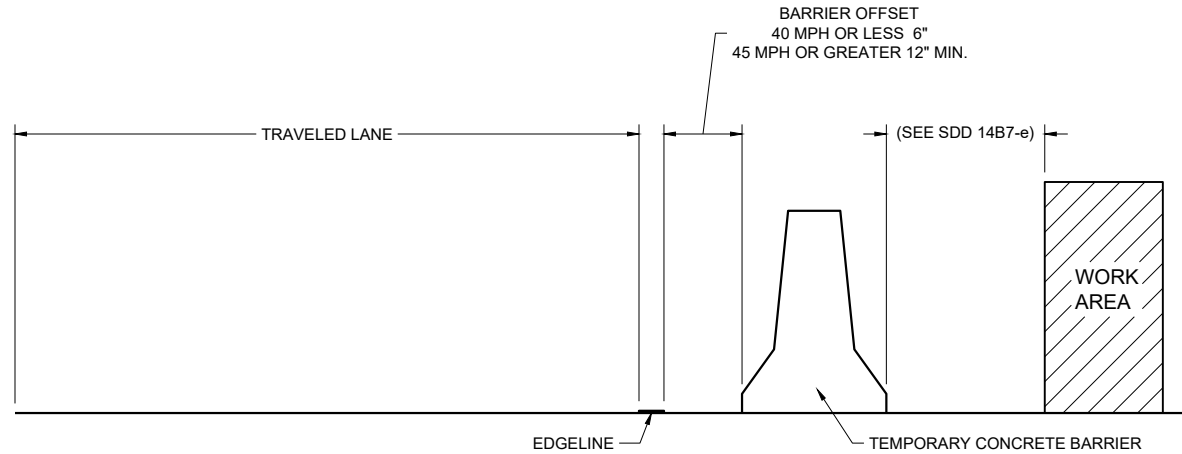

TEMPORARY BARRIER OFFSET FROM EDGE LINE


GENERAL NOTES

DETAILS OF CONSTRUCTION NOT SHOWN ON THIS DRAWING SHALL CONFORM TO STANDARD SPECIFICATIONS AND SPECIAL PROVISIONS.


LEGEND

DIRECTION OF TRAFFIC


* CONFIRM MARKING LINE WIDTH WITH THE MISCELLANEOUS QUANTITIES

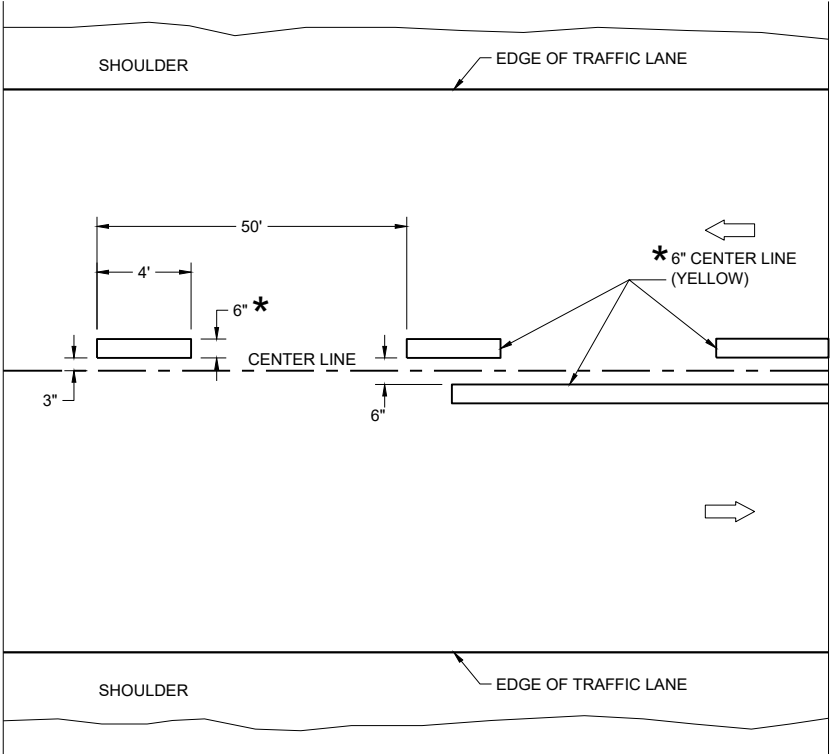

TWO WAY TRAFFIC

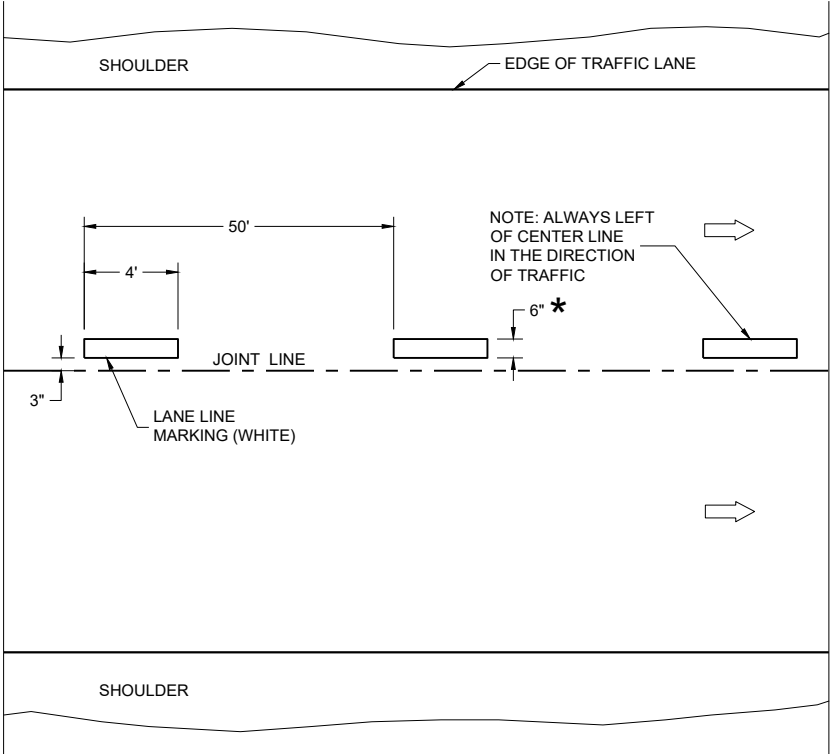


ONE WAY TRAFFIC

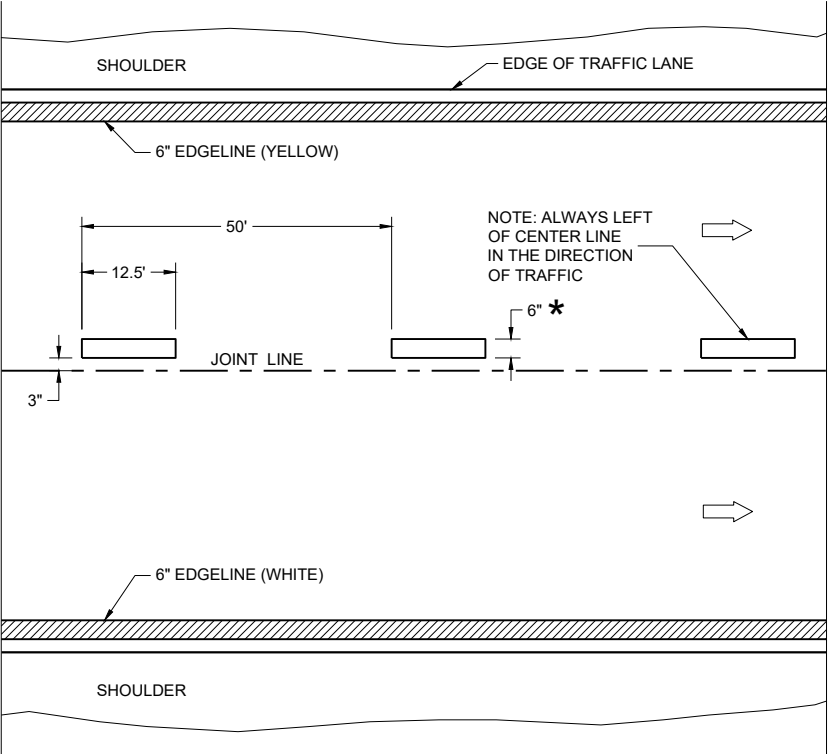

FREEWAYS AND EXPRESSWAYS


TEMPORARY PAVEMENT MARKING

TEMPORARY LONGITUDINAL PAVEMENT MARKING	
STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION	
APPROVED May 2023 DATE	/S/ Jeannie Silver Statewide Pavement Marking Engineer
FHWA	

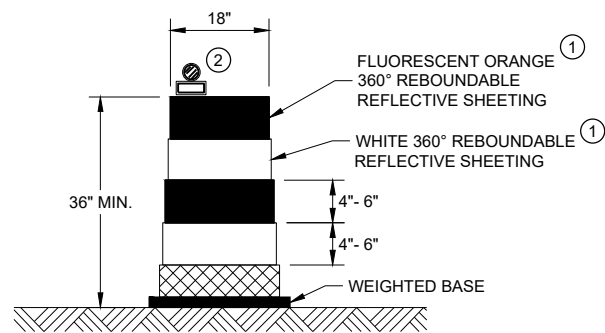


DRUM

BALLAST WIDTHS
RANGE FROM 24"-36"

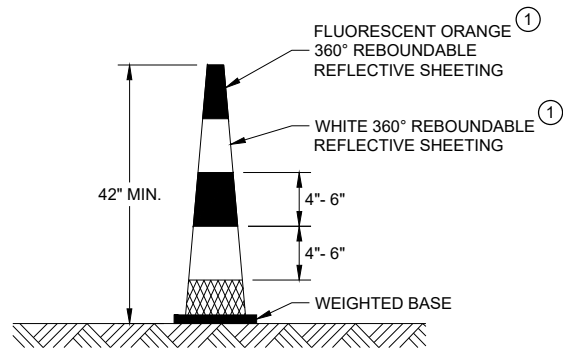


42" CONE

DO NOT USE IN TAPERS
½ SPACING OF DRUMS
BALLAST WIDTHS
RANGE FROM 14"-20"

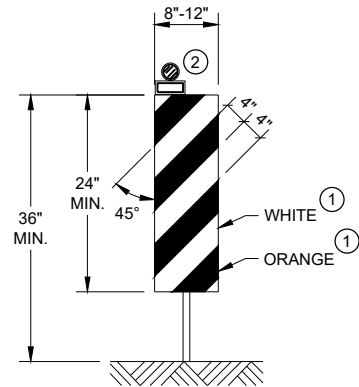


VERTICAL PANEL

THE STRIPES SHALL SLOPE DOWNWARD TO
THE TRAFFIC SIDE FOR CHANNELIZATION.

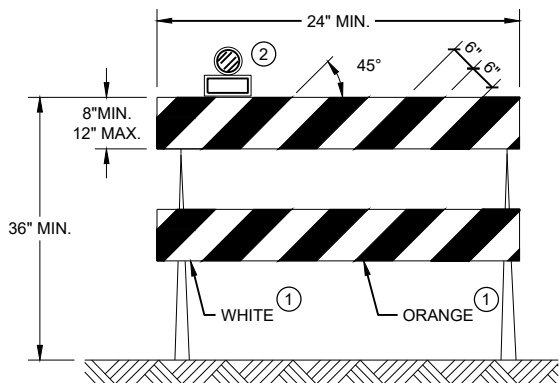

TYPE II BARRICADE

FOR RAILS LESS THAN 36" LONG, 4" WIDE STRIPES
MAY BE USED. ALL STRIPES SHALL SLOPE DOWNWARD
TO THE TRAFFIC SIDE FOR CHANNELIZATION.

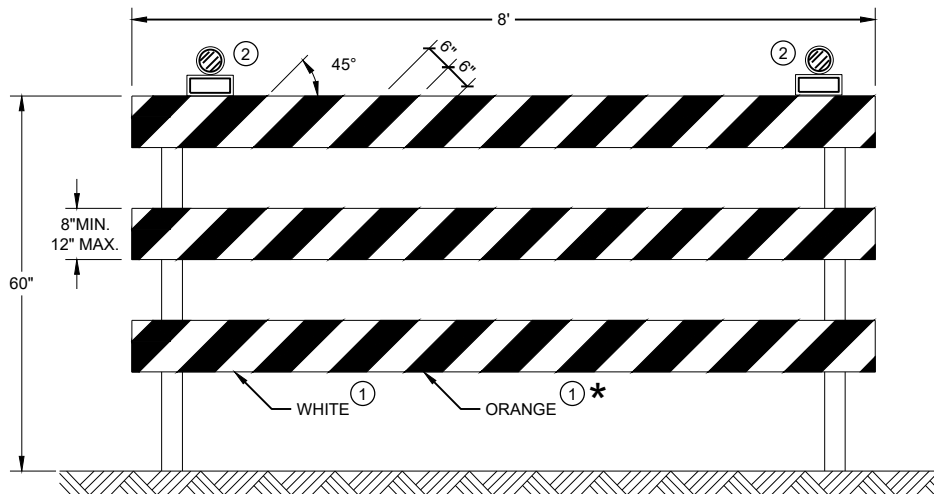

TYPE III BARRICADE

IF SIGN MOUNTED, DO NOT COVER MORE THAN 50% OF THE TOP
TWO RAILS OR 33% OF THE TOTAL AREA OF THE THREE RAILS.

* IF USED FOR A PERMANENT APPLICATION USE RED SHEETING.

GENERAL NOTES

- ① REFLECTIVE SHEETING SHALL FOLLOW THE REQUIREMENTS IN THE APPROVED PRODUCTS LISTING FOR SIGN SHEETING.
- ② LOCATION OF WARNING LIGHTS WHEN SHOWN ON THE PLAN.

**CHANNELIZING DEVICES
DRUMS, CONES, BARRICADES
AND VERTICAL PANELS**

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
November 2022 /S/ Andrew Heidtke
DATE WORK ZONE ENGINEER

FHWA

LEGEND

-  SIGN ON PORTABLE OR PERMANENT SUPPORT
-  TEMPORARY PORTABLE RUMBLE STRIP ARRAY
-  DIRECTION OF TRAFFIC
-  WORK AREA
-  FLAGGER, EQUIPPED WITH STOP/SLOW PADDLE FASTENED ON SUPPORT STAFF

GENERAL NOTES

DETAILS OF TRAFFIC CONTROL DEVICES AND INSTALLATION NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE STANDARD SPECIFICATIONS, THE SPECIAL PROVISIONS, AND THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES.

ALL SIGNS ARE 48" X 48" UNLESS OTHERWISE NOTED.

"WO" SIGNS ARE THE SAME AS "W" SIGNS EXCEPT THE BACKGROUND IS ORANGE.

THE EXACT NUMBER, LOCATION AND SPACING OF ALL SIGNS, DEVICES, AND LOCATION OF ALL FLAGGERS SHALL BE ADJUSTED TO FIT FIELD CONDITIONS AS APPROVED BY THE ENGINEER.

THE FIRST ADVANCE WARNING SIGN SHOULD TYPICALLY BE LOCATED IN ADVANCE OF THE ANTICIPATED TRAFFIC BACKUP OR QUEUE.

WHEN A SIDE ROAD OR RAMP INTERSECTS THE FACILITY ON WHICH THE WORK IS BEING PERFORMED, ADDITIONAL TRAFFIC CONTROLS SHALL BE PROVIDED AS SPECIFIED IN THE PLANS AND/OR THE SPECIAL PROVISIONS OR AS APPROVED BY THE ENGINEER.

FLAGGING


FLAGGERS SHALL BE IN SIGHT OF EACH OTHER OR IN DIRECT COMMUNICATION AT ALL TIMES. THEY SHALL BE EQUIPPED WITH STOP/SLOW PADDLES FASTENED ON SUPPORT STAFFS. WHEN THE FLAGGING OPERATION IS NOT IN EFFECT REMOVE TEMPORARY PORTABLE RUMBLE STRIPS PRIOR TO COVERING OR REMOVING ALL ADVANCE SIGNING.

- ① FOR MOVING WORK OPERATIONS, POST ADDITIONAL W20-7A FLAGGER SIGNS AT APPROXIMATELY 3,500' INTERVALS IN THE MOVING WORK OPERATION OR AS APPROVED BY THE ENGINEER.
- ② SIGN NOT REQUIRED IF FLAGGING OPERATION OCCURS WITHIN A SIGNED ROAD WORK ZONE AREA.

WHEN THE DISTANCE BETWEEN FLAGGERS EXCEEDS 2 MILES, A PILOT CAR IS REQUIRED. WHEN CURVES REDUCE SIGHT DISTANCE BELOW 400', A PILOT CAR IS REQUIRED.

TEMPORARY PORTABLE RUMBLE STRIPS

- UTILIZE TEMPORARY PORTABLE RUMBLE STRIPS ON ALL FLAGGING OPERATIONS.
- ③ EACH TEMPORARY PORTABLE RUMBLE STRIP ARRAY CONSISTS OF THREE RUMBLE STRIPS PLACED TRANSVERSE ACROSS THE LANE AT THE LOCATIONS SHOWN. WITHIN EACH ARRAY, SPACING BETWEEN RUMBLE STRIPS SHALL BE 15 FEET ON CENTER
- ONLY USE TEMPORARY PORTABLE RUMBLE STRIPS FROM THE APPROVED PRODUCTS LIST.
- INSTALL TEMPORARY RUMBLE STRIPS PER MANUFACTURER'S RECOMMENDATIONS.
- PLACE ADVANCE SIGNING PRIOR TO INSTALLING TEMPORARY RUMBLE STRIPS.
- DO NOT INSTALL TEMPORARY PORTABLE RUMBLE STRIPS ON GRAVEL, MILLED SURFACES, OR ASPHALT THAT HAS BEEN PAVED LESS THAN 12 HOURS.

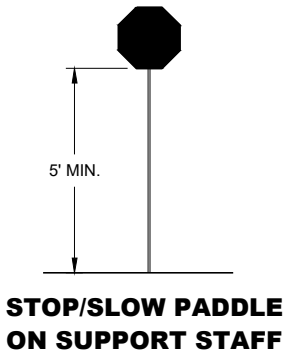


SIGN AND TEMPORARY RUMBLE STRIP ARRAY SPACING TABLE

SPEED LIMIT	SPACING "A"
25-30 MPH	200'
35-40 MPH	350'
45-55 MPH	500'



USE OF W03-4 SIGN IS OPTIONAL. WHEN USED, THIS SIGN SHALL BE LOCATED BETWEEN THE W20-7A AND W20-4A SIGNS, USING SPACING "A".

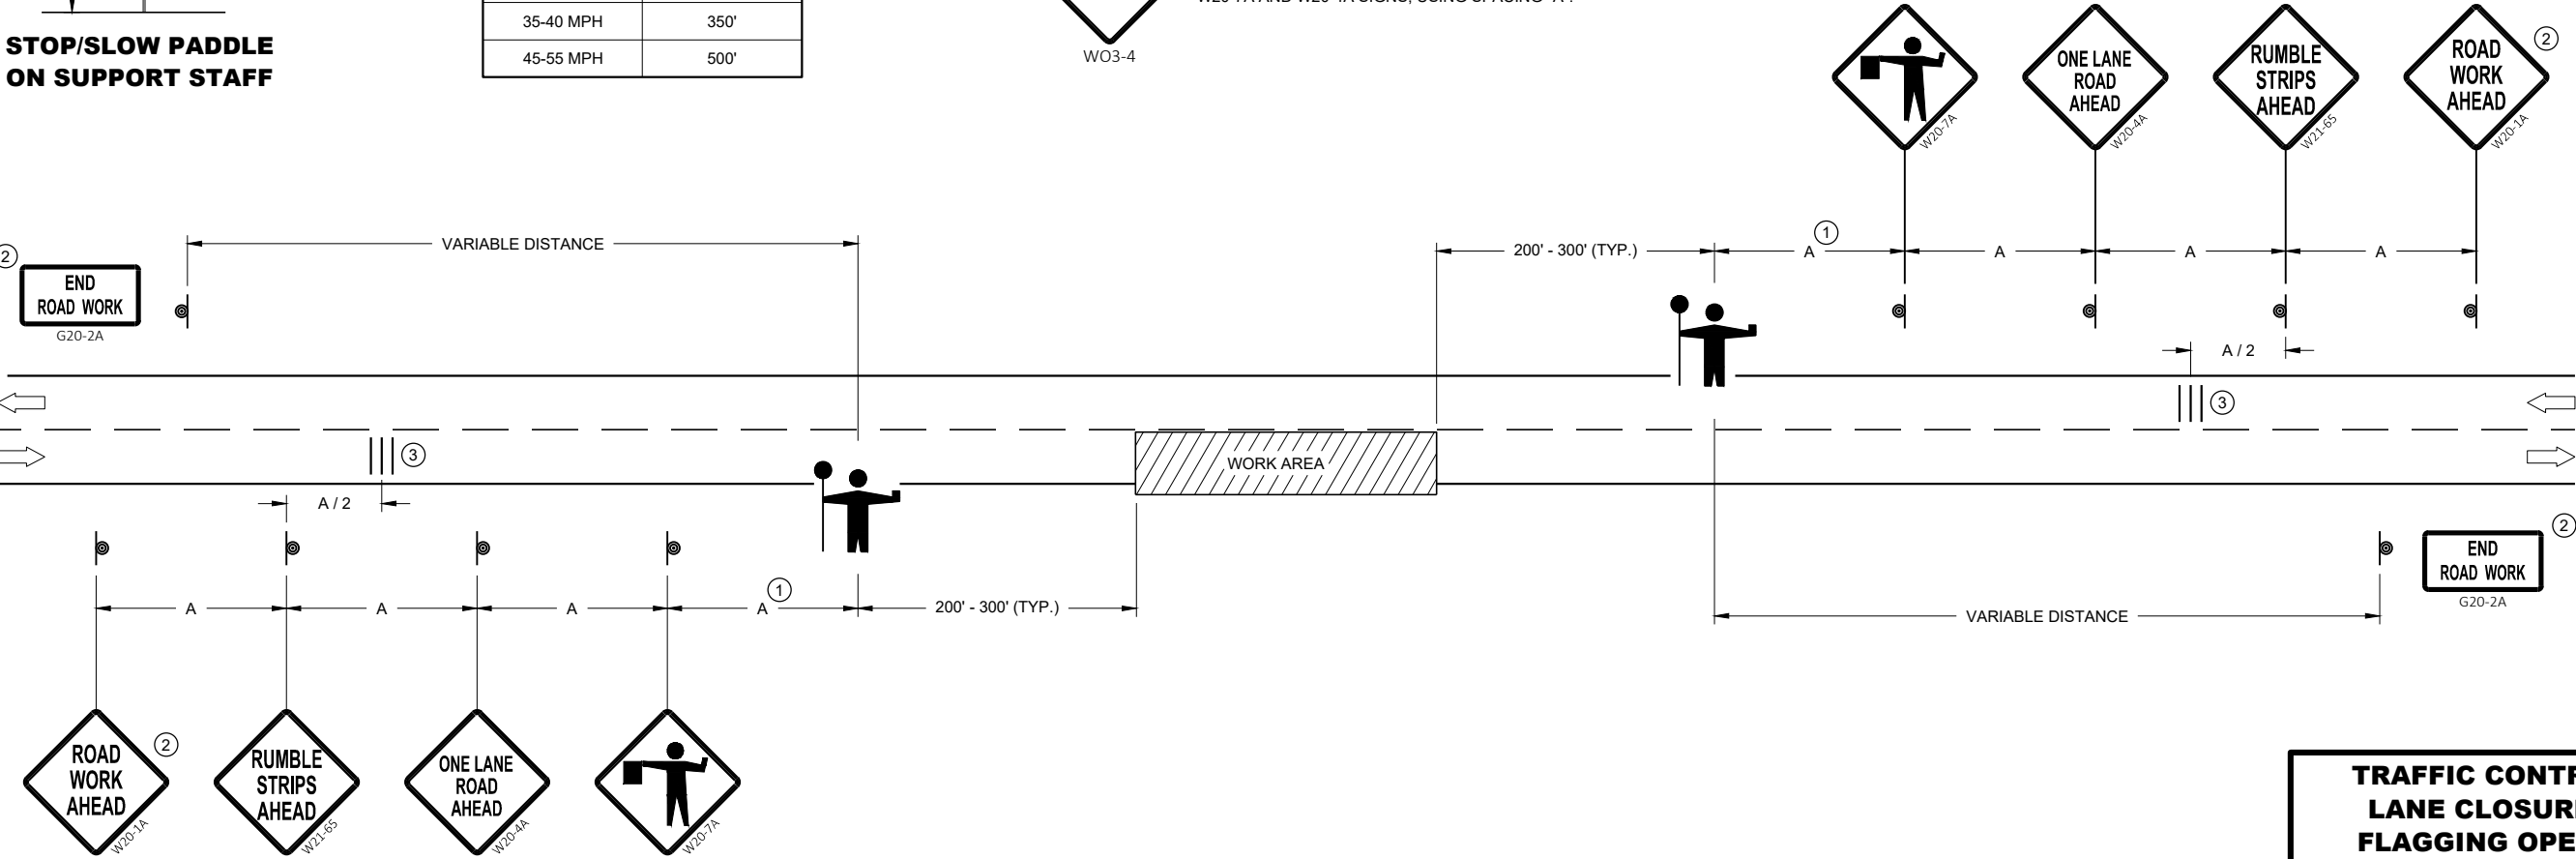

TRAFFIC CONTROL FOR LANE CLOSURE WITH FLAGGING OPERATION	
STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION	
APPROVED May 2022 DATE	/S/ Andrew Heidtke WORK ZONE ENGINEER
FHWA	

V1	LEAD VEHICLE
V2	MARKING VEHICLE
V3	SHADOW VEHICLE



➡ DIRECTION OF TRAFFIC

ALL VEHICLES SHALL BE EQUIPPED WITH TWO 360 DEGREE HIGH INTENSITY YELLOW FLASHING LIGHTS OR STROBE LIGHTS AND OPERATED WITH HEADLIGHTS TURNED ON.

ALL VEHICLES SHALL BE EQUIPPED WITH REAR FACING TYPE B OR C FLASHING ARROW PANEL OPERATING IN CAUTION MODE. SIGNS PLACED ON VEHICLES MUST NOT OBSCURE THE ARROW PANEL.

ALL SIGNS ARE 48" X 48" UNLESS OTHERWISE SPECIFIED.

DISTANCE BETWEEN VEHICLES MAY VARY ACCORDING TO TERRAIN, SIGHT DISTANCE, PAINT DRYING TIME, AND OTHER FACTORS. WHENEVER ADEQUATE STOPPING SIGHT DISTANCE EXISTS TO THE REAR, SHADOW VEHICLES SHOULD MAINTAIN THE MINIMUM DISTANCE FROM THE WORK VEHICLE AND PROCEED AT THE SAME SPEED AS THE WORK VEHICLE. SHADOW VEHICLES SHOULD SLOW DOWN IN ADVANCE OF VERTICAL AND HORIZONTAL CURVES THAT RESTRICT SIGHT DISTANCE.

THE WORK AND SHADOW VEHICLES SHOULD PULL OVER PERIODICALLY TO ALLOW TRAFFIC TO PASS.


WHEN NO WORK ACTIVITY IS TAKING PLACE, REMOVE OR LAY STATIONARY SIGNS AND SUPPORTS FLAT ON THE GRADE WITH

UPRIGHTS ORIENTED PARALLEL TO AND DOWNSTREAM FROM TRAFFIC.

CONES SHOULD BE USED BETWEEN THE MARKING AND SHADOW VEHICLE AT 100 FOOT SPACING. CONES MAY BE OMITTED ON PAINTED LINE IF APPROVED BY THE ENGINEER. CONSIDER PAVEMENT MARKING DRY OR CURE TIMES AND TRAFFIC VOLUME.

CONES SHALL BE A MINIMUM OF 28" FOR WET PAVEMENT MARKING .

- ① SIGNS SHALL BE REPEATED APPROXIMATELY EVERY THREE MILES AND AFTER EVERY MAJOR INTERSECTION.
- ② IF CONSTRUCTION WORK ZONE SIGNS ARE IN PLACE, W20-1A OR W21-63 ARE NOT REQUIRED.
- ③ V1 AND V2 CAN BE SWITCHED SO THAT THE MARKER IS THE LEAD VEHICLE.

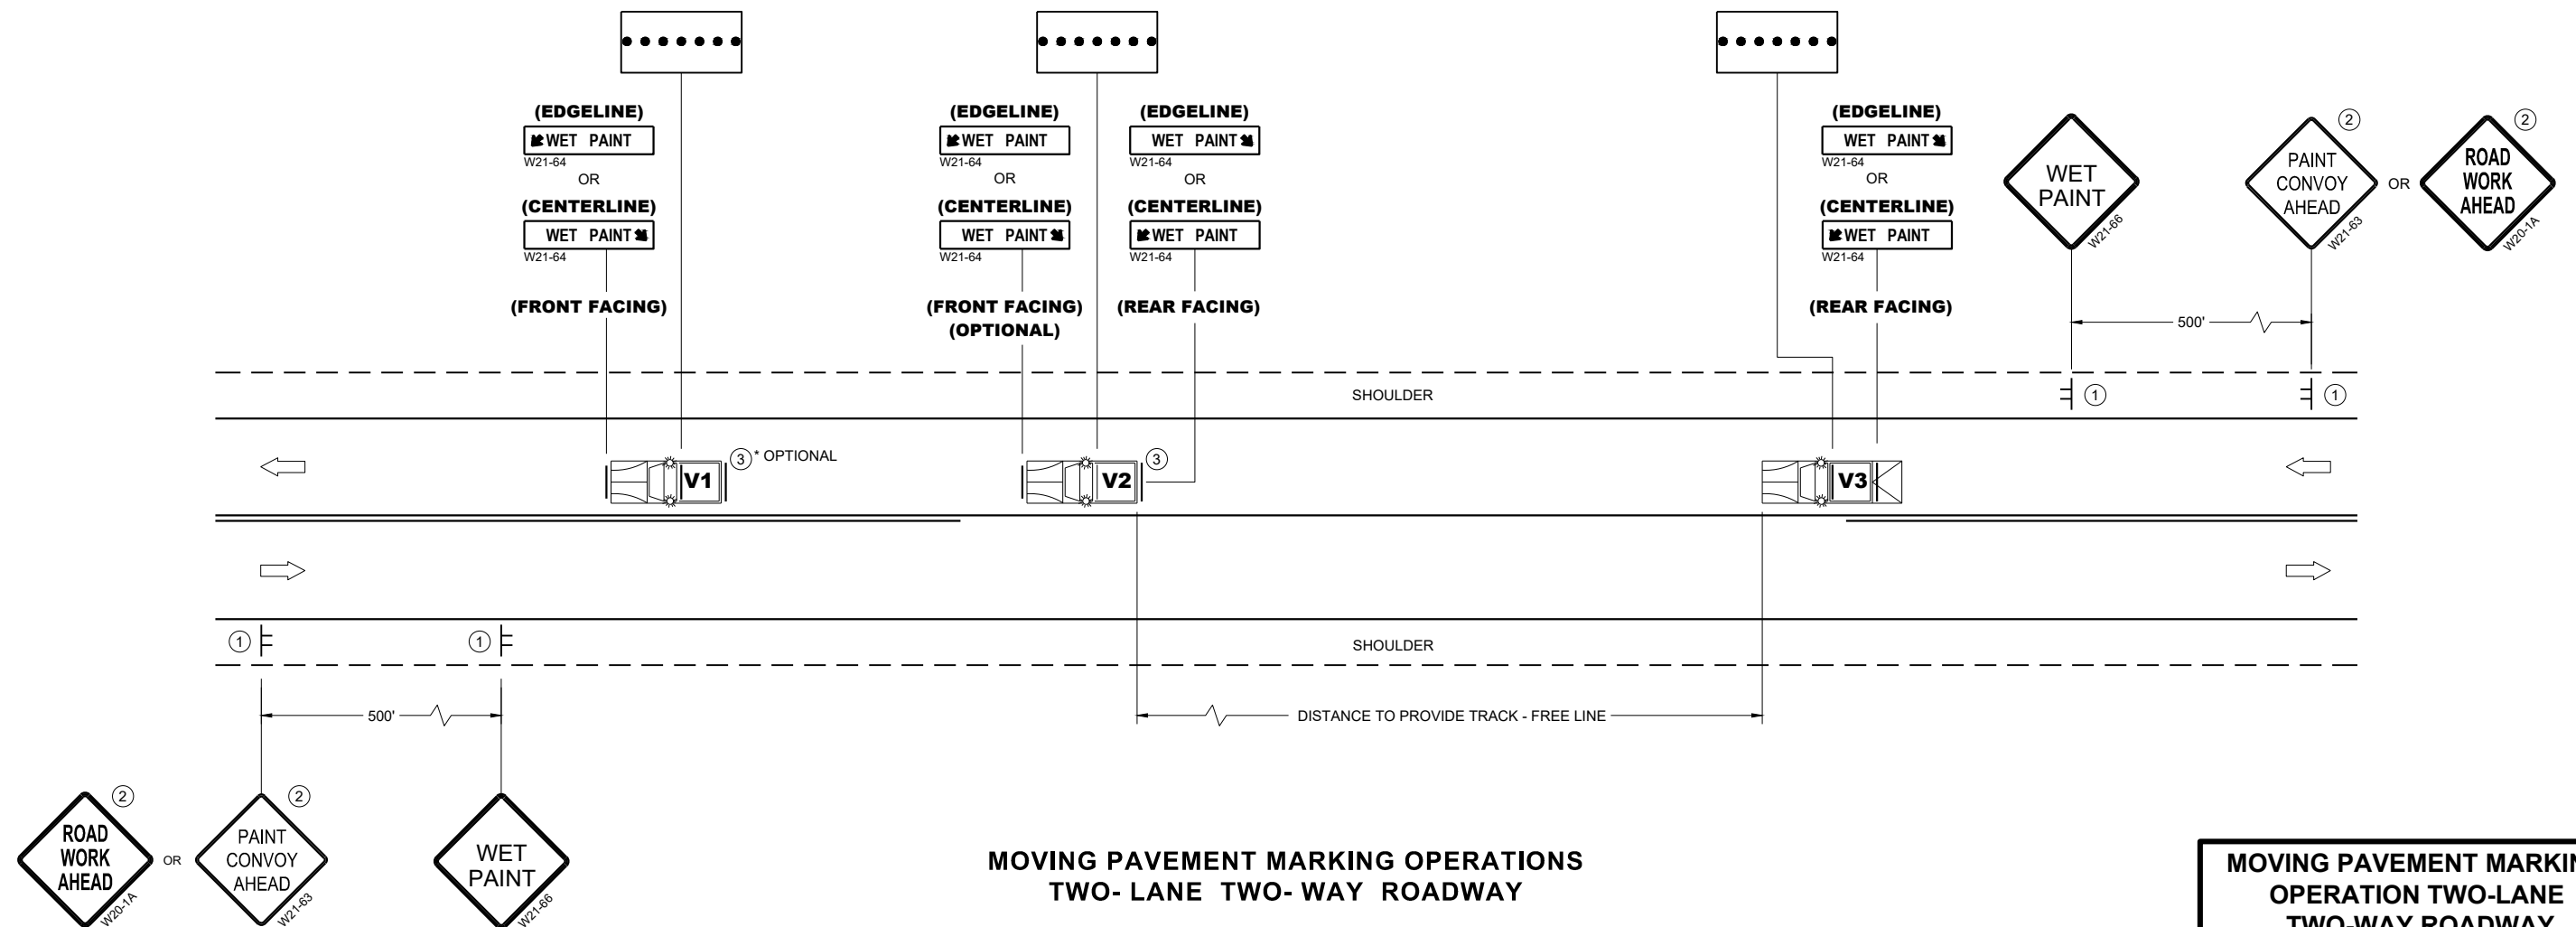


MOVING PAVEMENT MARKING OPERATION TWO-LANE TWO-WAY ROADWAY


STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
March 2024
DATE


/S/ Andrew Heidtke
WORK ZONE ENGINEER

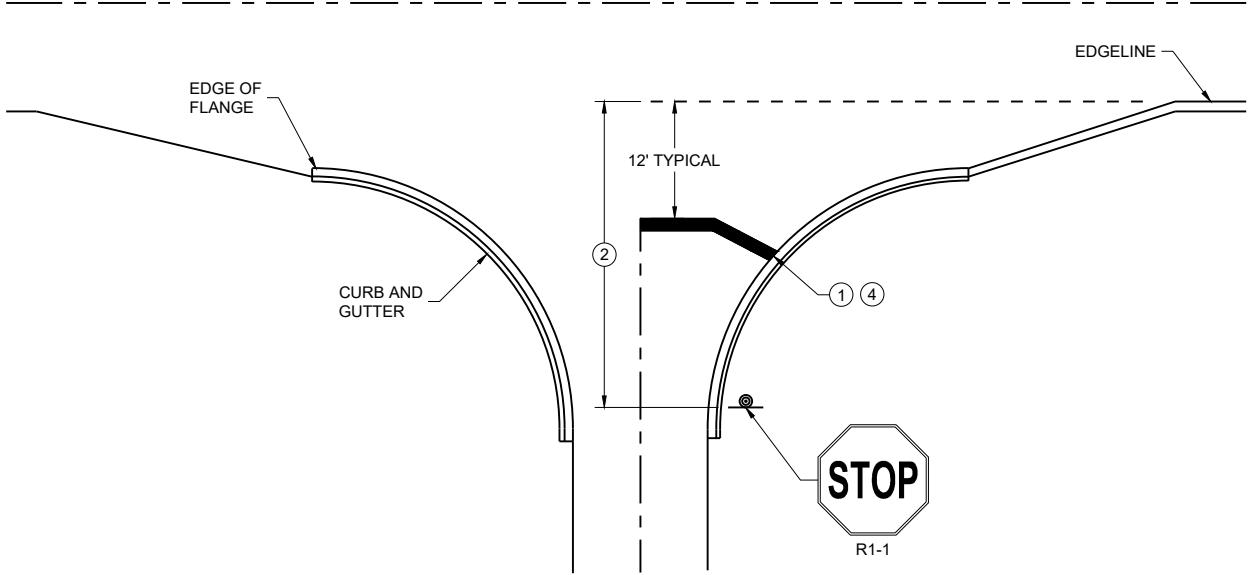


TYPICAL STOP LINE PAVEMENT MARKING WITH CURB AND GUTTER

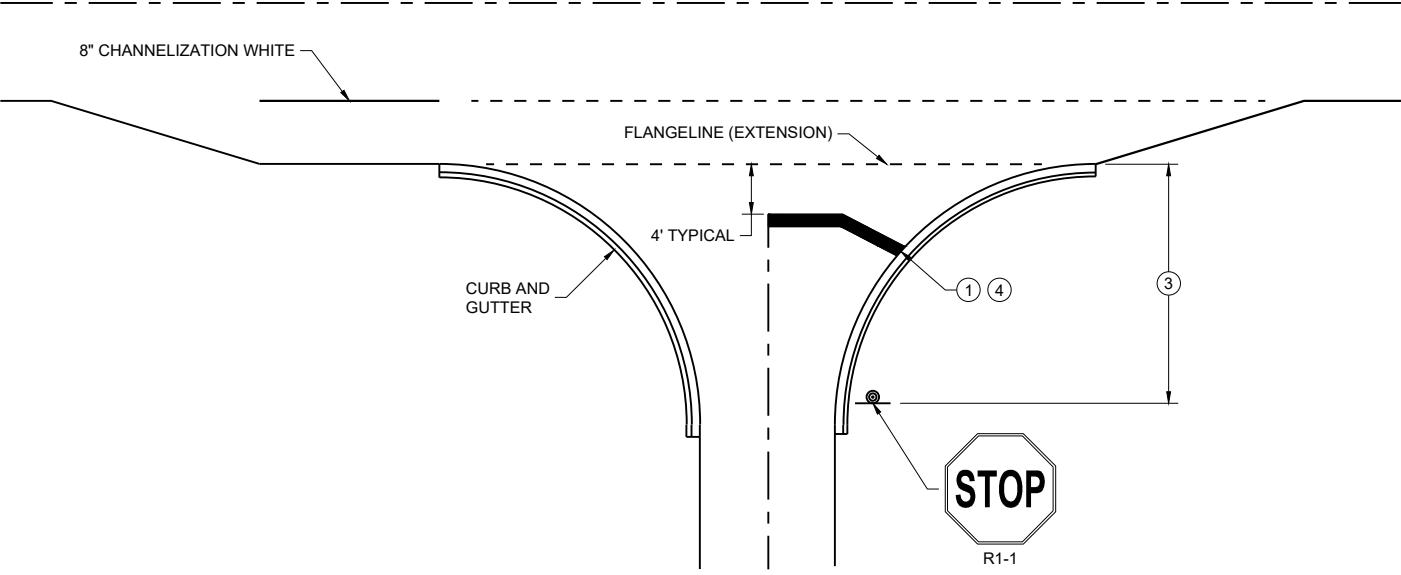

TYPICAL STOP LINE PAVEMENT MARKING FOR SIDE ROADS WITH RIGHT TURN LANE

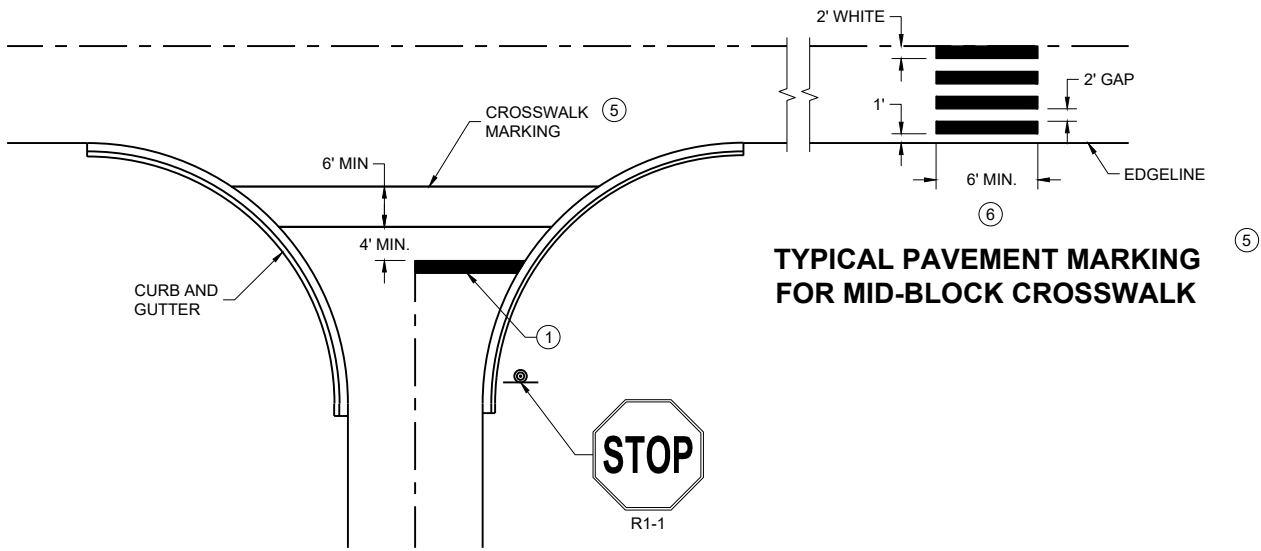

TYPICAL STOP LINE PAVEMENT MARKING FOR SIDE ROADS WITH CROSSWALK MARKING

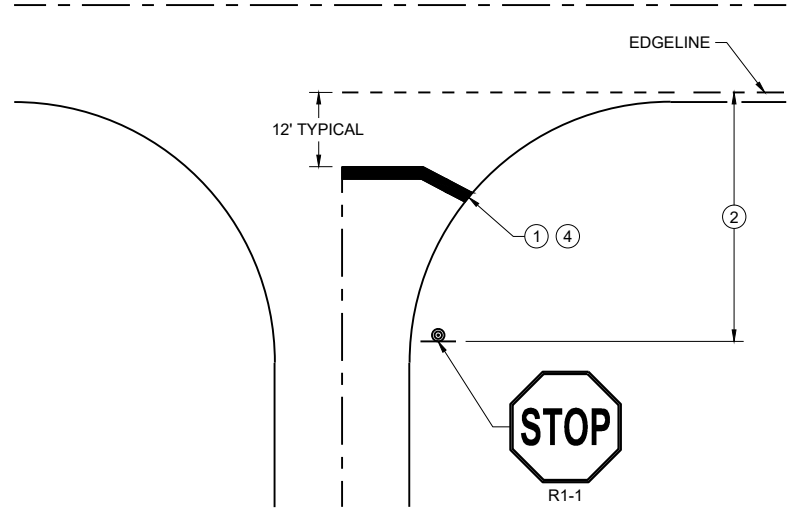

TYPICAL STOP LINE PAVEMENT MARKING WITHOUT CURB AND GUTTER

GENERAL NOTES


STOP SIGN SHALL BE PLACED A MINIMUM OF 6 FEET TO A MAXIMUM OF 50 FEET FROM THE EDGELINE LOCATION.

- 1 18-INCH STOP LINES MAY BE DELETED OR ADDED BY THE REGION MARKING ENGINEER BASED ON VISIBILITY AND SIGHT LINES.
- 2 NO STOP LINE IS REQUIRED IF STOP SIGN IS LESS THAN OR EQUAL TO 40 FEET FROM THE EDGELINE.
- 3 NO STOP LINE IS REQUIRED IF STOP SIGN IS LESS THAN OR EQUAL TO 30 FEET FROM THE FLANGE LINE EXTENSION.
- 4 MOVE CLOSER TO THE EDGE OF TRAVEL LINE AS NEEDED FOR VISIBILITY AND SIGHT LINES (NO CLOSER THAN 4 FEET).
- 5 LADDER BAR CROSSWALKS SHOULD ONLY BE USED FOR MID BLOCK CROSSINGS. USE 2 - 6" TRANSVERSE LINES.
- 6 POSTED SPEED LIMITS OF 40 MPH OR GREATER USE A MINIMUM WIDTH OF 8' FOR MIDBLOCK CROSSWALKS


STOP LINE AND CROSSWALK PAVEMENT MARKING

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
March 2024 /S/ Matthew Rauch
DATE STATE SIGNING AND MARKING
ENGINEER
FHWA

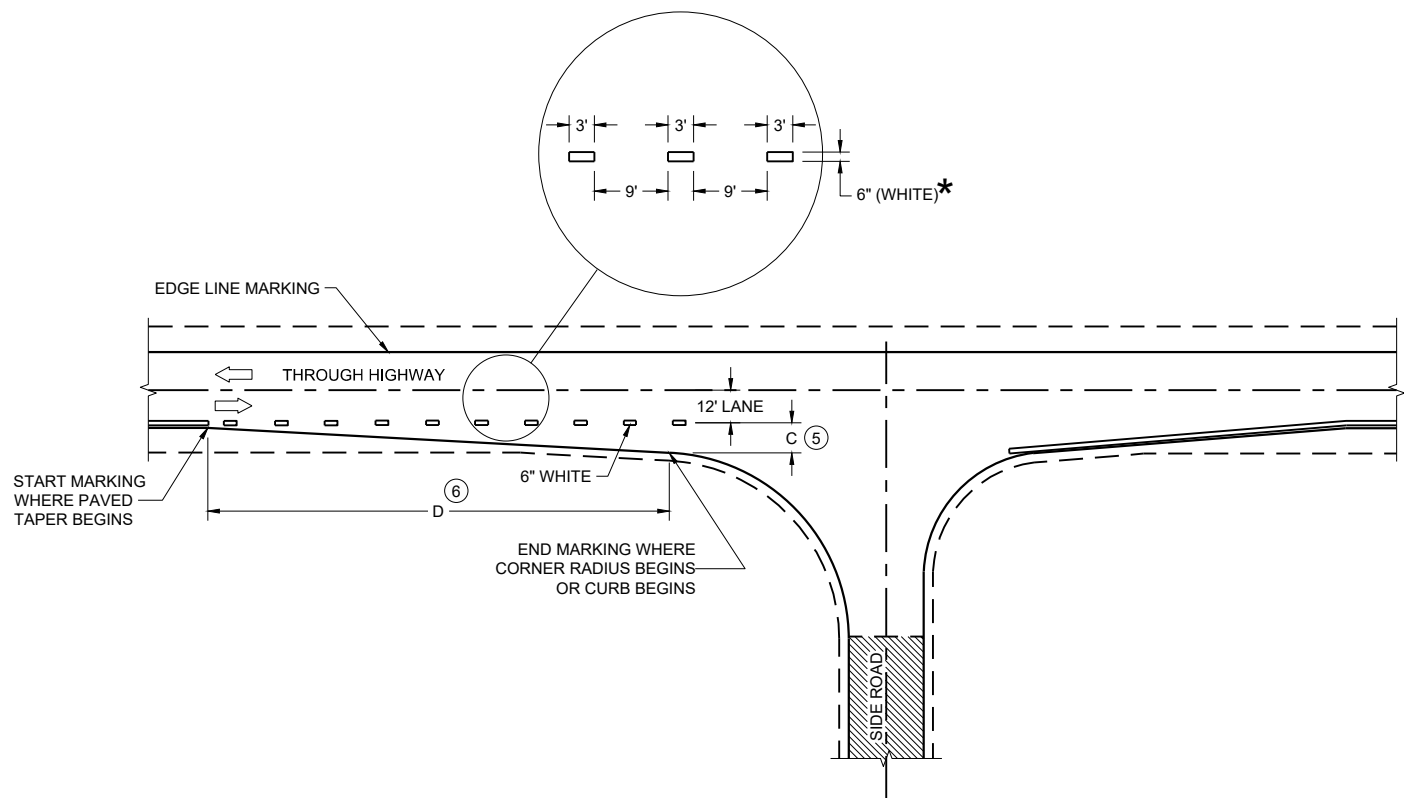

MINOR INTERSECTION

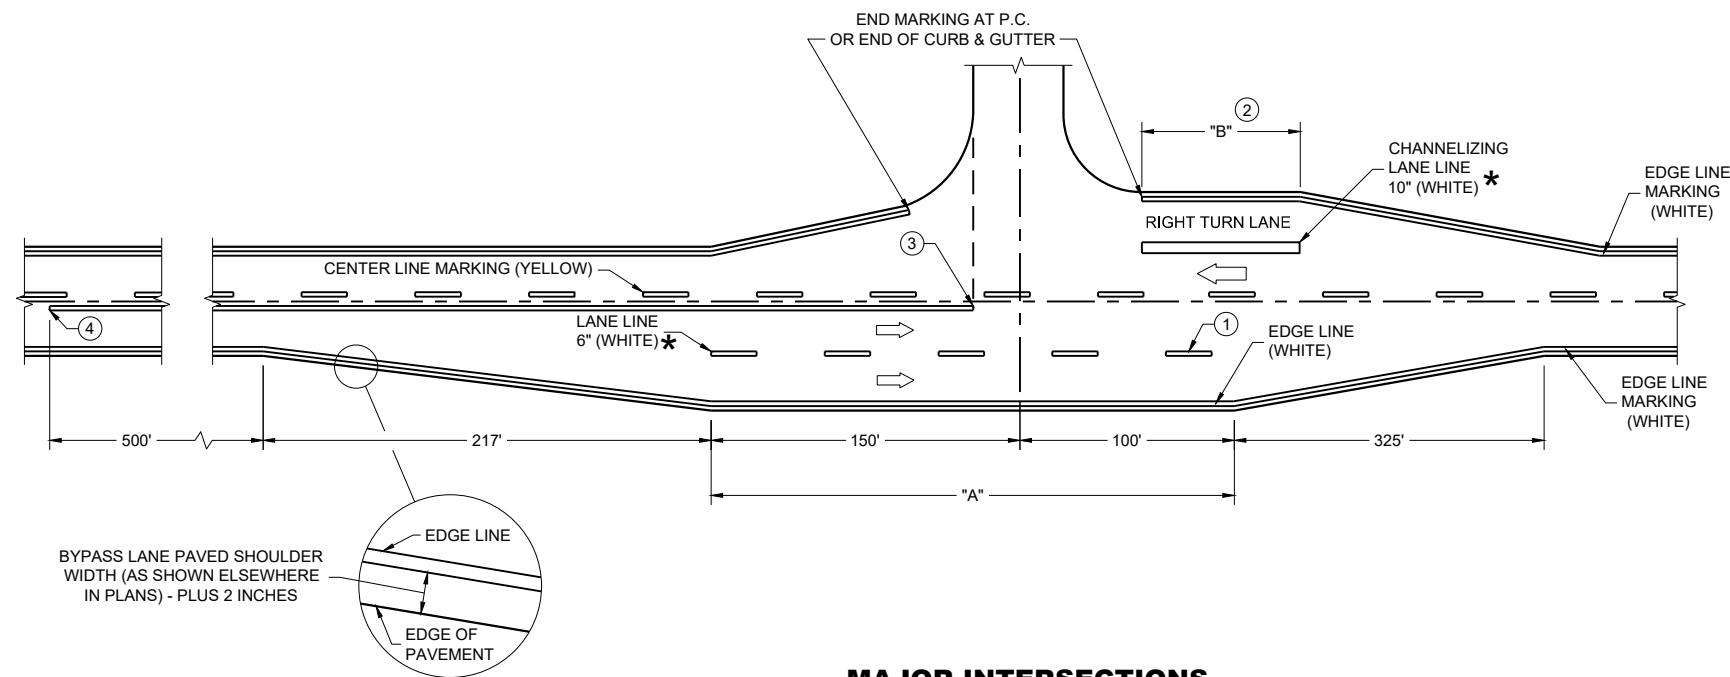

MAJOR INTERSECTIONS
(INTERSECTION WITH FULL RIGHT TURN LANE OR BYPASS LANE)

*CONFIRM MARKING LINE WIDTH WITH THE MISCELLANEOUS QUANTITIES


GENERAL NOTES

OMIT EDGE LINES THROUGH INTERSECTIONS. CONTINUE EDGE LINES THROUGH DRIVEWAYS.

- ① WHEN DISTANCE "A" IS LESS THAN 250 FEET, OMIT LANE LINE.
- ② WHEN DISTANCE "B" IS LESS THAN 100 FEET, OMIT CHANNELIZING LANE LINE.
- ③ BARRIER LINE ENDS AT SIDE ROAD PAVEMENT / SURFACE EDGE EXTENSION.
- ④ BARRIER LINE STARTS 500 FEET PRIOR TO THE BYPASS TAPER.
- ⑤ WHEN DISTANCE "C" IS LESS THAN 4 FEET, OMIT DOTTED EXTENSION.
- ⑥ WHEN DISTANCE "D" IS LESS THAN 50 FEET, OMIT DOTTED EXTENSION.

LEGEND


➡ DIRECTION OF TRAVEL

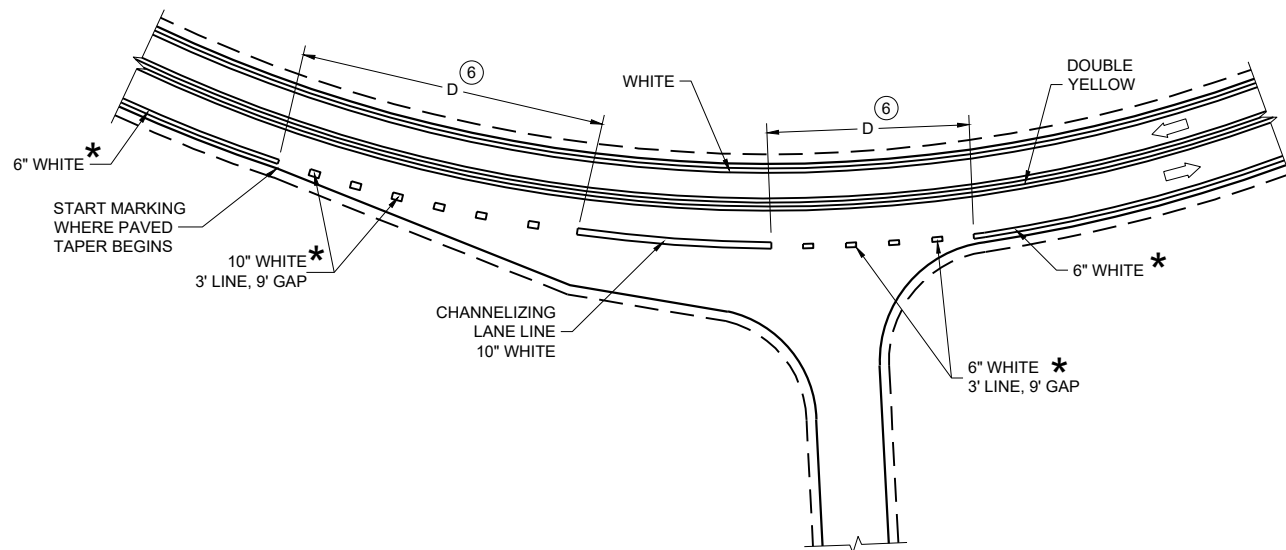


INTERSECTION ON OUTSIDE OF CURVE

PAVEMENT MARKING
(INTERSECTIONS)


STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

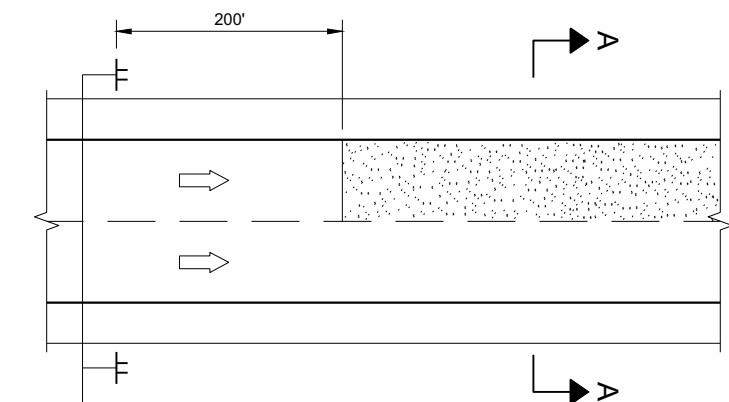

MULTI-LANE

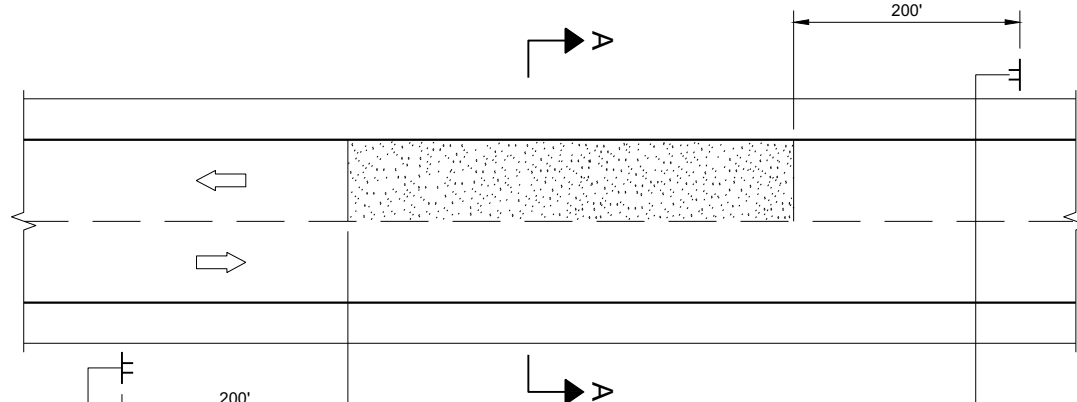


TWO-WAY TWO LANE

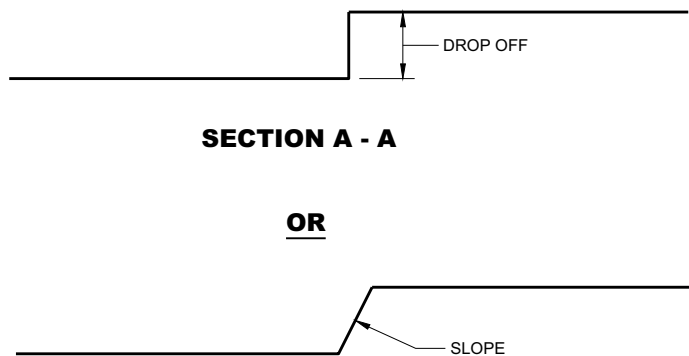

SECTION A - A

OR

SECTION A - A

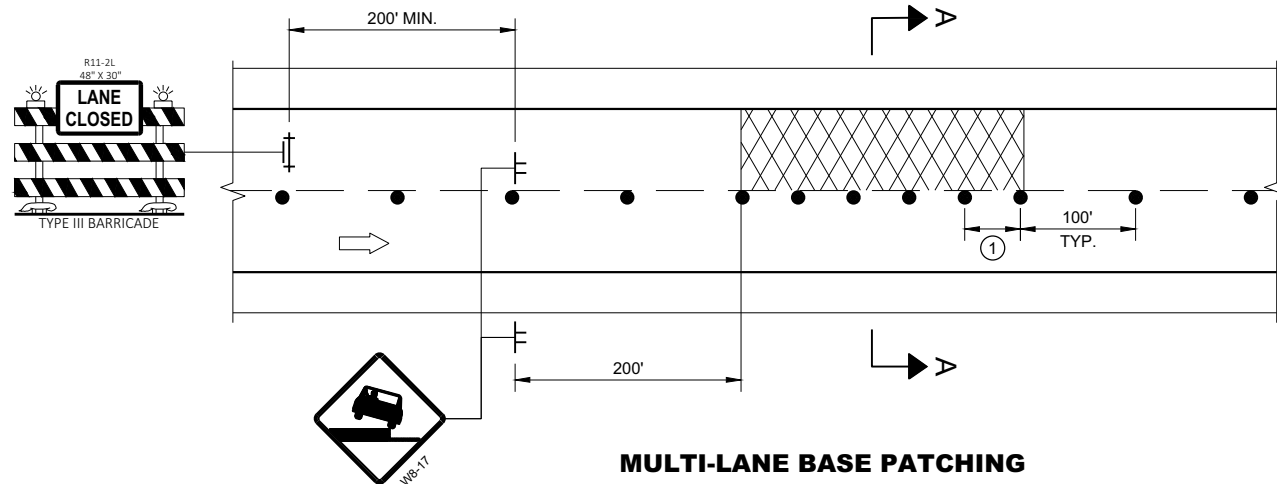

MULTI-LANE BASE PATCHING

ADJACENT LANE DROP-OFFS

GENERAL NOTES

FOR SPOT LOCATIONS USE ENGINEERING JUDGEMENT WHEN PLACING ADDITIONAL SIGNS.

ALL SIGNS ARE 48" X 48" UNLESS OTHERWISE NOTED.

"WO" SIGNS ARE THE SAME AS "W" SIGNS EXCEPT THE BACKGROUND IS ORANGE.


WARNING LIGHTS ARE NOT REQUIRED IF THE LANE CLOSURE IS A DAYTIME ONLY OPERATION.

* IF THE DROP-OFF IS CONTINUOUS ALONG THE PROJECT, PLACE ADDITIONAL SIGNS EVERY 1 MILE AND AFTER EVERY ENTRANCE RAMP.


① USE CLOSER SPACING WHEN DELINEATING DROP-OFF.

LEGEND

- SIGN ON TEMPORARY SUPPORT
- TRAFFIC CONTROL DRUM
- TYPE III BARRICADE WITH ATTACHED SIGN
- TYPE "A" WARNING LIGHT (FLASHING)
- DIRECTION OF TRAFFIC
- WORK AREA WITH DROP-OFF
- MILLED SURFACE

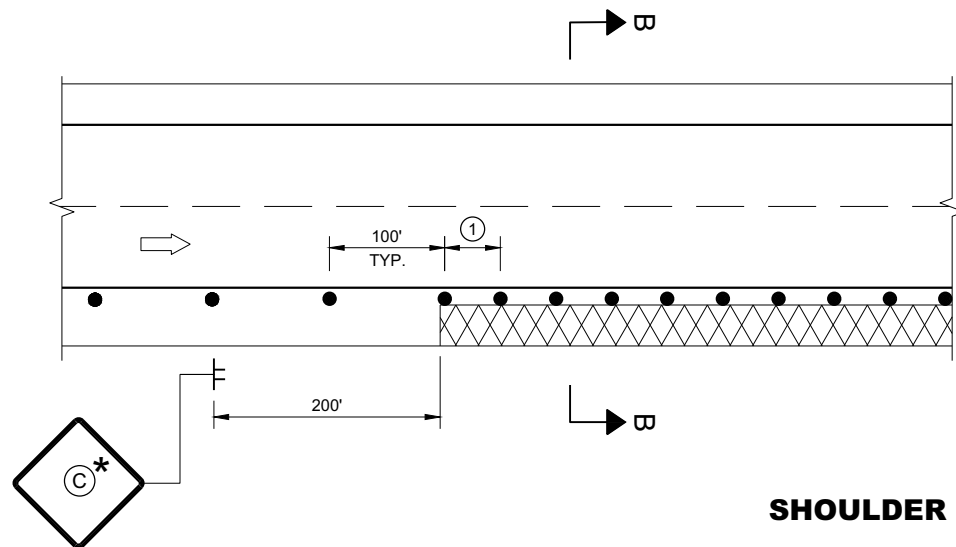

SHOULDER DROP-OFFS

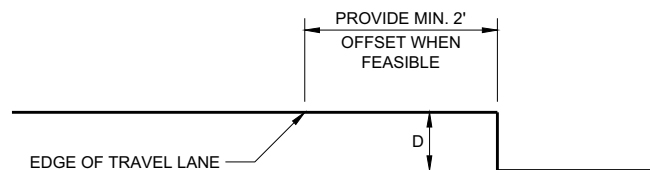

SECTION B - B

D	SIGN (C)
< 2" WITH A SLOPE STEEPER THAN 3:1	LOW SHOULDER WO8-9
2" < 6" WITH A SLOPE STEEPER THAN 3:1	SHOULDER DROP - OFF WB-9A PROVIDE A 3:1 OR FLATTER SLOPE OF MATERIAL ADJACENT TO THE PAVEMENT

**TRAFFIC CONTROL,
DROP-OFF SIGNING**

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
March 2018
DATE

/S/ Andrew Heidtke
WORK ZONE ENGINEER

FHWA

GENERAL NOTES

DRAWING NOT TO SCALE. ALL SIGNS AND POSTS ON THIS SHEET SHALL BE PAID FOR WITH 'TRAFFIC CONTROL SIGNS' BID ITEM. ALL SIDE ROADS WHICH ARE UNDER CONSTRUCTION OF CURB AND GUTTER AND/OR GRADING SHALL BE ADEQUATELY SIGNED.

ALL SIGNS AND DEVICES SHALL BE IN CONFORMANCE WITH THE WISCONSIN MANUAL OF UNIFORM TRAFFIC CONTROL DEVICES (WMUTCD). SIGN LAYOUTS SHALL BE IN ACCORDANCE WITH THE WISDOT STANDARD SIGN PLATES.

"WO" SIGNS ARE THE SAME AS "W" SIGNS EXCEPT THAT THE BACKGROUND IS ORANGE.

ALL SIGNS ARE 48" X 48" UNLESS OTHERWISE NOTED.

THE EXACT NUMBER, LOCATION AND SPACING OF ALL SIGNS AND DEVICES SHALL BE ADJUSTED TO FIT FIELD CONDITIONS AS DIRECTED BY THE ENGINEER.


ALL SIGNS INAPPROPRIATE TO THE STATUS OF THE CONTROL ZONE, INCLUDING PRE-EXISTING SIGNS IN THE VICINITY, SHALL BE COVERED OR REMOVED AS DIRECTED BY THE ENGINEER.

SEE 15C34 FOR ADDITIONAL TRAFFIC CONTROL SIGNING WHEN CENTERLINE PAVEMENT MAKINGS ARE MISSING. 'DO NOT PASS' SIGNS MUST BE INSTALLED ON THE SAME DAY AS MILLING OPERATIONS.


- ① PLACE SIGNS 350' IN ADVANCE OF MILLED SURFACES AND AT 1 MILE INTERVALS, OR AS DIRECTED BY THE ENGINEER.
- ② PLACE SIGN 200' MIN. FROM INTERSECTION AND 200' MIN. AFTER ADVANCE WARNING SIGN SHOWN IN SDD 15C04.

LEGEND

-  SIGN ON TEMPORARY SUPPORT
-  DIRECTION OF TRAFFIC

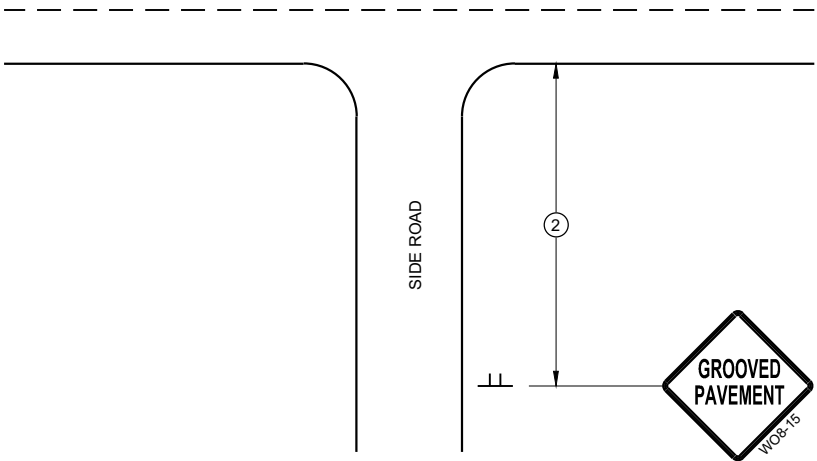

TYPICAL SIDE ROAD APPROACH
SIGN DETAIL

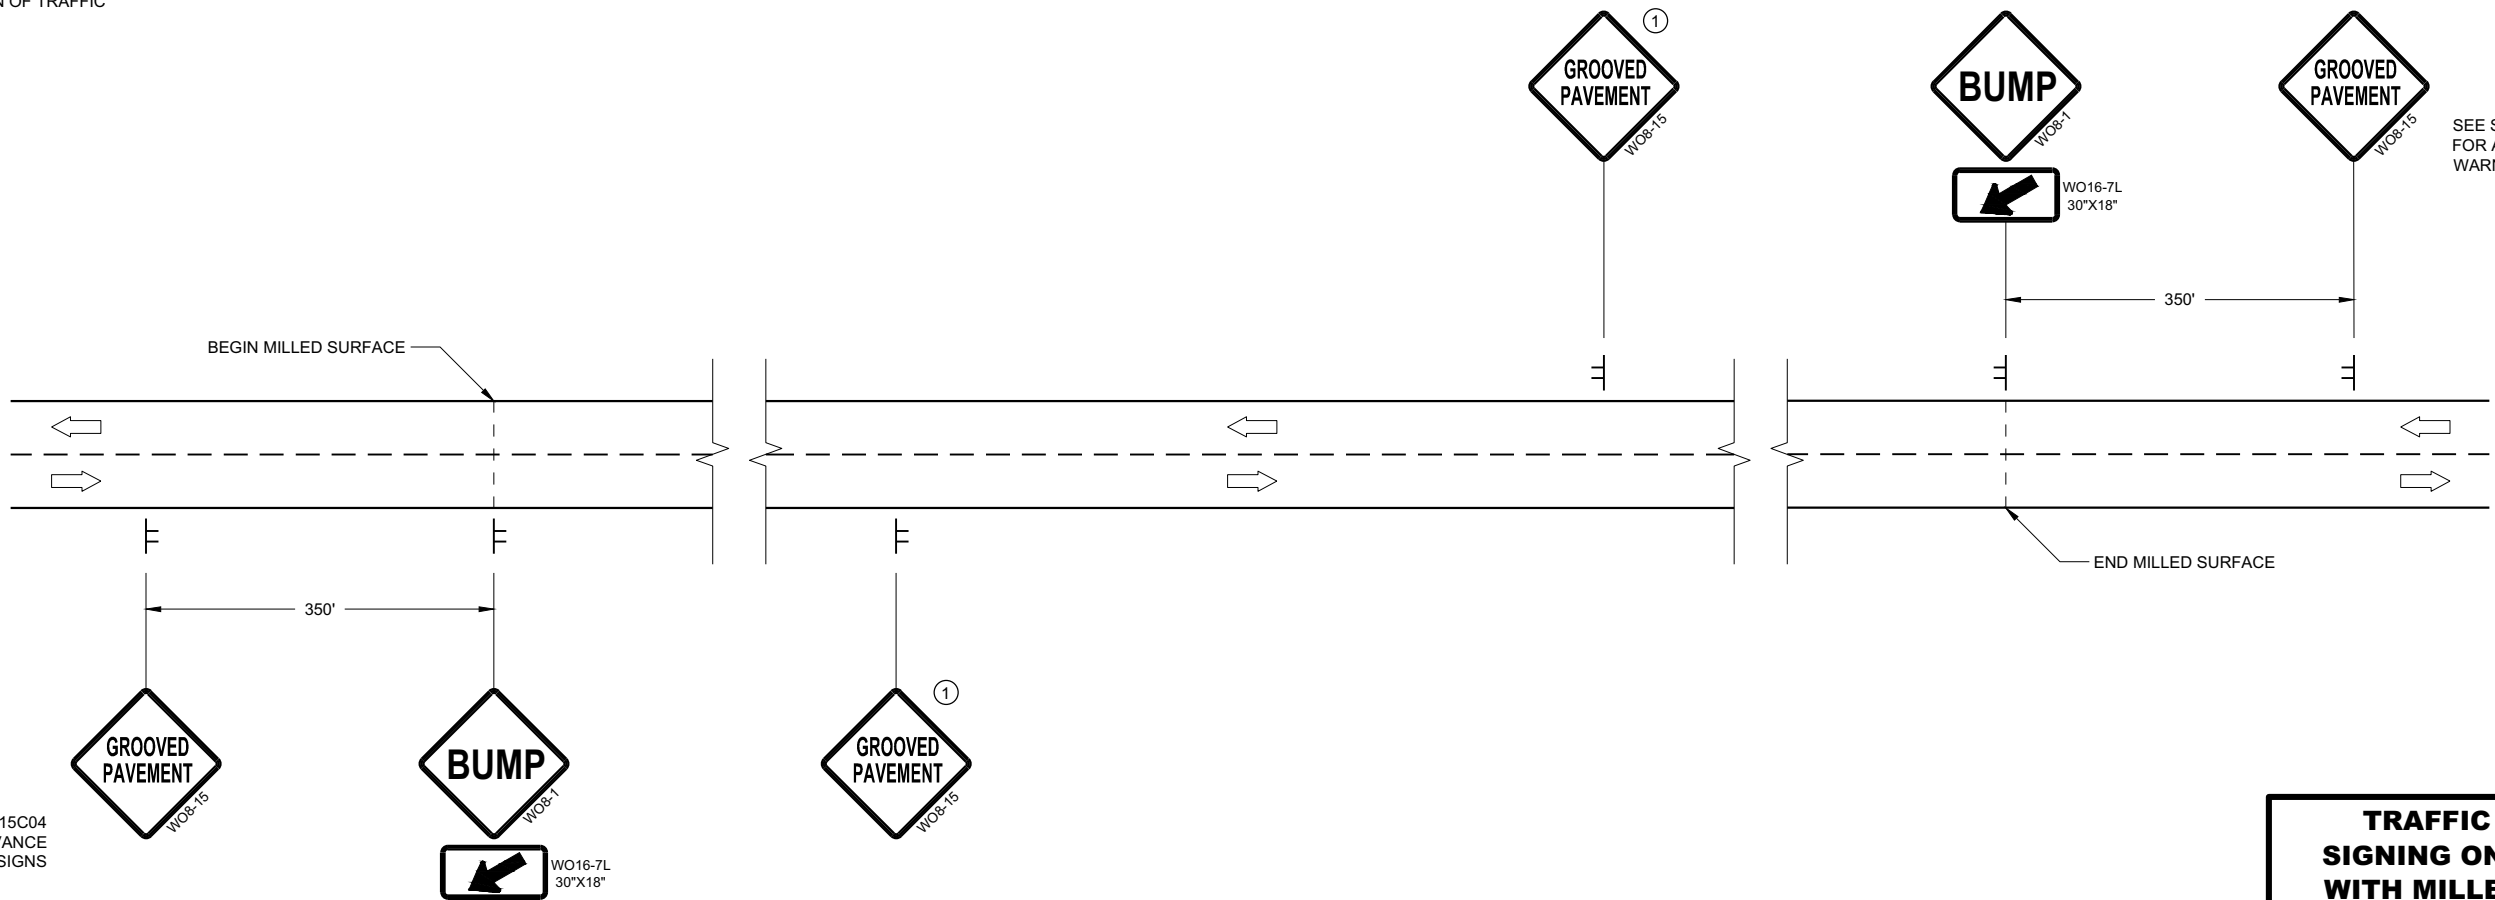

SEE SDD15C04
FOR ADVANCE
WARNING SIGNS

SEE SDD15C04
FOR ADVANCE
WARNING SIGNS

DETAIL FOR SIGNING ON MILLED SURFACES

TRAFFIC CONTROL,
SIGNING ON ROADWAYS
WITH MILLED SURFACES

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
February 2020 /S/ Andrew Heidtke
DATE WORK ZONE ENGINEER

FHWA

LEGEND

- V1

WORK VEHICLE
- V2

SHADOW VEHICLE
- 

TRUCK MOUNTED ATTENUATOR (TMA)
- 

FLASHING ARROW PANEL (CAUTION)
- 

WORK AREA
- 

DIRECTION OF TRAFFIC


POSTED SPEED PRIOR TO WORK STARTING (MPH)	DECISION SIGHT DISTANCE (D)
0 - 25	550'
30	550'
35	700'
40	700'
45	900'
50	900'
55	1200'

GENERAL NOTES

- ALL SIGNS ARE 48"X48" UNLESS OTHERWISE NOTED.
- MOBILE IS WORK THAT MOVES CONTINUOUSLY OR MOVES AT LEAST THE DECISION SIGHT DISTANCE EVERY 15 MINUTES.
- ALL VEHICLES SHALL BE EQUIPPED WITH TWO 360 DEGREE HIGH INTENSITY YELLOW FLASHING LIGHTS OR STROBE LIGHTS AND OPERATED WITH HEADLIGHTS TURNED ON.
- ALL ARROW PANELS SHALL BE REAR FACING, TYPE "B" OR "C", AND DISPLAYING THE FLASHING CAUTION MODE. SIGNS PLACED ON VEHICLES MUST NOT OBSCURE THE ARROW PANEL.
- USE AN ATTENUATOR ON THE REARMOST VEHICLE THAT BLOCKS ALL OR PART OF THE TRAFFIC LANE.
- ①

DISTANCE BETWEEN VEHICLES MAY INCREASE FROM THE ATTENUATOR'S ROLL AHEAD BASED ON TERRAIN, SIGHT DISTANCE, AND OTHER FACTORS. WHENEVER ADEQUATE STOPPING SIGHT DISTANCE EXISTS TO THE REAR, SHADOW VEHICLES SHOULD MAINTAIN THE MINIMUM DISTANCE FROM THE WORK VEHICLE AND PROCEED AT THE SAME SPEED AS THE WORK VEHICLE. SHADOW VEHICLES SHOULD SLOW DOWN IN ADVANCE OF VERTICAL OR HORIZONTAL CURVES THAT RESTRICT SIGHT DISTANCE.
- ②

ALIGN LEFT SIDE OF SHADOW VEHICLE WITH EDGE OF WORK AREA.

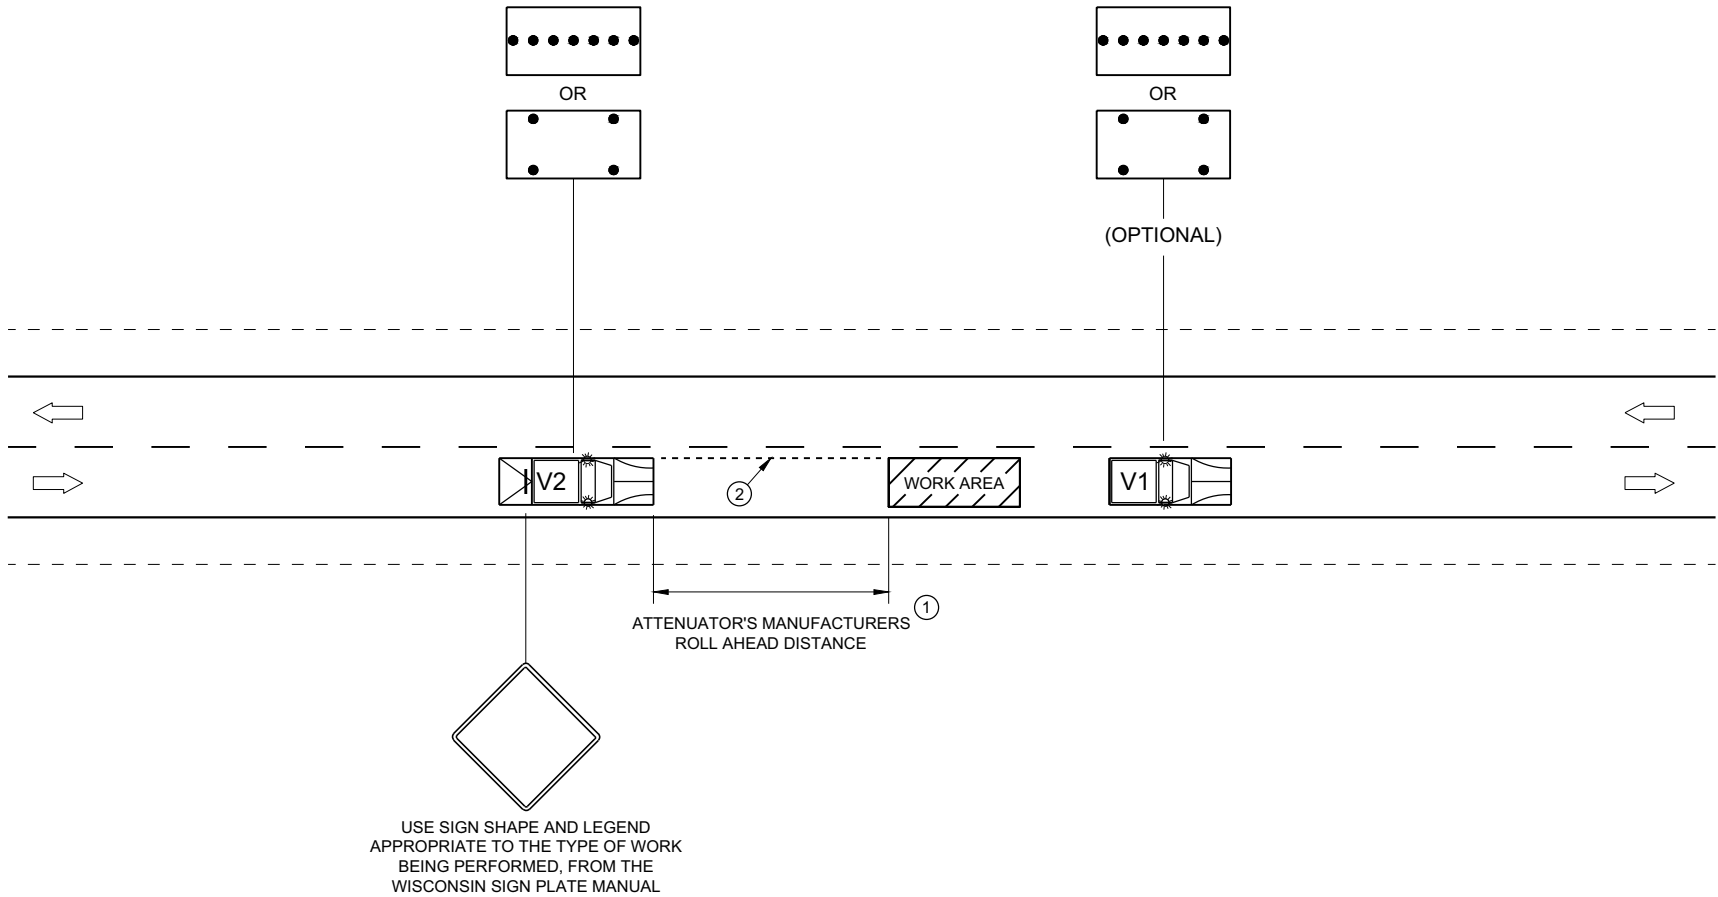

TRAFFIC CONTROL,
MOBILE OPERATIONS ON
AN UNDIVIDED ROADWAY



STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
February 2021
DATE

/S/ Andrew Heidtke
STATEWIDE WORK ZONE TRAFFIC
SAFETY ENGINEER



FHWA

URBAN AREA

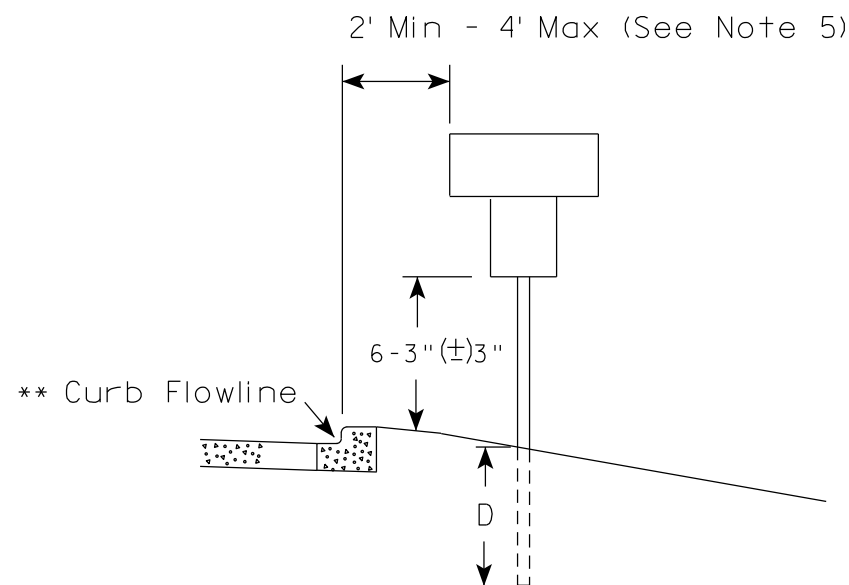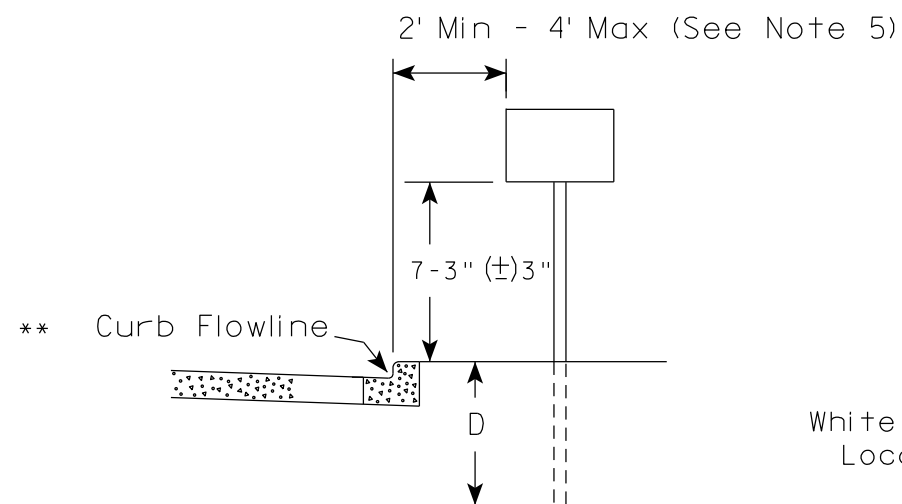

* * The existence of curb and gutter does not in itself mandate the vertical clearance illustrated. That height is typically measured where there is sidewalk adjacent to the roadway or parking is permitted. In the absence of sidewalk vertical clearance is measured from the top of the curb. Offset of signs is measured from the flow line.

RURAL AREA (See Note 2)

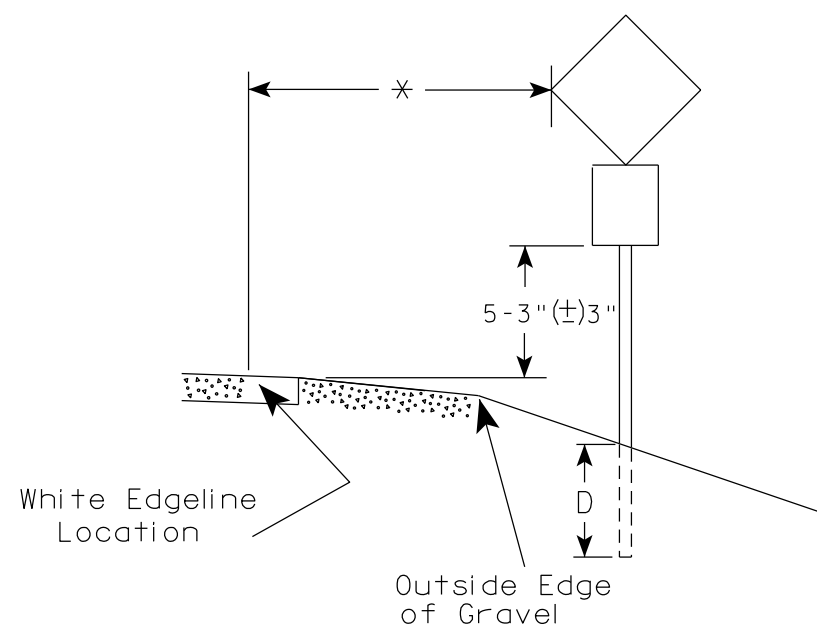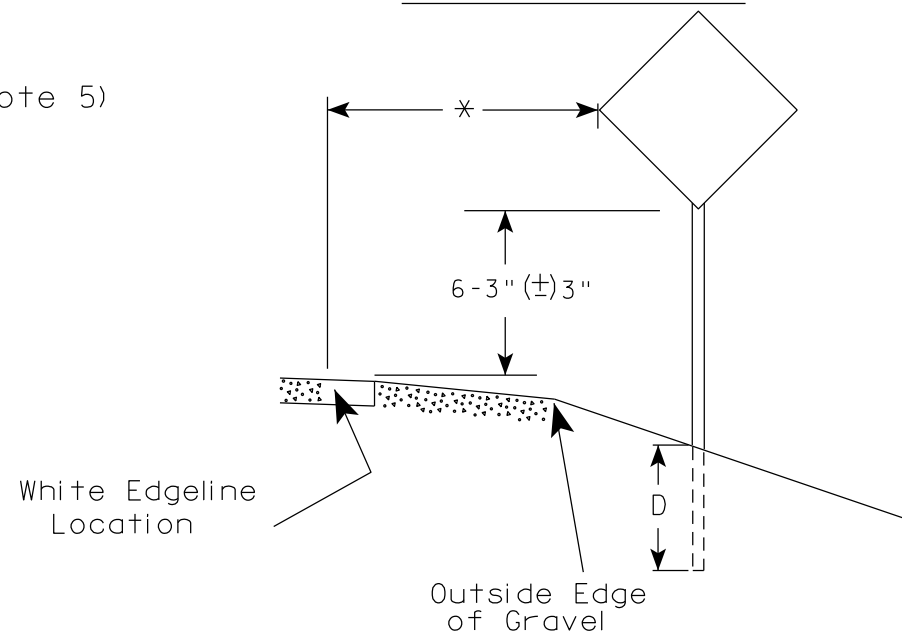

* 6 feet from edge of a paved shoulder or 12 feet from the edge of pavement (edge line location) or 2 feet from outside edge of gravel, whichever is greater unless directed by project engineer.

POST EMBEDMENT DEPTH

Area of Sign Installation (Sq. Ft.)	D (Min)
20 or Less	4'
Greater than 20	5'

GENERAL NOTES

- Signs wider than 4 feet or 20 sq.ft or larger, shall be mounted on multiple posts. Refer to plate A4-4.
- If signs are mounted on or behind barrier wall, see A4-10 sign plate.
The Double Arrow sign (W12-1D) shall be mounted at a height of 2'-3" (±) 3". The Chevron sign (W1-8), Roundabout Chevron panel (R6-4B), Enhanced Reference Markers, Clearance Markers (W5-52), Mile Markers (D10 series), In Road Object Markers (W5-54) & End of Road Markers (W5-56) shall be mounted at a height of 4'-3" (±) 3".
- For expressways and freeways, mounting height is 7'- 3" (±) 3" or 6'-3" (±) 3" depending upon existence of a sub-sign.
- Minimum mounting height for signs mounted on traffic signal poles is 5'- 3" (±) 3".
- Offset distance shall be consistent with existing signs or consistent throughout length of project.
- Folding signs shall be mounted at a height of 5'-3" (±) 3" or as directed by the Engineer.

TYPICAL INSTALLATION
OF PERMANENT TYPE II
SIGNS ON SINGLE POSTS

WISCONSIN DEPT OF TRANSPORTATION

APPROVED

Matthew R. Rauch
for State Traffic Engineer

DATE 12/6/23

PLATE NO. A4-3.23


PROJECT NO:

HWY:

COUNTY:

SHEET NO:


E

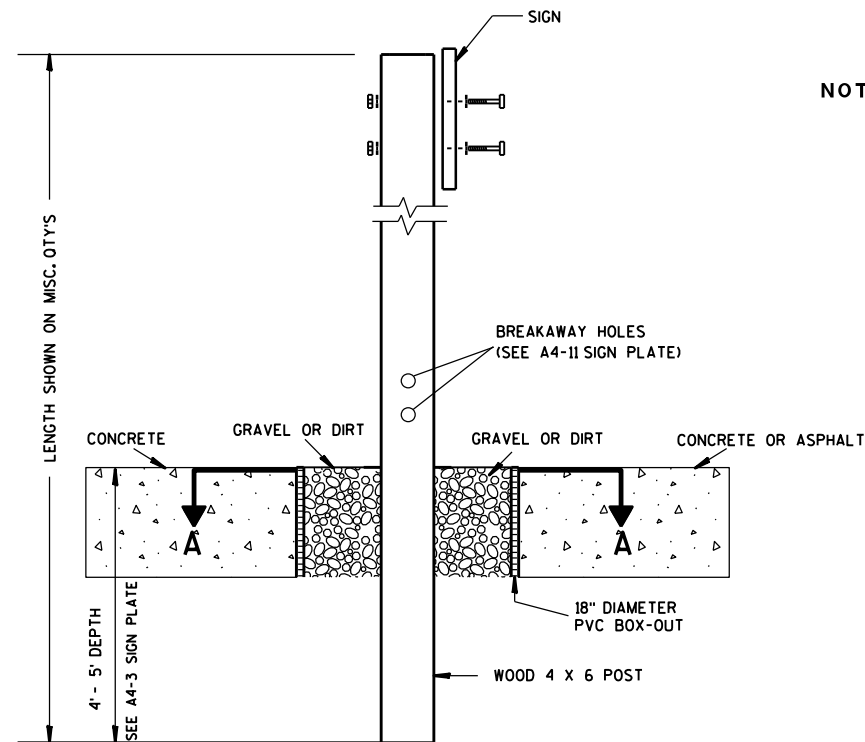

ELEVATION VIEW


DETAIL OF WOOD 4 X 6 SIGN POST IN BOX-OUT

- NOTES: 1. ALL MATERIAL TO BE APPROVED BY ENGINEER PRIOR TO INSTALLATION
2. SEE SIGN PLATE A4-8 FOR SIGN HARDWARE REQUIREMENTS
3. 18 INCH X 18 INCH SQUARE BOX-OUTS MAY BE USED FOR INSTALLATIONS IN EXISTING CONCRETE OR ASPHALT LOCATIONS.

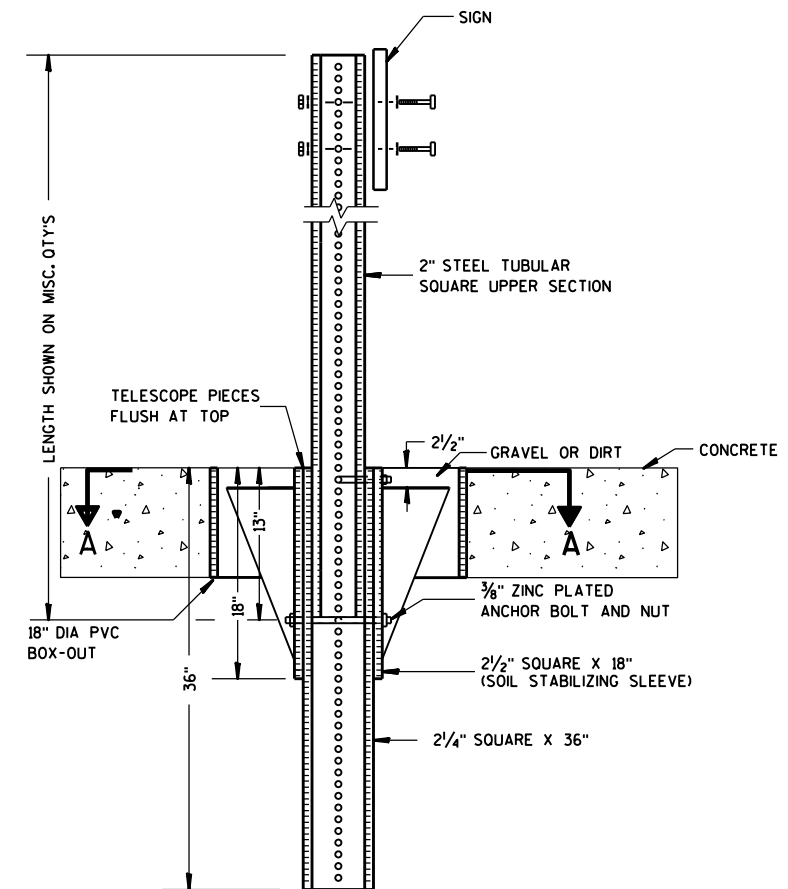

ELEVATION VIEW

DETAIL OF STEEL 2 X 2 SIGN POST IN BOX-OUT

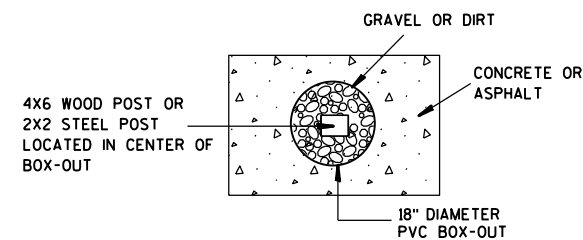

PLAN VIEW

FOR NEW CONCRETE/ASPHALT INSTALLATIONS

SIGN POST
BOX-OUTS
A4-3B

WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
for State Traffic Engineer

DATE 1/27/14 PLATE NO. A4-3B.1

PROJECT NO:


HWY:

COUNTY:



SHEET NO:

E


URBAN AREA

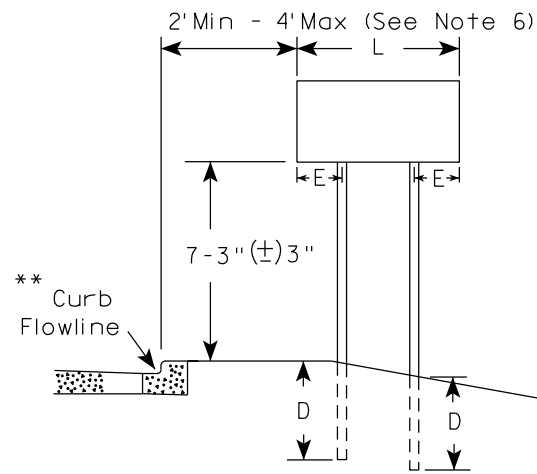


RURAL AREA (See Note 3)

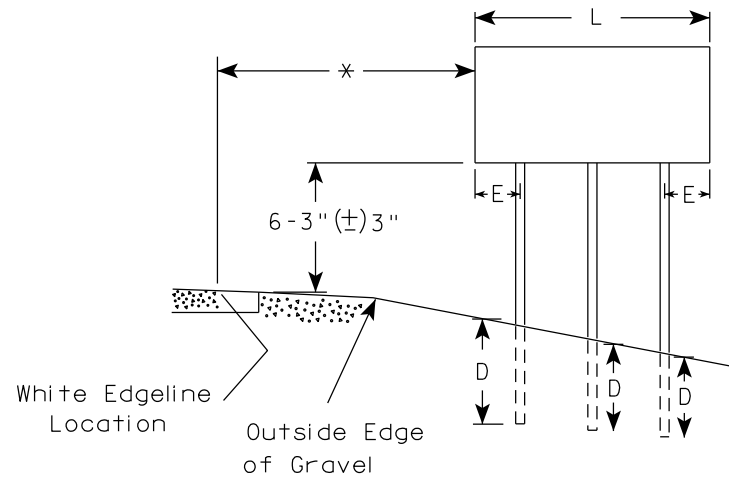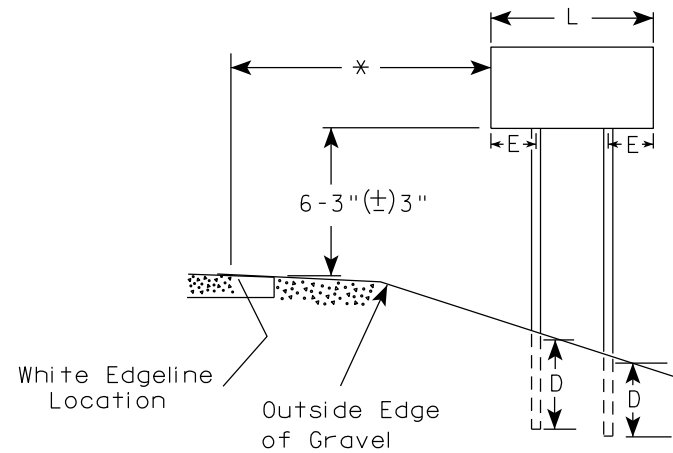

2' Min - 4' Max (See Note 6)

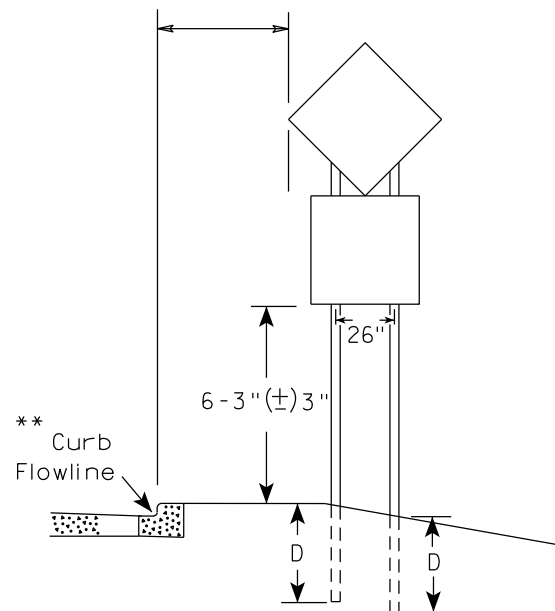

48" DIAMOND WARNING SIGN

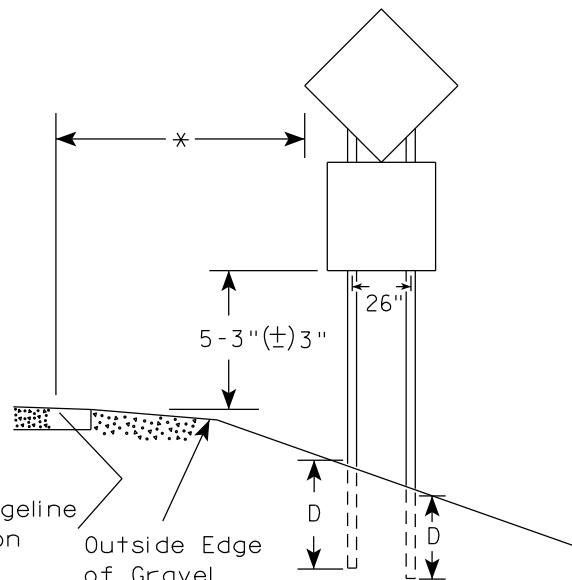

48" DIAMOND WARNING SIGN

SIGN SHAPE OTHER THAN DIAMOND (TWO POSTS REQUIRED)	
L	E
Greater than 48" Less than 60"	12"
60" to 108"	L/5

SIGN SHAPE OTHER THAN DIAMOND (THREE POSTS REQUIRED)	
L	E
Greater than 108" to 144"	12"

POST EMBEDMENT DEPTH

Area of Sign Installation (Sq.Ft.)	D (Min)
20 or Less	4'
Greater than 20	5'

TYPICAL INSTALLATION
OF TYPE II SIGNS
ON MULTIPLE POSTS

WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
for State Traffic Engineer

DATE 12/6/23 PLATE NO. A4-4.16


PROJECT NO:

HWY:

COUNTY:

SHEET NO:

E

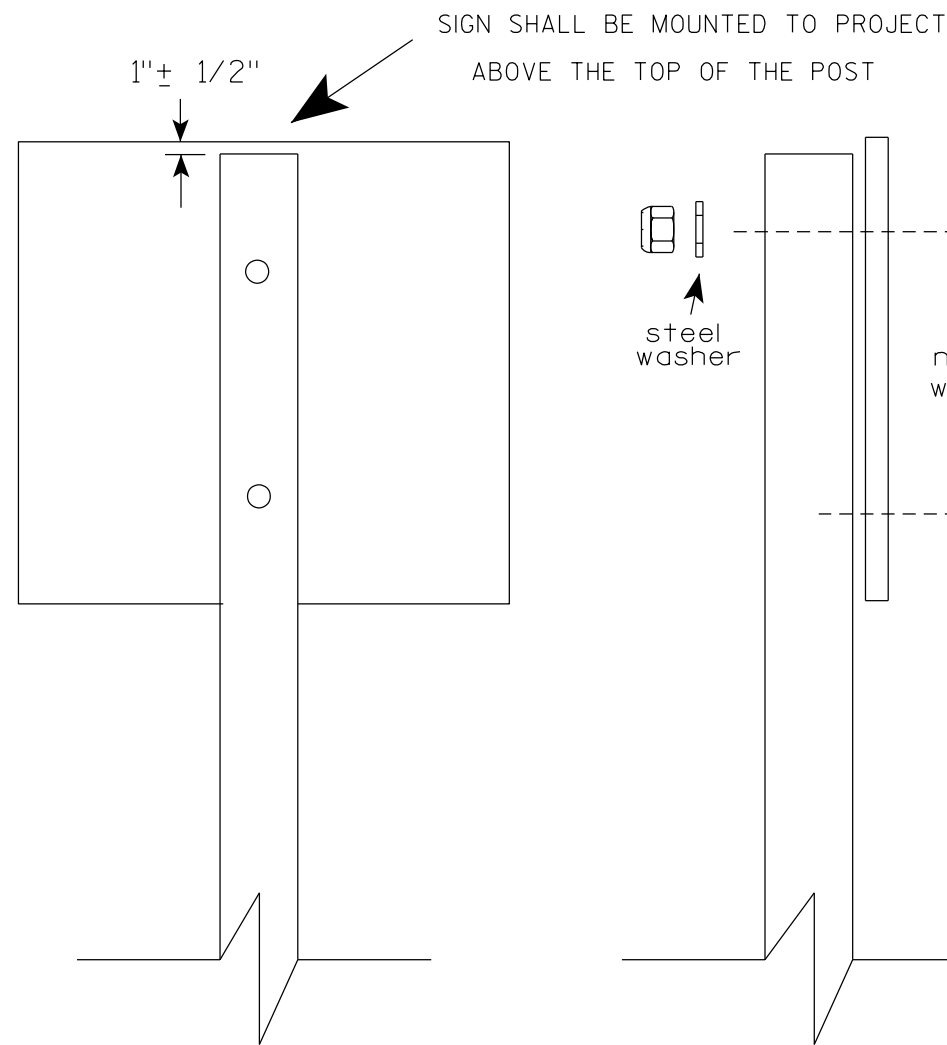

Nuts, bolts and lags used for mounting signs shall have hexagonal heads and shall be either :

- a. Hot dip galvanized in accordance with ASTM Designation: A 153, Class D, or SC 3
- b. Electro-galvanized in accordance with ASTM Designation : B 633, TYPE III, SC 3.


Threads on bolts and nuts shall be manufactured with sufficient allowance for the cadmium plate or galvanized coating to permit the nuts to run freely on the bolts.

- STRINGER BOLTING TO ALUMINUM SIGNS (SEE SIGN PLATE A4-18)
- MACHINE BOLTS - $\frac{5}{16}$ " X 1-3/4" Length w/ lock nuts
- WOOD POSTS (4" x 6")
- LAG SCREWS - $\frac{3}{8}$ " X 3" (NO STRINGERS ON BACK OF SIGN)
 $\frac{3}{8}$ " X 4" (STRINGERS ON BACK OF SIGN)
- SQUARE STEEL POSTS (2" x 2")
- MACHINE BOLTS - $\frac{3}{8}$ " X 3-1/4" Length w/ nuts (NO STRINGER ON BACK OF SIGN)
 $\frac{3}{8}$ " X 5" Length w/ nuts (STRINGERS ON BACK OF SIGN)
- RIVETS - $\frac{9}{32}$ " (6605-9-6) BULB-TITE, TRI-FOLD, ALUMINUM BODY/MANDREL
O.D. FLANGE .720-.765 INCH, GRIP RANGE .042-.375 INCH
- WASHERS (ALL POSTS) -
- 1-1/4" O.D. X $\frac{3}{8}$ " I.D. X $\frac{1}{16}$ " STEEL
 - 1-1/4" O.D. X $\frac{3}{8}$ " I.D. X .080 NYLON


* Two different fastening systems are shown for illustration purposes. On any individual sign, either one or the other system shall be used. Actual number of fasteners per sign varies with the sign area, but normally there are two. For a single post installation, all signs greater than 9 sq. ft. require the use of 3 fasteners.

ATTACHMENT OF SIGNS TO POSTS	
WISCONSIN DEPT OF TRANSPORTATION	
APPROVED	<i>Matthew R. Rauch</i> For State Traffic Engineer
DATE 4/1/2020	PLATE NO. A4-8.9

**2 1/4 " SQUARE
12 GAUGE
PERFORATED
GALVANIZED FINISH**

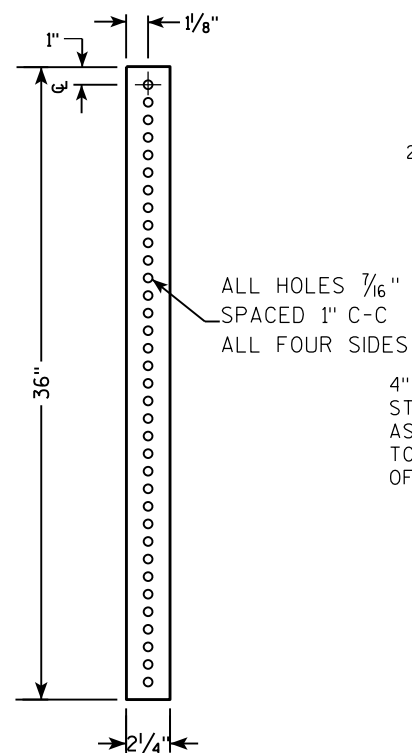


**2 1/2" SQUARE
12 GAUGE
OMNI-DIRECTIONAL
PERFORATED
SOIL STABILIZING SLEEVE
GALVANIZED FINISH**

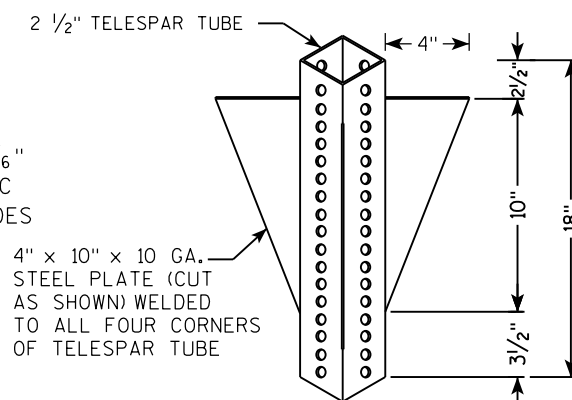[illegible]

TECHNICAL DRAWING OF A SIGNPOST ASSEMBLY:

- TELESCOPE PIECES FLUSH AT TOP**: Indicated by a dimension line on the left.
- 2" STEEL TUBULAR SQUARE UPPER SECTION**: The main vertical support.
- ALL HOLES $\frac{7}{16}$ " SPACED 1" C-C ALL FOUR SIDES**: Specification for the perforations in the tubular section.
- SIGN**: Attached to the top of the post.
- SEE SIGN PLATE A4-8 FOR BOLT WASHER, & NUT MATERIAL**: Reference to a sign plate for hardware details.
- 3/8" ZINC PLATED CORNER ANCHOR BOLT AND NUT**: Hardware used to secure the post to the base.
- 1"**: Dimension for the offset of the anchor bolt from the post face.
- 3/8" ZINC PLATED ANCHOR BOLT AND NUT**: Hardware used to secure the base plate to the ground.
- 2 1/2" SQUARE X 18" (SOIL STABILIZING SLEEVE)**: The base plate of the post.
- 2 1/4" SQUARE X 36"**: The main base plate.
- 36"**: Dimension for the height of the main base plate.
- 18"** and **12"**: Dimensions for the offset of the anchor bolt from the post face.
- A**: Downward arrows indicating load or weight.

3/8" ZINC PLATED CORNER
ANCHOR BOLT AND NUT



SECTION A-A

Area of Sign Installation (Sq. Ft.)	Number of Required Posts
9 or less	1
Greater than 9 less than or equal to 18	2
Greater than 18 less than or equal to 27	3

Signs wider than 3 feet or larger than 9 sq. ft shall be mounted on multiple posts (see above table).

TUBULAR STEEL
SIGN POST
A4-9

WISCONSIN DEPT OF TRANSPORTATION

APPROVED Matthaeus R. Rausch

for State Traffic Engineer

DATE 2/05/15 PLATE NO. A4-9.9

PROJECT NO:


HWY:

COUNTY:

SHEET NO:

1

7

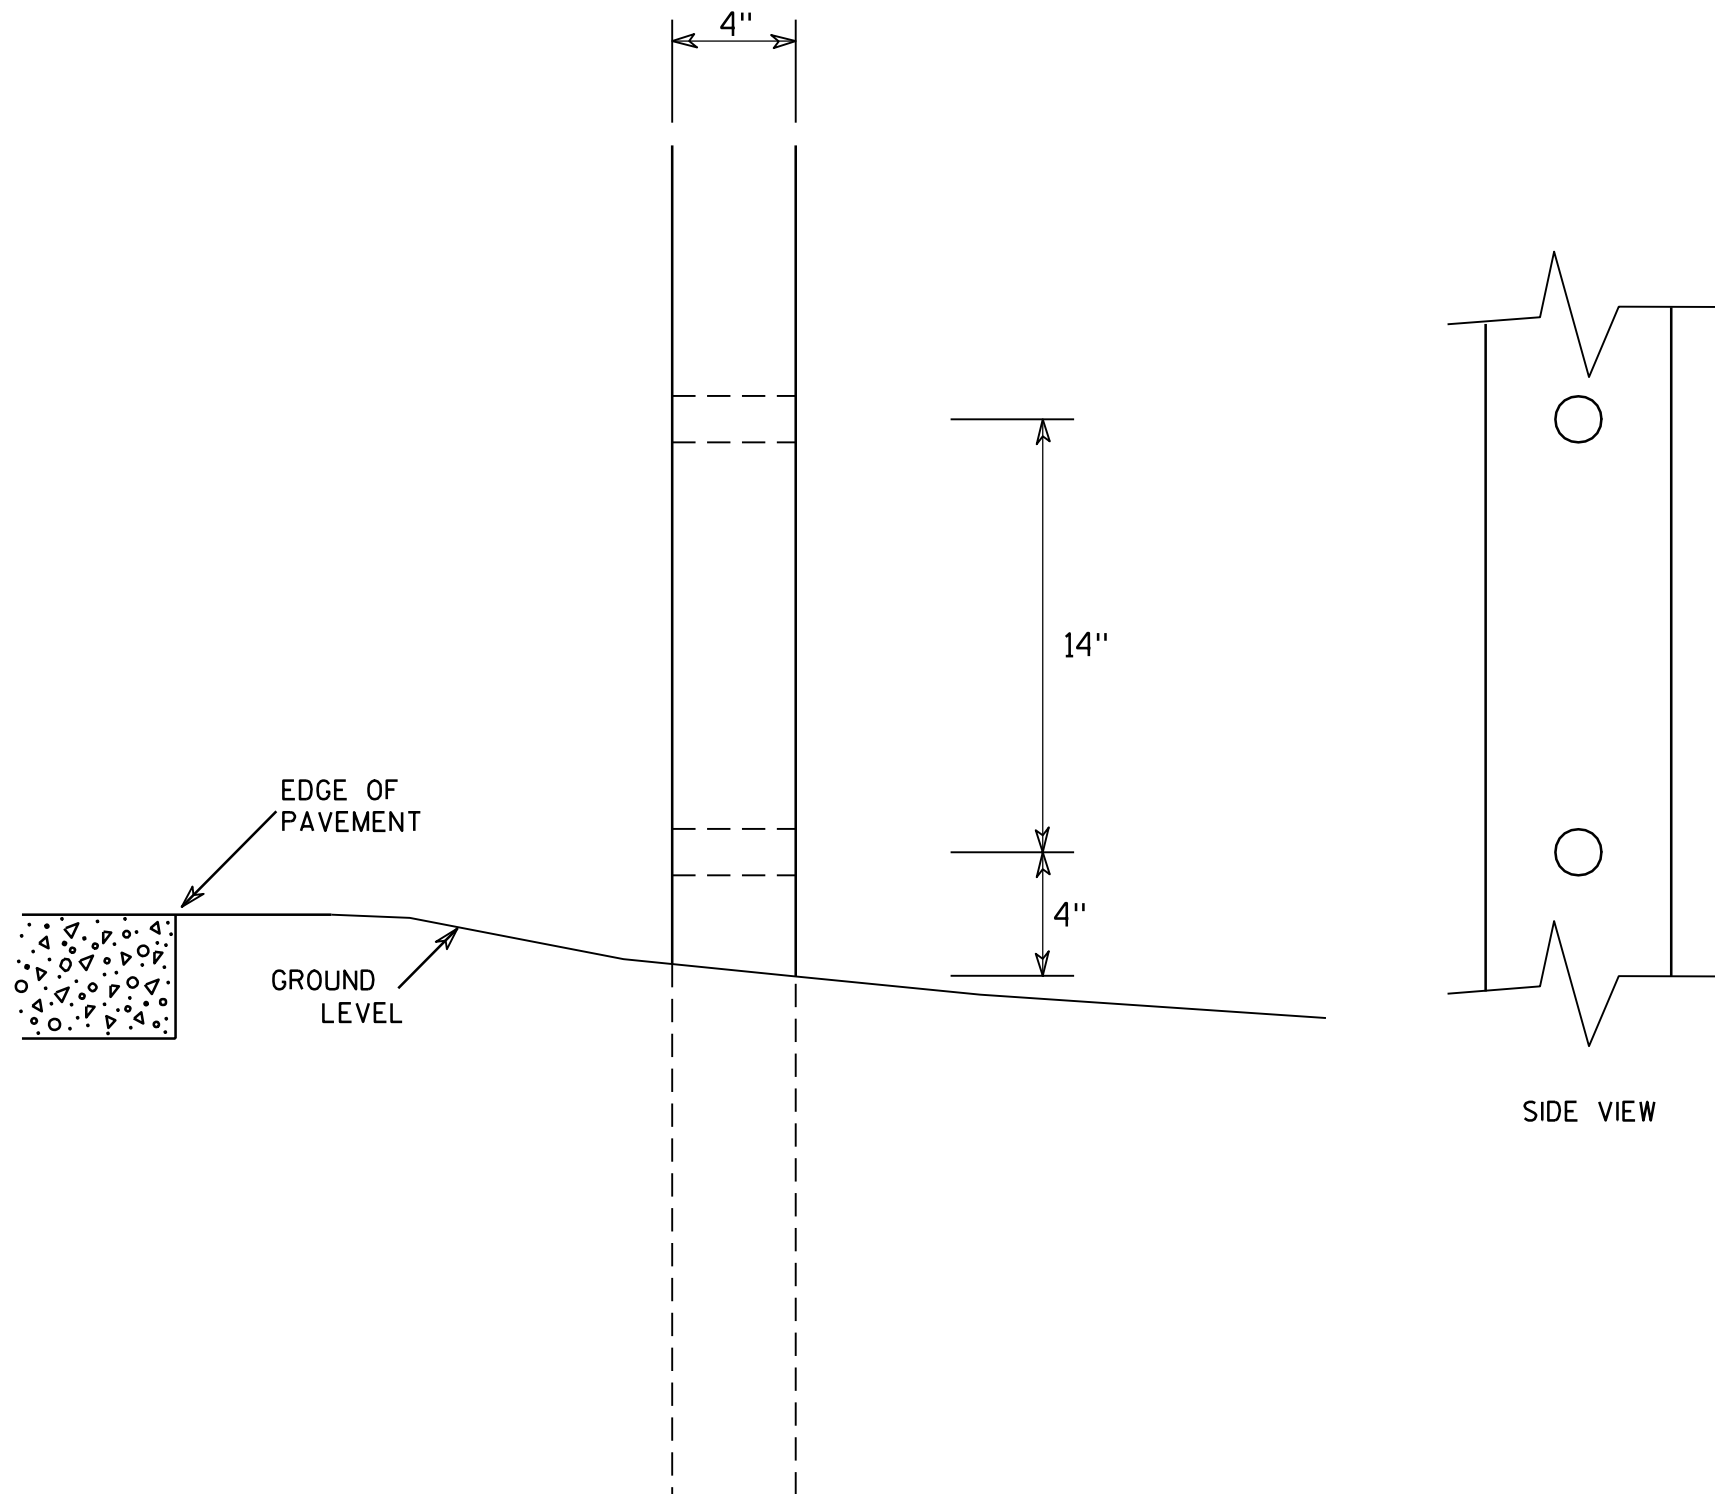

GENERAL NOTES

1. All 4 x 6 Wood Posts shall be modified by having two 1½" diameter holes drilled perpendicular to the roadway centerline.

7

4 X 6 WOOD POST MODIFICATIONS

WISCONSIN DEPT OF TRANSPORTATION

APPROVED

Chester J. Spang
for State Traffic Engineer

DATE 3/27/97

PLATE NO. A4-11.2

PROJECT NO:

HWY:




COUNTY:

SHEET NO:


E

BANDING

SINGLE SIGN

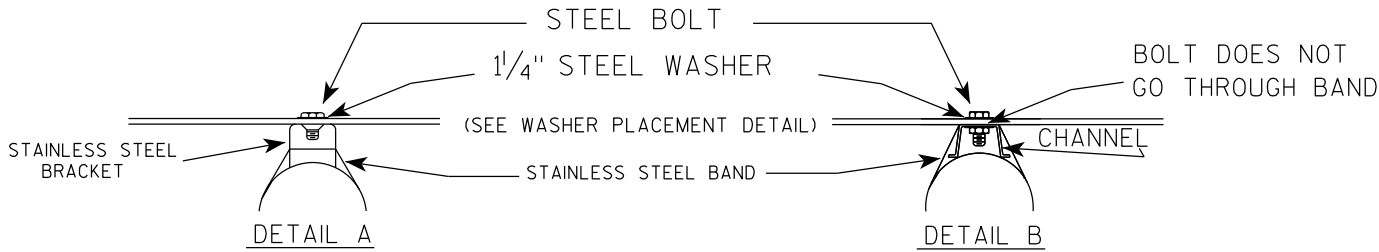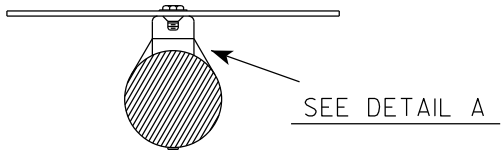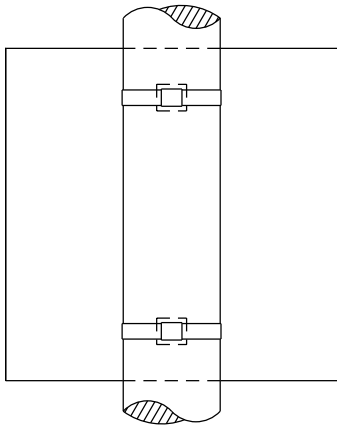

WASHER PLACEMENT

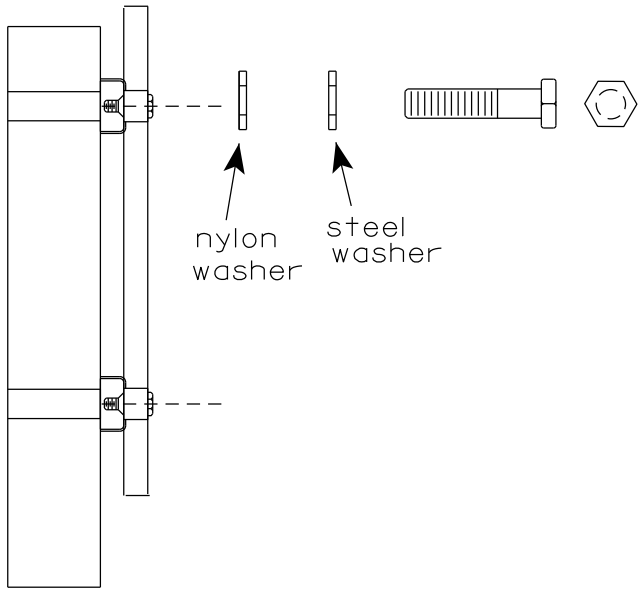


WASHERS (ALL POSTS) -
1-1/4" O.D. X 3/8" I.D. X 1/16" STEEL
1-1/4" O.D. X 3/8" I.D. X .080 NYLON
FOR ALL TYPE H SIGNS


GENERAL NOTES

1. Any sign over 3 feet in width shall use the V-Block banding method. See A5-10 standard plate.
2. Signs 3 feet or greater in height shall have three bracket bands installed. Signs less than 3 feet in height shall have two bracket bands installed.
3. Banding and assembly bracket shall be stainless steel. All bands shall be 3/4" in width and 0.025" thickness.
4. ALL SIGN MOUNTING BOLTS AND WASHERS SHALL BE EITHER:
 - a. Hot dip or mechanically galvanized in accordance with ASTM Designation: A 153, Class D
 - b. Electro-galvanized in accordance with ASTM designation: B 633, Type III, SC 3

"J" ASSEMBLY

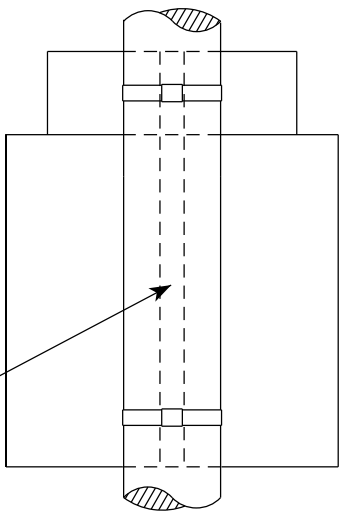


CHANNEL
SEE TYPICAL PANEL
INSTALLATION SHEET



STANDARD SIGN
SIGN BANDING DETAILS


WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
for State Traffic Engineer
DATE 6/10/19 PLATE NO. A5-9.4

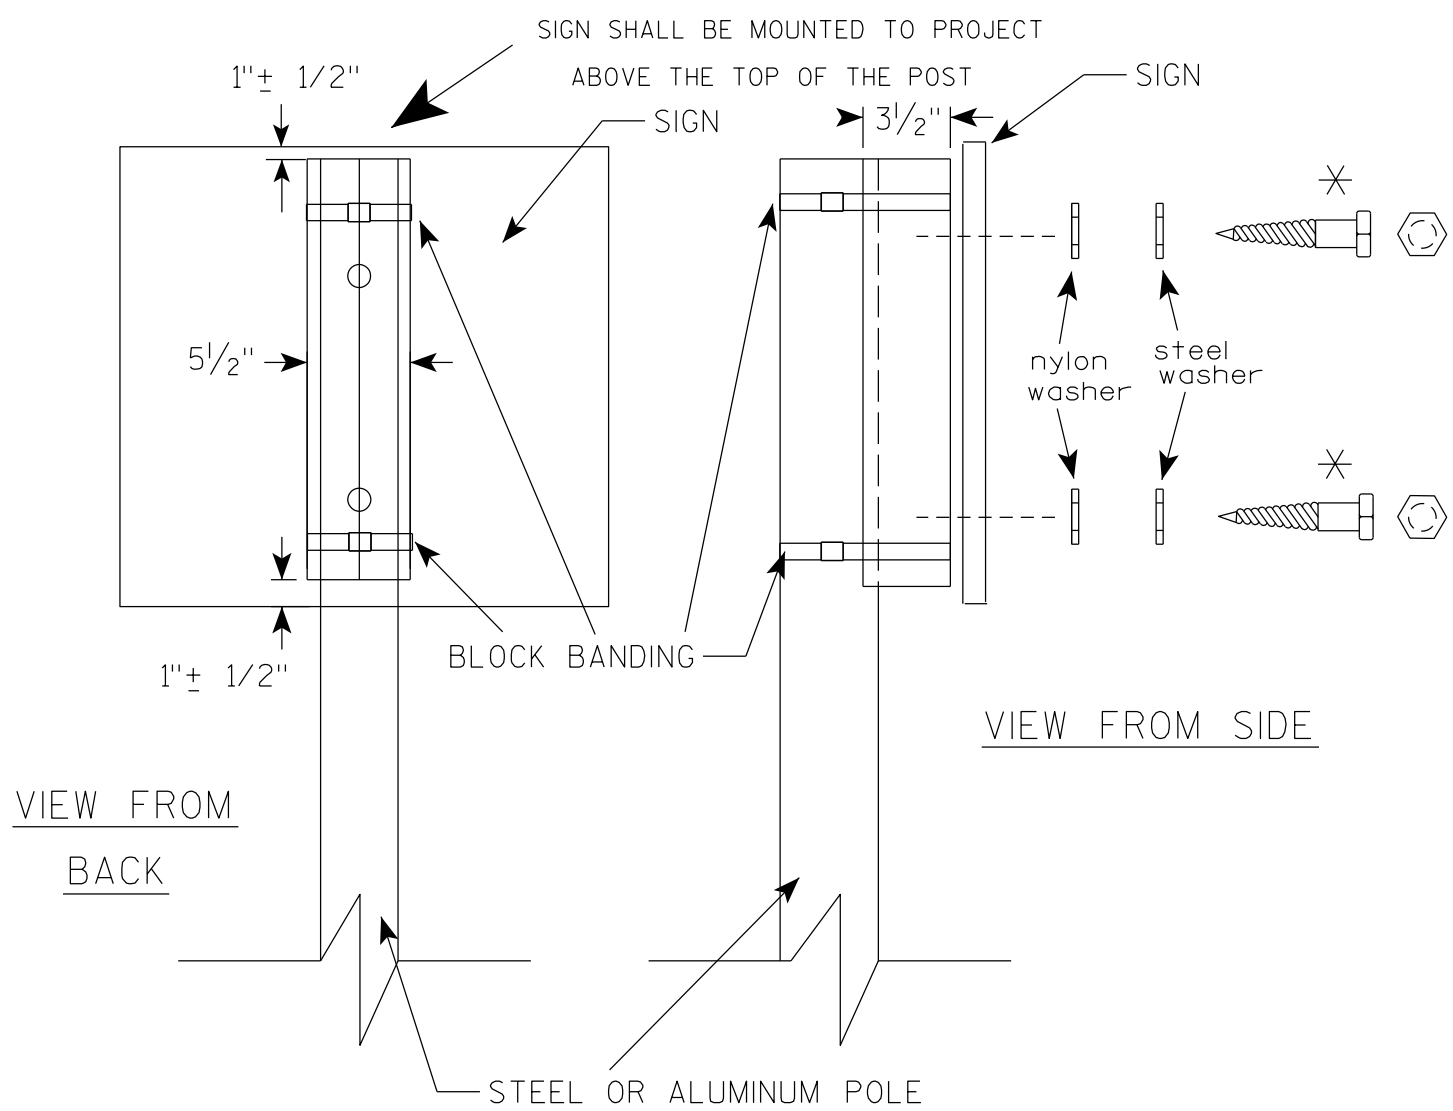

VIEW FROM
BACK

VIEW FROM SIDE

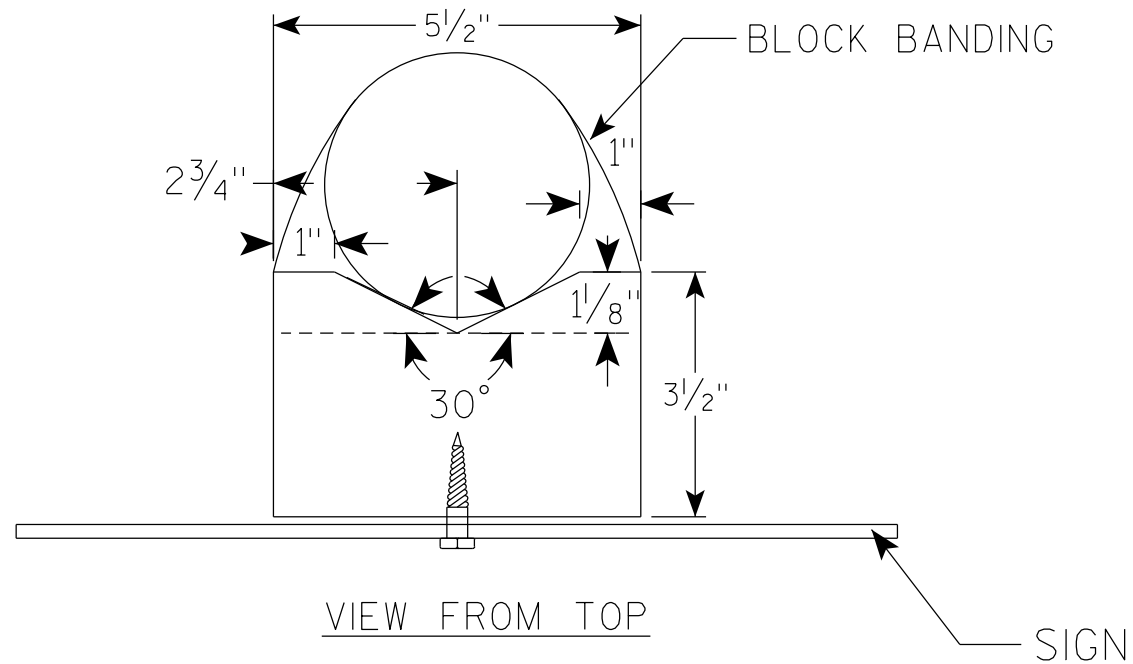

VIEW FROM TOP

GENERAL NOTES

1. WOOD 4"X6" POST MATERIAL SHALL CONFORM TO 507.2.2 OF THE WISDOT STANDARD SPECIFICATIONS
2. BLOCK BANDING AND CLIPS SHALL BE STAINLESS STEEL, $\frac{3}{4}$ " WIDTH AND 0.025" THICKNESS
3. SIGNS 3' OR GREATER IN HEIGHT SHALL UTILIZE 3 BLOCK BANDS. SIGNS UNDER 3' IN HEIGHT SHALL UTILIZE 2 BLOCK BANDS
4. ACTUAL NUMBER OF FASTENERS PER SIGN VARIES WITH THE SIGN AREA, BUT NORMALLY THERE ARE TWO. FOR SIGNS GREATER THAN 9 S.F. 3 FASTENERS SHALL BE USED.
5. ALL SIGN MOUNTING BOLTS AND WASHERS SHALL BE EITHER:
 - a. Hot dip or mechanically galvanized in accordance with ASTM Designation: A 153, Class D
 - b. Electro-galvanized in accordance with ASTM Designation : B 633, TYPE III, SC 3
6. ALL BOLTS SHALL HAVE HEXAGONAL HEADS.
7. STEEL WASHERS SHALL BE $\frac{1}{4}$ " O.D. X $\frac{3}{8}$ " I.D. X $\frac{1}{16}$ "
8. NYLON WASHERS SHALL BE $\frac{1}{4}$ " O.D. X $\frac{3}{8}$ " I.D. X .080 FOR TYPE H OR TYPE F FACE SIGN

✱ LAG BOLTS SHALL BE $\frac{3}{8}$ " X $2\frac{1}{2}$ "

BLOCK BANDING DETAIL
(V-BLOCK OPTION)

WISCONSIN DEPT OF TRANSPORTATION



APPROVED *Matthew R. Rauch*
for State Traffic Engineer

DATE 4/19/2022 PLATE NO. A5-10.3

PROJECT NO:

SHEET NO:

E

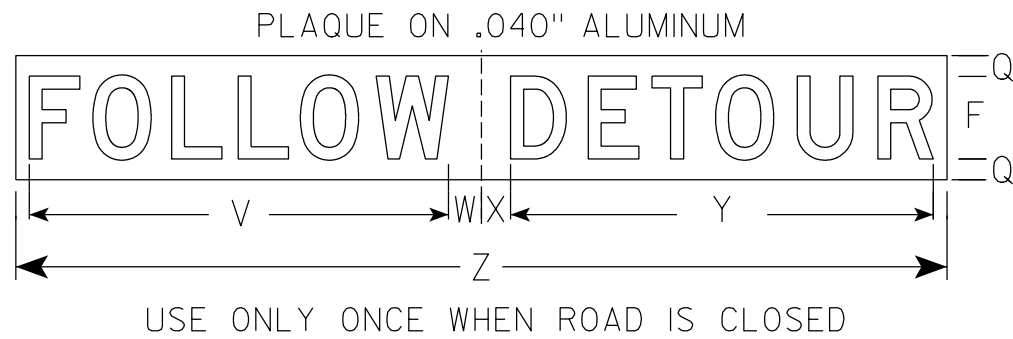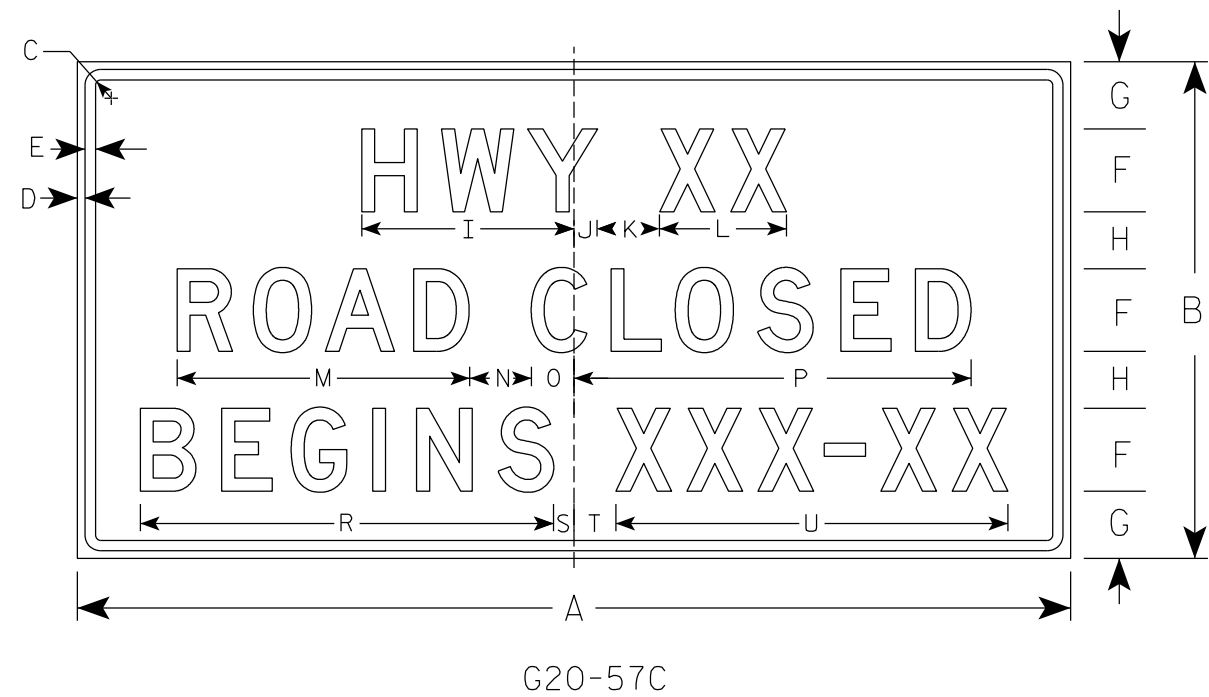

NOTES

- 1. Sign is Type II - Type F Reflective
- 2. Color:
 - Background - Orange
 - Message - Black
- 3. Message Series - D
- 4. Substitute appropriate numeral and adjust spacing to achieve proper balance.

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1																											
2																											
3	72	36	1 1/8	1/2	5/8	6	5	4	15 5/8	1 5/8	5	9 1/4	21 1/8	5	2 7/8	29	2	30	1 3/4	3 1/4	28 3/8	40 1/2	2	2	29 3/4	66	18.0
4	96	48	2 1/4	3/4	1	8	6 1/2	5 1/2	20 5/8	2 1/4	6	12 1/4	28 1/4	6	4 1/8	38 3/8	2	39 7/8	2	4	37 7/8	29 3/4	3 1/8	2 7/8	40 7/8	90	32.0
5																											

STANDARD SIGN
G20-57C

WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
for State Traffic Engineer

DATE 9/25/19 PLATE NO. G20-57C.1

PROJECT NO:


HWY:

COUNTY:

SHEET NO:


E

7

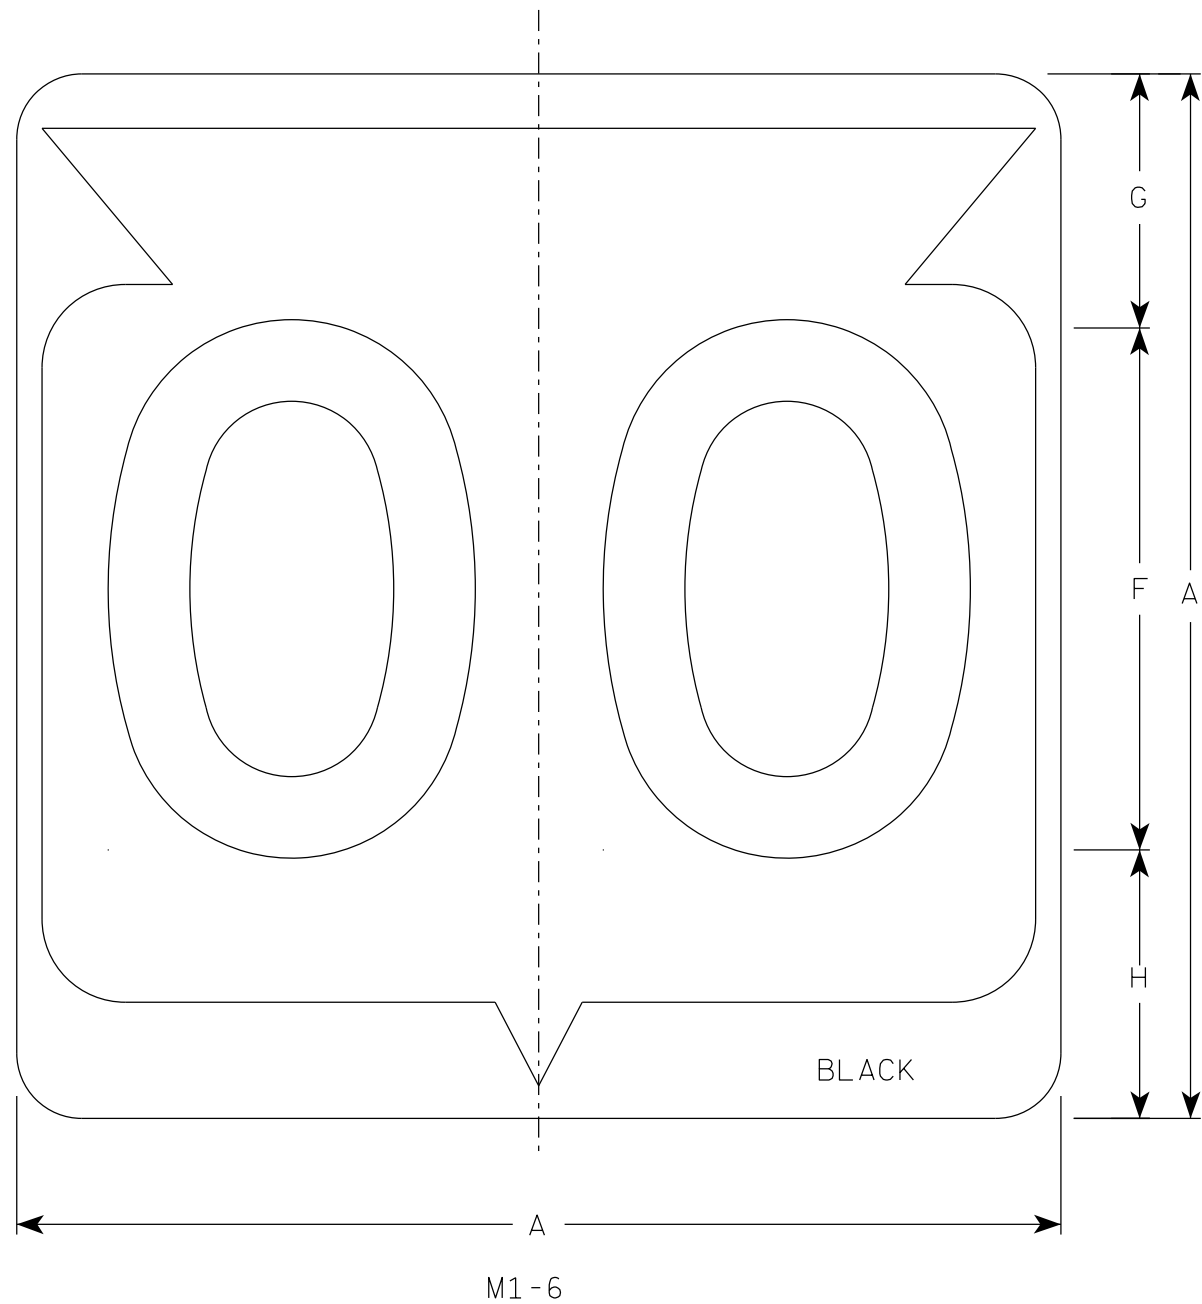

NOTES

1. Sign is Type II - Type H Reflective
2. Color:
Background - White
Message - Black
3. Message Series - D except 3 number signs Series C

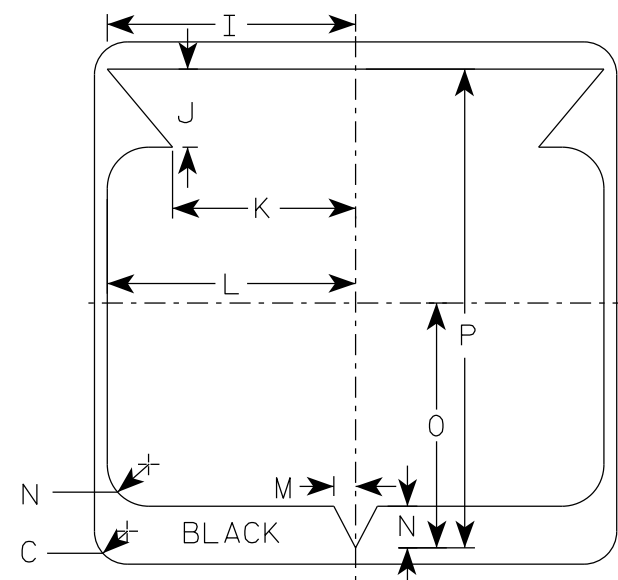

7









SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	v	W	X	Y	Z	Area sq. ft.
1																											
2	24		1 1/2			12	5 1/2	6 1/2	10 1/4	2 1/2	8 7/8	11 1/2	1	1 7/8	11 1/4	21 7/8											4.0
2M	24		1 1/2			12	5 1/2	6 1/2	10 1/4	2 1/2	8 7/8	11 1/2	1	1 7/8	11 1/4	21 7/8											4.0
3	36		2 1/4			18	8 3/4	9 1/4	15 3/8	5 3/8	12 5/8	17 1/8	1 1/2	2 7/8	16 7/8	33											9.0
4	36		2 1/4			18	8 3/4	9 1/4	15 3/8	5 3/8	12 5/8	17 1/8	1 1/2	2 7/8	16 7/8	33											9.0
5	36		2 1/4			18	8 3/4	9 1/4	15 3/8	5 3/8	12 5/8	17 1/8	1 1/2	2 7/8	16 7/8	33											9.0

STATE ROUTE MARKER
M1-6 FOR ASSEMBLIES

WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
for State Traffic Engineer

DATE 11/8/2022 PLATE NO. M1-6.11

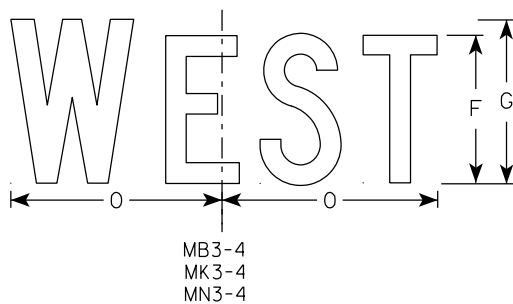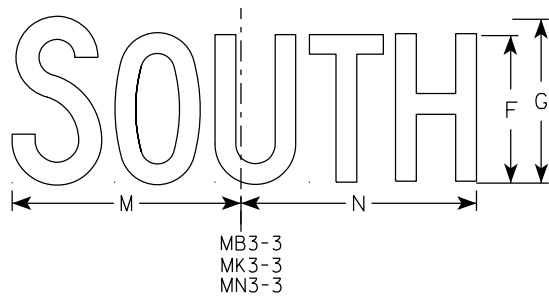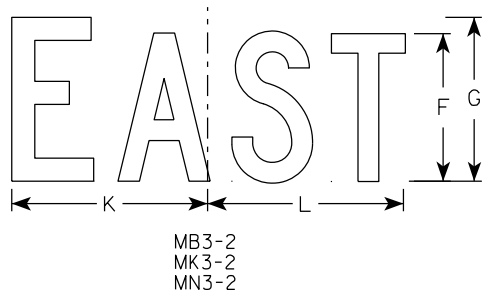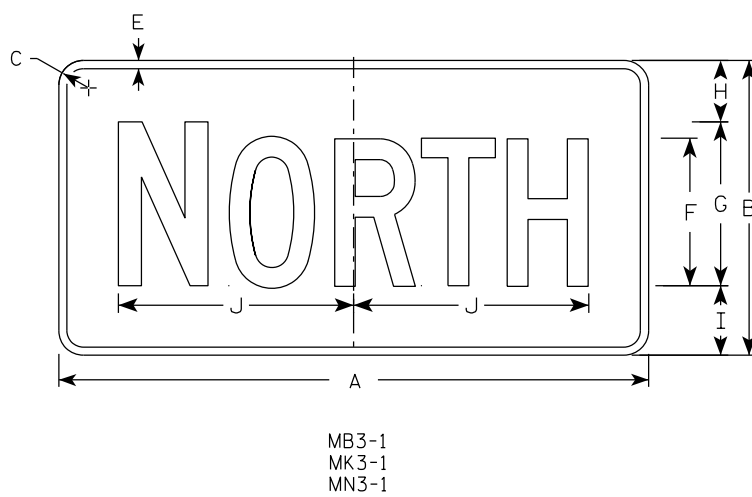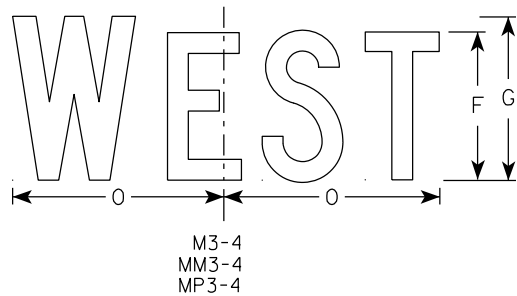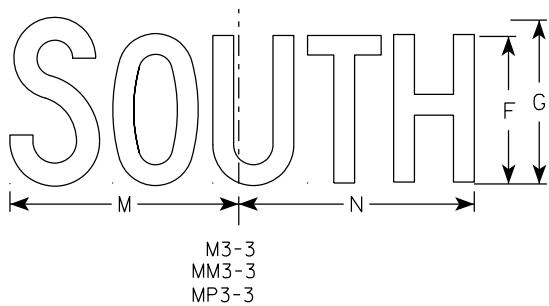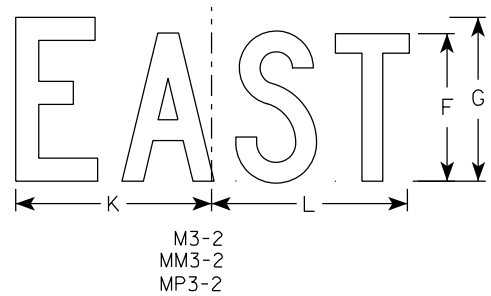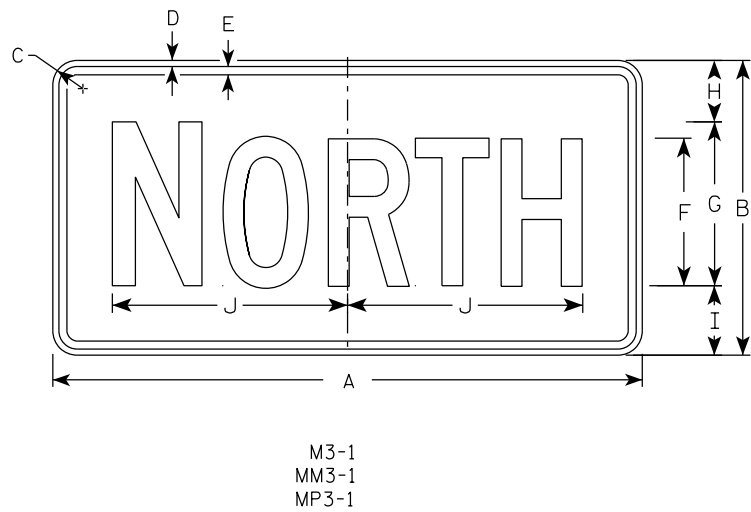

NOTES

1. All Signs Type II - Type H Reflective
2. Color:
Background - See note 5
Message - See note 5
3. Message Series - C
4. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.
5. M3-1 thru M3-4 Background - White
Message - Black
MB3-1 thru MB3-4 Background - Blue
Message - White
MK3-1 thru MK3-4 Background - Green
Message - White
MM3-1 thru MM3-4 Background - White
Message - Green
MN3-1 thru MN3-4 Background - Brown
Message - White
MP3-1 thru MP3-4 Background - White
Message - Blue
6. Note the first letter of each direction is larger than the remainder of the message.

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1																											
2S	24	12	1 1/2	3/8	3/8	6	7	2 1/4	2 3/4	10 1/4	7 7/8	8 3/8	10 1/4	9 3/4	8 3/4												2.00
2M	24	12	1 1/2	3/8	3/8	6	7	2 1/4	2 3/4	10 1/4	7 7/8	8 3/8	10 1/4	9 3/4	8 3/4												2.00
3	36	18	1 1/2	3/8	1/2	9	10	3 3/4	4 1/4	14 3/8	12	12 1/8	14	14 1/8	13												4.5
4	36	18	1 1/2	3/8	1/2	9	10	3 3/4	4 1/4	14 3/8	12	12 1/8	14	14 1/8	13												4.5
5	36	18	1 1/2	3/8	1/2	9	10	3 3/4	4 1/4	14 3/8	12	12 1/8	14	14 1/8	13												4.5

PROJECT NO:	HWY:	COUNTY:	SHEET NO:	E
-------------	------	---------	-----------	---

STANDARD SIGNS
M3-1 THRU M3-4
SERIES

WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
for State Traffic Engineer


DATE 2/8/2023 PLATE NO. M3-1.15

7

7

NOTES

- 1. Sign is Type II - Type F Reflective
- 2. Color:
Background - Orange
Message - Black
- 3. Message Series - B
- 4. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.

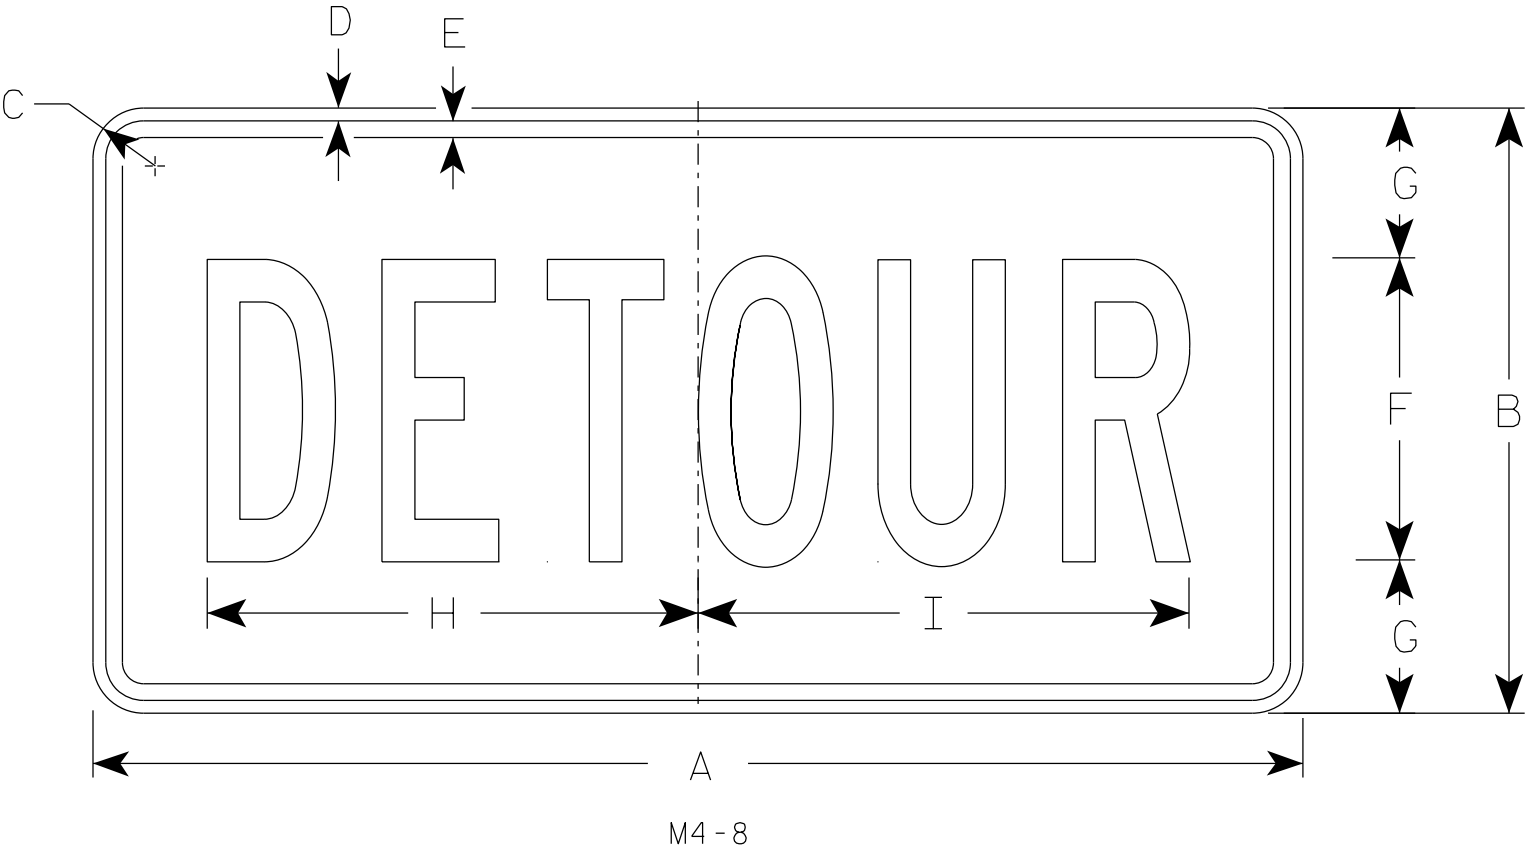

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1																											
2	24	12	1 1/2	3/8	3/8	6	3	10	10 1/4																		2.0
2M	24	12	1 1/2	3/8	3/8	6	3	10	10 1/4																		2.0
3	36	18	1 1/2	3/8	1/2	9	4 1/2	14 5/8	14 1/2																		4.5
4	36	18	1 1/2	3/8	1/2	9	4 1/2	14 5/8	14 1/2																		4.5
5	36	18	1 1/2	3/8	1/2	9	4 1/2	14 5/8	14 1/2																		4.5


STANDARD SIGN

M4 - 8

WISCONSIN DEPT OF TRANSPORTATION


APPROVED *Matthew R. Rauch*
for State Traffic Engineer

DATE 2/9/2023 PLATE NO. M4-8.4

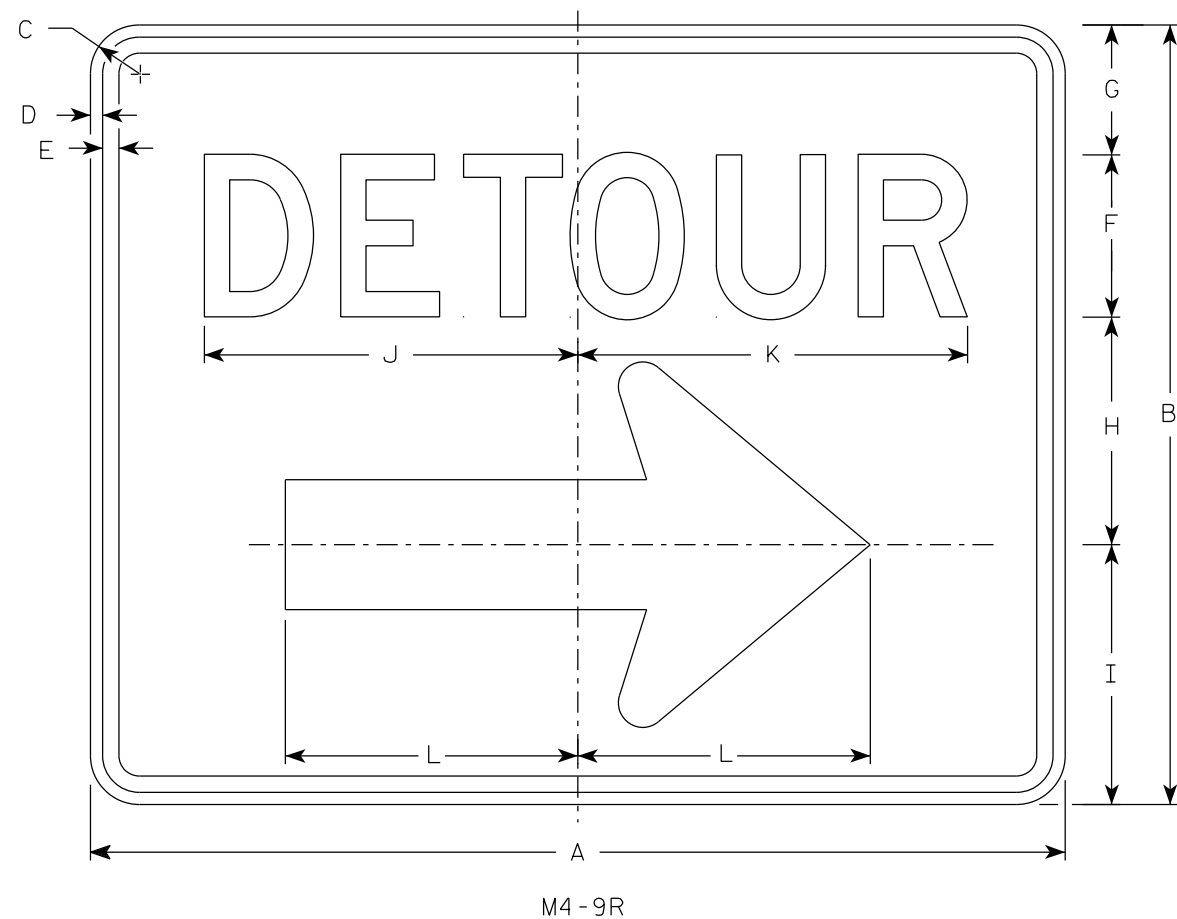

NOTES

1. Sign is Type II - Type F Reflective
2. Color:
Background - Orange
Message - Black
3. Message Series - D
4. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.
4. M4-9L is the same as M4-9R except the arrow is reversed.

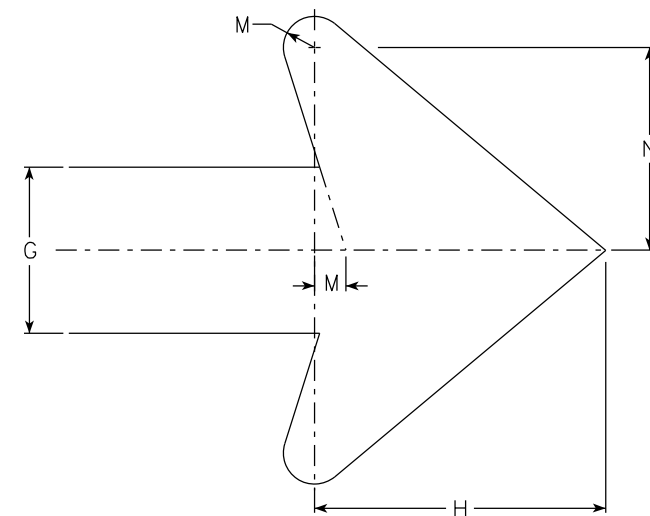

Arrow Detail

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1																											
2	30	24	1 1/2	3/8	1/2	5	4	7	8	11 1/2	12	9	3/4	4 7/8													5.00
2M	30	24	1 1/2	3/8	1/2	5	4	7	8	11 1/2	12	9	3/4	4 7/8													5.00
3	30	24	1 1/2	3/8	1/2	5	4	7	8	11 1/2	12	9	3/4	4 7/8													5.00
4	48	36	1 7/8	1/2	5/8	8	6	10 1/2	11 5/8	20 5/8	20 1/2	13 1/4	1 1/8	6 7/8													12.0
5	48	36	1 7/8	1/2	5/8	8	6	10 1/2	11 5/8	20 5/8	20 1/2	13 1/4	1 1/8	6 7/8													12.0


STANDARD SIGN
M4-9 R & L

WISCONSIN DEPT OF TRANSPORTATION


APPROVED *Matthew R. Rauch*
For State Traffic Engineer

DATE 2/9/2023 PLATE NO. M4-9R.6


PROJECT NO: HWY: COUNTY: SHEET NO: **E**

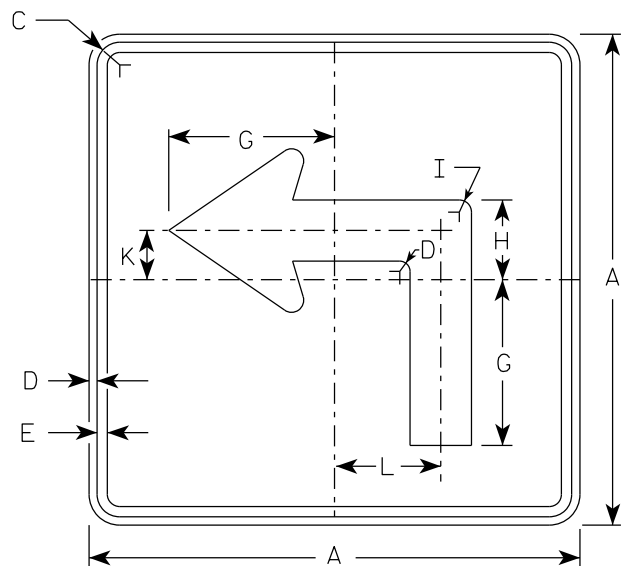


M5-1L
MM5-1L
M05-1L
MP5-1L

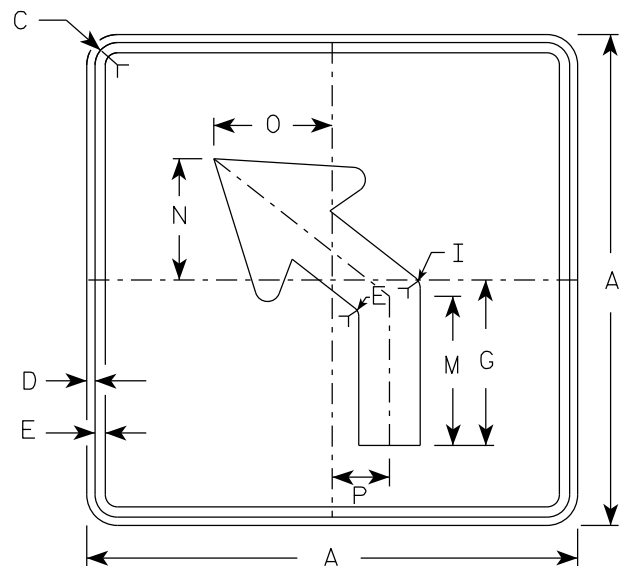

M5-2L
MM5-2L
M05-2L
MP5-2L

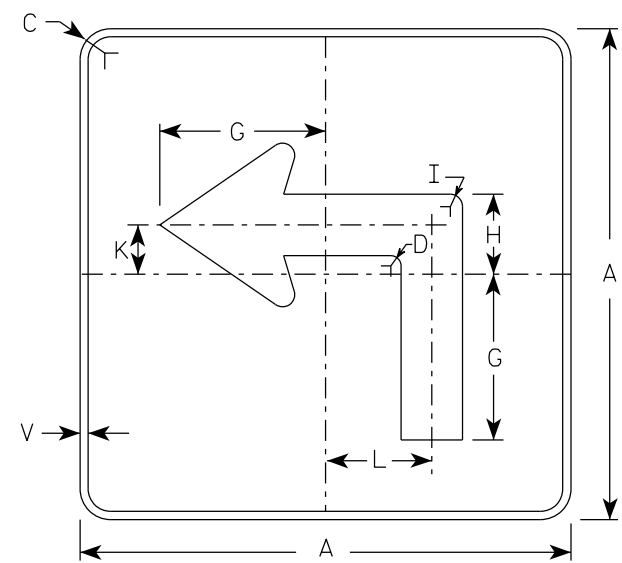

MB5-1L
MK5-1L
MN5-1L
MR5-1L

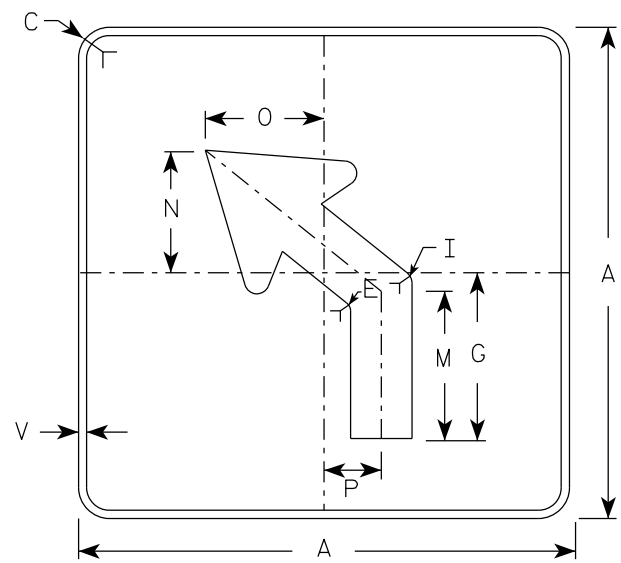


MB5-2L
MK5-2L
MN5-2L
MR5-2L

NOTES





- Signs are Type II - Type H reflective except as shown
- Color:
Background - See note 4
Message - See note 4
- Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.
- | | | |
|-----------|-------|---|
| M5-1 and | M5-2 | Background - White |
| | | Message - Black |
| MB5-1 and | MB5-2 | Background - Blue |
| | | Message - White |
| MK5-1 and | MK5-2 | Background - Green |
| | | Message - White |
| MM5-1 and | MM5-2 | Background - White |
| | | Message - Green |
| MN5-1 and | MN5-2 | Background - Brown |
| | | Message - White |
| M05-1 and | M05-2 | Background - Orange - Type F Reflective |
| | | Message - Black |
| MP5-1 and | MP5-2 | Background - White |
| | | Message - Blue |
| MR5-1 and | MR5-2 | Background - Brown |
| | | Message - Yellow |
- M5-1R same as M5-1L except arrow points right.
- M5-2R same as M5-2L except arrow tilts right.

ARROW DETAIL

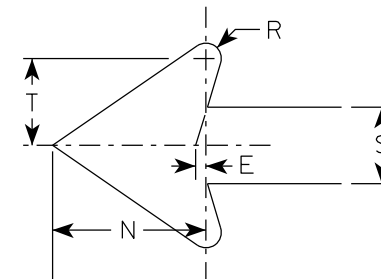


SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1																											
2S	21		1 1/2	3/8	3/8		7	3 3/8	5/8		2 1/8	4 1/2	6 3/8	5 1/4	5	2 1/2		1/2	2 5/8	3		1/2					3.06
2M	21		1 1/2	3/8	3/8		7	3 3/8	5/8		2 1/8	4 1/2	6 3/8	5 1/4	5	2 1/2		1/2	2 5/8	3		1/2					3.06
3	30		1 7/8	1/2	5/8		10 1/8	4 7/8	7/8		3	6 1/2	9 1/8	7 1/2	7 1/4	3 1/2		3/4	3 3/4	4 1/4		1/2					6.25
4	30		1 7/8	1/2	5/8		10 1/8	4 7/8	7/8		3	6 1/2	9 1/8	7 1/2	7 1/4	3 1/2		3/4	3 3/4	4 1/4		1/2					6.25
5	30		1 7/8	1/2	5/8		10 1/8	4 7/8	7/8		3	6 1/2	9 1/8	7 1/2	7 1/4	3 1/2		3/4	3 3/4	4 1/4		1/2					6.25

PROJECT NO:	HWY:	COUNTY:	SHEET NO:	E
-------------	------	---------	-----------	---

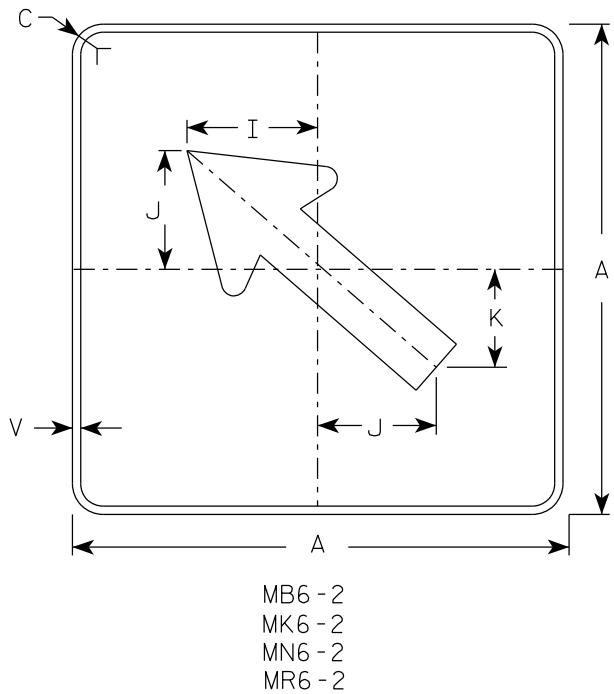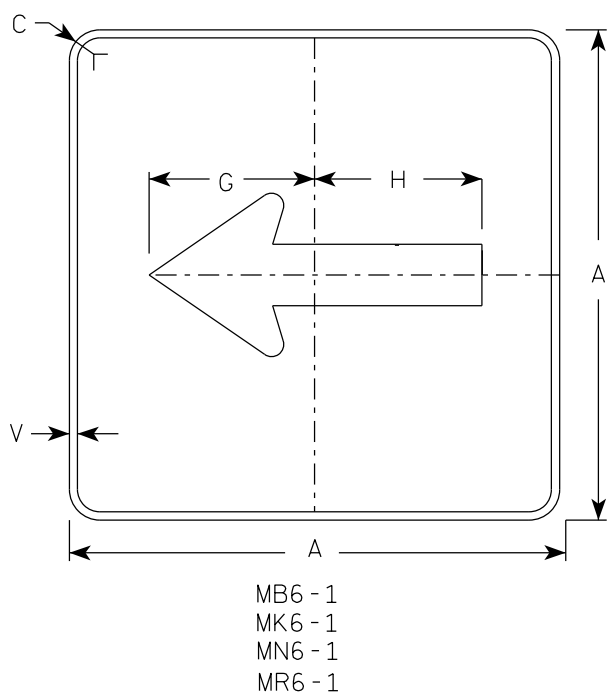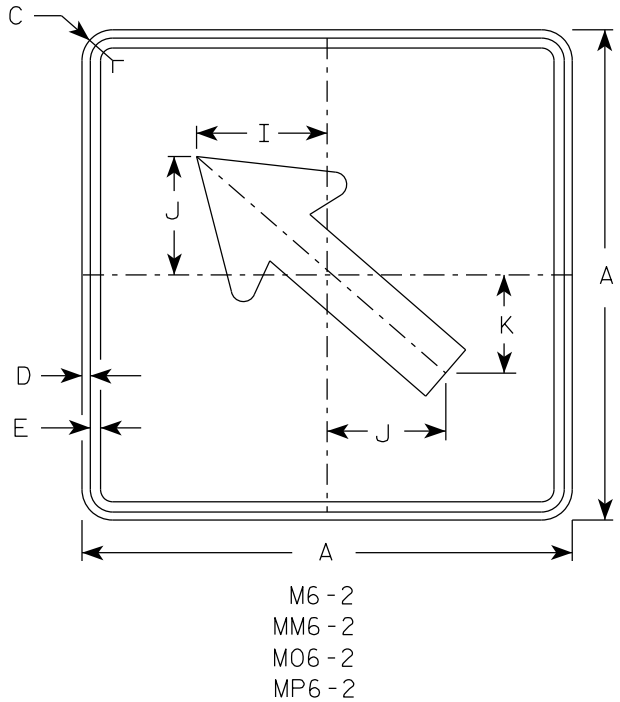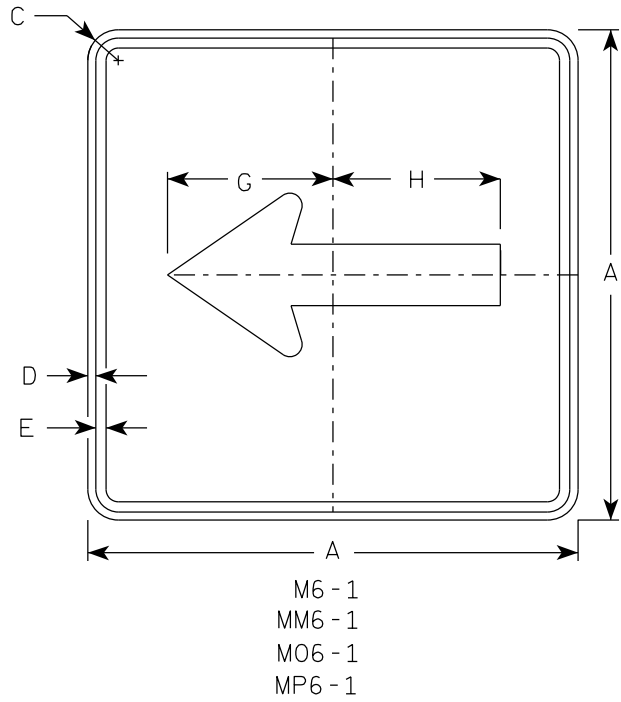

- NOTES
- Signs are Type II - Type H Reflective except as Shown
 - Color:
Background - See note 4
Message - See note 4
 - Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.
 - M6-1 and M6-2 Background - White
Message - Black
MB6-1 and MB6-2 Background - Blue
Message - White
MK6-1 and MK6-2 Background - Green
Message - White
MM6-1 and MM6-2 Background - White
Message - Green
MN6-1 and MN6-2 Background - Brown
Message - White
M06-1 and M06-2 Background - Orange - Type F Reflective
Message - Black
MP6-1 and MP6-2 Background - White
Message - Blue
MR6-1 and MR6-2 Background - Brown
Message - Yellow

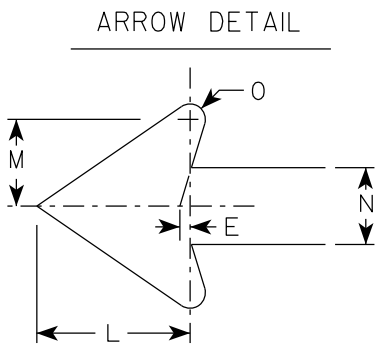

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.	
1																												
2S	21		1 1/2	3/8	3/8		7 1/2	7 1/8	5 5/8	5	4 1/4	5 1/4	3	2 5/8	1/2							1/2						3.06
2M	21		1 1/2	3/8	3/8		7 1/2	7 1/8	5 5/8	5	4 1/4	5 1/4	3	2 5/8	1/2							1/2						3.06
3	30		1 7/8	1/2	5/8		10 3/4	10 1/4	8	7 1/4	6	7 1/2	4 1/4	3 3/4	3/4							1/2						6.25
4	30		1 7/8	1/2	5/8		10 3/4	10 1/4	8	7 1/4	6	7 1/2	4 1/4	3 3/4	3/4							1/2						6.25
5	30		1 7/8	1/2	5/8		10 3/4	10 1/4	8	7 1/4	6	7 1/2	4 1/4	3 3/4	3/4							1/2						6.25

PROJECT NO:

HWY:

COUNTY:

SHEET NO:

E

STANDARD SIGN
M6 - 1 & M6 - 2
SERIES


WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
for State Traffic Engineer


DATE 2/13/2023 PLATE NO. M6-1.16

7

7

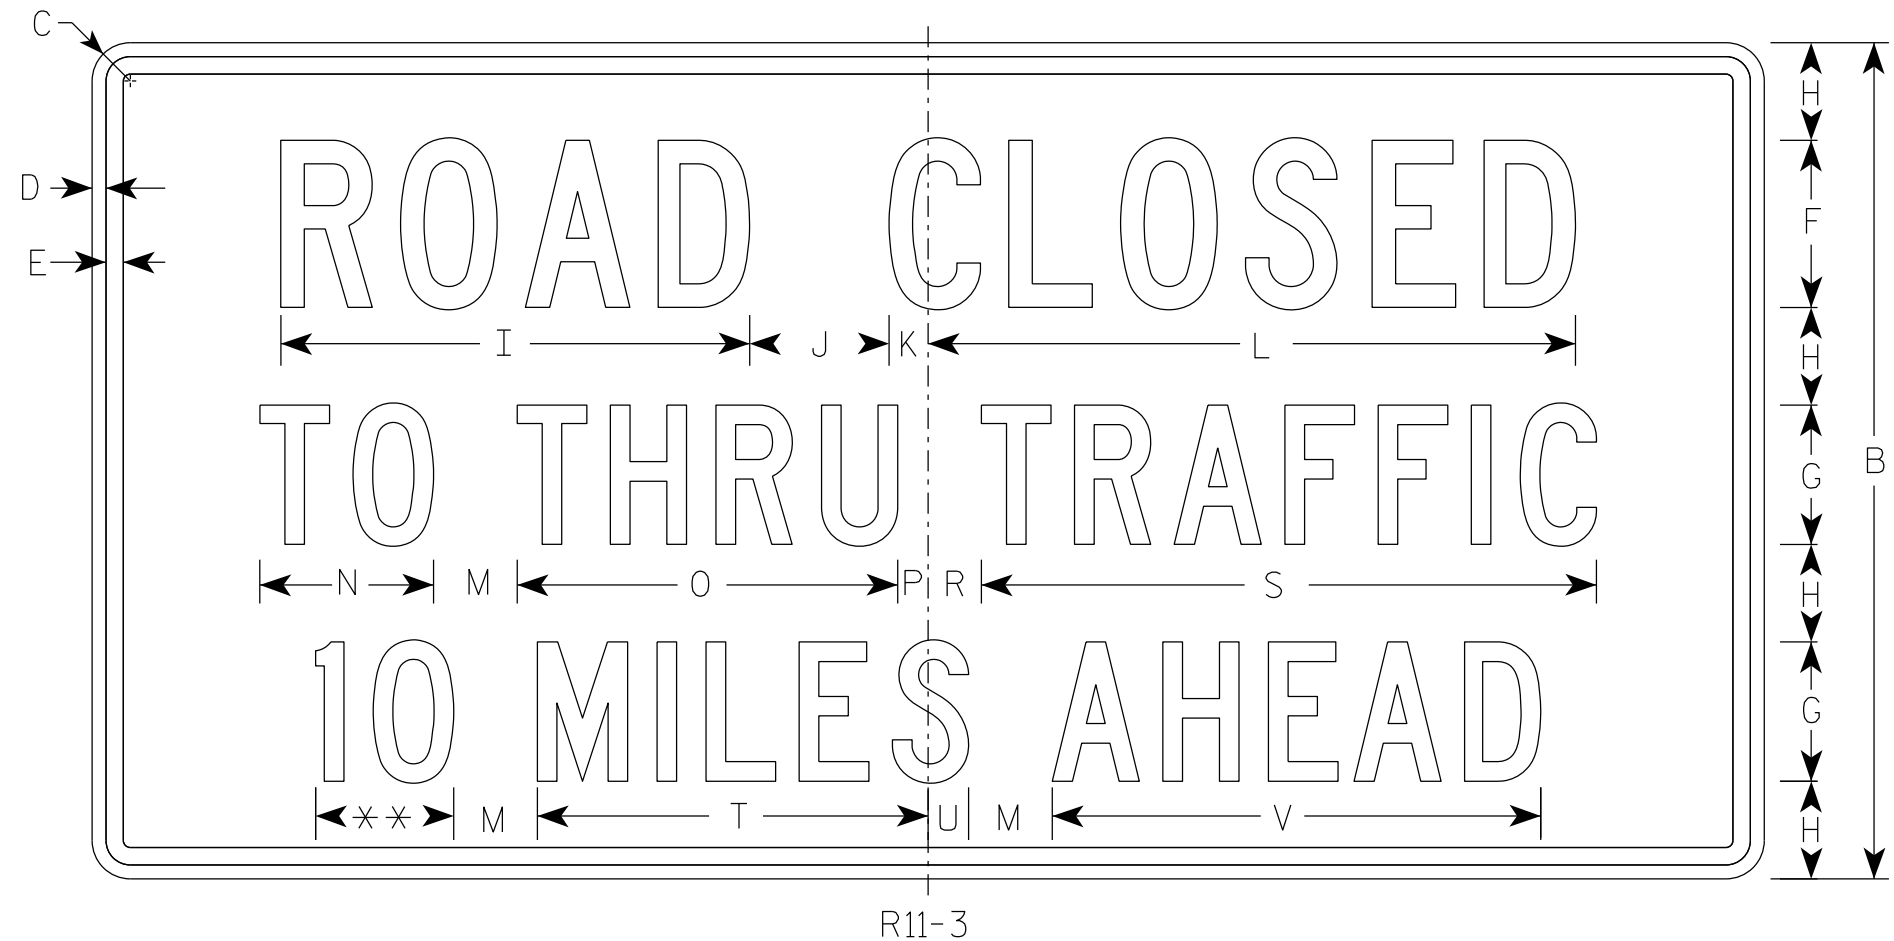

** See Note 5

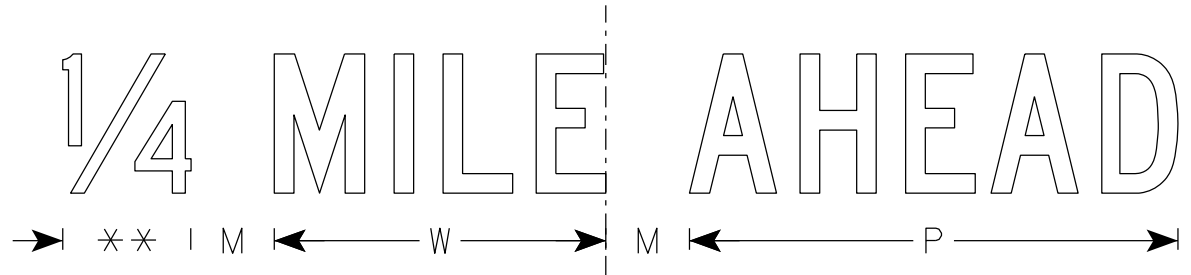

NOTES

1. Sign is Type II - Type H Reflective
2. Color:
Background - White
Message - Black
3. Message Series - C
4. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.
5. Substitute appropriate numerals to nearest quarter mile and optically adjust spacing to achieve proper balance.

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1	36	18	1 1/2	3/8	3/8	4	3	2	11 1/4	3	1 1/8	15 3/8	2	3 3/4	8 1/4	5/8		1 3/8	13 1/4	8 3/8	7/8	10 1/2	7 1/8				4.5
2S	60	30	1 7/8	1/2	5/8	6	5	3 1/2	16 7/8	5	1 3/8	23 1/4	3	6 1/4	13 5/8	1 1/8		1 7/8	22 1/8	14	1 1/2	17 1/2	11 7/8				12.5
2M	60	30	1 7/8	1/2	5/8	6	5	3 1/2	16 7/8	5	1 3/8	23 1/4	3	6 1/4	13 5/8	1 1/8		1 7/8	22 1/8	14	1 1/2	17 1/2	11 7/8				12.5
3																											
4																											
5																											

STANDARD SIGN
R11-3

WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
for State Traffic Engineer

DATE 2/5/24 PLATE NO. R11-3.10

PROJECT NO:


HWY:

COUNTY:

SHEET NO:

E

7

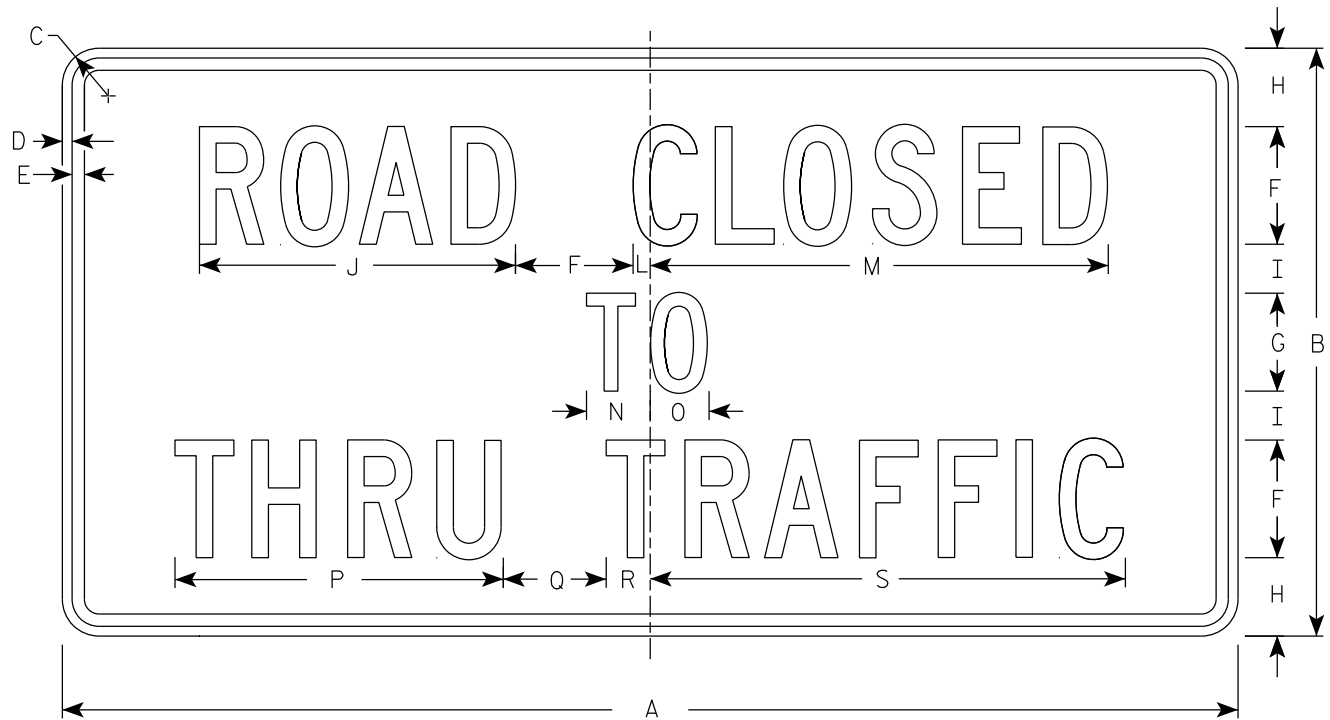

R11-4

NOTES

- 1. Sign is Type II - Type H Reflective
- 2. Color:
Background - White
Message - Black
- 3. Message Series - C
- 4. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.

7

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1																											
2S	60	30	1 7⁄8	1⁄2	5⁄8	6	5	4	2 1⁄2	16 1⁄8		7⁄8	23 3⁄8	3 1⁄4	3	16 3⁄4	5 1⁄4	2 1⁄4	24 1⁄4								12.5
2M	60	30	1 7⁄8	1⁄2	5⁄8	6	5	4	2 1⁄2	16 1⁄8		7⁄8	23 3⁄8	3 1⁄4	3	16 3⁄4	5 1⁄4	2 1⁄4	24 1⁄4								12.5
3																											
4																											
5																											


PROJECT NO:

HWY:


COUNTY:

SHEET NO:


E

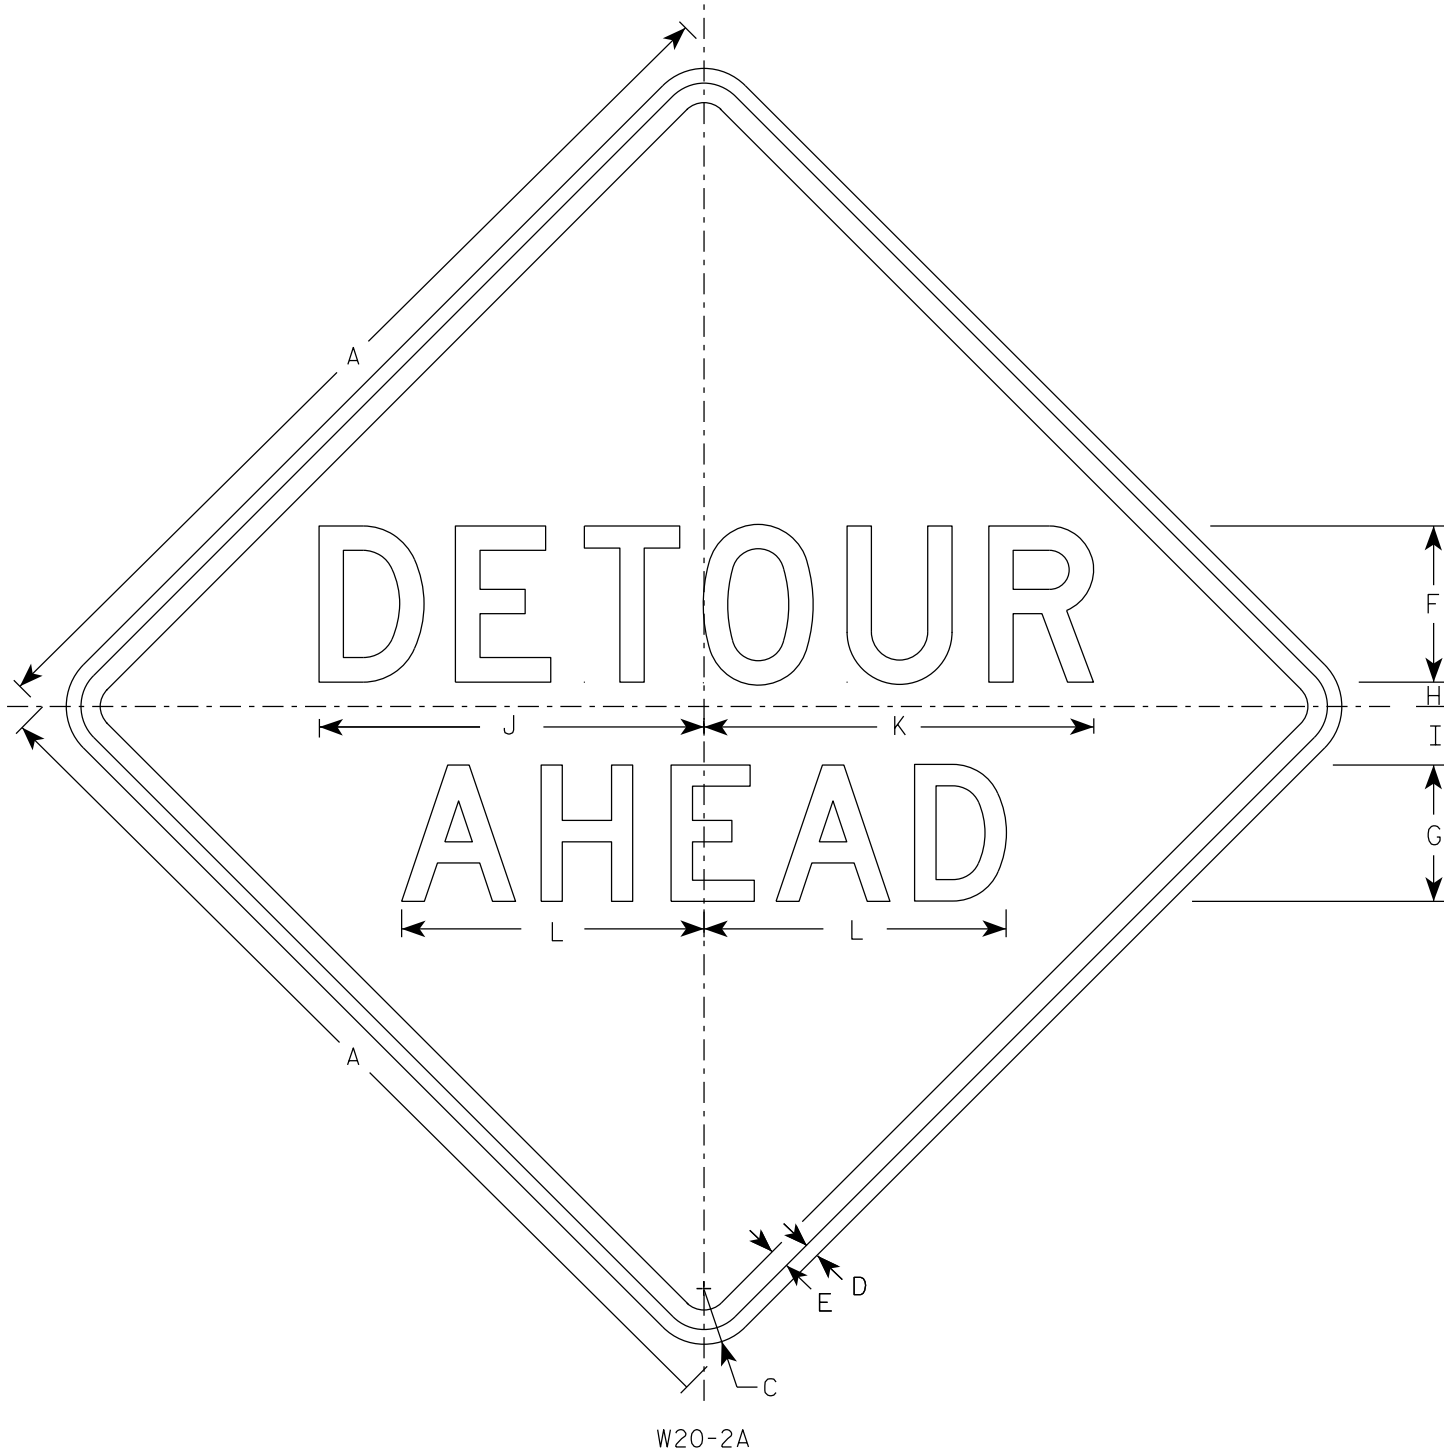


W20-2A

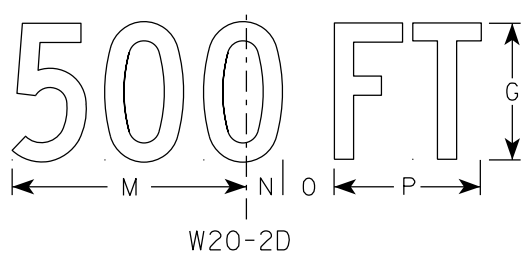


W20-2D

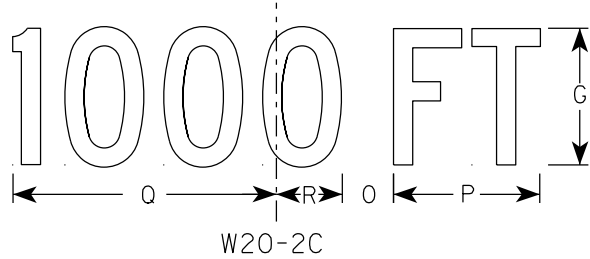


W20-2C

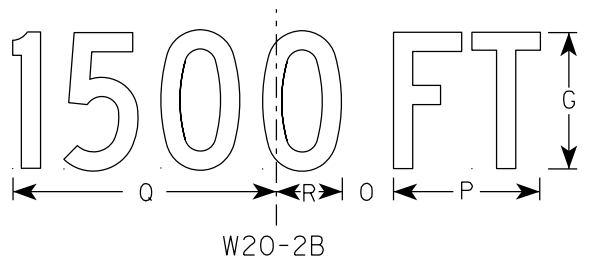

W20-2B

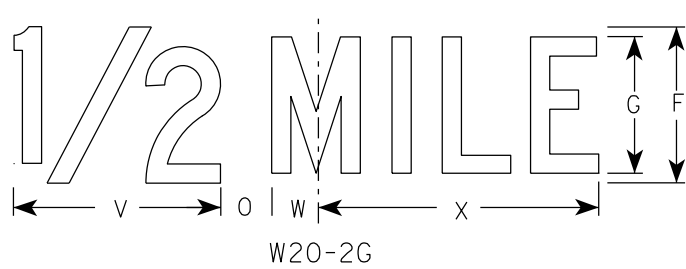

W20-2G

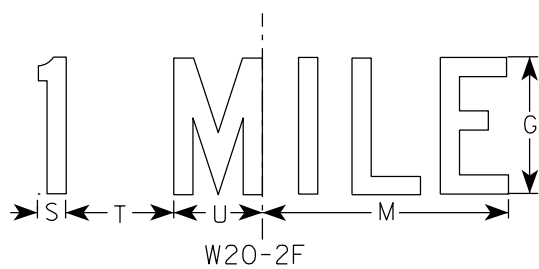

W20-2F

NOTES

- 1. Sign is Type II - Type F Reflective
- 2. Color:
Background - Orange
Message - Black
- 3. Message Series - See note 5
- 4. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.
- 5. Line 1 is Series D.
Line 2 is Series D for AHEAD and Series C for all other distances.


SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1	36		2 1/4	5/8	3/4	6	5	1	2 1/4	14 3/4	15	11 5/8	9	1 3/8	1 7/8	5 5/8	10 1/8	2 1/2	1 1/8	4 1/2	3 1/2	8	1 3/4	10 3/4			9.0
2S	48		3	3/4	1	8	7	1 1/4	3	19 3/4	20	15 1/2	12	1 7/8	2 5/8	7 1/2	13 1/2	3 3/8	1 1/2	6	4 5/8	10 5/8	2 3/8	14 3/8			16.0
2M	48		3	3/4	1	8	7	1 1/4	3	19 3/4	20	15 1/2	12	1 7/8	2 5/8	7 1/2	13 1/2	3 3/8	1 1/2	6	4 5/8	10 5/8	2 3/8	14 3/8			16.0
3	48		3	3/4	1	8	7	1 1/4	3	19 3/4	20	15 1/2	12	1 7/8	2 5/8	7 1/2	13 1/2	3 3/8	1 1/2	6	4 5/8	10 5/8	2 3/8	14 3/8			16.0
4	48		3	3/4	1	8	7	1 1/4	3	19 3/4	20	15 1/2	12	1 7/8	2 5/8	7 1/2	13 1/2	3 3/8	1 1/2	6	4 5/8	10 5/8	2 3/8	14 3/8			16.0
5	48		3	3/4	1	8	7	1 1/4	3	19 3/4	20	15 1/2	12	1 7/8	2 5/8	7 1/2	13 1/2	3 3/8	1 1/2	6	4 5/8	10 5/8	2 3/8	14 3/8			16.0

STANDARD SIGN
W20-2A,B,C,D,F & G


WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
For State Traffic Engineer


DATE 1/10/2024 PLATE NO. W20-2.7

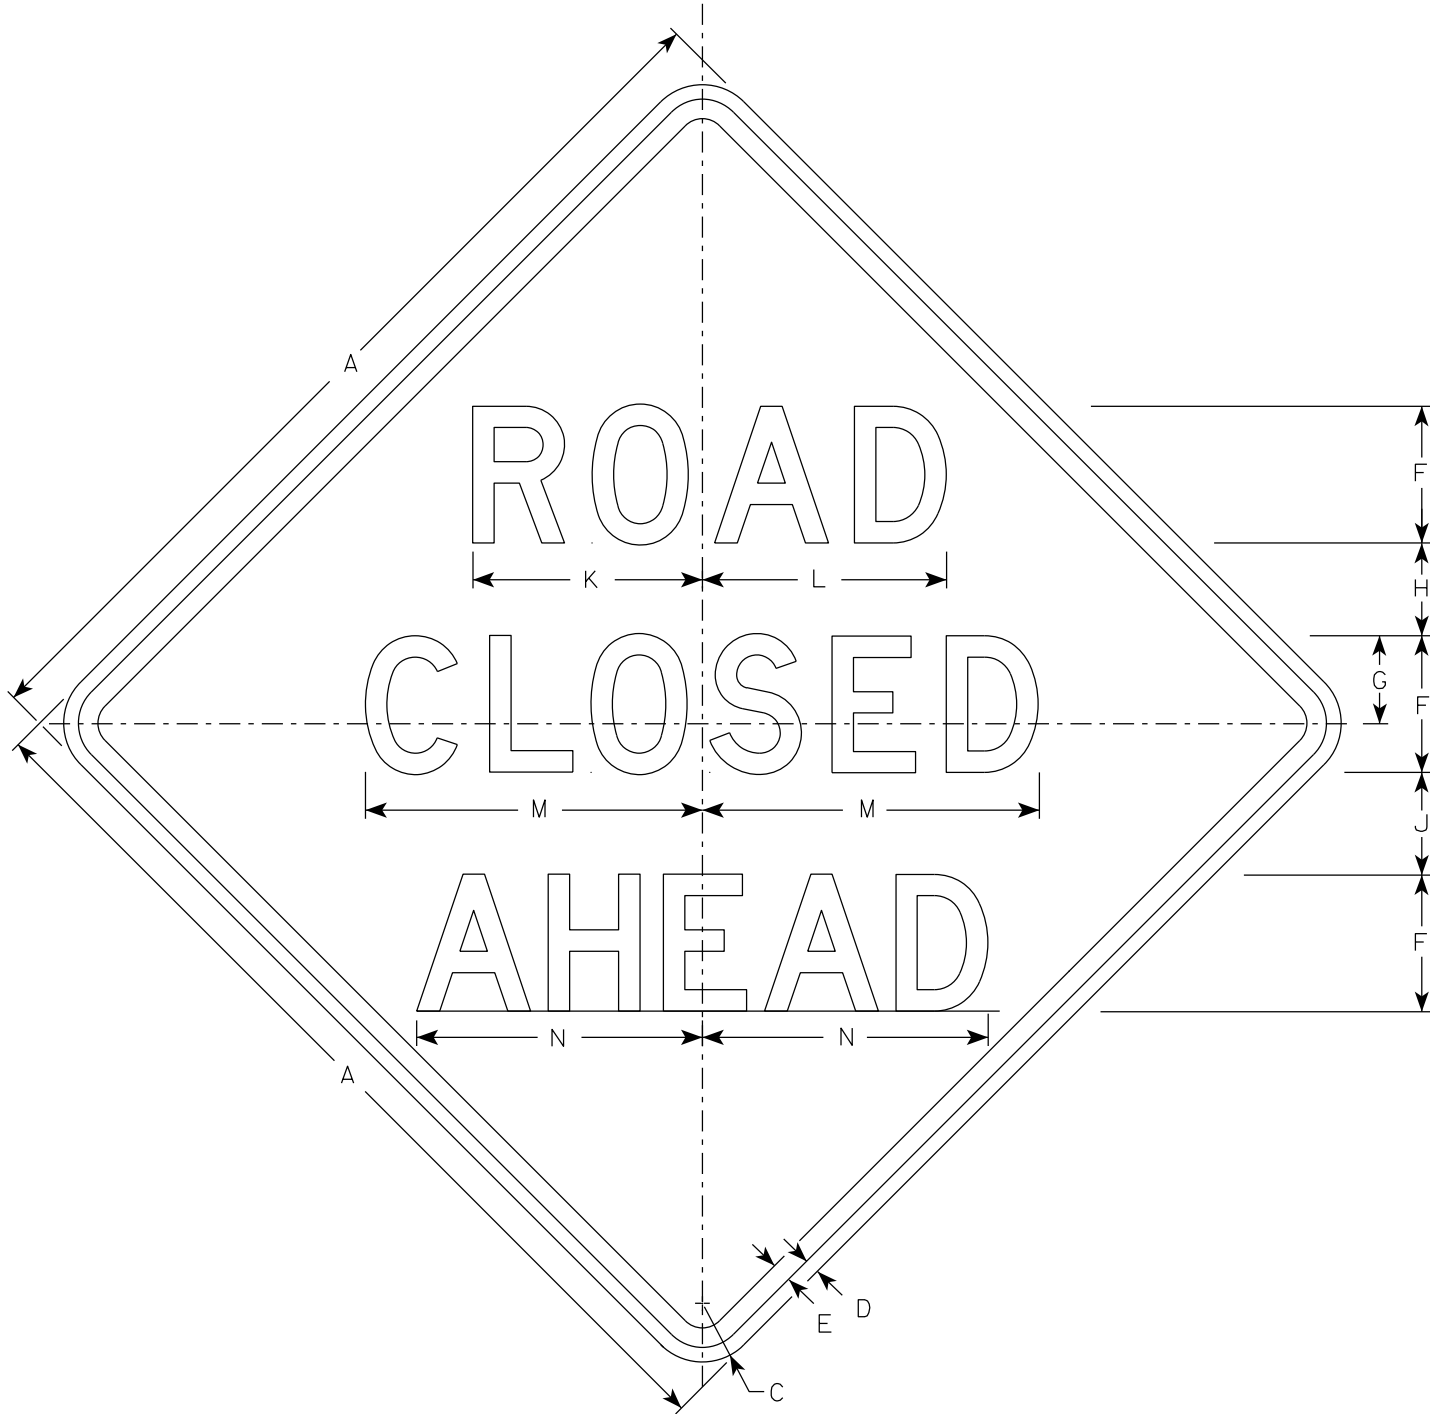


W20-3A

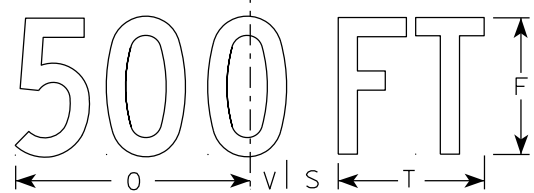


W20-3D

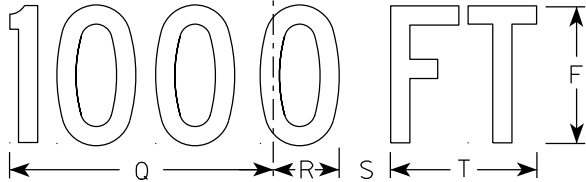


W20-3C

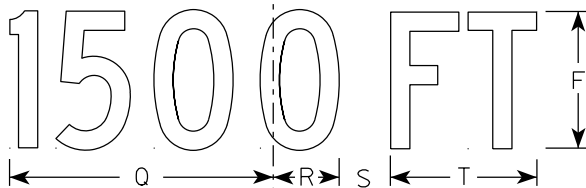

W20-3B

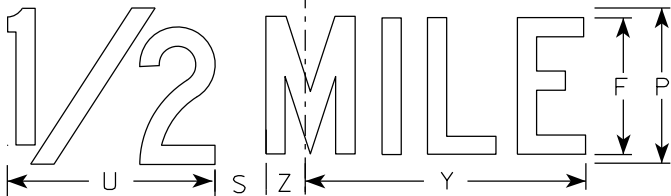

W20-3G

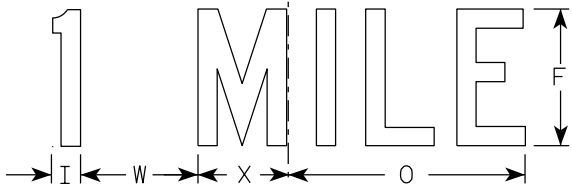

W20-3F

NOTES

1. Sign is Type II - Type F Reflective
2. Color:
Background - Orange
Message - Black
3. Message Series - see note 5
4. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.
5. Lines 1 and 2 are Series D.
Line 3 is Series D for AHEAD and Series C for all other distances.

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	v	W	X	Y	Z	Area sq. ft.
1	36		2 1/4	5/8	3/4	5	3 3/8	3 1/2	1 1/8	4	8 3/8	8 7/8	12 1/2	11	9	6	10 1/8	2 1/2	1 7/8	5 5/8	8	1 3/8	4 1/2	3 1/2	10 3/4	1 3/4	9.0
2S	48		3	3/4	1	7	4 1/2	4 3/4	1 1/2	5 1/4	11 3/4	12 1/2	17 1/4	14 5/8	12	8	13 1/2	3 3/8	2 5/8	7 1/2	10 5/8	1 7/8	6	4 5/8	14 3/8	2 3/8	16.0
2M	48		3	3/4	1	7	4 1/2	4 3/4	1 1/2	5 1/4	11 3/4	12 1/2	17 1/4	14 5/8	12	8	13 1/2	3 3/8	2 5/8	7 1/2	10 5/8	1 7/8	6	4 5/8	14 3/8	2 3/8	16.0
3	48		3	3/4	1	7	4 1/2	4 3/4	1 1/2	5 1/4	11 3/4	12 1/2	17 1/4	14 5/8	12	8	13 1/2	3 3/8	2 5/8	7 1/2	10 5/8	1 7/8	6	4 5/8	14 3/8	2 3/8	16.0
4	48		3	3/4	1	7	4 1/2	4 3/4	1 1/2	5 1/4	11 3/4	12 1/2	17 1/4	14 5/8	12	8	13 1/2	3 3/8	2 5/8	7 1/2	10 5/8	1 7/8	6	4 5/8	14 3/8	2 3/8	16.0
5	48		3	3/4	1	7	4 1/2	4 3/4	1 1/2	5 1/4	11 3/4	12 1/2	17 1/4	14 5/8	12	8	13 1/2	3 3/8	2 5/8	7 1/2	10 5/8	1 7/8	6	4 5/8	14 3/8	2 3/8	16.0

STANDARD SIGN
W20-3A, B, C, D, F & G


WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
for State Traffic Engineer


DATE 1/10/2024 PLATE NO. W20-3.8

DIVISION	FROM/TO STATION	LOCATION	205.0100 COMMON EXCAVATION (1)		SALVAGED/UNUSABLE PAVEMENT MATERIAL (3)	AVAILABLE MATERIAL (4)
			CUT (2)	EBS EXCAVATION		
DIVISION 1						
CULVERT	109+91 - 110+41	LT & RT	130	0	11	119
CULVERT	110+61 - 111+11	LT & RT	130	0	11	119
CULVERT	173+35 - 173+85	LT & RT	145	0	11	134
CULVERT	174+07 - 174+57	LT & RT	145	0	11	134
CULVERT	243+89 - 244+39	LT & RT	140	0	11	129
CULVERT	244+59 - 245+09	LT & RT	140	0	11	129
CULVERT	302+77 - 303+27	LT & RT	280	0	11	269
CULVERT	303+79 - 304+29	LT & RT	280	0	11	269
CULVERT	355+65 - 356+15	LT & RT	260	0	11	249
CULVERT	356+35 - 356+85	LT & RT	260	0	11	249
CULVERT	402+89 - 403+39	LT & RT	265	0	11	254
CULVERT	403+59 - 404+09	LT & RT	265	0	11	254
CULVERT	443+67 - 444+17	LT & RT	260	0	11	249
CULVERT	444+68 - 445+18	LT & RT	260	0	11	249
CULVERT	549+74 - 550+24	LT & RT	160	0	11	149
CULVERT	550+34 - 550+94	LT & RT	160	0	11	149
CULVERT	569+32 - 569+84	LT & RT	280	0	11	269
CULVERT	569+94 - 570+23	LT & RT	280	0	11	269
GRAND TOTAL			3,840	0	200	3,640
TOTAL COMMON EXC			3,840			

NOTES:
(1) COMMON EXCAVATION IS THE SUM OF THE CUT AND EBS EXCAVATION COLUMNS. ITEM NUMBER 205.0100.
(2) SALVAGED/UNSUABLE PAVEMENT MATERIAL IS INCLUDED IN CUT.
(3) SALVAGED/UNUSABLE PAVEMENT MATERIAL DOES NOT SHOW UP ON CROSS SECTIONS.
(4) AVAILABLE MATERIAL = CUT - SALVAGED/UNUSUABLE PAVEMENT MATERIAL

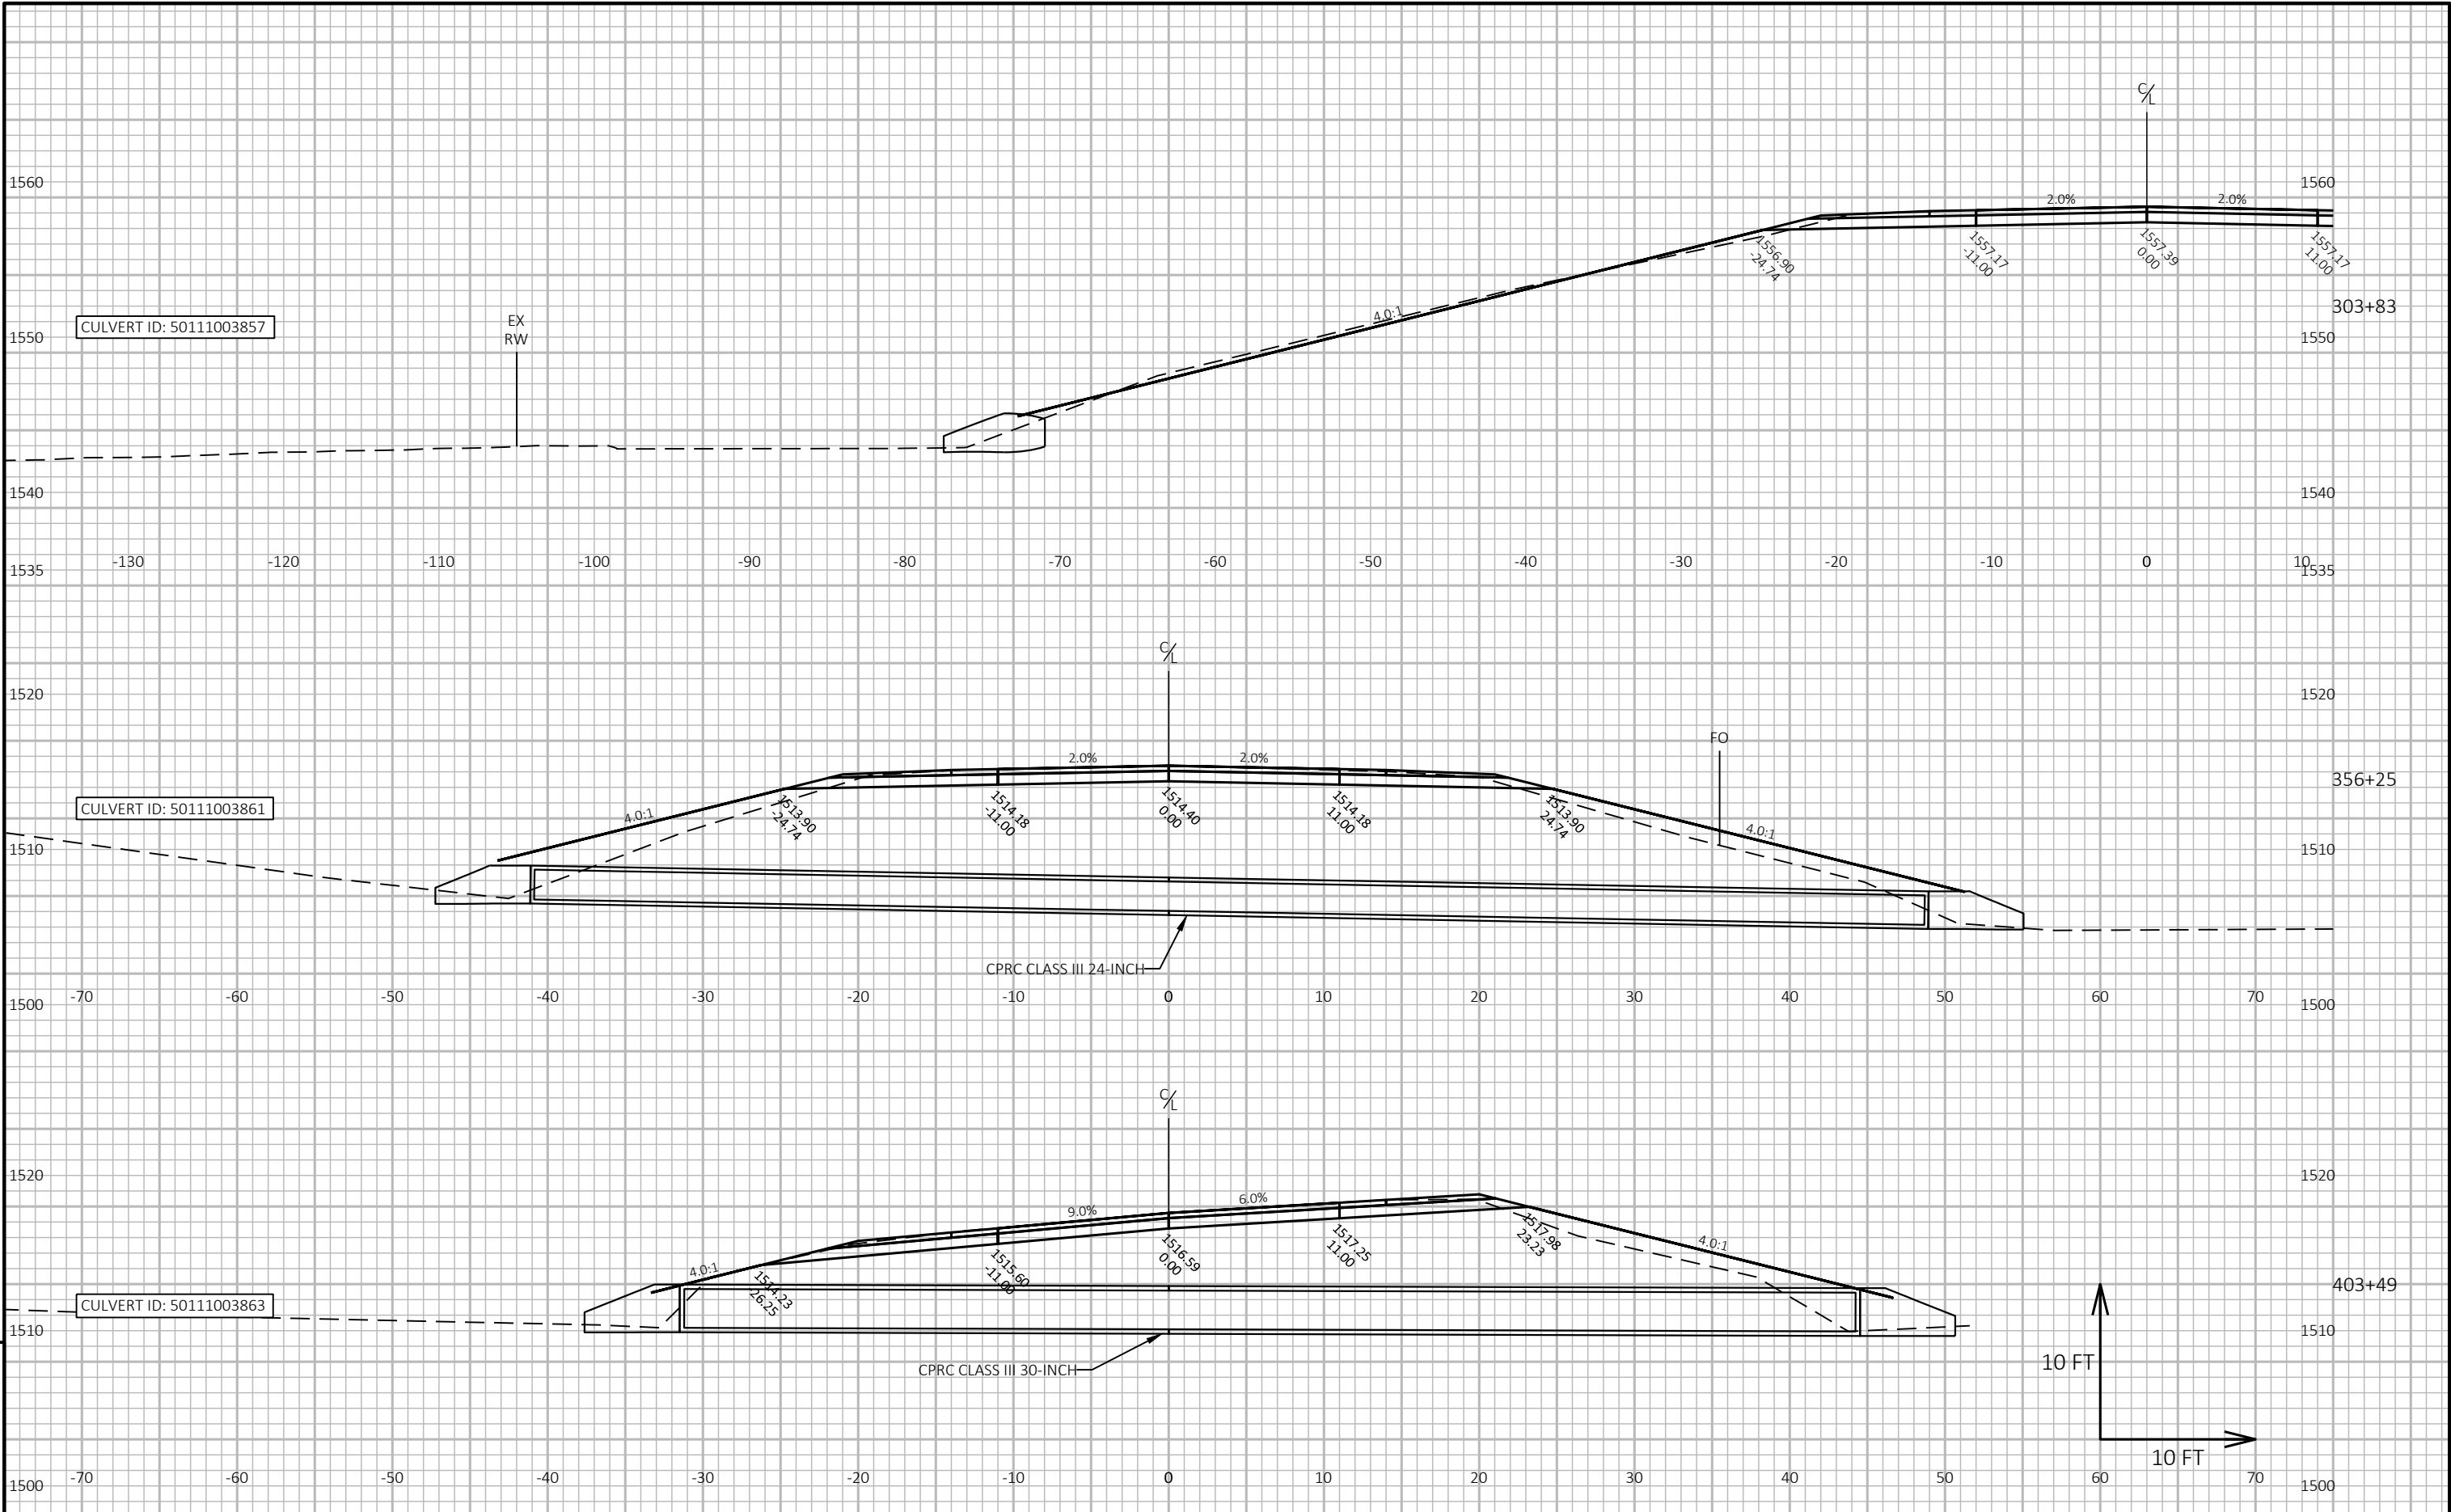

PROJECT NO:	8695-03-60	HWY:	STH 111	COUNTY:	PRICE	CROSS SECTIONS:	STH 111	SHEET	E
-------------	------------	------	---------	---------	-------	-----------------	---------	-------	---

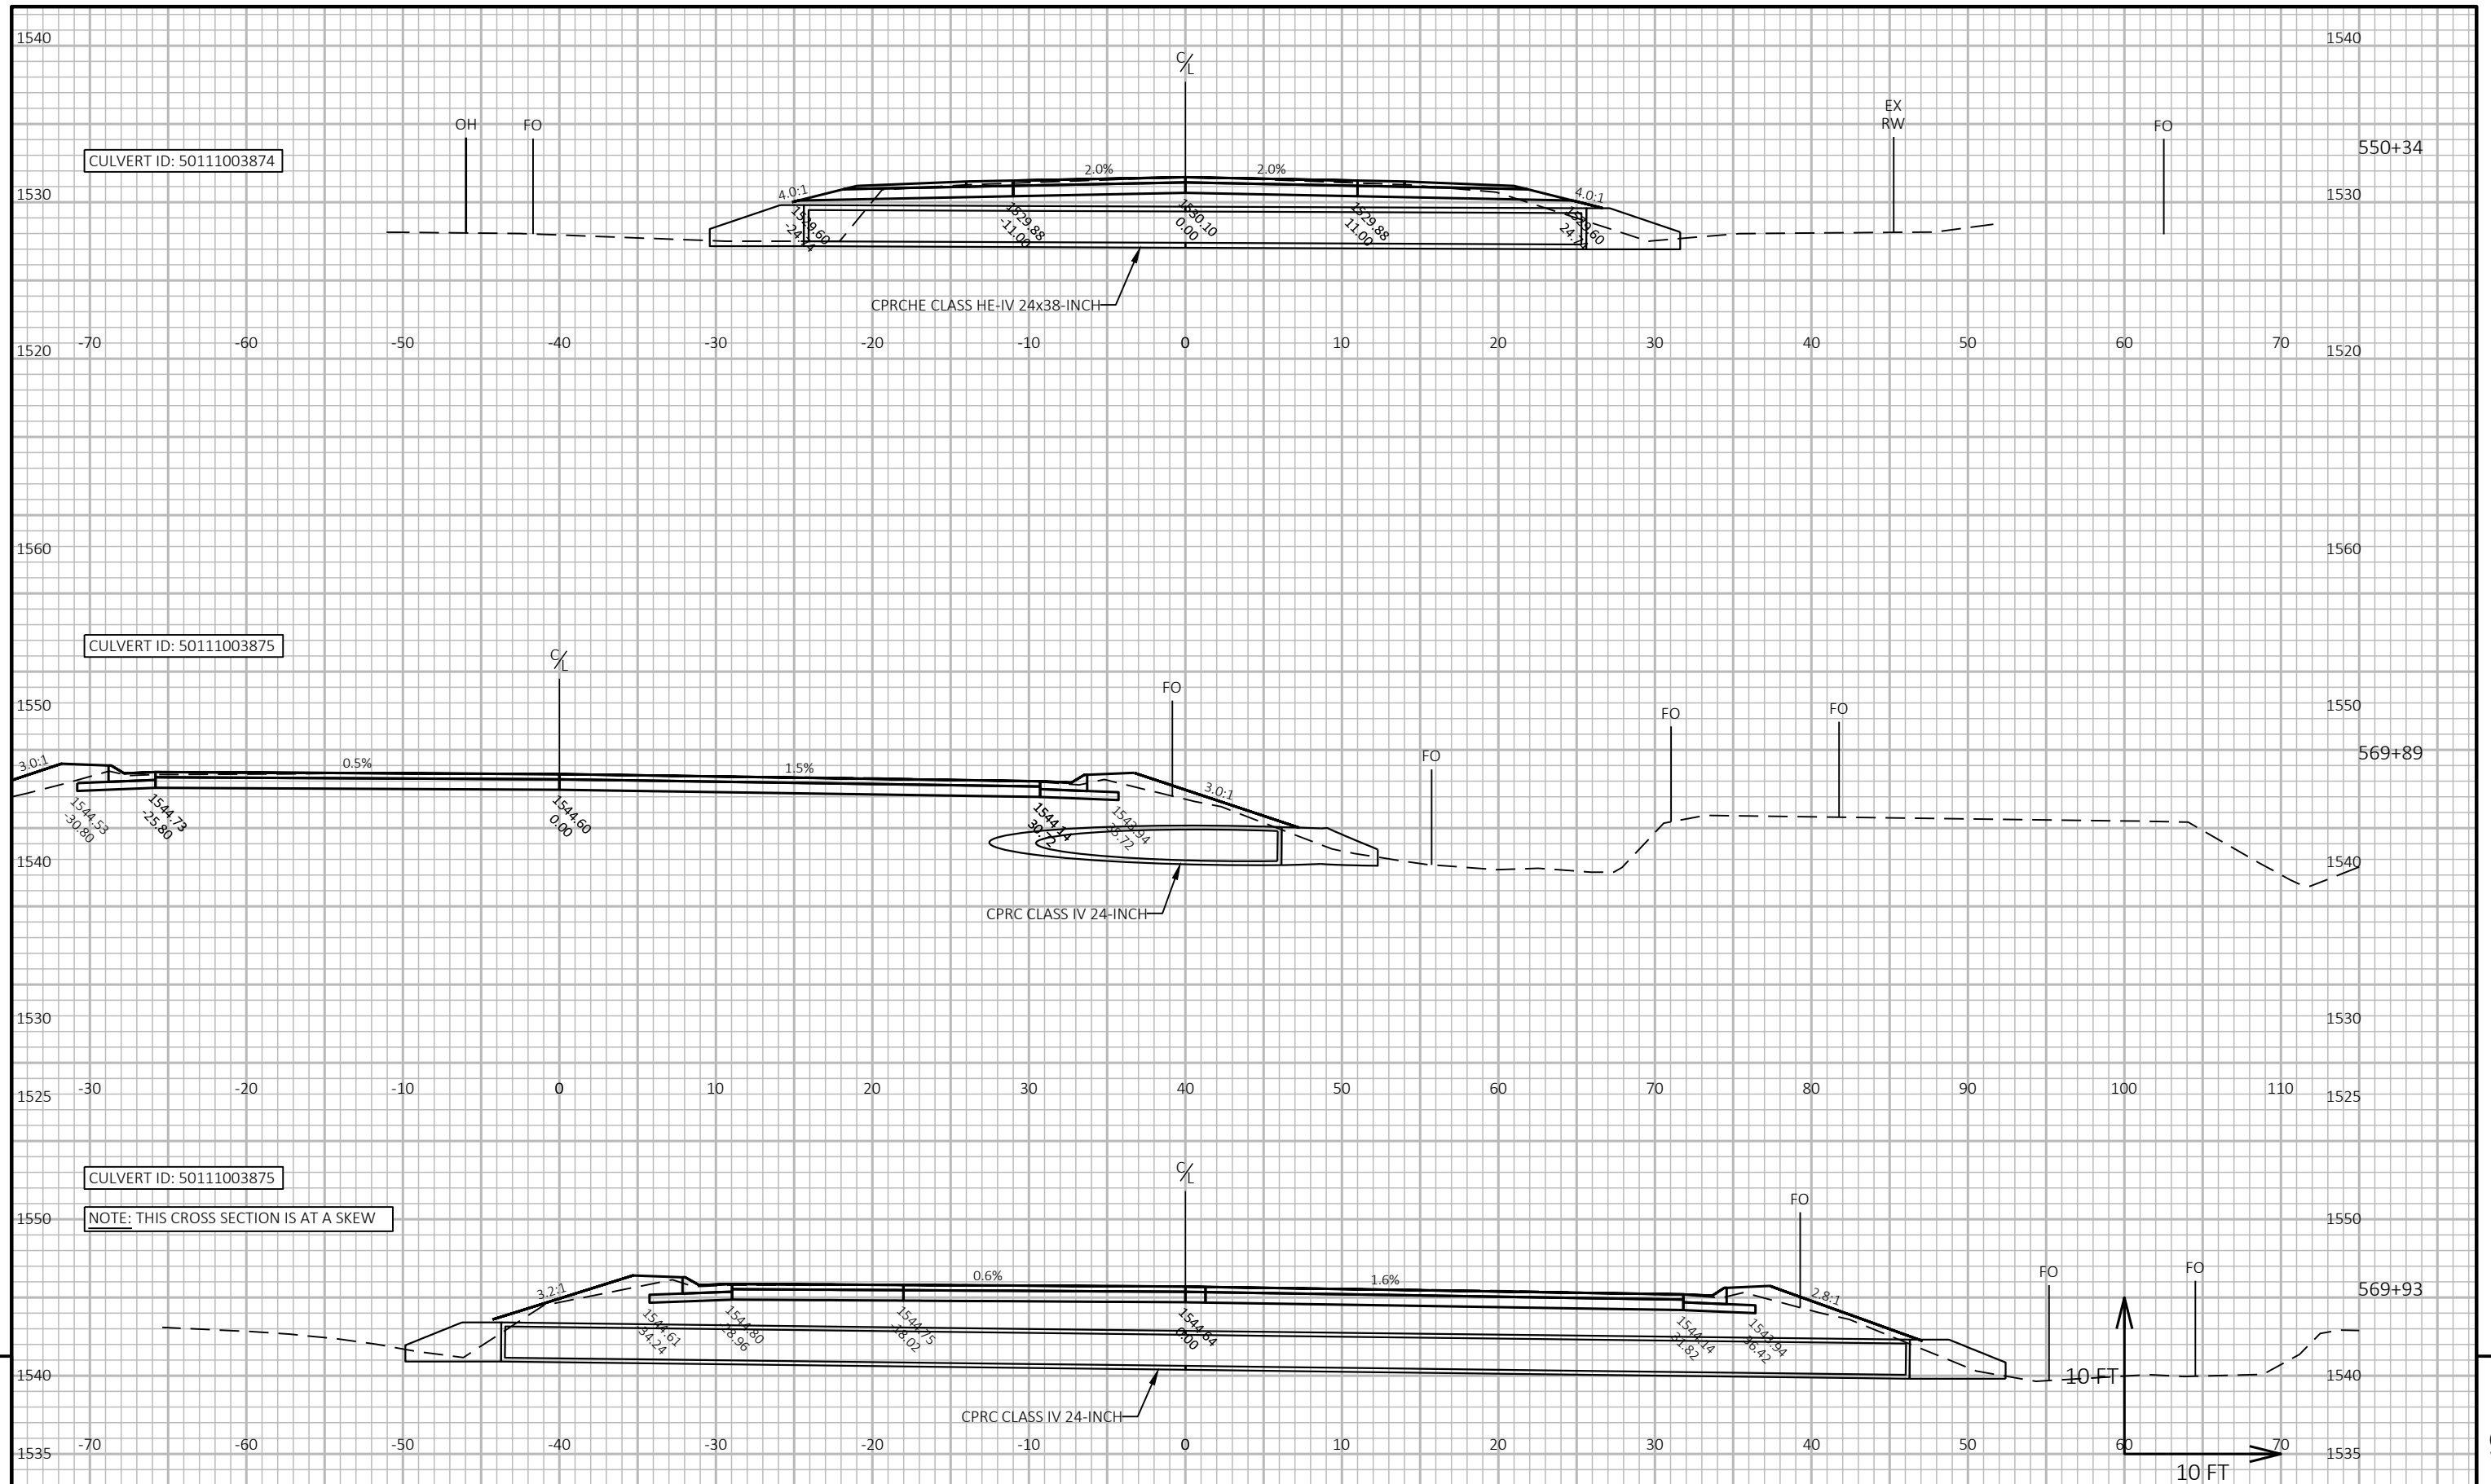

PROJECT NO:	8695-03-60
-------------	------------

HWY: STH 111

COUNTY:	PRICE
---------	-------

CROSS SECTIONS: STH 111

SHEET

1

FILE NAME : C:\OD\CORRE\INC\PROJECTS - WI-NC REGION\8695-03-30_STH 111 PRICE CO\500_CADD\501_C3D_2022\86950330\5SHEETPLAN\090201-XS.DWG
LAYOUT NAME - 05


PLOT DATE : 2/7/2025 7:34 AM

PLOT BY : MATT KOSKI

PLOT NAME :

PLOT SCALE : 1 IN:10 FT HORZ. / 1 IN:10 FT VERT.

WISDOT/CADDS SHEET 49

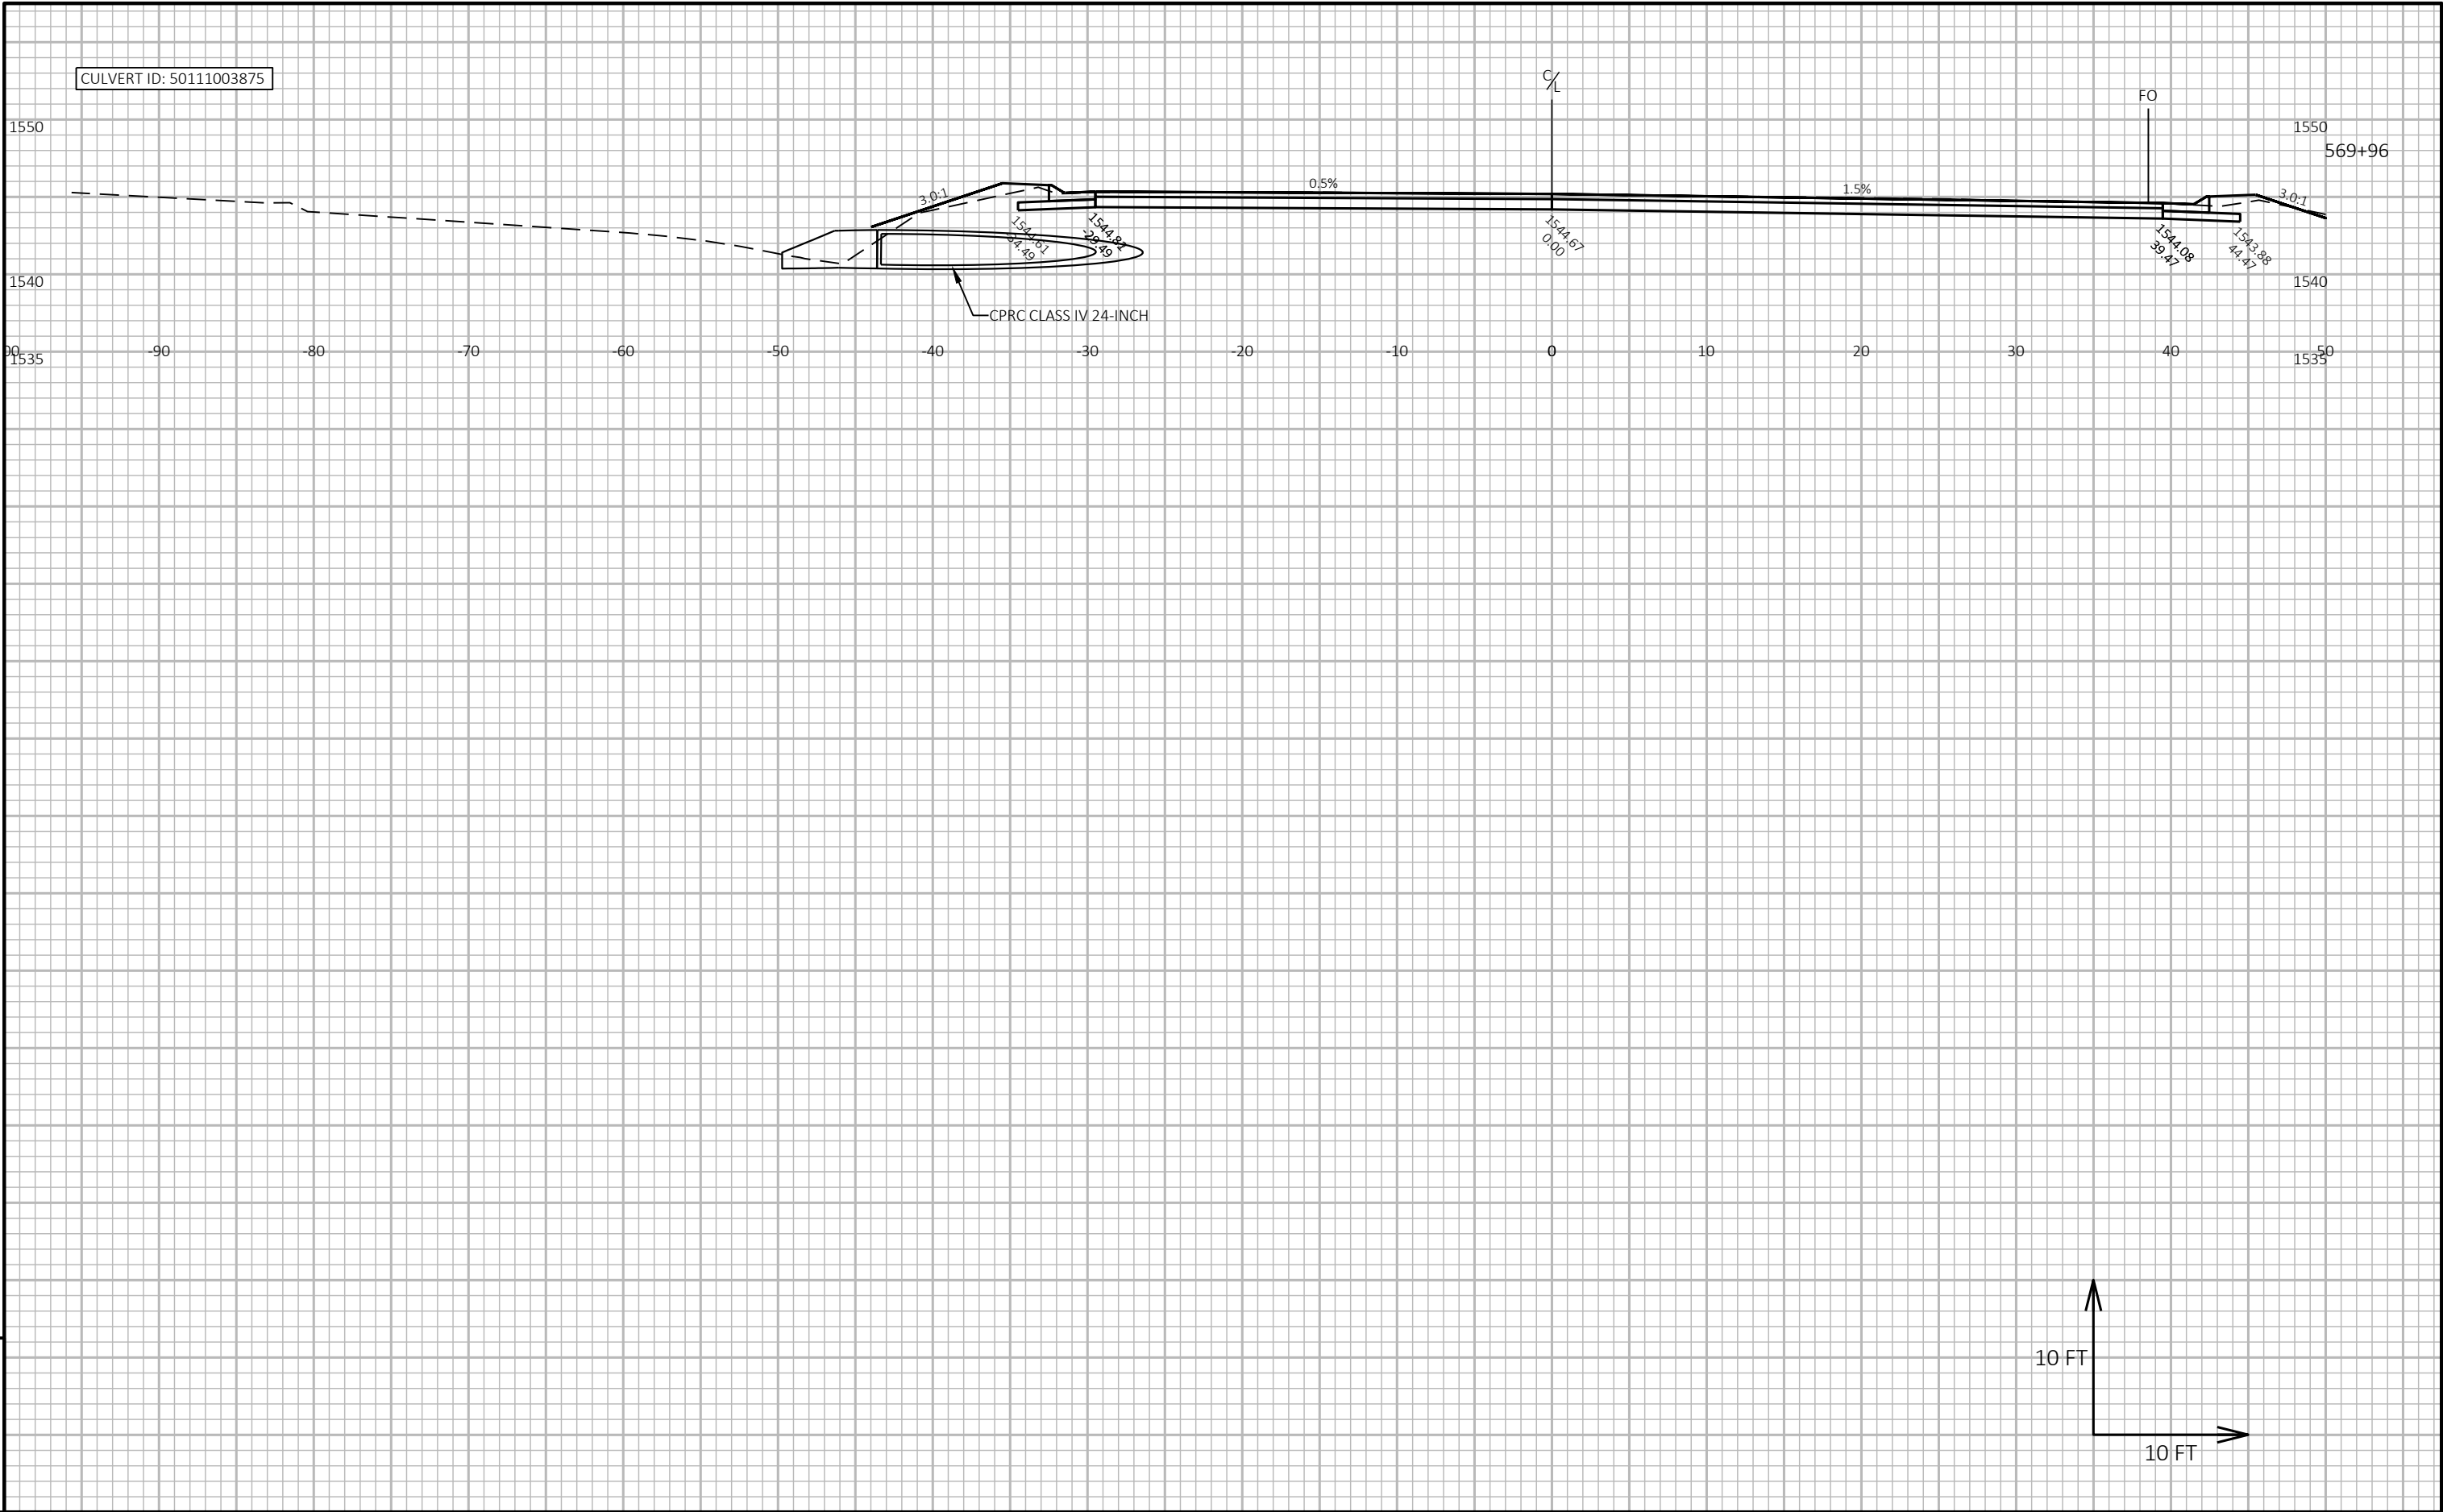


CULVERT ID: 50111003875

9

9

PROJECT NO: 8695-03-60	HWY: STH 111	COUNTY: PRICE	CROSS SECTIONS: STH 111	SHEET E
------------------------	--------------	---------------	-------------------------	---------

Notes

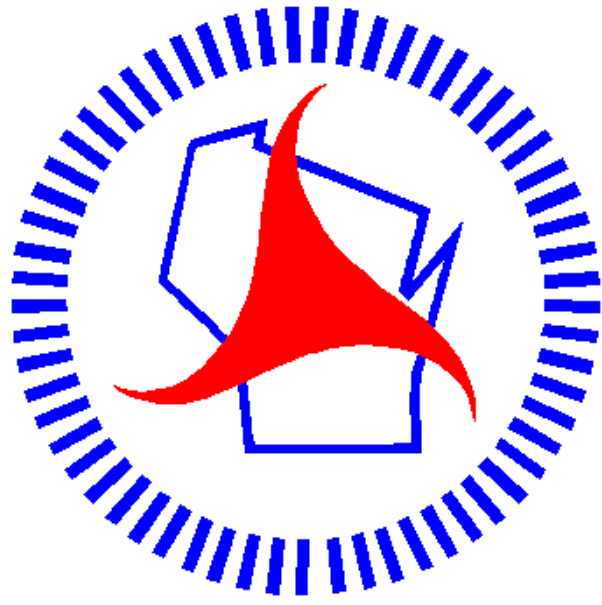

Wisconsin Department of Transportation

Dedicated people creating transportation solutions
through innovation and exceptional service.

<http://www.dot.wisconsin.gov>