

HIGHWAY WORK PROPOSAL

Wisconsin Department of Transportation
 DT1502 01/2020 s.66.0901(7) Wis. Stats

Proposal Number: **008**

| <u>STATE ID</u> | <u>FEDERAL ID</u> | <u>PROJECT DESCRIPTION</u> | <u>HIGHWAY</u> | <u>COUNTY</u> |
|-----------------|-------------------|--|----------------|---------------|
| 5710-00-72 | N/A | Lafarge - Hillsboro, Kickapoo River To Sth 33 | STH 082 | Vernon |
| 5710-00-73 | N/A | Lafarge - Hillsboro, Kickapoo River To Maple St | STH 082 | Vernon |

This proposal, submitted by the undersigned bidder to the Wisconsin Department of Transportation, is in accordance with the advertised request for proposals. The bidder is to furnish and deliver all materials, and to perform all work for the improvement of the designated project in the time specified, in accordance with the appended Proposal Requirements and Conditions.

| | |
|--|---|
| Proposal Guaranty Required: \$100,000.00 Payable to: Wisconsin Department of Transportation | Attach Proposal Guaranty on back of this PAGE. |
| Bid Submittal Date: April 14, 2026 Time (Local Time): 11:00 am | Firm Name, Address, City, State, Zip Code |
| Contract Completion Time 65 Working Days | SAMPLE NOT FOR BIDDING PURPOSES This contract is exempt from federal oversight. |
| Assigned Disadvantaged Business Enterprise Goal 0% | |

This certifies that the undersigned bidder, duly sworn, is an authorized representative of the firm named above; that the bidder has examined and carefully prepared the bid from the plans, Highway Work Proposal, and all addenda, and has checked the same in detail before submitting this proposal or bid; and that the bidder or agents, officer, or employees have not, either directly or indirectly, entered into any agreement, participated in any collusion, or otherwise taken any action in restraint of free competitive bidding in connection with this proposal bid.

Do not sign, notarize, or submit this Highway Work Proposal when submitting an electronic bid on the Internet.

Subscribed and sworn to before me this date _____

 (Signature, Notary Public, State of Wisconsin)

 (Bidder Signature)

 (Print or Type Name, Notary Public, State Wisconsin)

 (Print or Type Bidder Name)

 (Date Commission Expires)

 (Bidder Title)

Notary Seal

| | |
|---|--------------------------------|
| Type of Work: Removals, Milling, Grading, Aggregate, Asphalt Pavement, Structure Rehabilitation, Culvert Pipe, Curb and Gutter, Concrete Sidewalk, Storm Sewer, Beam Guard, Erosion Control, Permanent Signing, Traffic Control, Pavement Marking, Traffic Signals, Water, Restoration. | For Department Use Only |
| Notice of Award Dated | Date Guaranty Returned |

**PLEASE ATTACH
PROPOSAL GUARANTY HERE**

PROPOSAL REQUIREMENTS AND CONDITIONS

The bidder, signing and submitting this proposal, agrees and declares as a condition thereof, to be bound by the following conditions and requirements.

If the bidder has a corporate relationship with the proposal design engineering company, the bidder declares that it did not obtain any facts, data, or other information related to this proposal from the design engineering company that was not available to all bidders.

The bidder declares that they have carefully examined the site of, and the proposal, plans, specifications and contract forms for the work contemplated, and it is assumed that the bidder has investigated and is satisfied as to the conditions to be encountered, as to the character, quality, and quantities of work to be performed and materials to be furnished, and as to the requirements of the specifications, special provisions and contract. It is mutually agreed that submission of a proposal shall be considered conclusive evidence that the bidder has made such examination.

The bidder submits herewith a proposal guaranty in proper form and amount payable to the party as designated in the advertisement inviting proposals, to be retained by and become the property of the owner of the work in the event the undersigned shall fail to execute the contract and contract bond and return the same to the office of the engineer within fourteen (14) days after having been notified in writing to do so; otherwise to be returned.

The bidder declares that they understand that the estimate of quantities in the attached schedule is approximate only and that the attached quantities may be greater or less in accordance with the specifications.

The bidder agrees to perform the said work, for and in consideration of the payment of the amount becoming due on account of work performed, according to the unit prices bid in the following schedule, and to accept such amounts in full payment of said work.

The bidder declares that all of the said work will be performed at their own proper cost and expense, that they will furnish all necessary materials, labor, tools, machinery, apparatus, and other means of construction in the manner provided in the applicable specifications and the approved plans for the work together with all standard and special designs that may be designed on such plans, and the special provisions in the contract of which this proposal will become a part, if and when accepted. The bidder further agrees that the applicable specifications and all plans and working drawings are made a part hereof, as fully and completely as if attached hereto.

The bidder, if awarded the contract, agrees to begin the work not later than ten (10) days after the date of written notification from the engineer to do so, unless otherwise stipulated in the special provisions.

The bidder declares that if they are awarded the contract, they will execute the contract agreement and begin and complete the work within the time named herein, and they will file a good and sufficient surety bond for the amount of the contract for performance and also for the full amount of the contract for payment.

The bidder, if awarded the contract, shall pay all claims as required by Section 779.14, Statutes of Wisconsin, and shall be subject to and discharge all liabilities for injuries pursuant to Chapter 102 of the Statutes of Wisconsin, and all acts amendatory thereto. They shall further be responsible for any damages to property or injury to persons occurring through their own negligence or that of their employees or agents, incident to the performance of work under this contract, pursuant to the Standard Specifications for Road and Bridge Construction applicable to this contract.

In connection with the performance of work under this contract, the contractor agrees to comply with all applicable state and federal statutes relating to non-discrimination in employment. No otherwise qualified person shall be excluded from employment or otherwise be subject to discrimination in employment in any manner on the basis of age, race, religion, color, gender, national origin or ancestry, disability, arrest or conviction record (in keeping with s.111.32), sexual orientation, marital status, membership in the military reserve, honesty testing, genetic testing, and outside use of lawful products. This provision shall include, but not be limited to the following: employment, upgrading, demotion or transfer; recruitment or recruitment advertising; layoff or termination; rates of pay or other forms of compensation, and selection for training, including apprenticeship. The contractor further agrees to ensure equal opportunity in employment to all applicants and employees and to take affirmative action to attain a representative workforce.

The contractor agrees to post notices and posters setting forth the provisions of the nondiscrimination clause, in a conspicuous and easily accessible place, available for employees and applicants for employment.

If a state public official (section 19.42, Stats.) or an organization in which a state public official holds at least a 10% interest is a party to this agreement, this contract is voidable by the state unless appropriate disclosure is made to the State of Wisconsin Ethics Board.

BID PREPARATION

Preparing the Proposal Schedule of Items

A. General

- (1) Obtain bidding proposals as specified in section 102 of the standard specifications prior to 11:45 AM of the last business day preceding the letting. Submit bidding proposals using one of the following methods:
 1. Electronic bid on the internet.
 2. Electronic bid on a printout with accompanying diskette or CD ROM.
 3. Paper bid under a waiver of the electronic submittal requirements.
- (2) Bids submitted on a printout with accompanying diskette or CD ROM or paper bids submitted under a waiver of the electronic submittal requirements govern over bids submitted on the internet.
- (3) The department will provide bidding information through the department's web site at:

<https://wisconsin.gov/Pages/doing-bus/contractors/hcci/bid-let.aspx>

The contractor is responsible for reviewing this web site for general notices as well as information regarding proposals in each letting. The department will also post special notices of all addenda to each proposal through this web site no later than 4:00 PM local time on the Thursday before the letting. Check the department's web site after 5:00 PM local time on the Thursday before the letting to ensure all addenda have been accounted for before preparing the bid. When bidding using methods 1 and 2 above, check the Bid Express™ on-line bidding exchange at <http://www.bidx.com/> after 5:00 PM local time on the Thursday before the letting to ensure that the latest schedule of items Expedite file (*.ebs or *.00x) is used to submit the final bid.

- (4) Interested parties can subscribe to the Bid Express™ on-line bidding exchange by following the instructions provided at the www.bidx.com web site or by contacting:

Info Tech Inc.
5700 SW 34th Street, Suite 1235
Gainesville, FL 32608-5371
email: <mailto:customer.support@bidx.com>

- (5) The department will address equipment and process failures, if the bidder can demonstrate that those failures were beyond their control.
- (6) Contractors are responsible for checking on the issuance of addenda and for obtaining the addenda. Notice of issuance of addenda is posted on the department's web site at:

<https://wisconsin.gov/Pages/doing-bus/contractors/hcci/bid-let.aspx>

or by calling the department at (608) 266-1631. Addenda can ONLY be obtained from the department's web site listed above or by picking up the addenda at the Bureau of Highway Construction, 4th floor, 4822 Madison Yards Way, Madison, WI, during regular business hours.

- (7) Addenda posted after 5:00 PM on the Thursday before the letting will be emailed to the eligible bidders for that proposal. All eligible bidders shall acknowledge receipt of the addenda whether they are bidding on the proposal or not. Not acknowledging receipt may jeopardize the awarding of the project.

B. Submitting Electronic Bids

B.1 On the Internet

- (1) Do the following before submitting the bid:
 4. Have a properly executed annual bid bond on file with the department.
 5. Have a digital ID on file with and enabled by Info Tech Inc. Using this digital ID will constitute the bidder's signature for proper execution of the bidding proposal.
- (2) In lieu of preparing, delivering, and submitting the proposal as specified in 102.6 and 102.9 of the standard specifications, submit the proposal on the internet as follows:
 1. Download the latest schedule of items reflecting all addenda from the Bid Express™ web site.
 2. Use Expedite™ software to enter a unit price for every item in the schedule of items.
 3. Submit the bid according to the requirements of Expedite™ software and the Bid Express™ web site. Do not submit a bid on a printout with accompanying diskette or CD ROM or a paper bid. If the bidder does submit a bid on a printout with accompanying diskette or a paper bid in addition to the internet submittal, the department will disregard the internet bid.
 4. Submit the bid before the hour and date the Notice to Contractors designates.
 5. Do not sign, notarize, and return the bidding proposal described in 102.2 of the standard specifications.
- (3) The department will not consider the bid accepted until the hour and date the Notice to Contractors designates.

B.2 On a Printout with Accompanying Diskette or CD ROM

- (1) Download the latest schedule of items from the Wisconsin pages of the Bid Express web site reflecting the latest addenda posted on the department's web site at:
<https://wisconsin.gov/Pages/doing-bus/contractors/hcci/bid-let.aspx>
 Use Expedite™ software to prepare and print the schedule of items. Provide a valid amount for all price fields. Follow instructions and review the help screens provided on the Bid Express™ web site to assure that the schedule of items is prepared properly.
- (2) Staple an 8 1/2 by 11 inch printout of the Expedite™ generated schedule of items to the other proposal documents submitted to the department as a part of the bidder's sealed bid. As a separate submittal, not in the sealed bid envelope but due at the same time and place as the sealed bid, also provide the Expedite™ generated schedule of items on a 3 1/2 inch computer diskette or CD ROM. Label each diskette or CD ROM with the bidder's name, the 4 character department-assigned bidder identification code from the top of the bidding proposal, and a list of the proposal numbers included on that diskette or CD ROM as indicated in the following example:

Bidder Name
BN00
Proposals: 1, 12, 14, & 22
- (3) If bidding on more than one proposal in the letting, the bidder may include all proposals for that letting on one diskette or CD ROM. Include only submitted proposals with no incomplete or other files on the diskette or CD ROM.
- (4) The bidder-submitted printout of the Expedite™ generated schedule of items is the governing contract document and must conform to the requirements of section 102 of the standard specifications. If a printout needs to be altered, cross out the printed information with ink or typewriter and enter the new information and initial it in ink. If there is a discrepancy between the printout and the diskette or CD ROM, the department will analyze the bid using the printout information.

- (5) In addition to the reasons specified in section 102 of the standard specifications, proposals are irregular and the department may reject them for one or more of the following:
1. The check code printed on the bottom of the printout of the Expedite™ generated schedule of items is not the same on each page.
 2. The check code printed on the printout of the Expedite™ generated schedule of items is not the same as the check code for that proposal provided on the diskette or CD ROM.
 3. The diskette or CD ROM is not submitted at the time and place the department designates.

B Waiver of Electronic Submittal

- (1) The bidder may request a waiver of the electronic submittal requirements. Submit a written request for a waiver in lieu of bids submitted on the internet or on a printout with accompanying diskette or CD ROM. Use the waiver that was included with the paper bid document sent to the bidder or type up a waiver on the bidder's letterhead. The department will waive the electronic submittal requirements for a bidding entity (individual, partnership, joint venture, corporation, or limited liability company) for up to 4 individual proposals in a calendar year. The department may allow additional waivers for equipment malfunctions.
- (2) Submit a schedule of items on paper conforming to section 102 of the standard specifications. The department charges the bidder a \$75 administrative fee per proposal, payable at the time and place the department designates for receiving bids, to cover the costs of data entry. The department will accept a check or money order payable to: "Wisconsin, Dept. of Transportation."
- (3) In addition to the reasons specified in section 102 of the standard specifications, proposals are irregular and the department may reject them for one or more of the following:
 1. The bidder fails to provide the written request for waiver of the electronic submittal requirements.
 2. The bidder fails to pay the \$75 administrative fee before the time the department designates for the opening of bids unless the bidder requests on the waiver that they be billed for the \$75.
 3. The bidder exceeds 4 waivers of electronic submittal requirements within a calendar year.
- (4) In addition to the reasons specified in section 102 of the standard specifications, the department may refuse to issue bidding proposals for future contracts to a bidding entity that owes the department administrative fees for a waiver of electronic submittal requirements.

PROPOSAL BID BOND

DT1303 1/2006

Wisconsin Department of Transportation

| | | |
|-------------------|------------------------------------|--------------|
| Proposal Number | Project Number | Letting Date |
| Name of Principal | | |
| Name of Surety | State in Which Surety is Organized | |

We, the above-named Principal and the above-named Surety, are held and firmly bound unto the State of Wisconsin in the sum equal to the Proposal Guaranty for the total bid submitted for the payment to be made; we jointly and severally bind ourselves, our heirs, executors, administrators, successors and assigns. The condition of this obligation is that the Principal has submitted a bid proposal to the State of Wisconsin acting through the Department of Transportation for the improvement designated by the Proposal Number and Letting Date indicated above.

If the Principal is awarded the contract and, within the time and manner required by law after the prescribed forms are presented for signature, enters into a written contract in accordance with the bid, and files the bond with the Department of Transportation to guarantee faithful performance and payment for labor and materials, as required by law, or if the Department of Transportation shall reject all bids for the work described, then this obligation shall be null and void; otherwise, it shall be and remain in full force and effect. In the event of failure of the Principal to enter into the contract or give the specified bond, the Principal shall pay to the Department of Transportation **within 10 business days of demand** a total equal to the Proposal Guaranty as liquidated damages; the liability of the Surety continues for the full amount of the obligation as stated until the obligation is paid in full.

The Surety, for value received, agrees that the obligations of it and its bond shall not be impaired or affected by any extension of time within which the Department of Transportation may accept the bid; and the Surety does waive notice of any such extension.

IN WITNESS, the Principal and Surety have agreed and have signed by their proper officers and have caused their corporate seals to be affixed this date: **(DATE MUST BE ENTERED)**

PRINCIPAL

(Company Name) **(Affix Corporate Seal)**

(Signature and Title)

(Company Name)

(Signature and Title)

(Company Name)

(Signature and Title)

(Company Name)

(Signature and Title)

(Name of Surety) **(Affix Seal)**

(Signature of Attorney-in-Fact)

NOTARY FOR PRINCIPAL

(Date)

State of Wisconsin)
) ss.
_____ County)

On the above date, this instrument was acknowledged before me by the named person(s).

(Signature, Notary Public, State of Wisconsin)

(Print or Type Name, Notary Public, State of Wisconsin)

(Date Commission Expires)

Notary Seal

NOTARY FOR SURETY

(Date)

State of Wisconsin)
) ss.
_____ County)

On the above date, this instrument was acknowledged before me by the named person(s).

(Signature, Notary Public, State of Wisconsin)

(Print or Type Name, Notary Public, State of Wisconsin)

(Date Commission Expires)

Notary Seal

IMPORTANT: A certified copy of Power of Attorney of the signatory agent must be attached to the bid bond.

CERTIFICATE OF ANNUAL BID BOND

DT1305 8/2003

Wisconsin Department of Transportation

| |
|--|
| Time Period Valid (From/To) |
| Name of Surety |
| Name of Contractor |
| Certificate Holder Wisconsin Department of Transportation |

This is to certify that an annual bid bond issued by the above-named Surety is currently on file with the Wisconsin Department of Transportation.

This certificate is issued as a matter of information and conveys no rights upon the certificate holder and does not amend, extend or alter the coverage of the annual bid bond.

Cancellation: Should the above policy be cancelled before the expiration date, the issuing surety will give thirty (30) days written notice to the certificate holder indicated above.

(Signature of Authorized Contractor Representative)

(Date)

CERTIFICATION REGARDING DEBARMENT, SUSPENSION, AND OTHER RESPONSIBILITY MATTERS - PRIMARY COVERED TRANSACTIONS

Instructions for Certification

1. By signing and submitting this proposal, the prospective contractor is providing the certification set out below.
2. The inability of a person to provide the certification required below will not necessarily result in denial of participation in this covered transaction. The prospective contractor shall submit an explanation of why it cannot provide the certification set out below. The certification or explanation will be considered in connection with the department or agency's determination whether to enter into this transaction. However, failure of the prospective contractor to furnish a certification or an explanation shall disqualify such person from participation in this transaction.
3. The certification in this clause is a material representation of fact upon which reliance was placed when the department determined to enter into this transaction. If it is later determined that the contractor knowingly rendered an erroneous certification in addition to other remedies available to the Federal Government the department may terminate this transaction for cause or default.
4. The prospective contractor shall provide immediate written notice to the department to whom this proposal is submitted if at any time the prospective contractor learns that its certification was erroneous when submitted or has become erroneous by reason of changed circumstances.
5. The terms "covered transaction," "debarred," "suspended," "ineligible," "lower tier covered transaction," "participant," "person," "primary covered transaction," "principal," "proposal," and "voluntarily excluded," as used in this clause, have the meanings set out in the Definitions and Coverage sections of the rules implementing Executive Order 12549. You may contact the department to which this proposal is being submitted for assistance in obtaining a copy of those regulations.
6. The prospective contractor agrees by submitting this proposal that, should this contract be entered into, it shall not knowingly enter into any lower tier covered transaction with a person who is debarred, suspended, declared ineligible, or voluntarily excluded from participation in this covered transaction, unless authorized by the department entering into this transaction.
7. The prospective contractor further agrees by submitting this proposal that it will include the clause titled "Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion-Lower Tier Covered Transaction," which is included as an addendum to PR- 1273 - "Required Contract Provisions Federal Aid Construction Contracts," without modification, in all lower tier covered transactions and in all solicitations for lower tier covered transactions.
8. The contractor may rely upon a certification of a prospective subcontractor/materials supplier that it is not debarred, suspended, ineligible, or voluntarily excluded from the covered transaction, unless it knows that the certification is erroneous. A contractor may decide the method and frequency by which it determines the eligibility of its principals. Each contractor may, but is not required to, check the Disapproval List (telephone # 608/266/1631).

9. Nothing contained in the foregoing shall be construed to require establishment of a system of records in order to render in good faith the certification required by this clause. The knowledge and information of a contractor is not required to exceed that which is normally possessed by a prudent person in the ordinary course of business dealings.
10. Except for transactions authorized under paragraph 6 of these instructions, if a contractor in a covered transaction knowingly enters into a lower tier covered transaction with a person who is suspended, debarred, ineligible or voluntarily excluded from participation in this transaction, in addition to other remedies available to the Federal Government, the department may terminate this transaction for cause or default.

Certification Regarding Debarment, Suspension, and Other Responsibility Matters - Primary Covered Transactions

1. The prospective contractor certifies to the best of its knowledge and belief, that it and its principals:
 - (a) Are not presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from covered transactions by any Federal department or agency;
 - (b) Have not within a three-year period preceding this proposal been convicted of or had a civil judgment rendered against them for commission of fraud or a criminal offense in connection with obtaining, attempting to obtain, or performing a public (Federal, State or local) transaction or contract under a public transaction; violation of Federal or State antitrust statutes or commission of embezzlement, theft, forgery, bribery, falsification or destruction of records, making false statements or receiving stolen property;
 - (c) Are not presently indicted for or otherwise criminally or civilly charged by a governmental entity (Federal, State or local) with commission of any of the offense enumerated in paragraph (1)(b) of this certification; and
 - (d) Have not within a three-year period preceding this proposal had one or more public transactions (Federal, State or local) terminated for cause or default.
2. Where the prospective contractor is unable to certify to any of the statements in this certification, such prospective contractor shall attach an explanation to this proposal.

Special Provisions

Table of Contents

| Article | Description | Page # |
|---------|---|--------|
| 1. | General..... | 3 |
| 2. | Scope of Work..... | 3 |
| 3. | Prosecution and Progress..... | 3 |
| 4. | Traffic. | 5 |
| 5. | Notice to Contractor – Near-by Projects. | 8 |
| 6. | Holiday and Special Event Work Restrictions..... | 8 |
| 7. | Utilities..... | 8 |
| 8. | Information to Bidders, U.S. Army Corps of Engineers Section 404 Permit..... | 10 |
| 9. | Information to Bidders, WPDES Transportation Construction General Permit (TCGP) for Storm Water Discharges..... | 11 |
| 10. | Environmental Protection, Aquatic Exotic Species Control. | 11 |
| 11. | Construction Over or Adjacent to Navigable Waters. | 12 |
| 12. | Erosion Control Structures..... | 12 |
| 13. | Notice to Contractor, Verification of Asbestos Inspection, No Asbestos Found. | 12 |
| 14. | Archaeological Site. | 12 |
| 15. | Notice to Contractor – Electronic Load Tickets..... | 13 |
| 16. | Coordination with Businesses and Residents..... | 13 |
| 17. | Base Aggregate Dense 3/4-Inch, Item 305.0110..... | 13 |
| 18. | Pulverize and Relay. | 13 |
| 19. | HMA Percent Within Limits (PWL) Test Strip Volumetrics, Item 460.0105.S; HMA Percent Within Limits (PWL) Test Strip Density, Item 460.0110.S..... | 14 |
| 20. | HMA Pavement Percent Within Limits (PWL) QMP. | 18 |
| 21. | Appendix A. | 25 |
| 22. | HMA Pavement Longitudinal Joint Density..... | 31 |
| 23. | Epoxy Injection Crack Repair, Item 509.9025.S; Cored Holes 2-Inch Diameter, Item 509.9026.S..... | 34 |
| 24. | Culvert Pipe Liners, 24-Inch, Item 520.9700.S; Cleaning Culvert Pipes for Liner Verification, Item 520.9750.S..... | 36 |
| 25. | Insulation Board Polystyrene, 2-Inch, Item 612.0902.S..... | 39 |
| 26. | Locating No-Passing Zones, Item 648.0100..... | 40 |
| 27. | Temporary Traffic Signals for Bridges (B-41-136, Kickapoo River), Item 661.0100.01..... | 40 |
| 28. | Maintaining Bird Deterrent System 01. Station 81+00; Maintaining Bird Deterrent System 02. Station 107+65 Left, Item 999.2005.S. | 40 |
| 29. | Adjusting Water Valve Boxes, Item SPV.0060.01. | 43 |
| 30. | Adjusting Sanitary Manhole Covers, Item SPV.0060.02. | 44 |
| 31. | Utility Line Opening (ULO), Item SPV.0060.03..... | 44 |
| 32. | Foam Void Filling B-62-0051, Item SPV.0060.04. | 45 |
| 33. | Profile Curb Cut, Item SPV.0090.01. | 46 |

34. Culvert Pipe Reinforced Concrete Horizontal Elliptical Class HE-IV 43x68-INCH, Item
SPV.0090.0247

STSP'S Revised July 1, 2025

SPECIAL PROVISIONS

1. General.

Perform the work under this construction contract for Project 5710-00-72, La Farge - Hillsboro, Kickapoo River to STH 33, STH 82, Vernon County, and 5710-00-73, La Farge - Hillsboro, Kickapoo River to Maple St, STH 82, Vernon County., Wisconsin as the plans show and execute the work as specified in the State of Wisconsin, Department of Transportation, Standard Specifications for Highway and Structure Construction, 2025 Edition, as published by the department, and these special provisions.

If all or a portion of the plans and special provisions are developed in the SI metric system and the schedule of prices is developed in the US standard measure system, the department will pay for the work as bid in the US standard system.

100-005 (20250701)

2. Scope of Work.

The work under this contract shall consist of Removing Structure, Removing Asphaltic Surface Butt Joints, Removing Asphaltic Surface Milling, Prepare Foundation for Asphaltic Paving, Base Aggregate, Pulverize and Relay, Tack Coat, Incentive Density PWL HMA Pavement, Incentive Density HMA Pavement Longitudinal Joints, Incentive Air Voids HMA Pavement, HMA Pavement, Asphaltic Surface Driveways and Field Entrances, Asphalt Centerline Rumble Strips 2-lane rural, Concrete Masonry Endwalls, Culvert Pipe Reinforced Concrete Horizontal Elliptical Class HE-III 43x68 inch, Barrier System Grading Shaping Finishing, Adjusting Steel Plate Beam Guard, MGS Guardrail Terminal EAT, Mobilization, Traffic Control, Marking, Temporary Traffic Signals for Bridges, Incentive IRI Ride and all incidental items necessary to complete the work as shown on the plans and included in the proposal and contract.

104-005 (20090901)

3. Prosecution and Progress.

Begin work within 10 calendar days after the engineer issues a written notice to do so.

Provide the time frame for construction of the project within the 2026 construction season to the engineer in writing within a month after executing the contract but at least 14 calendar days before the preconstruction conference. Assure that the time frame is consistent with the contract completion time. Upon approval, the engineer will issue the notice to proceed within ten calendar days before the beginning of the approved time frame.

To revise the time frame, submit a written request to the engineer at least two weeks before the beginning of the intended time frame. The engineer will approve or deny that request based on the conditions cited in the request and its effect on the department's scheduled resources.

Interim Completion and Liquidated Damages – Structure C-62-0327 Removal and Replacement:

5 Working Days

At the beginning of Stage 1, close STH 82 to through traffic for a maximum of 5 working days. Do not reopen until completing the following work: Removing Structure C-62-0327, Concrete Pipe Reinforced Concrete Horizontal Elliptical Class HI-IV 43" X 68", Concrete Masonry Endwalls, Base Aggregate Dense 1 ¼-Inch, Storm Sewer Pipe, Manholes, and Inlets at the intersection of STH 82 and N Elm St.

If the contractor fails to complete the work necessary to reopen STH 82 to traffic within 5 working days, the department will assess the contractor \$4,370 in interim liquidated damages for each working day the contract work remains incomplete beyond 5 working days. An entire working day will be charged for any period of time within a working day that the road remains closed beyond 12:01 AM.

If contract time expires prior to completing all work specified in the contract, additional liquidated damages will be affixed according to standard spec 108.11.

Construction Staging Curb Ramps

Remove and replace the concrete curb ramps prior to completing the upper lift of the HMA surface. Prior to opening curb ramps and removing temporary pedestrian accommodations, place the 2 feet of asphaltic surface patching in front of the curb and gutter and eliminate any vertical drop offs in the pedestrian pathway.

The side roads of N Maple St, N Elm St, N Oak St, and N Cherry St may be fully closed to complete the curb ramp replacements and other improvements. Limit the sideroad closure to no more than one week. Do not close N Maple St, N Elm St, N Oak St, and N Cherry St concurrently.

Milling Operations – Begin Project to N Cherry St

The milled surface limits must be matched by the end of the day to eliminate centerline drop-offs.

Clear the roadway of all materials and equipment during non-working hours.

Flagging operations are not permitted before sunrise or after sunset.

Paving Operations – Begin Project to N Cherry St (Urban)

The milled surface must be paved with a minimum of the lower HMA Pavement layer within 72-hours.

Clear the roadway of all materials and equipment during non-working hours.

Flagging operations are not permitted before sunrise or after sunset.

Paving Operations –N Cherry St to End Project (Rural)

The pulverized surface must be paved with a minimum of the lower HMA Pavement layer within 5 working days.

Clear the roadway of all materials and equipment during non-working hours.

Pavement Marking Operations

Perform pavement marking operations in the following order unless approved by the engineer:

- Install Temporary Marking Line (yellow centerlines) on the milled surface if the lower HMA Pavement layer is not placed the same day as the milling operation
- Install Temporary Marking Line (yellow centerlines) on the lower HMA Pavement layer.
- Install Temporary Marking Line (yellow centerlines) on the upper HMA Pavement layer.
- Install Marking Line Grooved Wet Reflective Epoxy 6-inch on the upper HMA Pavement layer

Culvert Replacement – C-62-0327

Stage the removal and replacement of culvert C-62-0327 as shown in the plans or as approved by the engineer.

Stage 1:

- Fully close STH 82 and N Elm St
- Remove existing culvert C-62-0327
- Install the new culvert pipes from the south side of STH 82 to the north side of STH 82. Install enough culvert pipe to open STH 82 to a single lane of traffic and maintain temporary pedestrian accommodations
- Install the proposed storm sewer crossing STH 82
- Maintain pedestrian access on the existing sidewalk and pedestrian structure
- Limit full closure of STH 82 to no more than five working days and not to exceed more than one weekend.

Stage 2:

- Open STH 82 to a single lane of traffic following SDD "Traffic Control, One Lane Road Stop Condition" to maintain local access.
- Maintain pedestrian access on the existing STH 82 pavement and temporary pedestrian surface as shown in the plans
- Remove existing pedestrian structure
- Install remainder of culvert pipe and concrete masonry endwall from STH 82 to the north
- Install new concrete curb ramps, concrete curb and gutter, and storm sewer under the sidewalk on the west side of N Elm St

Fish Spawning

There shall be no instream disturbance of the Kickapoo River at Station 81+50, Bear Creek, North Bear Creek, or the West Branch Baraboo River as a result of construction activity under or for this contract, from September 15 to May 15 both dates inclusive, in order to avoid adverse impacts upon the spawning of fish species and other aquatic organisms.

Any change to this limitation will require submitting a written request by the contractor to the engineer, subsequent review and concurrence by the Department of Natural Resources in the request, and final approval by the engineer. The approval will include all conditions to the request as mutually agreed upon by WisDOT and DNR.

Migratory Birds

Swallow or other migratory bird nests have been observed on or under the existing structure(s). All active nests (when eggs or young are present) of migratory birds are protected under the federal Migratory Bird Treaty Act. The nesting season for swallows and other birds is from April 15 to August 31.

See below for information on affected structure(s). As a last resort, apply for a depredation permit from the US Fish and Wildlife Service for work that may disturb or destroy active nests. The need for a permit may be avoided by removing the existing bridge structure prior to nest occupation by birds or clearing nests from all structures before the nests become active in early spring.

Either prevent active nests from becoming established or prevent birds from nesting by installing and/or maintaining one suitable deterrent device on the following structure(s) prior to nesting activity under the bid item Maintaining Bird Deterrent System:

- B-62-0051
- Station 107+65 Left (Pedestrian bridge)

The structure(s) has an existing deterrent that was installed by Vernon County.

Protection of Endangered Bats (Tree Clearing)

Federally protected bats have the potential to inhabit the project limits because they roost in trees, bridges and culverts. Roosts may not have been observed on this project, but conditions to support the species exist. The species and all active roosts are protected by the federal Endangered Species Act. If an individual bat or active roost is encountered during construction operations, stop work, and notify the engineer and the WisDOT Regional Environmental Coordinator (REC).

Ensure all operators, employees, and subcontractors working in areas of known or presumed bat habitat are aware of environmental commitments and avoidance and minimization measures (AMMs) to protect both bats and their habitat.

Direct temporary lighting, if used, away from wooded areas during the bat active season April 15 to October 31, both dates inclusive.

The department has contracted with others and will perform the following operations after October 31 and prior to April 15:

- Cutting down and removing trees.

If there are clearing operations required to remove previously cut trees, submit a schedule and description with the ECIP 14 days prior to the work. The department will determine, based on schedule and scope of work, what additional erosion control measures shall be implemented prior to the start of clearing operations, and list those additional measures in the approval letter for the ECIP.

Contractor means and methods to remove additional trees will not be allowed. If it is determined that additional trees with a 3-inch or greater diameter at breast height (dbh) need to be removed beyond contractor means and methods, notify the engineer to coordinate with the WisDOT REC to determine if consultation with United States Fish and Wildlife Service (USFWS) is required. The contractor must be aware that the WisDOT REC and/or USFWS may not permit modifications.

4. Traffic.

At the beginning of the project, close STH 82 to through traffic. Do not reopen STH 82 until all contract work is completed for all projects. The posted detour route will remain in place until all contract work is complete.

Notify property owners at least three calendar days in advance of any work affecting access to their entrance. Do not close access to a driveway, field entrance, or commercial entrance unless agreed to by the property owner.

Project 5710-00-72

STH 82 will be closed to through traffic and through traffic will be detoured around the project.

A temporary signal and one lane bridge will be utilized to complete the work on structure B-62-0051 (STH 82 over Kickapoo River).

A full closure of STH 82 and N Elm St will be allowed for the removal and replacement of culvert C-62-0327. Limit full closure to no more than five working days, not to exceed two consecutive weekends. Once enough culvert pipe is installed and grade backfilled, open STH 82 to one lane of traffic including room for temporary pedestrian accommodations.

A full closure of N Maple St, N Elm St, N Oak St, and N Cherry St will be allowed for the replacement of the curb ramps and other improvements. Limit full closure to no more than one week. Do not close N Maple St, N Elm St, N Oak St, and N Cherry St concurrently unless approved by engineer.

Project 5710-00-73

STH 82 will be closed to through traffic and through traffic will be detoured around the project from State St (STH 131) to Maple St.

Maintain through traffic on STH 82 and intersecting roads during construction from the Kickapoo River to State St (STH 131). Traffic may be restricted to a single 16-foot-wide minimum clear roadway with a flagging operation during working hours. Utilize traffic control and flaggers according to the standard detail drawing entitled "Traffic Control for Lane Closure with Flagging Operation" for all construction occurring under one lane of traffic. No work shall be allowed on the opposing side of the roadway in a flagged section.

The project shall be open to two lanes of traffic at the end of the day from the Kickapoo River to State St (STH 131).

If traffic delays become longer than 15 minutes, coordinate with the engineer to limit or alter construction operations to prevent undue inconvenience to the traveling public as specified under standard spec 108.5.

If not paving in both directions by the end of each working day, provide temporary pavement marking of the centerline offset to the side not being paved. Provide same-day pavement markings of the centerline after both directions have been paved before opening the work zone up to two lane, two-way traffic

Bicycle and Pedestrian Accommodations

Bicycles and pedestrians shall be accommodated through the work zone on the existing sidewalks and through temporary pedestrian accommodations. Maintain a continuous pedestrian path by means of existing, finished, or approved temporary facilities throughout the project at all times. At all crosswalk locations eliminate all drop-offs greater than ¼" with a hard surface slope not to exceed a 12:1 slope at all times.

PCMS

One week prior to closing the road place one portable changeable message sign (PCMS) on each end of the project notifying motorists of upcoming closure. Contact the engineer for PCMS locations. Sign message shall conform to the message shown in the plan documents or as directed by engineer.

Private and Commercial Access

Maintain access at all times to all commercial entrances, private entrances, and field entrances, unless the contractor obtains written permission from the property owner a minimum of 48 hours in advance of closing the access.

Maintain a clearly delineated, suitable driving surface of at least 10-ft for residents, businesses, school busses, and emergency vehicles throughout construction. A suitable driving surface is defined as a material capable of withstanding a fully loaded quad axle truck without yielding as approved by the engineer.

The contractor shall provide the engineer and local law enforcement with a 24-hour, 7 days/week contact person responsible for the maintenance of the 10-foot driving lane for residents.

Contact farmers and businesses operating along STH 82 to coordinate their specific needs for agricultural equipment usage and deliveries along the corridor with the contractor's work operations. Employ such flaggers, signs, barricades, and drums as may be necessary to safeguard local traffic at all locations affected by construction operations. Make arrangements and be responsible for the prompt replacement of damaged or dislocated traffic control or guidance devices, day or night.

Do not store vehicles, equipment, or materials on adjacent streets beyond the project limits without specific approval from the engineer.

Notify the engineer if there are any changes in the schedule, early completions, or cancelations of scheduled work.

Bus Route Access

The contractor is responsible for coordinating with the following school districts to ensure bus routes are maintained and accessible throughout construction.

La Farge School District

Superintendent, Meaghan Gustafson, (608) 625-0107

Transportation Supervisor, Phil Campbell, (608) 625-0148

Kickapoo Area School District

District Administrator, Kim Johnson, (608) 627-0101, kimjohnson@kickapoo.k12.wi.us

Transportation Supervisor, Jeff Wendorf, (608) 627-0137, jwendorf@kickapoo.k12.wi.us

Hillsboro School District

Superintendent, Rich Moyer, (608) 489-2221, rich.moyer@hillsboroschools.org

Post Office Access

The contractor is responsible for coordinating with the following post offices to ensure mail delivery is maintained for residents along the project:

La Farge

205 W Main St, La Farge, WI 54639, (608) 625-2220

Hillsboro

713 Water Ave, Hillsboro, WI 54634, (608) 489-3528

Wisconsin Lane Closure System Advance Notification

Provide the following advance notification to the engineer for incorporation into the Wisconsin Lane Closure System (LCS).

TABLE 108-1 CLOSURE TYPE AND REQUIRED MINIMUM ADVANCE NOTIFICATION

| Closure type with height, weight, or width restrictions (available width, all lanes in one direction < 16 feet) | MINIMUM NOTIFICATION |
|---|-----------------------------|
| Lane and shoulder closures | 7 calendar days |
| Full roadway closures | 7 calendar days |
| Ramp closures | 7 calendar days |
| Detours | 7 calendar days |
| Closure type without height, weight, or width restrictions (available width, all lanes in one direction ≥ 16 feet) | MINIMUM NOTIFICATION |
| Shoulder Closures | 3 calendar days |
| Lane closures | 3 business days |
| Ramp closures | 3 business days |
| Modifying all closure types | 3 business days |

Discuss LCS completion dates and provide changes in the schedule to the engineer at weekly project meetings in order to manage closures nearing their completion date.

5. Notice to Contractor – Near-by Projects.

Project 5710-06-70

Project 5710-06-70, STH 131 from STH 82 to STH 33 is scheduled to be constructed under detour conditions in 2026. Coordinate with the project manager, Brad Schultz, at 608-246-3241, or bradschultz@dot.wi.gov prior to starting the project and detouring STH 82 traffic.

6. Holiday and Special Event Work Restrictions.

Do not perform work on, nor haul materials of any kind along or across any portion of the highway carrying STH 82 traffic, and entirely clear the traveled way and shoulders of such portions of the highway of equipment, barricades, signs, lights, and any other material that might impede the free flow of traffic during the following holiday and special event periods:

- From noon Friday, May 22, 2026 to 6:00 AM Tuesday, May 26, 2026 Memorial Day;
- From noon Friday, July 3, 2026 to 6:00 AM Tuesday, July 7, 2026 Independence Day;
- From noon Friday, September 4, 2026 to 6:00 AM Tuesday, September 8, 2026 Labor Day.

stp-107-005 (20210113)

7. Utilities.

This contract comes under the provision of Administrative Rule Trans 220.

The utility work plan includes additional detailed information regarding the location of known discontinued, relocated, or removed utility facilities. These can be requested from the department during the bid preparation process, or from the project engineer after the contract has been awarded and executed.

Some of the utility work described below is dependent on prior work being performed by the contractor at a specific site. In such situations, provide the engineer and the affected utility a good faith notice of when the utility is to start work at the site. Provide this notice 14 to 16 calendar days in advance of when the prior work will be completed and the site will be available to the utility. Follow-up with a confirmation notice to the engineer and the utility not less than 3 working days before the site will be ready for the utility to begin its work.

stp-107-065 (20240703)

Project 5710-00-72

La Farge Municipal Utilities – Electric has overhead and underground electric facilities within the project limits. Notify the La Farge Municipal Utilities representative to provide a watchdog to be on site at the following locations in the table below:

| Station | Offset | Facility | Work Operation |
|----------------|--------|----------------------|-----------------------------------|
| 79+50 | Right | OH Pole | Grading |
| 82+50 | Right | OH Pole | Grading Concrete Surface Drain |
| 178+50 | Right | OH Pole | Grading |
| 82+50 to 83+50 | Right | Underground Electric | Grading |

La Farge Municipal Utilities – Sewer has facilities within the project limits. Work will be completed during construction. Coordinate with the La Farge Municipal Utilities Representative prior to removing culvert C-62-0327. La Farge Municipal Utilities will arrange for their sanitary sewer contractor to bypass pump the sanitary sewer from Station 107+89, 11.7' Right to Station 107+42, 12' Right during removal of culvert C-62-0327. After culvert C-62-0327 is removed, La Farge Municipal Utilities will replace the sanitary sewer from Station 107+42, 12' Right to Station 107+89, 11.7' Right. The La Farge Municipal Utilities – Sewer work is dependent on the removal of culvert C-62-0327 and is anticipated to take one working day. Adjust manholes covers within the work zone at the following locations in the table below to match the new finished pavement elevation. Perform this work in accordance with the requirements of Adjusting Sanitary Manhole Covers.

| Station | Offset | Comments |
|-----------|-----------|------------------------|
| 104+06.55 | 11.61' RT | Reinstall chimney seal |
| 107+42.48 | 12.03' RT | Reinstall chimney seal |
| 107+89.42 | 11.70' RT | Reinstall chimney seal |
| 110+77.64 | 9.61' RT | Reinstall chimney seal |
| 113+87.95 | 15.24' LT | Reinstall chimney seal |
| 116+43.42 | 14.81' LT | Reinstall chimney seal |
| 111+27.28 | 11.39' LT | Reinstall chimney seal |

La Farge Municipal Utilities – Water has facilities within the project limits. Work to be completed during construction. Coordinate with the La Farge Municipal Utilities representative prior to installing the traffic control for the curb ramp work from Station 104+00 Left to Station 105+00 Left (Northeast corner of the intersection of STH 82 and N Maple St). La Farge Municipal Utilities will arrange for the water valve located at Station 104+35, 30.75' Left and the hydrant at Station 104+35, 33.5' Left to be relocated. The water valve and hydrant will be relocated approximately 8.5' closer to the STH 82 centerline, out of the proposed location of the sidewalk. The La Farge Municipal Utilities – Water relocation is dependent on the installation of the traffic control for the curb ramp from Station 104+00 to Station 104+75 Left and is anticipated to take one working day.

Adjust the water valve boxes in the work zone at locations in the table below to match the new finished pavement elevation. Perform this work in accordance with the requirements of Adjusting Water Valve Boxes.

| Station | Offset |
|-----------|-----------|
| 104+11.73 | 17.82' LT |
| 104+16.05 | 23.28' LT |
| 104+19.67 | 17.71' LT |
| 104+35.01 | 30.75' LT |
| 107+31.47 | 21.07' RT |

| Station | Offset |
|-----------|-----------|
| 107+36.46 | 20.95' RT |
| 110+67.75 | 18.26' RT |
| 110+70.52 | 21.35' RT |
| 110+73.40 | 18.24' RT |
| 113+97.11 | 29.96' LT |

| Station | Offset |
|-----------|-----------|
| 113+93.89 | 19.29' RT |
| 113+96.80 | 21.89' RT |
| 113+99.51 | 19.32' RT |

Midwest Natural Gas – Gas/Petroleum has underground gas main within the project limits. Prior to construction, Midwest Natural Gas will relocate their gas between approximately station 108+25 Left and station 113+50 Left. A new gas main will be installed approximately 27 feet left of the centerline underneath the sidewalk. The existing gas main between Station 108+25 Left and Station 113+50 Left will be discontinued and left in place. Coordination is required during placement of the Steel Plate Guardrail Short Radius terminal from Station 78+50 to Station 80+25 Left to ensure proper clearance between the posts and the existing underground facilities. Prior to installing the posts, locate the Midwest Natural Gas main to verify depths and location. Perform the work according to the item “Utility Line Opening.” Arrange for a watchdog to be on site during the Utility Line Opening and guardrail installation by notifying the Midwest Natural Gas representative.

Vernon Communication Coop – Communication has underground fiber optic facilities within the project limits. Arrange for a watchdog to be on site to provide depths during construction operations over Vernon Communication Coop facilities from Station 113+00 to Station 115+00, Station 174+00 to Station 180+00, and Station 212+50 to Station 216+50 by notifying the Vernon Communication Coop representative.

The following utility owners have facilities within the project area; however, no adjustments are anticipated:

Dairyland Power Coop – Electric

Hillsboro Telephone – Communication

Mediacom WI LLC – Communication

Vernon Electric Coop - Electric

Project 5710-00-73

La Farge Municipal Utilities – Sewer has facilities within the project limits. During construction, adjust the sanitary manhole covers in the work zone at the following locations in the table below to match the new finished pavement elevation. Perform this work in accordance with the requirements of Adjusting Sanitary Manhole Covers.

| Station | Offset | Comments |
|-----------|-----------|--|
| 87+43.19 | 11.64' RT | Reinstall chimney seal Casting is bolted to the structure |
| 90+86.64 | 11.43' RT | Reinstall chimney Casting is bolted to the structure |
| 94+17.33 | 9.41' RT | Reinstall chimney Casting is bolted to the structure |
| 97+47.77 | 8.50' RT | Reinstall chimney |
| 100+77.40 | 11.05' RT | Reinstall chimney |

La Farge Municipal Utilities – Water has facilities within the project limits. During construction, adjust the water valve boxes in the work zone at the following locations in the table below to match the new finished pavement elevation. Perform this work in accordance with the requirements of Adjusting Water Valve Boxes.

| Station | Offset |
|----------|-----------|
| 85+63.90 | 20.26' RT |
| 87+65.04 | 16.63' RT |
| 87+73.43 | 17.88' LT |
| 88+06.67 | 20.97' LT |
| 91+21.57 | 21.65' LT |

| Station | Offset |
|----------|-----------|
| 91+24.23 | 18.81' LT |
| 94+22.67 | 18.82' LT |
| 94+24.89 | 21.36' LT |
| 94+27.53 | 18.86' LT |
| 97+54.45 | 20.51' LT |

| Station | Offset |
|-----------|-----------|
| 98+02.15 | 23.24' LT |
| 100+90.25 | 18.60' LT |
| 100+94.09 | 14.89' LT |
| 101+21.47 | 21.75' LT |
| 101+24.83 | 18.96' LT |

The following utility owners have facilities within the project area; however, no adjustments are anticipated:

La Farge Municipal Utilities – Electric

Midwest Natural Gas – Gas/Petroleum

Mediacom WI LLC - Communication

Vernon Communication Coop – Communication

Vernon Electric Coop – Electric

8. Information to Bidders, U.S. Army Corps of Engineers Section 404 Permit.

The department has assumed coverage under the U.S. Army Corps of Engineers Section 404 Transportation Regional General Permit (TRGP). The department has determined that a pre-construction notification (permit application) to U.S. Army Corps of Engineers and their written verification of TRGP coverage is not necessary for this project.

A copy of the Section 404 Transportation Regional General Permit can be obtained on USACE's website:

<https://www.mvp.usace.army.mil/Portals/57/docs/regulatory/RGP/Transportation.pdf>

If the contractor requires work outside the proposed slope intercepts, based on their method of operation to construct the project, it is the contractor's responsibility to determine whether a pre-construction notification (permit application) and written verification from U.S. Army Corps of Engineers under the Section 404 Transportation Regional General permit is required. If written verification under the TRGP is necessary, submit a pre-construction notification to U.S. Army Corps of Engineers and obtain written verification of permit coverage prior to beginning construction operations requiring the permit. No time extensions as discussed in standard spec 108.10 will be granted for the time required to apply for and obtain the written verification of permit coverage. The contractor must be aware that the U.S. Army Corps of Engineers may not grant the permit request.

stp-107-054 (20230629)

9. Information to Bidders, WPDES Transportation Construction General Permit (TCGP) for Storm Water Discharges.

The calculated land disturbance for the project site is 0.8 acres.

The department has obtained permit coverage through the Wisconsin Department of Natural Resources to discharge storm water associated with land disturbing construction activities under this contract. Conform to all permit requirements for the project.

This permit is the Wisconsin Pollutant Discharge Elimination System, Transportation Construction General Permit, (WPDES Permit No. WI-S066796-2). The permit can be found at:

<https://widnr.widen.net/s/s5mwp2gd7s/finalsignedwisdotcsgp>

A "Certificate of Permit Coverage" is available from the regional office by contacting Brad Schultz at 608-246-3241. Post the "Certificate of Permit Coverage" in a conspicuous place at the construction site.

Permit coverage for additional land disturbing construction activities related to contractor means and methods will be considered as part of the ECIP review and approval process. Coverage under the TCGP for additional land disturbance areas will be considered if the areas meet all of the following:

- Must meet the permit's applicability criteria.
- Must be for the exclusive use of a WisDOT project.
- Land disturbance first commences after the ECIP approval, and the areas are fully restored to meet the final stabilization criteria of the permit upon completion of the work.

The contractor is responsible for obtaining any permits for areas that are not approved by the department for coverage under the TCGP.

stp-107-056 (20250108)

10. Environmental Protection, Aquatic Exotic Species Control.

Exotic invasive organisms such as VHS, zebra mussels, purple loosestrife, and Eurasian water milfoil are becoming more prolific in Wisconsin and pose adverse effects to waters of the state. Wisconsin State Statutes 30.07, "Transportation of Aquatic Plants and Animals; Placement of Objects in Navigable Waters", details the state law that requires the removal of aquatic plants and zebra mussels each time equipment is put into state waters.

At construction sites that involve navigable water or wetlands, use the follow cleaning procedures to minimize the chance of exotic invasive species infestation. Use these procedures for all equipment that comes in contact with waters of the state and/or infested water or potentially infested water in other states.

Ensure that all equipment that has been in contact with waters of the state, or with infested or potentially infested waters, has been decontaminated for aquatic plant materials and zebra mussels before being used in other waters of the state. Before using equipment on this project, thoroughly disinfect all equipment that has come into contact with potentially infested waters. Guidelines from the Wisconsin Department of Natural Resources for disinfection are available at:

<http://dnr.wi.gov/topic/invasives/disinfection.html>

Use the following inspection and removal procedures:

1. Before leaving the contaminated site, wash machinery and ensure that the machinery is free of all soil and other substances that could possibly contain exotic invasive species;
2. Drain all water from boats, trailers, bilges, live wells, coolers, bait buckets, engine compartments, and any other area where water may be trapped;
3. Inspect boat hulls, propellers, trailers and other surfaces. Scrape off any attached mussels, remove any aquatic plant materials (fragments, stems, leaves, seeds, or roots), and dispose of removed mussels and plant materials in a garbage can before leaving the area or invested waters; and
4. Disinfect your boat, equipment and gear by either:
 - 4.1. Washing with ~212 F water (steam clean), or
 - 4.2. Drying thoroughly for five days after cleaning with soap and water and/or high pressure water, or
 - 4.3. Disinfecting with either 200 ppm (0.5 oz per gallon or 1 Tablespoon per gallon) Chlorine for 10-minute contact time or 1:100 solution (38 grams per gallon) of Virkon Aquatic for 20- to 30-minute contact time. Note: Virkon is not registered to kill zebra mussel veligers nor invertebrates like spiny water flea. Therefore, this disinfect should be used in conjunction with a hot water (>104° F) application.

Complete the inspection and removal procedure before equipment is brought to the project site and before the equipment leaves the project site.

stp-107-055 (20130615)

11. Construction Over or Adjacent to Navigable Waters.

The Kickapoo River is classified as a state navigable waterway under standard spec 107.19.

stp-107-060 (20171130)

12. Erosion Control Structures.

Within three calendar days after completing the excavation for a substructure unit, place riprap or other permanent erosion control items required by the contract or deemed necessary by the engineer around the unit at a minimum to a height equivalent to the calculated water elevation resulting from a storm that occurs on the average of once every two years (Q2) as shown on the plan, or as the engineer directs.

In the event that construction activity does not disturb the existing ground below the Q2 elevation, the above timing requirements for permanent erosion control shall be waived.

stp-107-070 (20191121)

13. Notice to Contractor, Verification of Asbestos Inspection, No Asbestos Found.

John Roelke, License Number All-199523, inspected Structure B-62-0238, B-62-0051, and C-62-0327 for asbestos on May 2, 2022. No regulated Asbestos Containing Material (RACM) was found on this structure. A copy of the inspection report is available from John Bainter, 608-785-9729, john.bainter@dot.wi.gov.stp-107-127 (20220628)

14. Archaeological Site.

Archaeologic sites are located within the limits shown on the plans.

- 47VE0485, Approximately Station 82+94 to Station 86+66 Left
- BVE0116, Approximately Station 164+73 to Station 167+59 Left
- 47VE0978, Approximately Station 165+06 to Station 167+91 Right
- BVE0126, Approximately Station 687+67 to Station 689+14 Right
- BVE0127, Approximately Station 684+63 to Station 687+47 Left
- BVE0096, Approximately Station 849+84 to Station 853+48 Left

Notify the Bureau of Technical Services – Environmental Process and Document Section (BTS-EPDS) at (608) 266-0099 at least two weeks before commencement of any ground disturbing activities. BTS-EPDS will determine if a qualified archaeologist will need to be on site during construction of this area.

Do not use the site for borrow or waste disposal. Do not use the site area not currently capped by asphalt/concrete for the staging of personnel, equipment and/or supplies.

The use of a hydrovac is not permitted within the boundaries of the identified archaeological sites.

stp-107-220 (20180628)

15. Notice to Contractor – Electronic Load Tickets.

Replace standard spec 109.1.4.3 (1) with the following:

(1) Submit an electronic ticket for each load of material for the following bid items:

- 460.5224 - HMA Pavement 4 LT 58-28 S

Include the information as specified in 109.1.4.2 on each electronic ticket. If there is a failure in the electronic ticket system, provide a printed ticket for each load of material as a substitute for electronic tickets.

stp-107-230 (20250108)

16. Coordination with Businesses and Residents.

The contractor shall arrange and conduct a meeting between the contractor, the department, affected residents, local officials and business people to discuss the project schedule of operations including vehicular and pedestrian access during construction operations. Hold the first meeting at least one week before the start of work under this contract and no further meetings will be required unless directed by the engineer. The contractor shall arrange for a suitable location for meetings that provides reasonable accommodation for public involvement. The department will prepare and coordinate publication of the meeting notices and mailings for meetings. The contractor shall schedule meetings with at least 2 weeks prior notice to the engineer to allow for these notifications.

stp-108-060 (20141107)

17. Base Aggregate Dense 3/4-Inch, Item 305.0110.

Add the following to standard spec 301.2.4.3:

Furnish only aggregate classified as crushed stone for Dense 3/4-Inch when used in the top 3 inches of the unpaved portion of the shoulder or for unpaved driveways and field entrances.

swr-305-001 (20170711)

18. Pulverize and Relay.

Replace standard spec 325.3(2) with the following:

- (2) Immediately after pulverizing, relay the material with a paver, grader, or both the paver and grader. Use equipment with automatic grade and slope control systems for adjusting the slope through super-elevated curves, transitions, and tangent sections and an averaging device to achieve a smooth profile. If the automatic control systems break down, the contractor may use manual controls for the remainder of that day only.

stp-325-001 (20080902)

**19. HMA Percent Within Limits (PWL) Test Strip Volumetrics, Item 460.0105.S;
HMA Percent Within Limits (PWL) Test Strip Density, Item 460.0110.S.**

A Description

This special provision describes the Hot Mix Asphalt (HMA) density and volumetric testing tolerances required for an HMA test strip. An HMA test strip is required for contracts constructed under HMA Percent Within Limits (PWL) QMP. A density test strip is required for each pavement layer placed over a specific, uniform underlying material, unless specified otherwise in the plans. Each contract is restricted to a single mix design per mix type per layer (e.g., upper layer and lower layer may have different mix type specified or may have the same mix type with different mix designs). Each mix design requires a separate test strip. Density and volumetrics testing will be conducted on the same test strip whenever possible.

Perform work according to standard spec 460 and as follows.

B Materials

Use materials conforming to HMA Pavement Percent Within Limits (PWL) QMP special provision.

C Construction

C.1 Test Strip

Submit the test strip start time and date to the department in writing at least 5 calendar days in advance of construction of the test strip. If the contractor fails to begin paving within 2 hours of the submitted start time, the test strip is delayed, and the department will assess the contractor \$2,000 for each instance according to Section E of this document. Alterations to the start time and date must be submitted to the department in writing a minimum of 24 hours prior to the start time. The contractor will not be liable for changes in start time related to adverse weather days as defined by standard spec 101.3 or equipment breakdown verified by the department.

On the first day of production for a test strip, produce approximately 750 tons of HMA. (Note: adjust tonnage to accommodate natural break points in the project.) Locate test strips in a section of the roadway to allow a representative rolling pattern (i.e. not a ramp or shoulder, etc.).

C.1.1 Sampling and Testing Intervals

C.1.1.1 Volumetrics

Laboratory testing will be conducted from a split sample yielding three components, with portions designated for QC (quality control), QV (quality verification), and retained.

During production for the test strip, obtain sufficient HMA mixture for three-part split samples from trucks prior to departure from the plant. Collect three split samples during the production of test strip material. Perform sampling from the truck box and three-part splitting of HMA according to WTM R47. These three samples will be randomly selected by the engineer from each *third* of the test strip tonnage (T), excluding the first 50 tons:

| Sample Number | Production Interval (tons) |
|---------------|----------------------------|
| 1 | 50 to 1/3 T |
| 2 | 1/3 T to 2/3 T |
| 3 | 2/3 T to T |

C.1.1.2 Density

Required field tests include contractor QC and department QV nuclear density gauge tests and pavement coring at ten individual locations (five in each half of the test strip length) according to Appendix A: *Test Methods and Sampling for HMA PWL QMP Projects*. Both QV and QC teams shall have two nuclear density gauges present for correlation at the time the test strip is constructed. QC and QV teams may wish to scan with additional gauges at the locations detailed in Appendix A, as only gauges used during the test strip correlation phase will be allowed.

C.1.2 Field Tests

C.1.2.1 Density

For contracts that include STSP 460-020 QMP Density in addition to PWL, a gauge comparison according to WTM T355 shall be completed prior to the day of test strip construction. Daily standardization of gauges on reference blocks and a project reference site shall be performed according

to WTM T355. A standard count shall be performed for each gauge on the material placed for the test strip, prior to any additional data collection. Nuclear gauge readings and pavement cores shall be used to determine nuclear gauge correlation according to Appendix A. The two to three readings for the five locations across the mat for each of two zones shall be provided to the engineer. The engineer will analyze the readings of each gauge relative to the densities of the cores taken at each location. The engineer will determine the average difference between the nuclear gauge density readings and the measured core densities to be used as a constant offset value. This offset will be used to adjust raw density readings of the specific gauge and shall appear on the density data sheet along with gauge and project identification. An offset is specific to the mix and layer; therefore, a separate value shall be determined for each layer of each mix placed over a differing underlying material for the contract. This constitutes correlation of that individual gauge for the given layer. Two gauges per team are not required to be onsite daily after completion of the test strip. Any data collected without a correlated gauge will not be accepted.

The contractor is responsible for coring the pavement from the footprint of the density tests and filling core holes according to Appendix A. Coring and filling of pavement core holes must be approved by the engineer. The QV team is responsible for the labeling and safe transport of the cores from the field to the QC laboratory. Testing of cores shall be conducted by the contractor and witnessed by department personnel. The contractor is responsible for drying the cores following testing. The department will take possession of cores following laboratory testing and will be responsible for any verification testing at the discretion of the engineer.

The target maximum density to be used in determining core density is the average of the three volumetric/mix Gmm values from the test strip multiplied by 62.24 lb/ft³. In the event mix and density portions of the test strip procedure are separated, or if an additional density test strip is required, the mix portion must be conducted prior to density determination. The target maximum density to determine core densities shall then be the Gmm four-test running average (or three-test average from a PWL volumetric-only test strip) from the end of the previous day's production multiplied by 62.24 lb/ft³. If no PWL production QV volumetric test is to be taken in a density-only test strip, a non-random QV test will be taken according to 460.2.8.3.1.4 as modified in HMA Pavement Percent Within Limits (PWL) QMP and if non-conforming to C.2.1 herein, follow corrective action outlined in 460.2.8.2.1.7(4) as modified in HMA Pavement Percent Within Limits (PWL) QMP.

Exclusions such as shoulders and appurtenances shall be tested and reported according to CMM 815. However, all acceptance testing of shoulders and appurtenances will be conducted by the department, and average lot (daily) densities must conform to standard spec Table 460-3. No density incentive or disincentive will be applied to shoulders or appurtenances. However, unacceptable shoulder material will be handled according to standard spec 460.3.3.1 and CMM 815.11.

C.1.3 Laboratory Tests

C.1.3.1 Volumetrics

Obtain random samples according to C.1.1.1 and Appendix A. Perform tests the same day as taking the sample.

Theoretical maximum specific gravities of each mixture sample will be obtained. Bulk specific gravities of both gyratory compacted samples and field cores shall be determined. The bulk specific gravity values determined from field cores shall be used to calculate a correction factor (i.e., offset) for each QC and QV nuclear density gauge. The correction factor will be used throughout the remainder of the layer.

C.2 Acceptance

C.2.1 Volumetrics

Produce mix conforming to the following limits based on individual QC and QV test results (tolerances based on most recent JMF):

| ITEM | ACCEPTANCE LIMITS |
|------------------------------|-------------------|
| Percent passing given sieve: | |
| 37.5-mm | +/- 8.0 |
| 25.0-mm | +/- 8.0 |
| 19.0-mm | +/- 7.5 |
| 12.5-mm | +/- 7.5 |
| 9.5-mm | +/- 7.5 |
| 2.36-mm | +/- 7.0 |

| | |
|---|-------------|
| 75- μ m | +/- 3.0 |
| Asphaltic content in percent ^[1] | - 0.5 |
| Air Voids | -1.5 & +2.0 |
| VMA in percent ^[2] | - 1.0 |
| Maximum specific gravity | +/- 0.024 |

^[1] Asphalt content more than -0.5% below the JMF will be referee tested by the department's AASHTO accredited laboratory and HTCP certified personnel using automated extraction.

^[2] VMA limits based on minimum requirement for mix design nominal maximum aggregate size in [table 460-1](#).

QV samples will be tested for Gmm, Gmb, and AC. Air voids and VMA will then be calculated using these test results.

Calculation of air voids shall use either the QC, QV, or retained split sample test results, as identified by conducting the paired t-test with the WisDOT PWL Test Strip Spreadsheet.

If QC and QV test results do not correlate as determined by the split sample comparison, the retained split sample will be tested by the department's AASHTO accredited laboratory and HTCP certified personnel as a referee test. Additional investigation shall be conducted to identify the source of the difference between QC and QV data. Referee data will be used to determine material conformance and pay.

C.2.2 Density

Compact all layers of test strip HMA mixture according to Table 460-3.

Nuclear density gauges are acceptable for use on the project only if correlation is completed for that gauge during the time of the test strip and the department issues documentation of acceptance stating the correlation offset value specific to the gauge and mix design. The offset is not to be entered into any nuclear density gauge as it will be applied by the department-furnished Field Density Worksheet.

C.2.3 Test Strip Approval and Material Conformance

All applicable laboratory and field testing associated with a test strip shall be completed prior to any additional mainline placement of the mix. All test reports shall be submitted to the department upon completion and approved before paving resumes. The department will notify the contractor within 24 hours from start of test strip regarding approval to proceed with paving unless an alternate time frame is agreed upon in writing with the department. The 24-hour approval time includes only working days as defined in standard spec 101.3.

The department will evaluate material conformance and make pay adjustments based on the PWL value of air voids and density for the test strip. The QC core densities and QC and QV mix results will be used to determine the PWL values as calculated according to Appendix A.

The PWL values for air voids and density shall be calculated after determining core densities. An approved test strip is defined as the individual PWL values for air voids and density both being equal to or greater than 75, mixture volumetric properties conforming to the limits specified in C.2.1, and an acceptable gauge-to-core correlation. Further clarification on PWL test strip approval and appropriate post-test strip actions are shown in the following table:

PWL TEST STRIP APPROVAL AND MATERIAL CONFORMANCE CRITERIA

| PWL VALUE FOR AIR VOIDS AND DENSITY | TEST STRIP APPROVAL | MATERIAL CONFORMANCE | POST-TEST STRIP ACTION |
|-------------------------------------|-----------------------|---|---|
| Both PWL \geq 75 | Approved ¹ | Material paid for according to Section E | Proceed with Production |
| 50 \leq Either PWL < 75 | Not Approved | Material paid for according to Section E | Consult BTS to determine need for additional test strip |
| Either PWL < 50 | Not Approved | Unacceptable material removed and replaced or paid for at 50% of the contract unit price according to Section E | Construct additional Volumetrics or Density test strip as necessary |

¹ In addition to these PWL criteria, mixture volumetric properties must conform to the limits specified in C.2.1, split sample comparison must have a passing result and an acceptable gauge-to-core correlation must be completed.

A maximum of two test strips will be allowed to remain in place per pavement layer per contract. If material is removed, a new test strip shall replace the previous one at no additional cost to the department. If the contractor changes the mix design for a given mix type during a contract, no additional compensation will be paid by the department for the required additional test strip and the department will assess the contractor \$2,000 for the additional test strip according to Section E of this special provision. For simultaneously conducted density and volumetric test strip components, the following must be achieved:

- I. Passing/Resolution of Split Sample Comparison
- II. Volumetrics/mix PWL value ≥ 75
- III. Density PWL value ≥ 75
- IV. Acceptable correlation

If not conducted simultaneously, the mix portion of a test strip must accomplish (i) & (ii), while density must accomplish (iii) & (iv). If any applicable criteria are not achieved for a given test strip, the engineer, with authorization from the department's Bureau of Technical Services, will direct an additional test strip (or alternate plan approved by the department) be conducted to prove the criteria can be met prior to additional paving of that mix. For a density-only test strip, determination of mix conformance will be according to main production, i.e., HMA Pavement Percent Within Limits (PWL) QMP special provision.

D Measurement

The department will measure HMA Percent Within Limits (PWL) Test Strip as each unit of work, acceptably completed as passing the required air void, VMA, asphalt content, gradation, and density correlation for a Test Strip. Material quantities shall be determined according to standard spec 450.4 and detailed here within.

E Payment

The department will pay for measured quantities at the contract unit price under the following bid item:

| ITEM NUMBER | DESCRIPTION | UNIT |
|-------------|--|------|
| 460.0105.S | HMA Percent Within Limits (PWL) Test Strip Volumetrics | EACH |
| 460.0110.S | HMA Percent Within Limits (PWL) Test Strip Density | EACH |

These items are intended to compensate the contractor for the construction of the test strip for contracts paved under the HMA Pavement Percent Within Limits QMP article.

Payment for HMA Percent Within Limits (PWL) Test Strip Volumetrics is full compensation for volumetric sampling, splitting, and testing, and for the proper labeling, handling, and retention of the split samples.

Payment for HMA Percent Within Limits (PWL) Test Strip Density is full compensation for collecting and measuring of pavement cores, acceptably filling core holes, providing of nuclear gauges and operator(s), and all other work associated with completion of a core-to-gauge correlation, as directed by the engineer.

Acceptable HMA mixture placed on the project as part of a volumetric or density test strip will be compensated by the appropriate HMA Pavement bid item with any applicable pay adjustments. If a test strip is delayed as defined in C.1 of this document, the department will assess the contractor \$2,000 for each instance, under the HMA Delayed Test Strip administrative item. If an additional test strip is required because the initial test strip is not approved by the department or the mix design is changed by the contractor, the department will assess the contractor \$2,000 for each additional test strip (i.e., \$2,000 for each individual volumetrics or density test strip) under the HMA Additional Test Strip administrative item.

Pay adjustment will be calculated using 65 dollars per ton of HMA pavement. The department will pay for measured quantities of mix based on \$65/ton multiplied by the following pay adjustment:

| PAY ADJUSTMENT FOR HMA PAVEMENT AIR VOIDS & DENSITY | |
|--|---------------------------------|
| <i>PERCENT WITHIN LIMITS</i> | <i>PAYMENT FACTOR, PF</i> |
| <i>(PWL)</i> | <i>(percent of \$65/ton)</i> |
| ≥ 90 to 100 | $PF = ((PWL - 90) * 0.4) + 100$ |
| ≥ 50 to < 90 | $(PWL * 0.5) + 55$ |
| <50 | 50% ^[1] |

where, PF is calculated per air voids and density, denoted $PF_{\text{air voids}}$ & PF_{density}

^[1] Material resulting in PWL value less than 50 shall be removed and replaced, unless the engineer allows for such material to remain in place. In the event the material remains in place, it will be paid at 50% of the contract unit price of HMA pavement.

For air voids, PWL values will be calculated using lower and upper specification limits of 2.0 and 4.3 percent, respectively. Lower specification limits for density will be according to Table 460-3. Pay adjustment will be determined for an acceptably completed test strip and will be computed as shown in the following equation:

$$\text{Pay Adjustment} = (\text{PF}-100)/100 \times (\text{WP}) \times (\text{tonnage}) \times (\$65/\text{ton})^*$$

*Note: If Pay Factor = 50, the contract unit price will be used in lieu of \$65/ton and the weighted percentage (WP) will equal 1.0.

The following weighted percentage (WP) values will be used for the corresponding parameter:

| <u>Parameter</u> | <u>WP</u> |
|------------------|-----------|
| Air Voids | 0.5 |
| Density | 0.5 |

Individual Pay Factors for each air voids ($\text{PF}_{\text{air voids}}$) and density ($\text{PF}_{\text{density}}$) will be determined. $\text{PF}_{\text{air voids}}$ will be multiplied by the total tonnage produced (i.e., from truck tickets), and $\text{PF}_{\text{density}}$ will be multiplied by the calculated tonnage used to pave the mainline only (i.e., traffic lane excluding shoulder) as determined according to Appendix A.

The department will pay incentive for air voids under the following bid item:

| ITEM NUMBER | DESCRIPTION | UNIT |
|-------------|------------------------------------|------|
| 460.2005 | Incentive Density PWL HMA Pavement | DOL |
| 460.2010 | Incentive Air Voids HMA Pavement | DOL |

The department will administer disincentives under the Disincentive Density HMA Pavement and the Disincentive Air Voids HMA Pavement administrative items.

stp-460-040 (20230629)

20. HMA Pavement Percent Within Limits (PWL) QMP.

A Description

This special provision describes percent within limits (PWL) pay determination, providing and maintaining a contractor Quality Control (QC) Program, department Quality Verification (QV) Program, required sampling and testing, dispute resolution, corrective action, pavement density, and payment for HMA pavements. Pay is determined by statistical analysis performed on contractor and department test results conducted according to the Quality Management Program (QMP) as specified in standard spec 460, except as modified below.

B Materials

Conform to the requirements of standard spec 450, 455, and 460 except where superseded by this special provision. The department will allow only one mix design for each HMA mixture type per layer required for the contract, unless approved by the engineer. The use of more than one mix design for each HMA pavement layer will require the contractor to construct a new test strip according to HMA Pavement Percent Within Limits (PWL) QMP Test Strip Volumetrics and HMA Pavement Percent Within Limits (PWL) QMP Test Strip Density articles at no additional cost to the department.

Replace standard spec 460.2.8.2.1.3.1 Contracts with 5000 Tons of Mixture or Greater with the following:

460.2.8.2.1.3.1 Contracts under Percent within Limits

- (1) Furnish and maintain a laboratory at the plant site fully equipped for performing contractor QC testing. Have the laboratory on-site and operational before beginning mixture production.
- (2) Obtain random samples and perform tests according to this special provision and further defined in Appendix A: *Test Methods & Sampling for HMA PWL QMP Projects*. Obtain HMA mixture samples from trucks at the plant. For the subplot in which a QV sample is collected, discard the QC sample and test a split of the QV sample.
- (3) Perform sampling from the truck box according to WTM R97 and four-part splitting of HMA samples according to WTM R47. Sample size must be adequate to run the appropriate required tests in addition to one set of duplicate tests that may be required for dispute resolution (i.e., retained). This requires sample sizes which yield four splits for all random sampling per subplot. All QC samples shall

provide the following: QC, QV, Retained, and Extra. Take possession of the QC and Extra split samples intended for QC testing. The department will observe the splitting and take possession of the QV and Retained split samples intended for QV testing. Additional sampling details are found in Appendix A. Label samples according to WTM R97.

- (4) Test the QC split sample using the test methods identified below at a frequency greater than or equal to that indicated. The Extra split sample shall be tested only when the Gmm and/or Gmb replicate tolerances are exceeded according to WTM T166 section 13.1.4 and WTM T209 section 14.1.1. When testing the Extra split sample, only the results from the test from which the tolerances were exceeded may replace the results from the QC split sample. The Rule of Retained according to CMM 836.1.2 applies.
 - Blended aggregate gradations according to WTM T30.
 - Asphalt content (AC) in percent.
 - Determine AC using one of the following methods:
 - AC by ignition oven according to WTM T308. If the department is using an ignition oven to determine AC, conform to WTP [H-003](#). If the department is not using an ignition oven to determine AC, IOCFs must still be reverified for any of the reasons listed in [WTP H-003 Table 2](#) and conform to WTP H-003 section 3.
 - AC by chemical extraction according to AASHTO T 164 Method A or B.
 - AC by automated extraction according to WTM D8159.
 - Bulk specific gravity (Gmb) of the compacted mixture according to WTM T166.
 - Maximum specific gravity (Gmm) according to WTM T209.
 - Air voids (Va) by calculation according to WTM T269.
 - Voids in Mineral Aggregate (VMA) by calculation according to WTM R35 section 9.2.
- (5) Lot size shall consist of 3,750 tons with sublots of 750 tons. Test each design mixture at a frequency of 1 test per 750 tons of mixture type produced and placed as part of the contract. Add a random sample for any fraction of 750 tons at the end of production for a specific mixture design. Partial lots with less than three subplot tests will be included into the previous lot for data analysis and pay adjustment. Volumetric lots will include all tonnage of mixture type under specified bid item unless otherwise specified in the plan.
- (6) Conduct field tensile strength ratio tests according to WTM T283 on each qualifying mixture according to CMM 836.6.14. Test each full 50,000-ton production increment, or fraction of an increment, after the first 5,000 tons of production. Perform required increment testing in the first week of production of that increment. If field tensile strength ratio values are below the spec limit, notify the engineer. The engineer and contractor will jointly determine a corrective action.

Delete standard spec 460.2.8.2.1.5 and 460.2.8.2.1.6.

Replace standard spec 460.2.8.2.1.7 Corrective Action with the following:

460.2.8.2.1.7 Corrective Action

- (1) Material must conform to the following action and acceptance limits based on individual QC and QV test results (tolerances relative to the JMF used on the PWL Test Strip):

| ITEM | ACTION LIMITS | ACCEPTANCE LIMITS |
|------------------------------|---------------|-------------------|
| Percent passing given sieve: | | |
| 37.5-mm | +/- 8.0 | |
| 25.0-mm | +/- 8.0 | |
| 19.0-mm | +/- 7.5 | |
| 12.5-mm | +/- 7.5 | |
| 9.5-mm | +/- 7.5 | |
| 2.36-mm | +/- 7.0 | |
| 75-µm | +/- 3.0 | |

| | | |
|-------------------------------|-------|--------------|
| AC in percent | -0.3 | -0.5 |
| Va | | - 1.5 & +2.0 |
| VMA in percent ^[1] | - 0.5 | -1.0 |

^[1] VMA limits based on minimum requirement for mix design nominal maximum aggregate size in table 460-1.

- (2) QV samples will be tested for Gmm, Gmb, and AC. Air voids and VMA will then be calculated using these test results.
- (3) Notify the engineer if any individual test result falls outside the action limits, investigate the cause and take corrective action to return to within action limits. If two consecutive test results fall outside the action limits, stop production. Production may not resume until approved by the engineer. Additional QV samples may be collected upon resuming production, at the discretion of the engineer.
- (4) For any additional non-random tests outside the random number testing conducted for volumetrics, the data collected will not be entered into PWL calculations. Additional QV tests must meet acceptance limits or be subject to production stop. If the department's non-random test does not conform to the acceptance limits, the retained sample will be tested by the BTS lab. If the BTS results also do not meet the acceptance limits, the material will be considered unacceptable as described in (5) below.
- (5) Remove and replace unacceptable material at no additional expense to the department. Unacceptable material is defined as any individual QC or QV tests results outside the acceptance limits or a PWL value < 50. For AC in percent, unacceptable material is defined as any individual QV test result outside of the acceptance limit. The engineer may allow such material to remain in place with a price reduction. The department will pay for such HMA Pavement allowed to remain in place at 50 percent of the contract unit price.

Replace standard spec 460.2.8.3.1.2 Personnel Requirements with the following:

460.2.8.3.1.2 Personnel Requirements

- (1) The department will provide at least one HTCP-certified Transportation Materials Sampling (TMS) Technician, to observe QV sampling of HMA mixtures.
- (2) Under departmental observation, a contractor TMS technician shall collect and split samples.
- (3) A department HTCP-certified Hot Mix Asphalt, Technician I, Production Tester (HMA-IPT) technician will ensure that all sampling is performed correctly and conduct testing, analyze test results, and report resulting data.
- (4) The department will make an organizational chart available to the contractor before mixture production begins. The organizational chart will include names, telephone numbers, and current certifications of all QV testing personnel. The department will update the chart with appropriate changes, as they become effective.

Replace standard spec 460.2.8.3.1.4 Department Verification Testing Requirements with the following:

460.2.8.3.1.4 Department Verification Testing Requirements

- (1) HTCP-certified department personnel will obtain QV random samples by directly supervising HTCP-certified contractor personnel sampling from trucks at the plant. Sample size must be adequate to run the appropriate required tests in addition to one set of duplicate tests that may be required for dispute resolution (i.e., retained). This requires sample sizes which yield four splits for all random sampling per subplot. All QV samples shall furnish the following: QC, QV, Retained, and Extra. The department will observe the splitting and take possession of the QV, Retained, and Extra split samples intended for QV testing. The department will take possession of retained samples accumulated to date each day QV samples are collected. The department will retain samples until surpassing the analysis window of up to 5 lots, as defined in standard spec 460.2.8.3.1.7(2) of this special provision. Additional sampling details are found in Appendix A.
- (2) The department will verify product quality using the test methods specified here in standard spec 460.2.8.3.1.4(3). The department will identify test methods before construction starts and use only those methods during production of that material unless the engineer and contractor mutually agree otherwise.

- (3) The department will test the QV split sample using the test methods identified below at the frequency indicated. The Extra split sample will be tested only when the Gmm and/or Gmb replicate tolerances are exceeded according to WTM T166 section 13.1.4 and WTM T209 section 14.1.1. When testing the Extra split sample, only the results from the test from which the tolerances were exceeded may replace the results from the QV split sample. The Rule of Retained according to CMM 836.1.2 applies. In the event that both the department and contractor's replicate tolerances are exceeded, perform dispute resolution according to 460.2.8.3.1.7(2).
- Bulk specific gravity (Gmb) of the compacted mixture according to WTM T166.
 - Maximum specific gravity (Gmm) according to WTM T209.
 - Air voids (Va) by calculation according to WTM T269.
 - Voids in Mineral Aggregate (VMA) by calculation according to WTM R35 section 9.2.
 - Asphalt Content (AC) in percent determined by ignition oven method according to WTM T308 and conforming to WTP H-003, chemical extraction according to AASHTO T 164 Method A or B, or automated extraction according to WTM D8159.
- (4) The department will randomly test each design mixture at the minimum frequency of one test for each lot.

Delete standard spec 460.2.8.3.1.6.

Replace standard spec 460.2.8.3.1.7 Dispute Resolution with the following:

460.2.8.3.1.7 Data Analysis for Volumetrics

- (1) Analysis of test data for pay determination will be contingent upon QC and QV test results. Statistical analysis will be conducted on Gmm and Gmb test results for calculation of Va. If either Gmm or Gmb analysis results in non-comparable data as described in 460.2.8.3.1.7(2), subsequent testing will be performed for both parameters as detailed in the following paragraph.
- (2) The engineer, upon completion of the first 3 lots, will compare the variances (F-test) and the means (t-test) of the QV test results with the QC test results. Additional comparisons incorporating the first 3 lots of data will be performed following completion of the 4th and 5th lots (i.e., lots 1-3, 1-4, and 1-5). A rolling window of 5 lots will be used to conduct F & t comparison for the remainder of the contract (i.e., lots 2-6, then lots 3-7, etc.), reporting comparison results for each individual lot. Analysis will use a set alpha value of 0.025. If the F- and t-tests report comparable data, the QC and QV data sets are determined to be statistically similar and QC data will be used to calculate the Va used in PWL and pay adjustment calculations. If the F- and t-tests result in non-comparable data, proceed to the *dispute resolution* steps found below. Note: if both QC and QV Va PWL result in a pay adjustment of 102% or greater, dispute resolution testing will not be conducted. Dispute resolution via further investigation is as follows:
- [1] The Retained portion of the split from the lot in the analysis window with a QV test result furthest from the QV mean (not necessarily the subplot identifying that variances or means do not compare) will be referee tested for Gmm, Gmb, and Asphalt Content by the bureau's AASHTO accredited laboratory and certified personnel. All previous lots within the analysis window are subject to referee testing and regional lab testing as deemed necessary. Referee test results will replace the QV data of the subplot(s).
 - [2] Statistical analysis will be conducted with referee test results replacing QV results.
 - i. If the F- and t-tests indicate variances and means compare, no further testing is required for the lot and QC data will be used for PWL and pay factor/adjustment calculations.
 - ii. If the F- and t-tests indicate non-comparable variances or means, the Retained portion of the random QC sample will be tested for Gmm, Gmb, and Asphalt Content by the department's regional lab for the remaining 4 sublots of the lot which the F- and t- tests indicate non-comparable datasets. The department's regional lab and the referee test results will be used for PWL and pay factor/adjustment calculations. Upon the second instance of non-comparable variance or means and for every instance thereafter, the department will assess a pay reduction for the additional testing of the remaining 4 sublots at \$2,000/lot under the HMA Regional Lab Testing administrative item.
 - [3] The contractor may choose to dispute the regional test results on a lot basis within 7 days after receiving the results from the region. In this event, the retained portion of each subplot will be referee tested by the department's AASHTO accredited laboratory and certified personnel. The referee Gmm and Gmb test results will supersede the regional lab results for the disputed lot.

- i. If referee testing results in an increased calculated pay factor, the department will pay for the cost of the additional referee testing.
 - ii. If referee testing of a disputed lot results in an equal or lower calculated pay factor, the department will assess a pay reduction for the additional referee testing at \$2,000/lot under the Referee Testing administrative item.
- (3) The department will notify the contractor of the referee test results within 3 working days after receipt of the samples by the department's AASHTO accredited laboratory. The intent is to provide referee test results within 7 calendar days from completion of the lot.
- (4) The department will determine mixture conformance and acceptability by analyzing referee test results, reviewing mixture data, and inspecting the completed pavement according to the standard spec, this special provision, and accompanying Appendix A.
- (5) Unacceptable material (i.e., resulting in a PWL value less than 50 or individual QC or QV test results not meeting the Acceptance Requirements of 460.2.8.2.1.7 as modified herein) will be referee tested by the bureau's AASHTO accredited laboratory and certified personnel and those test results used for analysis. Such material may be subject to remove and replace, at the discretion of the engineer. If the engineer allows the material to remain in place, it will be paid at 50% of the HMA Pavement contract unit price. Replacement or pay adjustment will be conducted on a subplot basis. If an entire PWL subplot is removed and replaced, the test results of the newly placed material will replace the original data for the subplot. Any remove and replace shall be performed at no additional cost to the department. Testing of replaced material must include a minimum of one QV result. [Note: If the removed and replaced material does not result in replacement of original QV data, an additional QV test will be conducted and under such circumstances will be entered into the HMA PWL Production spreadsheet for data analysis and pay determination.] The quantity of material paid at 50% the contract unit price will be deducted from PWL pay adjustments, along with accompanying data of this material.

Delete standard spec 460.2.8.3.1.8 Corrective Action.

C Construction

Replace standard spec 460.3.3.2 Pavement Density Determination with the following:

460.3.3.2 Pavement Density Determination

- (1) The engineer will determine the target maximum density using department procedures described in WTM T355 and CMM 815. The engineer will determine density as soon as practicable after compaction and before placement of subsequent layers or before opening to traffic.
- (2) Do not re-roll compacted mixtures with deficient density test results. Do not operate continuously below the specified minimum density. Stop production, identify the source of the problem, and make corrections to produce work meeting the specification requirements.
- (3) A lot is defined as 7,500 lane feet with sublots of 1,500 lane feet (excluding shoulder, even if paved integrally) and placed within a single layer for each location and target maximum density category indicated in table 460-3. Complete three tests randomly per subplot and the department will randomly conduct one QV test per subplot. A partial quantity less than 750 lane feet will be included with the previous subplot. Partial lots with less than three sublots will be included in the previous lot for data analysis/acceptance and pay, by the engineer. If density lots/sublots are determined prior to construction of the test strip, any random locations within the test strip shall be omitted. Exclusions such as shoulders and appurtenances shall be tested and recorded according to WTM T355 and CMM 815. However, all acceptance testing of shoulders and appurtenances will be conducted by the department, and average lot (daily) densities must conform to standard spec Table 460-3 or else be subject to disincentives according to 460.5.2.2(5) herein. No density incentive will be applied to shoulders or appurtenances. Offsets will not be applied to nuclear density gauge readings for shoulders or appurtenances. Unacceptable shoulder material will be handled according to standard spec 460.3.3.1 and CMM 815.11.
- (4) The three QC locations per subplot represent the outside, middle, and inside of the paving lane. The QC density testing procedures are detailed in Appendix A.
- (5) QV nuclear testing will consist of one randomly selected location per subplot. The QV density testing procedures will be the same as the QC procedure at each testing location and are also detailed in Appendix A.

- (6) An HTCP-certified nuclear density technician (NUCDENSITYTEC-I) shall identify random locations and perform the testing for both the contractor and department. The responsible certified technician shall ensure that sample location and testing is performed correctly, analyze test results, and provide density results to the contractor weekly, or at the completion of each lot.
- (7) For any additional tests outside the random number testing conducted for density, the data collected will not be entered into PWL calculations. However, additional QV testing must meet the tolerances for material conformance as specified in the standard specification and this special provision. If additional density data identifies unacceptable material, proceed as specified in CMM 815.11.

Replace standard spec 460.3.3.3 Waiving Density Testing with Acceptance of Density Data with the following:

460.3.3.3 Analysis of Density Data

- (1) Analysis of test data for pay determination will be contingent upon test results from both the contractor (QC) and the department (QV).
- (2) As random density locations are paved, the data will be recorded in the HMA PWL Production Spreadsheet for analysis in chronological order. The engineer, upon completion of the first 3 lots, will compare the variances (F-test) and the means (t-test) of the QV test results with the QC test results. A rolling window of 3 lots will be used to conduct F & t comparison for the remainder of the contract (i.e., lots 2-4, then lots 3-5, etc.), reporting comparison results for each individual lot. Analysis will use a set alpha value of 0.025.
 - i. If the F- and t-tests indicate variances and means compare, the QC and QV data sets are determined to be statistically similar and QC data will be used for PWL and pay adjustment calculations.
 - ii. If the F- and t-tests indicate variances or means do not compare, the QV data will be used for subsequent calculations.
- (3) The department will determine mixture density conformance and acceptability by analyzing test results, reviewing mixture data, and inspecting the completed pavement according to standard spec, this special provision, and accompanying Appendix A.
- (4) Density resulting in a PWL value less than 50 or not meeting the requirements of 460.3.3.1 (any individual density test result falling more than 3.0 percent below the minimum required target maximum density as specified in standard spec Table 460-3) is unacceptable and may be subject to remove and replace at no additional cost to the department, at the discretion of the engineer.
 - i. Replacement may be conducted on a subplot basis. If an entire PWL subplot is removed and replaced, the test results of the newly placed material will replace the original data for the subplot.
 - ii. Testing of replaced material must include a minimum of one QV result. [Note: If the removed and replaced material does not result in replacement of original QV data, an additional QV test must be conducted and under such circumstances will be entered into the data analysis and pay determination.]
 - iii. If the engineer allows such material to remain in place, it will be paid for at 50% of the HMA Pavement contract unit price. The extent of unacceptable material will be addressed as specified in CMM 815.11. The quantity of material paid at 50% the contract unit price will be deducted from PWL pay adjustments, along with accompanying data of this material.

D Measurement

The department will measure the HMA Pavement bid items acceptably completed by the ton, as specified in standard spec 450.4 and as follows in standard spec 460.5, as modified in this special provision.

E Payment

Replace standard spec 460.5.2 HMA Pavement with the following:

460.5.2 HMA Pavement

460.5.2.1 General

- (1) Payment for HMA Pavement Type LT, MT, and HT mixes is full compensation for providing HMA mixture designs; for preparing foundation; for furnishing, preparing, hauling, mixing, placing, and compacting mixture; for HMA PWL QMP testing and aggregate source testing; for warm mix asphalt additives or processes; for stabilizer, hydrated lime and liquid antistripping agent, if required; and for all materials including asphaltic materials.

- (2) If provided for in the plan quantities, the department will pay for a leveling layer, placed to correct irregularities in an existing paved surface before overlaying, under the pertinent paving bid item. Absent a plan quantity, the department will pay for a leveling layer as extra work.

460.5.2.2 Calculation of Pay Adjustment for HMA Pavement using PWL

- (1) Pay adjustments will be calculated using 65 dollars per ton of HMA pavement. The HMA PWL Production Spreadsheet, including data, will be made available to the contractor by the department as soon as practicable upon completion of each lot. The department will pay for measured quantities of mix based on this price multiplied by the following pay adjustment calculated according to the HMA PWL Production Spreadsheet:

PAY FACTOR FOR HMA PAVEMENT AIR VOIDS & DENSITY

| <i>PERCENT WITHIN LIMITS (PWL)</i> | <i>PAYMENT FACTOR, PF (percent of \$65/ton)</i> |
|--|---|
| ≥ 90 to 100 | $PF = ((PWL - 90) * 0.4) + 100$ |
| ≥ 50 to < 90 | $(PWL * 0.5) + 55$ |
| <50 | 50% ^[1] |

where PF is calculated per air voids and density, denoted PF_{air voids} & PF_{density}.

^[1] Any material resulting in PWL value less than 50 shall be removed and replaced unless the engineer allows such material to remain in place. In the event the material remains in place, it will be paid at 50% of the contract unit price of HMA pavement.

- (2) For air voids, PWL values will be calculated using lower and upper specification limits of 2.0 and 4.3 percent, respectively. Lower specification limits for density shall be according to standard spec Table 460-3.
- (3) Pay adjustment will be determined on a lot basis and will be computed as shown in the following equation:

$$\text{Pay Adjustment} = (PF-100)/100 \times (WP) \times (\text{tonnage}) \times (\$65/\text{ton})^*$$

*Note: If Pay Factor = 50%, the contract unit price will be used in lieu of \$65/ton and the weighted percentage (WP) will equal 1.0.

The following weighted percentage (WP) values will be used for the corresponding parameter:

| Parameter | WP |
|-----------|-----|
| Air Voids | 0.5 |
| Density | 0.5 |

- (4) Individual Pay Factors for each air voids (PF_{air voids}) and density (PF_{density}) will be determined. PF_{air voids} will be multiplied by the total tonnage placed (i.e., from truck tickets), and PF_{density} will be multiplied by the calculated tonnage used to pave the mainline only (i.e., travel lane excluding shoulder) as determined according to Appendix A.
- (5) Pay adjustment for shoulders and appurtenances accepted by department testing will be determined on a lot basis. If the lot density is less than the specified minimum in table 460-3, the department will reduce pay based on the contract unit price for the HMA pavement bid item for that lot as follows:

DISINCENTIVE PAY REDUCTION FOR HMA PAVEMENT DENSITY

| PERCENT LOT DENSITY BELOW SPECIFIED MINIMUM | PAYMENT FACTOR (percent of contract price) |
|--|---|
| From 0.5 to 1.0 inclusive | 98 |
| From 1.1 to 1.5 inclusive | 95 |
| From 1.6 to 2.0 inclusive | 91 |
| From 2.1 to 2.5 inclusive | 85 |
| From 2.6 to 3.0 inclusive | 70 |

More than 3.0^[1]

[1] Remove and replace the lot with a mixture at the specified density. When acceptably replaced, the department will pay for the replaced work at the contract unit price. Alternatively, the engineer may allow the nonconforming material to remain in place with a 50 percent payment factor.

(6) The department will pay incentive for air voids and density under the following bid items:

| ITEM NUMBER | DESCRIPTION | UNIT |
|-------------|------------------------------------|------|
| 460.2005 | Incentive Density PWL HMA Pavement | DOL |
| 460.2010 | Incentive Air Voids HMA Pavement | DOL |

The department will administer disincentives under the Disincentive Density HMA Pavement and the Disincentive Air Voids HMA Pavement administrative items.

The department will administer a disincentive under the Disincentive HMA Binder Content administrative item for each individual QV test result indicating asphalt binder content below the Action Limit in 460.2.8.2.1.7 presented herein. The department will adjust pay per subplot of mix at 65 dollars per ton of HMA pavement multiplied by the following pay adjustment calculated according to the HMA PWL Production Spreadsheet:

| <u>AC Binder Relative to JMF</u> | <u>Pay Adjustment / Sublot</u> |
|----------------------------------|--------------------------------|
| -0.4% to -0.5% | 75% ^[1] |
| More than -0.5% | 50% ^{[1][2]} |

[1] Any material resulting in an asphalt binder content more than 0.3% below the JMF AC content will be referee tested by the department's AASHTO accredited laboratory and HTCP certified personnel using automated extraction according to automated extraction according to WTM D8159.

[2] Any material resulting in an asphalt binder content more than 0.5% below the JMF AC content shall be removed and replaced unless the engineer allows such material to remain in place. In the event the material remains in place, it will be paid at 50% of the contract unit price of HMA pavement.

Note: PWL value determination is further detailed in the PWL Production Spreadsheet Instructions located in the *Project Info & Instructions* tab of the HMA PWL Production spreadsheet.

stp-460-050 (20240105)

21. Appendix A.

Test Methods & Sampling for HMA PWL QMP Projects

The following procedures are included with the HMA Pavement Percent Within Limits (PWL) Quality Management Program (QMP) special provision:

- WisDOT Procedure for Nuclear Gauge/Core Correlation – Test Strip
- WisDOT Test Method for HMA PWL QMP Density Measurements for Main Production
- Sampling for WisDOT HMA PWL QMP
- Calculation of PWL Mainline Tonnage Example

WisDOT Procedure for Nuclear Gauge/Core Correlation – Test Strip

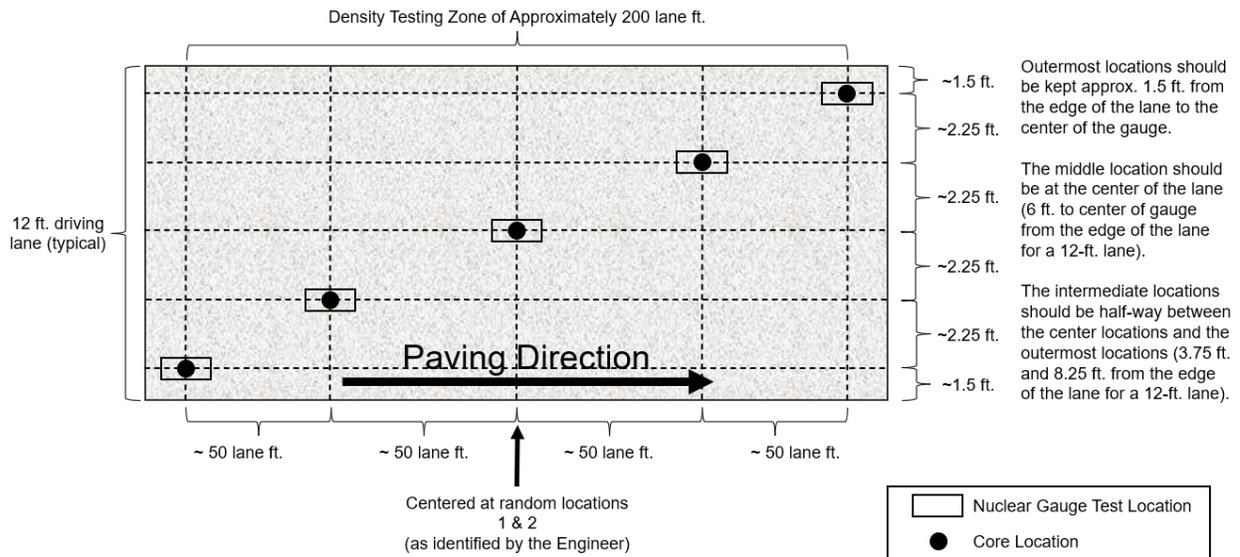


Figure 1: Nuclear/Core Correlation Location Layout

The engineer will identify two zones in which gauge/core correlation is to be performed. These two zones will be randomly selected within each *half* of the test strip length. (Note: Density zones shall not overlap and must have a minimum of 100 feet between the two zones; therefore, random numbers may be shifted (evenly) in order to meet these criteria.) Each zone shall consist of five locations across the mat as identified in Figure 1. The following shall be determined at each of the five locations within both zones:

- two one-minute nuclear density gauge readings for QC team*
- two one-minute nuclear density gauge readings for QV team*
- pavement core sample

*If the two readings exceed 1.0 pcf of one another, a third reading is conducted in the same orientation as the first reading. In this event, all three readings are averaged, the individual test reading of the three which falls farthest from the average value is discarded, and the average of the remaining two values is used to represent the location for the gauge.

The zones are supposed to be undisclosed to the contractor/roller operators. The engineer will not lay out density/core test sites until rolling is completed and the cold/finish roller is beyond the entirety of the zone. Sites are staggered across the 12-foot travel lane, and do not include shoulders. The outermost locations shall be 1.5-feet from the center of the gauge to the edge of the lane. [NOTE: This staggered layout is only applicable to the test strip. All mainline density locations after test strip shall have a longitudinal and transverse random number to determine the location as detailed in the *WisDOT Test Method for HMA PWL QMP Density Measurements for Main Production* section of this document.]

The nuclear site is the same for QC and QV readings for the test strip, i.e., the QC and QV teams are to take nuclear density gauge readings in the same footprint. Each of the QC and QV teams are to take a minimum of two one-minute readings per nuclear site, with the gauge rotated 180 degrees between readings, as seen here:



(a)



(b)

Figure 2: Nuclear Gauge Orientation for (a) 1st One-Minute Reading and (b) 2nd One-Minute Reading

Take photos of each of the 10 core/gauge locations of the test strip. Include gauge readings (pcf) and a labelled core within the gauge footprint. If a third reading is needed, record and document all three readings. Only raw readings in pcf shall be written on the pavement during the test strip, with a corresponding gauge ID/SN (generalized as QC-1 through QV-2 in the following Figure) in the following format:

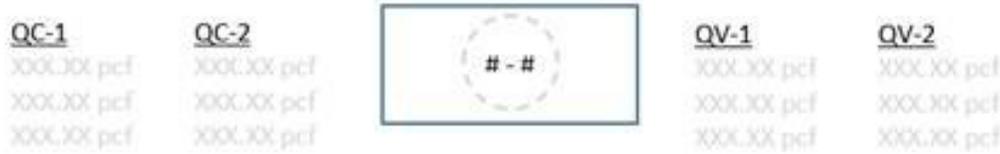


Figure 3: Layout of Raw Gauge Readings as Recorded on the Pavement

Take each core from the center of the gauge footprint and correlate each gauge with the laboratory-measured bulk specific gravities of the pavement cores. One core in good condition must be obtained from each of the 10 locations. If a core is damaged at the time of extracting from the pavement, a replacement core should be taken immediately adjacent to the damaged core, i.e., from the same footprint. If a core is damaged during transport, it shall be recorded as damaged and excluded from the correlation. Coring after traffic is on the pavement shall be avoided. The contractor shall be responsible for coring of the pavement. Coring and filling of core holes must be approved by the engineer. The QV team is responsible for the labeling and safe transport of the cores from the field to the QC laboratory. Conduct core density testing with a witness by department personnel. Dry the cores following testing. The department will take possession of cores following initial testing and is responsible for any verification testing.

Each core 100 or 150 mm (4 or 6 inches) in diameter will be taken at locations as identified in Figure 1. Each random core will be full thickness of the layer being placed. Thoroughly dry cores obtained from the mat according to WTM R79 prior to using specimens for in-place density determination according to WTM T166.

Cut cores by the next day after completion of the test strip, except if the next day is not a working day, then cut within 48 hours of placement. Cores are cut under department/project staff observation. Relabel each core immediately after extruding or ensure that labels applied to pavement prior to cutting remain legible. The layer interface should also be marked immediately following extrusion. Cores should be cut at this interface, using a wet saw, to allow for density measurement of only the most recently placed layer. Cores should be protected from excessive temperatures such as direct sunlight. Also, there should be department custody (both in transport and storage) for the cores until they are tested whether that be immediately after the test strip or the subsequent day if agreed upon between department and contractor. Use of concrete cylinder molds works well to transport cores. Cores should be placed upside down (flat surface to bottom of cylinder mold) in the molds, one core per mold, cylinder molds stored upright, and ideally transported in a cooler. Avoid any stacking of pavement cores.

Fill all core holes with non-shrink rapid-hardening grout, mortar, or concrete, or with HMA. When using grout, mortar, or concrete, remove all water from the core holes prior to filling. Mix the mortar or concrete in a separate container prior to placement in the hole. If HMA is used, fill all core holes with hot-mix matching the same day's production mix type at same day compaction temperature +/- 20 F. Dry the core holes and coat with tack before filling, filled with a top layer no thicker than 2.25 inches, lower layers not to exceed 4 inches, and compacted with a Marshall hammer or similar tamping device using approximately 50 blows per layer. The finished surface shall be flush with the pavement surface. Any deviation in the surface of the filled core holes greater than ¼ inch at the time of final inspection will require removal of the fill material to the depth of the layer thickness and replacement.

WisDOT Test Method for HMA PWL QMP Density Measurements for Main Production

For nuclear density testing of the pavement beyond the test strip, QC tests shall be completed at three locations per subplot, with a subplot defined as 1,500 lane feet. The three locations shall represent the outside, middle, and inside of the paving lane (i.e., the lane width will be divided into thirds as shown by the dashed longitudinal lines in Figure 3 and random numbers shall be used to identify the specific transverse location within each third determined by WTM D3665). Longitudinal locations within each

sublot shall be determined with 3 independent random numbers determined by WTM D3665. The PWL Density measurements do not include the shoulder and other appurtenances. Such areas are tested by the department and are not eligible for density incentive but are subject to disincentive according to 460.5.2.2(5) of the HMA PWL QMP article. Measure each location with two one-minute gauge readings oriented 180 degrees from one another, in the same footprint as detailed in Figure 2 above. Each location requires a minimum of two readings per gauge. The density gauge orientation for the first test shall be with the source rod towards the direction of paving. QV nuclear testing will consist of one randomly selected location per sublot. The QV is also comprised of two one-minute readings oriented 180 degrees from one another. For both QC and QV test locations, if the two readings exceed 1.0 pcf of one another, a third reading shall be conducted in the same orientation as the first reading. In this event, all three readings are averaged, the individual test reading of the three which falls farthest from the average value is discarded, and the average of the remaining two values is used to represent the location for the gauge. The sublot density testing layout is depicted in Figure 4, with QC test locations shown as solid black boxes and QV test locations shown as dashed red boxes.

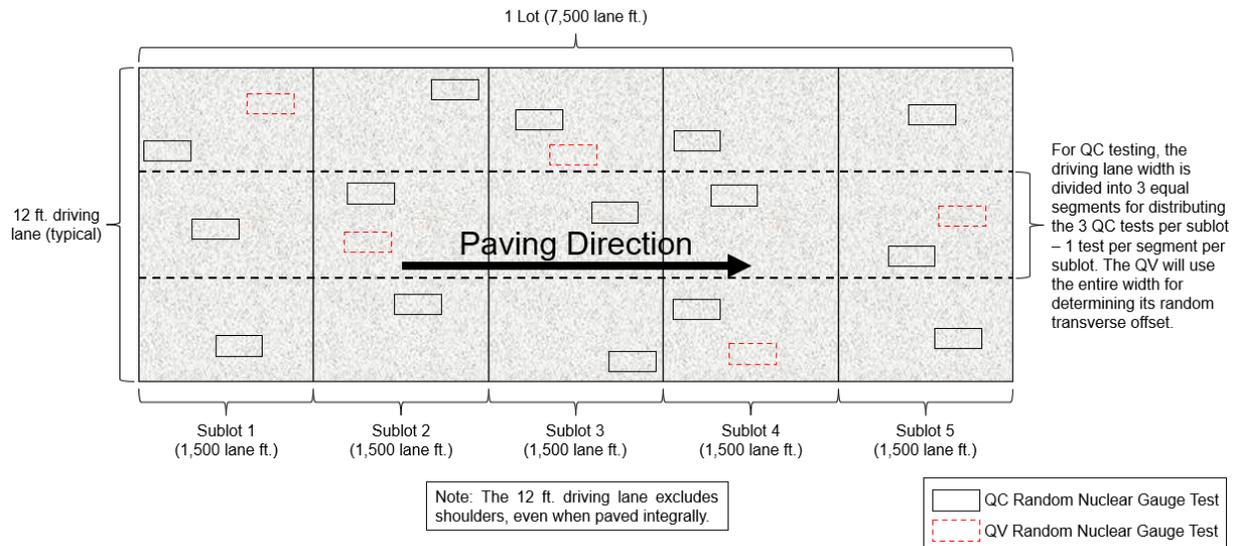


Figure 4: Example Layout of Mainline HMA Nuclear Density Tests

Raw nuclear density data must be shared by both parties at the end of each shift. Paving may be delayed if the raw data is not shared in a timely manner. QC and QV nuclear density gauge readings will be statistically analyzed according to Section 460.3.3.3 of the HMA PWL QMP article. (Note: For density data, if F- and t-tests compare, QC data will be used for the subsequent calculations of PWL value and pay determination. However, if an F- or t-test does not compare, the QV data will be used in subsequent calculations.)

Investigative cores will be allowed on the approaching side of traffic outside of the footprint locations. Results shall be shared with the department.

The QV density technician is expected to be onsite within 1 hour of the start of paving operations and should remain on-site until all paving is completed. Perform footprint testing as soon as both the QC and QV nuclear density technician are onsite and a minimum of once per day to ensure the gauges are not drifting apart during a project. Footprint testing compares the density readings of two gauges at the same testing location and can be done at any randomly selected location on the project. Both teams are encouraged to conduct footprint testing as often as they feel necessary. Footprint testing does not need to be performed at the same time. At project start-up, the QV should footprint the first 10 QC locations. Individual density tests less than 0.5% above the lower limit should be communicated to the other party and be footprint tested. Each gauge conducts 2 to 3 1-minute tests according to WTM T355 and the final results from each gauge are compared for the location. If the difference between the QC and QV gauges exceeds 1.0 pcf (0.7 percent) for an average of 10 locations, investigate the cause, check gauge moisture and density standards and perform additional footprint testing. If the cause of the difference between gauge readings cannot be identified, the regional HMA Coordinator will consult the RSO, the regional PWL representative and the BTS HMA unit to determine necessary actions. If it is agreed that there is a gauge comparison issue, perform one of the following two options:

New Gauge Combination

- All 4 gauges used on the test strip must footprint 10 locations on the pavement. Pavement placed on a previous day may be used.
- The results of the footprint testing will be analyzed to see if a better combination of acceptable gauges is available.
- If a better combination is found, those gauges should be used moving forward.
- If a better combination cannot be found, a new gauge correlation must be performed. (see below)
- **Re-correlation of Gauges**
- Follow all test strip procedures regarding correlating gauges except the following:
- The 10 locations can be QC or QV random locations.
- The locations used may have been paved on a previous day.
- Retesting with gauges must be done immediately prior to coring.
- New gauge offsets will be used for that day's paving and subsequent paving days. New gauge offsets will not be used to recalculate density results from prior days.

Density Dispute Resolution Procedure

Density results may be disputed by the contractor on a lot-by-lot basis if one of the following criteria is met:

- The lot average for either QC or QV is below the lower specification limit.
- The lot average for QC is different from the lot average for QV by more than 0.5%.
- The lot is in disincentive.

In lieu of using density gauges for acceptance of the lot, the lot will be cored in the QV locations. The results of the cores from the entire lot will be entered in the spreadsheet and used for payment. If the pay factor increases, the contractor will only receive the additional difference in payment for the disputed lot. If the pay factor does not increase, the department will assess the contractor \$2,000 for the costs of additional testing.

Notify the engineer in writing before dispute resolution coring. Immediately prior to coring, QC and QV will test the locations with nuclear density gauges.

Under the direct observation of the engineer, cut 100 or 150 mm (4 or 6 inch) diameter cores. Cut cores by the next day after completion of the lot, except if the next day is not a working day, then cut within 48 hours of placement. Prepare cores and determine density according to WTM T166. Dry cores after testing. Fill core holes according to Appendix A and obtain engineer approval before opening to traffic. The department will maintain custody of cores throughout the entire sampling and testing process. The department will label cores, transport cores to testing facilities, witness testing, store dried cores, and provide subsequent verification testing. If a core is damaged at the time of coring, immediately take a replacement core 1 ft ahead of the existing testing location in the direction of traffic at the same offset as the damaged core. If a core is damaged during transport, record it as damaged and notify the engineer immediately.

Sampling for WisDOT HMA PWL QMP Production

Sampling of HMA mix for QC, QV, Retained, and Extra split samples shall conform to WTM R97 and WTM R47.

Sampling Hot Mix Asphalt

At the beginning of the contract, determine the anticipated tonnage to be produced. The frequency of sampling is 1 per 750 tons (sublot) for QC and Retained Samples and 1 per 3,750 tons (lot or 5 sublots) for QV as defined by the HMA PWL QMP article. A test sample is obtained randomly from each sublot. Each random sample shall be collected at the plant according to WTM R97. Submit the random numbers for all mix sampling to the department before production begins.

Example 1

Expected production for a contract is 12,400 tons. The number of required samples is determined based on this expected production (per HMA PWL QMP SPV) and is determined by the random sample calculation.

- Sample 1 – from 50 to 750 tons
- Sample 2 – from 751 to 1500 tons
- Sample 3 – from 1501 to 2250 tons
- Sample 4 – from 2251 to 3000 tons
- Sample X –
- Sample 16 – from 11,251 to 12,000 tons
- Sample 17 – from 12,001 to 12,400 tons

The approximate location of each sample within the prescribed sublots is determined by selecting random numbers using WTM D3665. The random numbers selected are used in determining when a sample is to be taken and will be multiplied by the subplot tonnage. This number will then be added to the final tonnage of the previous subplot to yield the approximate cumulative tonnage of when each sample is to be taken.

To allow for plant start-up variability, the procedure calls for the first random sample to be taken at 50 tons or greater per production day (not intended to be taken in the first two truckloads). Random samples calculated for 0-50 ton shall be taken in the next truck (51-75 ton).

This procedure is to be used for any number of samples per contract.

If the production is less than the final randomly generated sample tonnage, then the random sample is to be collected from the remaining portion of that subplot of production. If the randomly generated sample is calculated to be within the first 0-50 tons of the subsequent day of production, it shall be taken in the next truck. Add a random sample for any fraction of 750 tons at the end of the contract. Lot size will consist of 3750 tons with sublots of 750 tons. Partial lots with less than three subplot tests will be included into the previous lot, by the engineer.

It is intended that the plant operator is not advised ahead of time when samples are to be taken.

If belt samples are used during troubleshooting, the blended aggregate will be obtained when the mixture production tonnage reaches approximately the sample tonnage. For plants with storage silos, this could be up to 60 minutes in advance of the mixture sample that's taken when the required tonnage is shipped from the plant.

Collect QC, QV, Retained, and Extra split samples for all test strip and production mixture testing using a four-part splitting procedure according to WTM R47.

Calculation of PWL Mainline Tonnage Example

A mill and overlay project is being constructed with a 12-foot travel lane and an integrally paved 3-foot shoulder. The layer thickness is 2 inches for the full width of paving. Calculate the tonnage in each subplot eligible for density incentive or disincentive.

Solution:

$$\frac{1500 \text{ ft} \times 12 \text{ ft}}{9 \text{ sf/sy}} \times \frac{2 \text{ in} \times 112 \text{ lb/sy/in}}{2000 \text{ lb/ton}} = 224 \text{ tons}$$

stp-460-055 (20240105)

22. HMA Pavement Longitudinal Joint Density.

A Description

This special provision incorporates longitudinal joint density requirements into the contract and describes the data collection, acceptance, and procedure used for determination of pay adjustments for HMA pavement longitudinal joint density. Pay adjustments will be made on a linear foot basis, as applicable per pavement layer and paving lane. Applicable longitudinal joints are defined as those between any two or more traffic lanes including full-width passing lanes, turn lanes, or auxiliary lanes more than 1,500 lane feet, and those lanes must also include the 460.2005 Incentive Density PWL HMA Pavement bid item. This excludes any joint with one side defined as a shoulder and ramp lanes of any length. If echelon paving is required in the contract, the longitudinal joint density specification shall not apply for those joints. Longitudinal joints placed during a test strip will be tested for information only to help ensure the roller pattern will provide adequate longitudinal joint density during production. Longitudinal joint density test results collected during a test strip are not eligible for pay adjustment.

Pay is determined according to standard spec 460, HMA Pavement Percent Within Limits QMP special provisions, and as modified within.

B Materials

Compact all applicable HMA longitudinal joints to the appropriate density based on the layer, confinement, and mixture type shown in Table B-1.

TABLE B-1 MINIMUM REQUIRED LONGITUDINAL JOINT DENSITY

| Layer | Percent of Target Maximum Density | | | |
|-------------------------------------|-----------------------------------|-------------------|---------------------|---------------------|
| | Unconfined | | Confined | |
| | LT and MT | HT | LT and MT | HT |
| Lower (on crushed/recycled base) | 88 | 89 | 89.5 | 90.5 |
| Lower (on Concrete/HMA) | 90 ^[1] | 90 ^[1] | 91.5 ^[1] | 91.5 ^[1] |
| Upper | 90 | 90 | 91.5 | 91.5 |

^[1] Minimum reduced by 1.0 percent for a 1.25-inch-thick No. 5 mix lower layer constructed on a paved or milled surface.

C Construction

Add the following to standard spec 460.3.3.2:

- (5) Establish companion QC and QV density locations for each applicable joint. Each companion location shares longitudinal stationing with the respective QC or QV mainline density location within each subplot and is located transversely with the center of the gauge 6-inches from the final joint edge of the paving area. Sublot and lot numbering remains the same as mainline densities, however, in addition to conventional naming, joint identification must clearly indicate "M" for inside/median side of lane or "O" for outside shoulder side of lane, as well as "U" for an unconfined joint or "C" for a confined joint (e.g., XXXXX-MC or XXXXX-OU).
- (6) Each joint shall be measured, reported, and accepted under methods, testing times, and procedures consistent with the program employed for mainline density, i.e., PWL.
- (7) For single nuclear density test results greater than 3.0% below specified minimums per Table B-1 herein, perform the following:
 - a) Testing at 50-foot increments both ahead and behind the unacceptable site.
 - b) Continued 50-foot incremental testing until test values indicate higher than or equal to -3.0 percent from target joint density.
 - c) Materials within the incremental testing indicating lower than -3.0 percent from target joint density are defined as unacceptable and will be handled with remedial action as defined in the payment section of this document.

- d) The remaining subplot average (exclusive of unacceptable material) will be determined by the first forward and backward 50-foot incremental tests that reach the criteria of higher than or equal to -3.0 percent from target joint density.

Note: If the 50-foot testing extends into a previously accepted subplot, remedial action is required up to and inclusive of such material; however, the results of remedial action must not be used to recalculate the previously accepted subplot density. When this occurs, the lane feet of any unacceptable material will be deducted from the subplot in which it is located, and the previously accepted subplot density will be used to calculate pay for the remainder of the subplot.

- (8) Joint density measurements shall be kept separate from all other density measurements and entered as an individual data set into Atwood Systems.
- (9) Placement and removal of excess material outside of the final joint edge, to increase joint density at the longitudinal joint nuclear testing location, shall be done at the contractor's discretion and cost. This excess material and related labor will be considered waste and will not be paid for by the department. Joints with excess material placed outside of the final joint edge to increase joint density or where a notched wedge is used will be considered unconfined joints.
- (10) When not required by the contract, echelon paving may be performed at the contractor's discretion to increase longitudinal joint density and still remain eligible to earn incentive. The additional costs incurred related to echelon paving will not be paid for by the department. If lanes are paved in echelon, the contractor may choose to use a longitudinal vertical joint or notched wedge longitudinal joint as described in [SDD 13c19](#). Lanes paved in echelon shall be considered confined on both sides of the joint regardless of the selected joint design. The joint between echelon paved lanes shall be placed at the centerline or along lane lines.
- (11) When performing inlay paving below the elevation of the adjacent lane, the longitudinal joint along the adjacent lane to be paved shall be considered unconfined.

D Measurement

- (1) The department will measure each side of applicable longitudinal joints, as defined in Section A of this special provision, by the linear foot of pavement, acceptably placed. Measurement will be conducted independently for the inside or median side and for the outside or shoulder side of paving lanes with two applicable longitudinal joints. Each paving layer will be measured independently at the time the mat is placed.

E Payment

Add the following as 460.5.2.4 Pay Adjustment for HMA Pavement Longitudinal Joint Density:

- (1) The department will administer longitudinal joint density adjustments under the Incentive Density HMA Pavement Longitudinal Joints and Disincentive Density HMA Pavement Longitudinal Joints items. The department will adjust pay based on density relative to the specified targets in Section B of this special provision, and linear foot of the HMA Pavement bid item for that subplot as follows:

PAY ADJUSTMENT FOR HMA PAVEMENT LONGITUDINAL JOINT DENSITY

| PERCENT SUBLOT DENSITY | PAY ADJUSTMENT PER LINEAR FOOT |
|---|--------------------------------------|
| ABOVE/BELOW SPECIFIED MINIMUM | |
| Equal to or greater than +1.0 confined, +2.0 unconfined | \$0.20 |
| From 0.0 to +0.9 confined, 0.0 to +1.9 unconfined | \$0 |
| From -0.1 to -1.0 | \$(0.20) |
| From -1.1 to -2.0 | \$(0.40) |
| From -2.1 to -3.0 | \$(0.80) |
| More than -3.0 | <i>REMEDIAL ACTION^[1]</i> |

^[1] Remedial action must be approved by the engineer and agreed upon at the time of the pre-pave meeting and may include partial sublots as determined and defined in 460.3.3.2(7) of this document. If unacceptable material is removed and replaced per guidance by the engineer, the removal and replacement will be for the full lane width of the side of which the joint was constructed with unacceptable material.

- (2) The department will not assess joint density disincentives for pavement placed in cold weather because of a department-caused delay as specified in standard spec 450.5.2(3).

- (3) The department will not pay incentive on the longitudinal joint density if the traffic lane is in disincentive. A disincentive may be applied for each mainline lane and all joint densities if both qualify for a pay reduction.
- (4) Inlay paving operations will limit payment for additional material to 2 inches wider than the final paving lane width at the centerline.

The department will pay incentive for longitudinal joint density under the following bid items:

| ITEM NUMBER | DESCRIPTION | UNIT |
|-------------|--|------|
| 460.2007 | Incentive Density HMA Pavement Longitudinal Joints | DOL |


The department will administer disincentives under the Disincentive Density HMA Pavement Longitudinal Joints administrative item.

Appendix

WisDOT Longitudinal Joint – Nuclear Gauge Density Layout

Each QC and QV density location must have a companion density location at any applicable joint. This companion location must share longitudinal stationing with each QC or QV density location and be located transversely with the center of the gauge 6-inches from the final joint edge of the paving area.

For HMA Pavement Percent Within Limits QMP projects, this appears as follows:

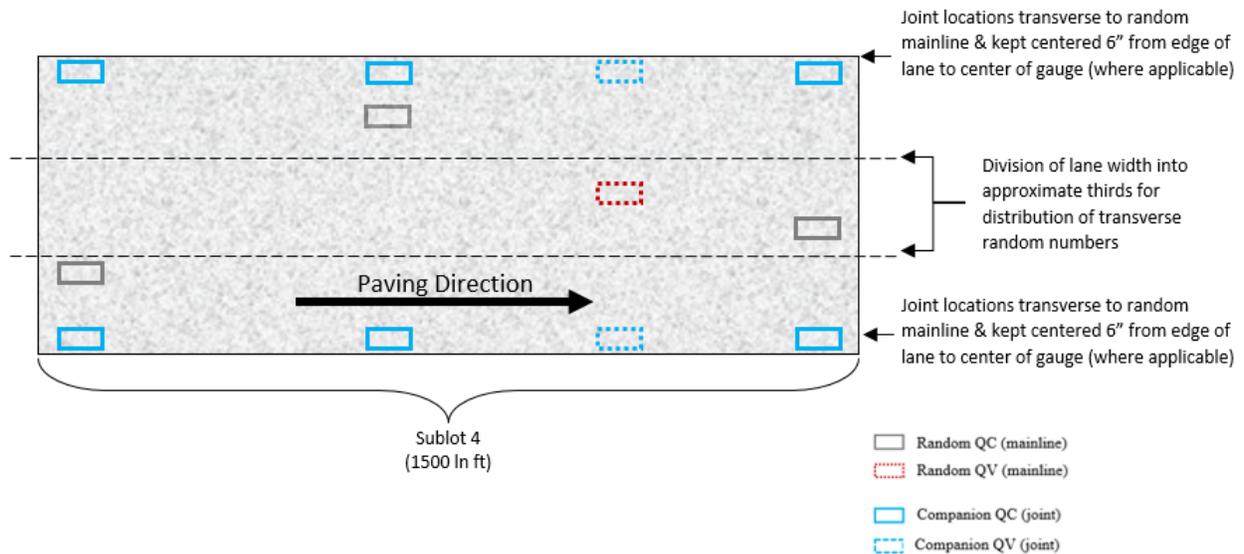

Further Explanation of *PAY ADJUSTMENT FOR HMA PAVEMENT LONGITUDINAL JOINT DENSITY* Table

| | Confined | | | | Pay Adjust |
|----------------------------------|-----------------------|-------------|-------------|-------------|-----------------|
| | Lower Layer (On Base) | | Upper Layer | | |
| | LT/MT | HT | LT/MT | HT | |
| Mainline Target (SS 460-3) | 91.0 | 92.0 | 93.0 | 93.0 | - |
| Confined Target (mainline - 1.5) | 89.5 | 90.5 | 91.5 | 91.5 | - |
| Equal to or greater than +1.0 | ≥ 90.5 | ≥ 91.5 | ≥ 92.5 | ≥ 92.5 | \$0.20 |
| From 0.0 to +0.9 | 90.4 - 89.5 | 91.4 - 90.5 | 92.4 - 91.5 | 92.4 - 91.5 | \$0 |
| From -0.1 to -1.0 | 89.4 - 88.5 | 90.4 - 89.5 | 91.4 - 90.5 | 91.4 - 90.5 | (\$0.20) |
| From -1.1 to -2.0 | 88.4 - 87.5 | 89.4 - 88.5 | 90.4 - 89.5 | 90.4 - 89.5 | (\$0.40) |
| From -2.1 to -3.0 | 87.4 - 86.5 | 88.4 - 87.5 | 89.4 - 88.5 | 89.4 - 88.5 | (\$0.80) |
| More than -3.0 | < 86.5 | < 87.5 | < 88.5 | < 88.5 | REMEDIAL ACTION |

| | Unconfined | | | | Pay Adjust |
|-----------------------------------|-----------------------|-------------|-------------|-------------|-----------------|
| | Lower Layer (On Base) | | Upper Layer | | |
| | LT/MT | HT | LT/MT | HT | |
| Mainline Target (SS 460-3) | 91.0 | 92.0 | 93.0 | 93.0 | - |
| Unconfined Target (Mainline -3.0) | 88.0 | 89.0 | 90.0 | 90.0 | - |
| Equal to or greater than +2.0 | > 90.0 | > 91.0 | > 92.0 | > 92.0 | \$0.20 |
| From 0.0 to +1.9 | 89.9 - 88.0 | 90.9 - 89.0 | 91.9 - 90.0 | 91.9 - 90.0 | \$0 |
| From -0.1 to -1.0 | 87.9 - 87.0 | 88.9 - 88.0 | 89.9 - 89.0 | 89.9 - 89.0 | (\$0.20) |
| From -1.1 to -2.0 | 86.9 - 86.0 | 87.9 - 87.0 | 88.9 - 88.0 | 88.9 - 88.0 | (\$0.40) |
| From -2.1 to -3.0 | 85.9 - 85.0 | 86.9 - 86.0 | 87.9 - 87.0 | 87.9 - 87.0 | (\$0.80) |
| More than -3.0 | < 85.0 | < 86.0 | < 87.0 | < 87.0 | REMEDIAL ACTION |

stp-460-075 (20240105)

**23. Epoxy Injection Crack Repair, Item 509.9025.S;
Cored Holes 2-Inch Diameter, Item 509.9026.S.**

A Description

This special provision describes repairing structural cracks in concrete structures using the epoxy injection method, and coring 2 inch diameter core samples the repaired cracks.

Conform to standard spec 509 as modified in this special provision.

B Materials

Furnish epoxy injection material and surface seal material specifically designed for concrete crack injection.

Furnish epoxy injection material that is insensitive to the presence of water and is composed of a two-component epoxy resin designed specifically for structurally re-bonding cracks in Portland cement concrete. The epoxy injection material shall conform to the following physical properties at 77 degrees F:

| | Unmixed | | Mixed |
|--------------------------------|------------------------|---------------------------|--------------|
| | Component A (Resin) | Component B (Catalyst) | |
| Weight per gallon, lbs | 9.15 ±0.1 | 8.2 ±0.1 | 9.15 ±0.1 |
| Viscosity, cps | 500-700 | 120-160 | 275-350 |
| Specific Gravity, g/cc | 1.128 ±0.012 | 0.984 ±0.012 | 1.099 ±0.012 |
| Color Straw | Straw | Straw | Straw |
| Shelf Life (closed containers) | 2 years | 2 years | --- |
| Solids by Weight | --- | --- | 100% |
| Pot Life (200 gram mass) | --- | --- | 12-15 mins. |
| Mixing Ratio (by weight) | 80% | 20% | --- |
| Mixing Ratio (by volume) | 78% | 22% | --- |
| Bond Strength | --- | --- | 2000 psi min |
| Shrinkage Resistance | --- | --- | ASTM C883 |
| Thermal Compatibility | --- | --- | ASTM C884 |

Furnish surface seal material for confining the injected epoxy resin in the cracks that meets the following requirements:

1. Adequate strength to hold the injection fittings firmly in place to resist injection pressures and prevent leakage during injection.
2. Non-sag consistency.
3. Insensitive to the presence of water.
4. Controlled cure time.
5. Two-component epoxy resin.
6. 100% solids by weight.
7. Applicable to wet surfaces.
8. Viscosity should be paste.

C Construction

C.1 Injection Equipment

Use equipment to meter and mix the two-epoxy resin components and to inject the mixture into the cracks. The equipment shall be portable and have positive displacement type pumps equipped with an interlock to provide positive ration control of exact proportions of the two components at the nozzle. Use electric or air powered pumps that provide in-line metering and mixing.

Use injection equipment that has automatic pressure control capable of discharging the mixture at any present pressure up to 160 psi (± 5 psi) and is equipped with a manual pressure control override.

The equipment shall have the capability of maintaining the volume ratio for the mixture prescribed by the manufacturer of the epoxy resin material within a tolerance of $\pm 5\%$ by volume at any discharge pressure up to 160 psi.

The injection equipment shall be equipped with sensors on both the Component A and B reservoirs that will automatically stop the machine when only one component is being pumped to the mixing head.

C.2 Surface Area Preparation

Clean the surface areas adjacent to cracks of all dirt, dust, grease, oil, efflorescence, or other foreign matter, which may be detrimental to adhesion of the surface seal material. Acids and corrosives will not be permitted for cleaning.

Install injection ports along the crack at intervals of 4 to 10 inches, or as appropriate to accomplish full penetration of the injection resin. Center the injection ports over the cracks and secure in place using surface seal material. Where possible, install the injection ports over the widest areas of the cracks.

Apply the surface seal material to the face of the crack between the entry ports. For known through cracks, apply the surface seal material to both faces of the member. Before proceeding with the injection operation, allow sufficient time to elapse for the surface seal material to gain adequate strength.

C.3 Epoxy Injection

Install the epoxy injection resin according to the manufacturer's instructions.

During installation, in general, limit pressures to 35 psi at the point of entry into the crack.

On vertical cracks, start the injection at the lowest point and continue upward along the crack. While injecting, resin should flow to and out of the next higher port. When this flow is established, cap the lower port, and continue the injection until all ports have been injected and flow has been established between them.

On horizontal cracks, follow the same procedures used for vertical cracks; start the injection at one end and continue the injection in succession along the crack until all ports have been injected and flow has been established between them.

C.4 Finishing and Clean-Up

When cracks are completely filled, cure the epoxy resin for a sufficient length of time so that when the surface seal is removed, there is no draining or runback of the epoxy material from the cracks. Grind, or use other appropriate method, to remove surface seal material, excess epoxy material, and injection ports. No epoxy material shall extend beyond the plane of the surfaces of the in-situ concrete.

C.5 Core Sampling

To determine if the crack injection is complete, obtain two 2 inch diameter core samples from the repaired concrete. Take the cores to the depth of the element or at least 12 inches. Take the cores at locations selected by the engineer. The engineer will have the option of increasing or decreasing the number of cores taken.

The injection shall be considered complete if more than 90% of the crack void, to 12 inches deep, is filled with the epoxy resin in each of the samples taken. If the injection is incomplete, re-injection and additional cores may be required.

Repair the core holes left in the member using one of the two following methods:

1. Fill core holes with an epoxy mortar consisting of one part epoxy injection resin to four parts clean, dry, bagged fine aggregate mixed by volume. Match the finish repair to the surrounding surface.
2. Fill core holes with an epoxy mortar consisting of one part epoxy gel to one part clean, dry, bagged fine aggregate mixed by volume. Match the finish repair to the surrounding surface.

D Measurement

The department will measure Epoxy Injection Crack Repair in length by the linear foot crack, acceptably repaired.

The department will measure Cored Holes 2-Inch Diameter as each individual cored hole, as approved by the engineer and acceptably completed. Additional cores taken as required by the engineer after re-injection (due to incomplete injection) will not be measured for payment. Additional cores taken by the contractor that are not ordered by the engineer will not be measured for payment.

E Payment

The department will pay for measured quantities at the contract unit price under the following bid items:

| ITEM NUMBER | DESCRIPTION | UNIT |
|-------------|------------------------------|------|
| 509.9025.S | Epoxy Injection Crack Repair | LF |
| 509.9026.S | Cored Holes 2-Inch Diameter | EACH |

Payment is full compensation for furnishing and placing the epoxy sealant, including any cleaning before and after injection; coring samples of the work; inspecting the core samples; and for repairing the core holes left in the member.

stp-509-025 (20240703)

24. Culvert Pipe Liners, 24-Inch, Item 520.9700.S; Cleaning Culvert Pipes for Liner Verification, Item 520.9750.S.

A Description

This special provision describes providing, verifying, and pressure grouting culvert pipe liners for circular culverts.

B Materials

B.1 General

Provide flow calculations at the preconstruction conference. Use contractor-proposed liner properties, the Manning's coefficients listed on the department's approved products list, and base calculations on existing culvert sizes and liner sizes the plans show. For host pipes use a maximum Manning's coefficient of 0.013 for concrete pipe and 0.024 for corrugated metal pipes. Ensure that pipes when lined have a capacity within $\pm 5\%$ of the original full flow capacity of the pipe.

B.2 Flexible Pipe Liner

Use liners with a Manning's coefficient value published on the department's approved products list. Upon delivery provide manufacturer certificates of compliance certifying that the liners conform to the following:

| Pipe Type | ASTM/AASHTO Designation | ASTM D3350 Resin |
|---|---|------------------|
| High Density Polyethylene (HDPE) | | |
| Profile Wall Pipe | ASTM F894 | 345463C |
| Solid Wall Pipe | ASTM F714 | 345463C |
| Type S Wall Pipe | AASHTO M294 | --- |
| Polyvinylchloride (PVC) | ASTM F949 | --- |
| Steel Reinforced Polyethylene (SRPE) | ASTM F2562 AASHTO M335 (12- to 60-in. Dia.) AASHTO MP40 (66- to 120-in. Dia.) | 345463C |

B.3 Grout

B.3.1 Cement

Furnish cement meeting the requirements of standard spec 501.2.4.1 for Type I or II Portland Cement or Type IL Portland-Limestone Cement.

B.3.2 Fly Ash

Furnish Class C or F Fly Ash meeting the requirements of standard spec 501.2.4.2.2.

B.3.3 Sand

Furnish natural sand meeting the fine aggregate requirements of standard spec 501.2.7.2 and the size requirements of standard spec 501.2.7 except the percent passing the number 200 sieve shall be 0-5 percent by weight.

B.3.4 Water

Furnish water meeting the requirements of standard spec 501.2.6.

B.3.5 Mix Design

Use the basic proportions of dry materials per cubic yard of grout as follows:

- Cement 100 pounds
- Fly Ash 400 pounds
- Fine Aggregate 2600 pounds

Air entraining and chemical admixtures to control fluidity of the grout are allowable. Ten days before placement, furnish to the engineer a design mix detailing all components and their proportions in the mix.

B.3.6 Cellular Grout

Alternatively, the contractor may use, or if the manufacturer recommends, an engineer-approved commercial cellular concrete grout conforming to the following:

| | | |
|----------------------|----------------------------|---|
| Cement | ASTM C150/ASTM C595 | Type I or II/Type IL |
| Density | ASTM C495 (no oven drying) | 50 pcf min |
| Compressive Strength | ASTM C495 | 300 psi @ 28 day min 100 psi in 24 hours |
| Shrinkage | ASTM C157 | 1% by volume |
| Flow | ASTM C939 | 35 sec max |

C Construction

C.1 General

As soon as possible after contract execution, survey existing culvert pipes to determine which culverts need cleaning in order to verify the required liner diameter and length. Notify the engineer before cleaning to confirm payment under the Cleaning Culvert Pipes for Liner Verification bid item.

Coordinate with the engineer to field verify culvert diameter and length, shape, material, and condition before ordering the liners.

Obtain easements as necessary if contractor means and methods for installing long sections of pipe requires work outside of the available right-of-way.”

C.2 Excavating and Cleaning

Before inserting the liner, clean and dry the pipe. Excavate and pump as required to remove debris and other materials that would interfere with the placement or support of the inserted liner. Dispose of and replace unserviceable endwalls as the engineer directs.

C.3 Flow Diversion

Maintain drainage at and through worksite during construction in accordance to standard specs 107.20, 205 and 520. Use existing culvert pipes, existing drainage channels, temporary culvert pipes, or temporary drainage channels to maintain existing surface and pipe drainage. Provide, operate, and maintain pumps to bypass flow or dewater during construction as necessary. Unless otherwise approved by the engineer, dewater by bypassing or diverting flow during bulkheading and grouting operations. Provide a plan for controlling flow and dewatering (including sediment treatment as required) as part of the project ECIP.

C.4 Placing Liners

Unload liners using slings and boom-type trucks or equivalents. Do not use chains or wire rope to handle liners and do not dump liners from the trucks when unloading.

Install liners such that the alignment and invert lie true to the lines, grades, and elevations in the plan. In absence of plan details, install liners horizontally to provide even annular space between the host pipe and sides of the liner. Install liners vertically with the invert as close to the host pipe invert as possible.

Obtain additional easements, if necessary, for installing long sections of liner.

Connect joints and install the liner per the manufacturer's recommendations and this part.

C.5 Pressure Grouting

Furnish a written plan for grouting the annular space between the host pipe and culvert pipe liner to the engineer for acceptance. Furnish the grouting plan prior to or at the project preconstruction conference so that it can be reviewed and discussed. At a minimum, the grouting plan shall consist of the following:

- Intended grout mix(es)
- Testing methods and frequency
- Pumping equipment and pressure regulation
- Intended grout staging
- Grout monitoring
- Bracing/floatation control

Include a description of staging in the grouting plan. Based on the length and slope of the host culvert, multiple stages may be required to minimize external loads on the culvert pipe liner. Develop the staging plan with the manufacturer based on the recommended maximum loading for the culvert pipe liner and the condition of the host culvert. Unless approved by the manufacturer, in no case shall a single lift of grout exceed 1/3rd the pipe external diameter at any point in the pour.

After the liner is in place, fill the area between the original culvert and the liner completely with grout per the accepted grouting plan. Block, grout in lifts, or otherwise secure liners to prevent floatation or deformation of the liner while grouting. Grout ports can be fabricated to allow placement of anti-floatation bracing or spacers.

Use a grout plant that is capable of accurately measuring, proportioning, mixing, and discharging by volume and at discharge pressures the liner manufacturer recommends. Do not exceed manufacturer-specified maximum pressures. Place grout in lifts to prevent exceeding maximum allowable pressures and to prevent floatation.

Use grout and witness ports to vent grouting and monitoring grouting progress. Plug ports as necessary as grout reaches them.

Do not remove any bracing inside of the liner until the grouting process is complete.

C.6 Assembly, Floatation, and Deflection Mitigation

Damage or misalignment due to assembly, floatation or deformation during grouting, or otherwise resulting from workmanship will be mitigated at the contractor's expense.

C.7 Site Restoration

Replace pipe sections damaged or collapsed during installation or grouting operations. Restore the grade to its original or improved cross section. Dispose of waste material.

D Measurement

The department will measure the Culvert Pipe Liners bid items by the linear foot measured in place for each culvert location, acceptably completed.

The department will measure Cleaning Culvert Pipes for Liner Verification as each culvert, acceptably cleaned. The department will only measure culverts the engineer approves for payment.

E Payment

The department will pay for measured quantities at the contract unit price under the following bid item:

| ITEM NUMBER | DESCRIPTION | UNIT |
|-------------|---|------|
| 520.9700.S | Culvert Pipe Liners 24-Inch | LF |
| 520.9750.S | Cleaning Culvert Pipes for Liner Verification | EACH |

Payment for the Culvert Pipe Liners bid items is full compensation for providing pipe liners; obtaining easements; for excavation; for pumping to bypass flow, to clean pipes, for liner insertion or for grouting; for shoring and dewatering; for cleaning the existing pipe before liner installation; for pressure grouting; for replacing contractor-damaged pipe and endwalls; and for restoring the grade and disposing of waste materials.

The department will pay the contractor \$150 per cubic yard for grout required in excess of 110 percent of the theoretical quantity required to fill the space between the inside diameter of the existing pipe and the outside diameter of the liner.

Payment for Cleaning Culvert Pipes for Liner Verification is full compensation for cleaning required to verify liner length and diameter; for excavation; for pumping to bypass flow, to dewater, or to remove debris; and for disposing of waste material.

The department will pay separately for replacing unserviceable endwalls not rendered unserviceable by contractor operations under the appropriate contract endwall bid item, or absent the appropriate item as extra work.

stp-520-015 (20250701)

25. Insulation Board Polystyrene, 2-Inch, Item 612.0902.S.

A Description

This special provision describes furnishing and placing polystyrene insulation board as the plans show.

B Materials

Provide polystyrene insulation board that conforms to the requirements for Extruded Insulation Board, AASHTO Designation M230 as modified in this special provision.

Delete flammability requirement.

B.1 Certification

Before installation, obtain from the manufacturer a certification indicating compliance and furnish it to the project engineer.

C (Vacant)

D Measurement

The department will measure Insulation Board Polystyrene, 2-Inch by area in square yards of work, completed and accepted.

E Payment

The department will pay for measured quantities at the contract unit price under the following bid item:

| ITEM NUMBER | DESCRIPTION | UNIT |
|-------------|--------------------------------------|------|
| 612.0902.S | Insulation Board Polystyrene ,2-Inch | SY |

Payment is full compensation for all excavation; and for furnishing and placing the insulation board.

stp-612-005 (20030820)

26. Locating No-Passing Zones, Item 648.0100.

For this project, the spotting sight distance in areas with a 55 mph posted speed limit is 0.21 miles (1108 feet).

stp-648-005 (20060512)

27. Temporary Traffic Signals for Bridges (B-41-136, Kickapoo River), Item 661.0100.01.

The following timing plan is required as a part of the installation. Timing is based on pre-timed operation. Signal timing is subject to change at pre-construction conference depending on the type of temporary signal that the contractor plans to use.

SIGNAL SEQUENCE

| INTERVAL | NB/EB | SB/WB | Seconds |
|----------|-------|-------|---------|
| 1 | G | R | 14 |
| 2 | Y | R | 5.5 |
| 3 | R | R | 17.6 |
| 4 | R | G | 14 |
| 5 | R | Y | 5.5 |
| 6 | R | R | 17.6 |

Cycle Length = 74.2

Any changes to the timing plan need to be approved by Regional Traffic Engineer prior to being implemented in the field.

Contact Dominic Cypher at least 3 business days prior to turning on temporary signals at (608) 860-5924.

28. Maintaining Bird Deterrent System 01. Station 81+00; Maintaining Bird Deterrent System 02. Station 107+65 Left, Item 999.2005.S.

A Description

This special provision describes inspecting, installing and/or maintaining approved deterrents that prevent migratory bird nesting on bridges and culverts. Swallows or other migratory birds' nests have been observed on or under the existing culvert or bridge at the station identified. All active nests (when eggs or young are present) of migratory birds are protected under the federal Migratory Bird Treaty Act. One deterrent system shall be installed and/or maintained for each applicable structure. Deterrent methods selected shall be appropriate for structure type, size and/or site-specific constraints.

B Materials

B.1 Hardware and Lumber

Lumber, hardware, and fastening devices shall be durable enough to last through the length of the nesting season. Fastening devices and deterrence system must be approved by the engineer prior to installation on culverts and bridges that will remain in service after removal of deterrent systems. The method of fastening should not compromise the culvert or bridge concrete surfaces or steel protection

systems. The attachment locations must be restored and repaired as needed by use of engineer approved fillers, sealers and paint systems.

B.2 Netting Materials

Exclusion netting is material either wrapped around or draped and fastened to bridge decks/abutments and culvert corners to prevent bird entry.

Furnish exclusionary netting to deter nesting in bridge decks and abutments and corners of box culverts, consisting of either:

- a. 1/2" x 1/2" or 3/4" x 3/4" knotless, flame resistant, U.V. stabilized polyethylene or polypropylene netting with minimum 40-pound breaking strength per strand, or engineer approved equal.
- b. Galvanized wire mesh (hardware cloth) with a wire diameter of .040 inches (19-gauge) and opening width of 1/2-inch.

At a minimum, use either 1" x 2" (nominal) lumber or 3/4" x 2" pressure treated plywood strips and of equal length as the netting.

B.3 Plastic Strip Curtain

Plastic strip curtains are strips of plastic attached to vertical surfaces in areas suitable for nesting.

Furnish 3-foot wide lengths of 6 mil minimum plastic sheeting with the lower 2 feet cut into vertical strips 2 inches wide.

At a minimum, use either 1" x 2" (nominal) lumber or 3/4" x 2" pressure treated plywood strips and staples to attach plastic strips to wood to fabricate the strip curtain.

Furnish concrete screws to attach strip curtain to structure.

B.4 Corner Slope Materials

Corner slopes are pieces of curved plastic placed in corners suitable for nesting. They are particularly effective in preventing nesting in top corners of box culverts.

Furnish U.V. stabilized pre-fabricated PVC or polycarbonate corner slopes from commercial bird-deterrent manufacturers or an approved equal.

C Construction

C.1 General

If active nests are observed after construction starts, or if a trapped bird or an active nest is found, stop work that may affect birds or their nests, and notify the engineer to consult with the Wisconsin Department of Natural Resources transportation liaison at Karen Kalvelage, at 608-785-9115, or the department regional environmental coordinator Anna Jahns, at 608-785-9961.

Efforts should be made to release trapped birds, unharmed.

C.2 Nest Removal

Remove unoccupied nests prior to the beginning of the nesting season as designated in Prosecution and Progress. Nest removal involves the removal and disposal of unoccupied or partially constructed nests without eggs or nestlings. Removing all evidence of nesting (e.g. cleaning droppings from structures) eliminates a visual cue for a potential breeding location, especially for first-time breeders. Nest removal is not a type of deterrent and does not prevent nest establishment but can delay the process. As such, it should only be used in conjunction with other methods. It cannot be used on its own to ensure compliance. Nest removal is not required if deterrents are installed before the start of the avoidance window unless nests interfere with successful installation of the deterrent.

Remove nests on the structure by scraping or pressure washing prior to established avoidance windows to deter nesting. Remove only unoccupied or partially constructed nests without eggs or nestlings. Remove newly built nests every two days before eggs are laid. Nest removal is intended to be used prior to and in conjunction with other nesting deterrents.

C.3 Exclusion Netting

C.3.1 Installation

Using concrete screws, anchor lumber to bridge or culvert along perimeter of intended netting. Fasten netting to lumber until netting is held taut. Use the minimum length of lumber and netting necessary to avoid sections of netting that are not flush to the bridge or culvert. Eliminate any loose pockets or wrinkles

that could trap and entangle birds or other wildlife. Ensure the net is pulled taut in order to prevent flapping in the wind, which results in tangles or breakage at mounting points.

For culverts, attach netting at a 45-degree angle at the culvert corner so it extends at least 12" below the corner.

C.4 Plastic Curtains

C.4.1 Installation

Attach plastic curtains along the entire length of vertical surface or corner on which nest building is to be deterred. Affix plastic curtain strips to treated lumber with staples spaced a minimum of 1 foot O.C. Wrap plastic curtains around lumber prior to attaching it to the structure to reduce the likelihood of it tearing out at the staples. Screw lumber into the underside of the bridge deck or top of box culvert with concrete screws placed 24-inches O.C. minimum.

C.5 Corner Slopes

C.5.1 Installation

Attach corner slopes to the structure per the manufacturer's recommendations. Use urethane-based adhesives if manufacturer supplied hardware or adhesives are not available or no recommendations are provided. Install end caps or seal ends of corner slopes to prevent entry of birds or other animals.

C.6 Inspection and Maintenance

Inspect bird deterrent devices every two weeks both during and prior to construction when deterrents have been installed to exclude birds prior to nesting windows, and after large storm events or high winds. Ensure that netting is taut, that no gaps or holes have formed, and that the nets are functioning properly. Ensure that corner slopes are not cracked or otherwise damaged and are functioning properly. Ensure that curtains are undamaged, with no tears, holes, or creases. Repair any damaged or loose deterrent devices. Inspect, maintain, and repair nesting deterrents whether installed by the contractor or others. Repair, replace, supplement deterrents as necessary with materials meeting the requirements of this specification.

Remove any unoccupied or partially constructed nests without eggs or nestlings.

Repair deterrents to prevent birds from attempting to nest again.

Record all inspection, removal, and maintenance activities. Provide inspection, removal and maintenance records to the engineer upon request.

C.7 Removal and Structure Repair

Maintain the deterrent until the engineer determines that the deterrent is deemed no longer necessary. Upon completion of the project, remove any remaining migratory bird deterrent from the project site. If the existing bridge or culvert is to remain after construction, restore and repair as needed by use of engineer approved fillers, sealers and paint systems.

D Measurement

The department will measure Installing and Maintaining Bird Deterrent System (Station) as a single unit at each structure, acceptably completed.

The department will measure Maintaining Bird Deterrent System (Station) as a single unit at each structure, acceptably completed.

E Payment

The department will pay for measured quantities at the contract unit price under the following bid item:

| ITEM NUMBER | DESCRIPTION | UNIT |
|-------------|---|------|
| 999.2005.S | Maintaining Bird Deterrent System Station 01. 81+00 | EACH |
| 999.2005.S | Maintaining Bird Deterrent System Station 02. 107+65 Left | EACH |

Payment for Installing and Maintaining Bird Deterrent System is full compensation for providing and installing deterrents that prevent migratory bird nesting; removing and disposing of unoccupied or partially constructed nests without eggs or nestlings; maintaining, repairing, replacing, supplementing, existing deterrent materials; repairing damage to structures resulting from installation of deterrents; removal and disposal of materials.

Payment for Maintaining Bird Deterrent System is full compensation for inspecting structures for the presence of migratory birds, inspecting deterrents installed by others; maintaining, repairing, replacing,

and supplementing existing deterrent materials; repairing damage to structures resulting from installation of deterrents; removal and disposal of materials.

stp-999-200 (20250108)

29. **Adjusting Water Valve Boxes, Item SPV.0060.01.**

A Description

This special provision describes adjusting water main and hydrant valve boxes to finished grade, which includes protecting and maintaining accessibility to the water valve boxes during construction.

B Materials

If the existing valve box has insufficient length a new top valve box section shall be furnished by the contractor. New top valve box sections shall screw on the outside of the existing lower valve box section. The new section shall be a screw type with a cover marked "WATER". Acceptable manufactures include Tyler 6850 series and Bingham and Taylor 4905. The use of adjustment rings and internal extensions are prohibited.

C Construction

The contractor, or an authorized project representative, shall contact the Village of Lone Rock Public Works Department prior to the start of construction. The Village will locate, mark, inspect and repair existing valve boxes within the limits of the project prior to commencement of work on the project by the contractor.

The elevations for indicated on the plans are approximate and are subject to all revisions necessary to fit field conditions.

The contractor shall take precautions to prevent gravel and other materials from entering the valve box. All materials falling into the valve box shall be removed by the contractor.

If needed excavate and backfill as specified for excavation for structures in section 206 of the standard specifications. Use granular backfill material for backfilling unless the engineer directs otherwise.

The Contractor shall adjust valve boxes to grade by screwing or sliding the valve box top section to the required elevation. If the valve box cannot be adjusted to grade by screwing or adjusting the top section, the top section must be removed and replaced with a taller section. Valve boxes must be installed with the bell section above the spigot so that soil cannot drop into the threads. Dispose of any materials outside the right-of-way in accordance with 203.3.3 of the standard specifications.

The Contractor shall coordinate with the Village of Lone Rock Public Works Department regarding inspection of all valves and valve boxes, including hydrant valves, to ensure valve boxes are clean, properly aligned, valve nuts are accessible, and valves are operational. Valves shall be inspected by the Public Works Department during adjustment, before beginning and after completing paving operations.

After completing the paving operation, if the Public Works Department determines a water valve is inoperable due to displacement, faulty adjusting, or lack of protection, the contractor will be required to perform all work necessary to correct the condition and make the valve operational at his own expense and within five days of being notified by the Public Works Department.

D Measurement

The department will measure Adjusting Water Valve Boxes as each individual unit, acceptably completed, regardless of the number of adjustments made to the valve box.

E Payment

The department will pay for measured quantities at contract unit price under the following bid items:

| ITEM NUMBER | DESCRIPTION | UNIT |
|-------------|-----------------------------|------|
| SPV.0060.01 | Adjusting Water Valve Boxes | EACH |

Payment is full compensation for furnishing and installing all required materials, including new top valve box sections when required; for all necessary excavation, backfilling, backfill material, and disposing of surplus material; for all labor, tools, equipment, and incidentals necessary to complete the work; and for cleaning out and restoring the work site, except the Department will pay for restoration work such as topsoil, seeding, or asphalt surface under separate contract items.

30. Adjusting Sanitary Manhole Covers, Item SPV.0060.02.

A Description

Perform work according to the applicable provisions of standard spec 611, as detailed in the plans, and as hereinafter provided.

B Materials

Furnish round high-density polyethylene (HDPE) adjusting rings from the department's approved product list. Provide approval butyl sealant between adjusting rings as recommended by manufacturer.

C Construction

Unless the contract provides otherwise, adjust existing covers, including frames and grates or lids, to the required elevation. Remove the existing fixture, adjust the top of the existing structure, and reinstall the fixture. Support the fixture on HDPE adjusting rings, constructed to hold the covers firmly in place. Set the manhole frames so that they comply with the surface requirements of standard spec 450.3.2.9. At the completion of the paving, a 6-foot straightedge shall be placed over the centerline of each manhole frame parallel to the direction of traffic. A measurement shall be made at each side of the frame. The two measurements shall be averaged. If this average is greater than 5/8 inches, reset the manhole frame to the correct plane and elevation. If this average is 5/8 inches or less but greater than 3/8 inches, the manhole frame shall be allowed to remain in place but shall be paid for at 50 percent of the contract unit price. If the manhole frame is higher than the adjacent pavement, the two measurements shall be made at each end of the straightedge. These two measurements shall be averaged. The same criteria for acceptance and payment as above, shall apply.

D Measurement

The department will measure Adjusting Sanitary Manhole Covers as each individual unit, acceptably completed.

E Payment

The department will pay for measured quantities at the contract unit price under the following bid item:

| ITEM NUMBER | DESCRIPTION | UNIT |
|-------------|-----------------------------------|------|
| SPV.0060.02 | Adjusting Sanitary Manhole Covers | EACH |

Payment is full compensation for providing required materials, exclusive of frames, grates, or lids available and designated for adjusting; and for removing, reinstalling, and adjusting the covers. The contractor shall replace covers rendered unusable by the contractor's operations, at no expense to the department.

31. Utility Line Opening (ULO), Item SPV.0060.03.

A Description

This special provision describes excavating to uncover utilities for the purpose of determining elevation and potential conflicts with proposed work, as shown on the plans or as directed by the engineer.

B (Vacant)

C Construction

Perform the excavation according to Wisconsin State Statue 182.0175.

Perform the utility line openings as soon as possible, before ordering precast structures, and at least 10 days in advance of proposed utility construction to allow any conflicts to be resolved with minimal disruption. Allow the engineer a minimum of three working days once utility line opening information is received to review all relevant design information.

Coordinate and approve all utility line openings with the engineer. Notify the utilities a minimum of 3 days before the work so they may be present.

Backfill the excavation with suitable backfill material, and thoroughly compact.

D Measurement

The department will measure Utility Line Opening (ULO) as each individual utility line opening (ULO) acceptably completed. Utility line openings include a trench up to 10-feet long as measured at the trench

bottom, and of any width and depth required to locate the intended utility. Where utilities are within 6 feet of each other at a potential conflict location, only one utility line opening will be measured.

E Payment

The department will pay for the measured quantity at the contract unit price under the following bid item:

| ITEM NUMBER | DESCRIPTION | UNIT |
|-------------|----------------------------|------|
| SPV.0060.03 | Utility Line Opening (ULO) | EACH |

Payment is full compensation for performing the excavation required to expose the utility line, backfilling, and for restoring and cleaning up the site.

swr-107-001 (20160601)

32. Foam Void Filling B-62-0051, Item SPV.0060.04.

A Description

This special provision describes furnishing materials and filling voids at abutments of bridges as detailed in the plans and as hereinafter provided.

B Materials

The polyurethane foam shall be a two-component solvent free 100% reactive MDI and Hydrolytic stable polyether polyol resins capable of cure strength to accept traffic within 30 minutes of injection between 40 degrees F and 100 degrees F. The foam manufacturer shall supply certifications with each container of polyurethane foam stating that it meets this specification.

The material used shall be a closed cell, hydroinsensitive, high-density polyurethane.

The material shall have a minimum free rise density of 3.0 lbs./cubic feet and a minimum compressive strength of 38.0 psi.

The material shall have a maximum free rise density of 5.0 lbs./cubic foot.

The material used shall be a high-density polyurethane material as approved by the engineer. The material shall be a polyurethane-forming mixture that reacts in both dry and wet environments without dilution.

C Construction

C.1 General

Remove deleterious materials and debris from open voids, including drift and muddy, loose, or organic soils. Provide and install temporary forms as needed to contain foam within open voids to the shape and configuration shown on the plans. Place polyurethane-based foam sealant into voids under and along the back face of abutments using methods appropriate from the front face of the abutment, as approved by the engineer.

Install and if feasible remove injection pipes as necessary.

Inject polyurethane material at the required depths and volume under the supervision of the engineer, or his representative.

Monitor for movement of the structure during the inject process.

Clean-up site during and after injection.

C.2 Equipment Requirements

A mobile pumping unit capable of injecting the high-density polyurethane material into the soils adjacent to the structure to the depths required shall be used. The pumping unit shall be capable of controlling the rate of flow of material as required to place the polyurethane, and fill voids in a controlled manner. The unit shall be equipped with a manufacturer's certified flow meter to measure the amount of high-density polyurethane injected at each location. The certified flow meter shall have a digital output in both pounds and gallons.

Provide temperature control devices capable of maintaining proper temperature and proportionate mixing of the polyurethane component materials shall be used.

Where drilling through existing concrete is necessary for proper foam placement, utilize pneumatic or electric drills capable of efficiently drilling 5/8" to 3/4" diameter injection holes through the concrete without damaging the structural integrity of the existing concrete element(s) and capable of installing 1/2" injection probes to the required depths without damage. At the completion of work, patch the drilled holes with an engineer-approved product to restore the surface flush with the surrounding concrete.

C.3 Injection Point Installation/Extraction

Contractor shall install injection points through a series of 5/8" to 3/4" holes (as required for tube placement) drilled at approximately 4-6 foot spaced intervals through or adjacent to the concrete or temporary forms where indicated by the engineer based on soil conditions. Position the holes to facilitate complete densification of the soils surrounding the void. Contractor shall lay out the injection point locations for review by the engineer, or his site representative, prior to drilling the holes.

Tubing shall be used for injection of the polyurethane material into the soil. The tubing should be pressed into place or installed with a pneumatic hammer to ensure immediate contact with the surrounding soils to minimize material travelling along the annulus.

C.4 Polyurethane Injection

Void Filling – as necessary, polyurethane material shall first be injected through a series of 5/8" to 3/4" drilled holes until all known or encountered voids adjacent to the structural element are filled. The rate of material injection shall be determined by the contractor and the engineer based on site conditions.

D Measurement

The department will measure Foam Void Filling B-62-0051 as a single complete unit of work per bridge, acceptable completed.

E Payment

The department will pay for measured quantities at the contract unit price under the following bid item:

| ITEM NUMBER | DESCRIPTION | UNIT |
|-------------|-----------------------------|------|
| SPV.0060.04 | Foam Void Filling B-62-0051 | EACH |

Payment is full compensation for removing and disposing of any debris; for any additional costs resulting from working at the front face of the abutment; for providing, installing, and removing temporary forms; for providing all materials to install the polyurethane-based foam, and for any clean-up or miscellaneous work associated to foam injection.

33. Profile Curb Cut, Item SPV.0090.01.

A Description

This special provision describes providing a sawcut at the flow line of existing curb or curb and gutter in order to remove the existing curb head as shown on the plans and as hereinafter provided. Perform this work in accordance to standard spec 690, the construction details and hereinafter provided.

B Materials

Furnish materials that are in accordance to the pertinent requirements of standard spec 690.

C Construction

Perform this work in accordance to the construction details and standard spec 690.

D Measurement

The department will measure Profile Curb Cut by the linear foot, acceptably completed, measured along the existing face of curb.

E Payment

The department will pay for measured quantities at the contract unit price under the following bid item:

| ITEM NUMBER | DESCRIPTION | UNIT |
|-------------|------------------|------|
| SPV.0090.01 | Profile Curb Cut | LF |

Payment is full compensation for the curb cut, including excavation, removal and disposal of the existing curb head and sludge.

swr-690-001 (20160601)

34. Culvert Pipe Reinforced Concrete Horizontal Elliptical Class HE-IV 43x68-INCH, Item SPV.0090.02.

A Description

This special provision describes providing concrete culvert pipe.

B Materials

Furnish materials in accordance with standard specifications 522.2 for Class IV culvert pipe.

C Construction

All work shall be in accordance with standard specifications 522.3.

D Measurement

The department will measure Culvert Pipe Reinforced Concrete Horizontal Elliptical Class IV 43x68-Inch by length in linear feet acceptably completed.

E Payment

The department will pay for measured quantities at the contract unit price under the following bid item:

| ITEM NUMBER | DESCRIPTION | UNIT |
|-------------|---|------|
| SPV.0090.02 | Culvert Pipe Reinforced Concrete Horizontal Elliptical Class HE-IV 43x68-INCH | LF |

Payment is full compensation for the work under this item according to standard spec 520.5.

ADDITIONAL SPECIAL PROVISION 4

This special provision does not limit the right of the department, prime contractor, or subcontractors at any tier to withhold payment for work not acceptably completed or work subject to an unresolved contract dispute.

Payment to First-Tier Subcontractors

Within 10 calendar days of receiving a progress payment for work completed by a subcontractor, pay the subcontractor for that work. The prime contractor may withhold payment to a subcontractor if, within 10 calendar days of receipt of that progress payment, the prime contractor provides written notification to the subcontractor and the department documenting "just cause" for withholding payment.

The prime contractor is not allowed to withhold retainage from payments due subcontractors.

Payment to Lower-Tier Subcontractors

Ensure that subcontracting agreements at all tiers provide prompt payment rights to lower-tier subcontractors that parallel those granted first-tier subcontractors in this provision.

Acceptance and Final Payment

Within 30 calendar days of receiving the semi-final estimate from the department, submit written certification that subcontractors at all tiers are paid in full for acceptably completed work.

**Additional Special Provision 6 (ASP-6)
Modifications to the standard specifications**

Table of Contents

| | |
|---|----|
| Section 104 Scope of Work | 1 |
| Section 105 Control of the Work | 3 |
| Section 107 Legal Relations and Responsibility to the Public | 3 |
| Section 305 Dense Graded Base | 4 |
| Section 310 Open-Graded Base | 5 |
| Section 415 Concrete Pavement | 5 |
| Section 416 Concrete Pavement - Repair and Replacement | 6 |
| Section 506 Steel Bridges | 6 |
| Section 509 Concrete Overlay and Structure Repair | 8 |
| Section 513 Railing | 8 |
| Section 517 Paint and Painting | 8 |
| Section 526 Temporary Structures | 9 |
| Section 550 Driven Piles | 9 |
| Section 621 Landmark Reference Monuments | 10 |
| Section 643 Traffic Control | 10 |
| Section 646 Pavement Marking | 12 |
| Section 650 Construction Staking | 13 |
| Section 680 Public Land Survey Monuments | 13 |
| Section 682 Geodetic Survey Monuments | 14 |
| Section 710 General Concrete QMP | 15 |
| Section 715 QMP Concrete Pavement, Cast-in-Place Barrier and Structures | 20 |
| Section 716 QMP Ancillary Concrete | 22 |
| Section Bid Items | 22 |
| ERRATA | 23 |

Additional Special Provision 6 (ASP-6)
Modifications to the standard specifications

Make the following revisions to the standard specifications.

104 Scope of Work**104.2.2 Issuing Change Orders**

Replace subsection 104.2.2 with the following and rearrange to add a 104.2.2.7 effective with the February 2026 letting.

104.2.2.1 Change Orders for Differing Site Conditions

- (1) During the progress of the work, if one or more of the following differing conditions are encountered at the site, the party discovering the condition must promptly notify the other party of the specific condition before further disturbing the site and before further performing the affected work.
 1. A subsurface or latent physical condition, differing materially from those indicated in the contract.
 2. An unknown physical condition of an unusual nature, differing materially from those ordinarily encountered and generally recognized as inherent in the work specified in the contract.
- (2) If the contractor discovers the differing condition, the contractor shall provide oral notification as specified in 104.3.2, of the specific differing condition before further disturbing the site and before further performing the affected work.
- (3) The project engineer will investigate the conditions. If the project engineer determines the conditions materially differ and cause an increase or decrease in the cost, time, or both, required to perform the work under the contract, the project engineer will adjust the contract price, time, or both, and modify the contract in writing accordingly. The project engineer will respond to the contractor as to whether or not an adjustment is warranted. The project engineer will follow the contractor notification procedures specified in 104.3.
- (4) The department will not allow a contract adjustment unless the contractor has provided the required notice as specified in 104.3.

104.2.2.2 Change Orders for Engineer-Ordered Suspensions

- (1) If the project engineer suspends or delays the performance of all or any portion of the work in writing for an unreasonable period of time (not originally anticipated, customary, or inherent to the construction industry) and the contractor believes that additional payment, contract time, or both, is due because of the suspension or delay, the contractor shall notify the engineer as specified in 104.3.
- (2) The project engineer will evaluate the contractor's request. If the project engineer agrees that the cost, time, or both, required for the performance of the contract has increased due to the suspension or delay and the suspension or delay was caused by conditions beyond the control of and not the fault of the contractor, its suppliers, or subcontractors at any approved tier, and not caused by weather, the project engineer will make an adjustment and modify the contract in writing accordingly. The project engineer will respond to the contractor as to whether or not an adjustment is warranted as specified in 104.3.6.
- (3) The project engineer will not consider a contract adjustment unless the contractor submits the request for adjustment within the time specified above.
- (4) The project engineer will not consider a contract adjustment under this clause to the extent that the performance would have been suspended by any other cause, or for which an adjustment is provided or excluded under any other term or condition of this contract.

104.2.2.3 Change Orders for Altered Work

- (1) If original contract work is altered from what is included in the contract, the department will adjust the contract if the character of the work as altered differs materially in kind or nature from that involved or included in the original contract.
- (2) Before performing altered work, reach agreement with the project engineer for any price adjustments as specified in 109.4. If the project engineer does not agree that the work has significantly changed and a price adjustment is justified, follow the notification procedures as specified in 104.3.
- (3) If the alterations do not significantly change the character of the work under the contract, the department will not adjust the contract.

104.2.2.4 Change Orders for Quantity Variations

- (1) If all original contract work for a bid item is completed as required in the contract, and the measured quantity for that bid item varies from the contract quantity, the department will adjust the contract if the department or contractor demonstrates that the quantity variation affects the contractor's unit cost to perform the work and

meets one of the criteria below. If the quantity variation does not significantly change the character of the work under the contract, the department will pay for the work at the contract price.

1. The quantity of a major bid item, as defined in 101.3, is increased in excess of 125 percent or decreased below 75 percent of the original contract quantity. Any allowance for an increase in quantity applies only to that portion in excess of 125 percent of the original contract bid item quantity, or in case of a decrease below 75 percent, to the work actually performed.
2. The quantity of a minor bid item is increased to become a major bid item. An adjustment in the contract unit price for that bid item applies only to the quantity of that bid item having a contract value as follows:
 - Original Contract < \$8M: In excess of 6.25 percent of the original contract.
 - Original Contract >= \$8M: In excess of \$500,000.
3. The quantity of a minor bid item that is part of an approved subcontract and that exceeds 10 percent of the original value of that subcontract is decreased more than 50 percent from the original contract quantity for that bid item. Either party to the contract may submit a request for a revision to the contract unit price for that bid item. The department's total payment for the final reduced quantity will not exceed 75 percent of the original contract quantity at the contract price.
4. The quantity of a minor bid item that is part of an approved subcontract and that exceeds 10 percent of the original value of that subcontract is increased more than 50 percent from the original contract quantity for that bid item and which as increased does not qualify for adjustment as a major bid item. Either party to the contract may submit a request to the other for a revision of the contract unit price for that quantity of the bid item that is in excess of 125 percent of the original contract quantity.

104.2.2.5 Change Orders for Extra Work

- (1) The department has the right to direct extra work not required in the original contract, as defined in 101.3.
- (2) The engineer will determine payment for extra work as specified in 109.4.

104.2.2.6 Change Orders for Eliminated Work

- (1) The department has the right to partially eliminate or completely eliminate work the project engineer finds to be unnecessary for the project. If the project engineer partially eliminates or completely eliminates work, the project engineer will issue a change order for a fair and equitable amount as specified in 109.5.

104.2.2.7 Change Orders for Revisions to Contract Time

- (1) The department will issue a change order to revise the contract time as specified in 108.10.

104.6 Roadway Maintenance and Traffic Control

104.6.1.2.3 Drop-Off Protection

Replace subsection with the following effective with the November 2025 letting.

- (1) Eliminate vertical drop-offs greater than 2 inches and edge slopes steeper than 3:1 between adjacent lanes open to traffic.
- (2) If the roadway remains open to through traffic during construction and a greater than 2-inch drop-off occurs within 3 feet or less from the edge of the traveled way, eliminate the drop-off within 48 hours after completing that days work. Provide aggregate shoulder material compacted to a temporary 3:1 or flatter cross slope from the surface of the pavement edge.
- (3) Unless the engineer allows otherwise address drop-offs when they exist greater than 3 and less than 8 feet from the travelled way as follows:
 - Delineate vertical drop-offs 2 inches or greater and edge slopes steeper than 3:1 with drums, barricades, and signs, by the end of the workday.
 - Eliminate vertical drop-offs 2 inches or greater and edge slopes steeper than 3:1 within 72 hours or before a weekend or holiday whichever comes first.
 - Eliminate or use temporary concrete barrier to protect vertical drop-offs 4-inches or greater after 72 hours or before a weekend or holiday whichever comes first.
- (4) If a 4-inch or greater vertical drop-off or an edge slope steeper than 3:1 exists greater than 8 and less than 15 feet from the traveled way, delineate that drop-off or edge slope with drums, barricades, and signs by the end of the workday.
- (5) If a 12-inch or greater vertical drop-off exists greater than 8 and less than 15 feet from a traveled way with a posted speed limit of 55 mph or greater, eliminate or use temporary concrete barrier to protect that drop-off within 72 hours or before a weekend or holiday whichever comes first.

104.6.1.2.4 Hazard Protection on Roads Open to All Traffic

Replace subsection with the following effective with the November 2025 letting.

- (1) On roads open to all traffic; conform to the following construction clear zone requirements:

- Posted speeds 45 mph or less: within 8 feet of the travelled way.
 - Posted speeds from 45 mph to 55 mph inclusive: within 10 feet of the travelled way.
 - Posted speeds above 55 mph: within 15 feet of the travelled way.
- (2) Remove all construction debris, stored materials, and equipment not in use from the construction clear zone; or if the engineer allows, delineate and shield with concrete barrier.
- (3) Delay removal of existing permanent roadside safety devices until necessary. When located within the construction clear zone and not shielded by concrete barrier, use temporary traffic control drums to delineate bridge abutments, concrete barrier blunt ends, sign bridge foundations, drainage structures, and slopes exposed by removing permanent protective measures.
- For exposed bridge abutments, concrete barrier blunt ends, sign bridge foundations, and drainage structures, eliminate the need for delineation within 5 calendar days.
 - For exposed slopes steeper than 3:1, eliminate the need for delineation within 14 calendar days , or duration approved by the engineer.

105 Control of the Work

105.13 Claims Process for Unresolved Changes

Replace subsection with the following effective with the February 2026 letting.

105.13.3 Submission of Claim

- (1) Submit the claim to the project engineer as promptly as possible following the submission of the Notice of Claim. If the contractor does not submit the claim prior to the earlier of the following dates, the department will deny the claim:
1. 120 calendar days from the date of the Notice of Claim.
 2. The end of the time allowed under 109.7 for the contractor to respond in writing to the engineer issued semi-final estimate.
- (2) The department will not accept the submission of a claim until the resolution process in 104.3 has been completed and the contractor makes no further requests to submit updated information that may affect the region's final decision.

107 Legal Relations and Responsibility to the Public

Add section 107.27 (Drones or Unmanned Aircraft Systems (UAS)) effective with the November 2024 letting.

107.27 Drones or Unmanned Aircraft Systems (UAS)

107.27.1 Licensing and Compliance

Add paragraph 107.27.1(5) to the information included with the November 2024 ASP-6, effective with the February 2026 letting.

- (1) Obtain and possess the necessary Federal Aviation Administration (FAA) licenses and certifications to operate drones commercially (<https://www.faa.gov/uas>).
- (2) Comply with all FAA regulations, airspace restrictions, and local laws. Operators of small drones that are less than 55 pounds for work or business must follow all requirements as listed in Title 14, Chapter 1, Subchapter F, Part 107 of the Code of Federal Regulations (14 CFR) and obtain a remote pilot certificate (https://www.faa.gov/uas/commercial_operators).
- (3) Comply with Wisconsin State Statute 942.10. Limit operations to the specific approved purpose and employ reasonable precautions to avoid capturing images of the public except those that are incidental to the project.
- (4) Provide copies of waivers required for specific project conditions to the engineer prior to any flight.
- (5) UAS and UAS components are required to be compliant with federal guidelines outlined in the American Security Drone Act of 2023 (ASDA) and the OMB memorandum M-26-02.

107.27.2 Flight Approval, Safety, and Incident Reporting

- (1) Submit information in 107.27.2(2) to obtain written drone flight approval from the engineer at least 3 business days prior to operating a drone within the right-of-way. Do not operate a drone within the right-of-way unless approved by the engineer.
- (2) Drone flight application for review and approval must include:
 - UAS pilot information and qualifications, images of certification
 - UAS drone information and FAA tail numbers
 - Max/ Min allowable flight parameters (weather)
 - Specifics of flight mission: capture scope

- Estimated flight duration
 - Pre-flight checklist
 - Site-specific parameters
 - Notification protocols - Federal/Local/Agency/Owner/Responsible in Charge
 - Confirmation and verification of approved operators and hardware
 - Flight plan map diagram (including launch and landing location)
 - FAA-Airspace flight map classification and confirmation with graphics
 - UAS incident management protocol
- (3) If contractor is requesting multiple types of the same flight, a simplified request can be submitted listing weekly flight plan.
- (4) Safety measures must include but are not limited to:
- Regular training and updates on drone regulations are required and must be provided upon request.
 - Drones must be operated in accordance with safety guidelines, including maintaining a safe distance from people, structures, vehicles, etc.
 - Conduct a pre-flight safety assessment, considering weather conditions, airspace restrictions, and potential hazards.
 - Emergency procedures (e.g., drone malfunction, loss of control) must be documented and followed.
 - All incidents must be reported to the engineer.
- (5) If the drone has an incident during flight, report the following to the engineer:
- Incident background and details.
 - FAA (14 CFR 107.9) and NTSB (49 CFR 870) notification protocol.
 - Contractor internal notification protocol.

107.27.3 Insurance Requirements

- (1) Maintain drone liability insurance with the following limits.
1. For drones weighing 10 pounds or less, a liability policy with a minimum limit of \$1,000,000.00 is required.
 2. For drones weighing more than 10 pounds and less than or equal to 20 pounds, a liability policy with a minimum limit of \$2,000,000.00 is required.
 3. For drones weighing more than 20 pounds, notify engineer and department will determine appropriate liability policy coverage levels based on size, use, location, and other risk factors.

305 Dense Graded Base

305.3.3.3 Shoulders Adjacent to Asphaltic Pavement or Surfacing

Replace subsection with the following effective with the November 2025 letting.

- (1) If the roadway is closed to through traffic during construction, construct the aggregate shoulders before opening the road.
- (2) If the roadway remains open to through traffic during construction, conform as specified in 104.6.1.2.3.
- (3) Provide and maintain signing and other traffic protection and control devices, as specified in 643, until completing shoulder construction to the required cross-section and flush with the asphaltic pavement or surfacing.

310 Open-Graded Base

310.2 Materials

Replace paragraph (2) with the following effective with the November 2025 letting.

- (2) The contractor may substitute material conforming to the gradation requirements for crushed aggregate specified in table 310-01 if that material conforms to the fracture requirements for open-graded crushed gravel specified in 301.2.4.5.

TABLE 310-01 COARSE AGGREGATE (% passing by weight)

AASHTO No. 67 ^[1]

| SIEVE | COARSE AGGREGATE (% PASSING by WEIGHT) AASHTO No. 67 |
|------------|--|
| 2-inch | - |
| 1 1/2-inch | - |
| 1-inch | 100 |
| 3/4-inch | 90 - 100 |
| 1/2-inch | - |
| 3/8-inch | 20 - 55 |
| No. 4 | 0 - 10 |
| No. 8 | 0 - 5 |
| No. 16 | - |
| No. 30 | - |
| No. 50 | - |
| No. 100 | - |
| No. 200 | - |

^[1] Size according to AASHTO M43.

415 Concrete Pavement

415.3.16.4.1.2 Magnetic Pulse Induction

Replace subsection with the following effective with the November 2025 letting.

- (1) The department will measure thickness within 10 business days of paving. Upon completion of the project thickness testing, the department will provide the test results to the contractor within 5 business days.
- (2) The department will establish a project reference plate at the start of each paving stage. The department will notify the contractor of project reference plate locations before testing. The department will measure the project reference plate before each day of testing.
- (3) If the random plate test result falls within 80 to 50 percent pay range specified in 415.5.2, the department will measure the second plate in that unit. The department will notify the contractor immediately if the average of the 6 readings fall within the 80 to 50 percent pay range.
- (4) If an individual random plate test result is more than 1 inch thinner than contract plan thickness, the pavement is unacceptable. Department will determine limits of unacceptable pavement by performing the following:
 - The engineer will test each consecutive plate stationed ahead and behind until the thickness test result is plan thickness or greater.
 - The engineer will direct the contractor to core the hardened concrete to determine the extent of the unacceptable area. In each direction, the contractor shall take cores at points approximately 20 feet from the furthest out of specification plate towards the plate that is plan thickness of greater. Once a core is within 80 to 100 percent pay range, the coring is complete and the limits of unacceptable pavement extend from the stationing between the core test results of 80 to 100 percent payment, inclusive of all unacceptable core and plate test results.
 - Perform coring according to WTM T24. The department will evaluate the results according to AASHTO T148
 - Fill core holes with concrete or mortar.

416 Concrete Pavement - Repair and Replacement**416.2 Materials****416.2.1 General**

Replace paragraph (3) with the following effective with the November 2025 letting.

- (3) The contractor may use accelerating admixtures for concrete placed under SHES bid items as follows:
 1. If using calcium chloride,
 - AASHTO M144, type S as grade N1 or grade N2, class A.
 - AASHTO M144, type L in a concentration of approximately 30 percent for premixed solutions.
 2. If using non-chloride accelerators, conform to:
 - AASHTO M194, type C accelerating admixtures.
 3. Do not exceed the manufacturer's recommended maximum dosage.
 4. If the engineer requests, provide a written copy of the manufacturer's dosage recommendations.

416.2.4 Special High Early Strength Concrete Pavement Repair and Replacement**416.2.4.1 Composition and Proportioning of Concrete**

Add paragraph (4) to subsection effective with the November 2025 letting.

- (4) The contractor may use pre-packaged horizontal rapid set concrete patch material from the APL for partial and full-depth pavement repairs instead of specified grades of concrete.

506 Steel Bridges**506.3.12.3 High-Strength Bolts****506.3.12.3.1 Materials**

Replace subsection with the following effective with the November 2025 letting.

- (1) Install bolts according to AASHTO LRFD Bridge Construction Specifications, article 11.5.5, with the following exceptions:
 1. If connections are assembled, install bolts with a hardened washer under the nut or bolt head, whichever is the element turned in tightening.
 2. If using oversized holes, 2 hardened washers are required, one under the bolt head and one under the nut.
 3. Bring the bolted parts into solid contact bearing before final tightening. Use not less than 25 percent of the total number of bolts in a joint to serve as fitting up bolts.
 4. For steel diaphragms on prestressed concrete bridges do the following:
 - 4.1. For steel-to-steel connections within diaphragms:
 - Tension by the turn-of-nut method.
 - 4.2. For steel-to-concrete girder connections:
 - No PIV or field rotational capacity (RoCAP) testing is required.
 - Tighten as the plan details specify.
- (2) Before fasteners are delivered to the site, provide documentation of rotational capacity testing in accordance with ASTM F3125, Annex A2, Rotational Capacity (RoCap) Test. The fasteners must be received in packages that match the fastener assembly combination as tested. If documentation of RoCap testing is not received; then perform this testing in the field prior to installation.
- (3) Install bolt, nut, and washer combinations from the same rotational-capacity lot.
- (4) Check galvanized nuts to verify that a visible dyed lubricant is on the threads and at least one bolt face.
- (5) Ensure that uncoated bolts are oily to the touch over their entire surface when delivered and installed.
- (6) Provide and use a Skidmore-Wilhelm Calibrator or an acceptable equivalent tension measuring device at each job site during erection. Perform pre-installation verification (PIV) testing in the field conforming to the procedures enumerated in department form DT2114 no earlier than 14 calendar days prior to permanent bolting. Submit 2 copies of form DT2114 to the engineer.
- (7) Prior to installation, ensure that the fastener condition has not changed due to accumulation of rust or dirt, weathering, mixture of tested assembly lots, or other reasons. If changes have occurred, including cleaning and re-lubricating of weathered bolts, the engineer will require re-qualification using RoCap testing in the field, for a minimum of two fastener assemblies of each combination to be used in permanent bolting, and PIV re-testing.

- (8) Additional RoCap or PIV tests are required whenever the condition of the fasteners or understanding of the bolting crew is in question by the Engineer. Do not allow permanent bolting until PIV testing is completed.
- (9) Tighten threaded bolts by the turn-of-nut method while holding the bolt head. Where clearance is an issue, the contractor may tighten the bolt head while holding the nut.
- (10) The contractor may use alternate tightening methods if the engineer approves before use.
- (11) The contractor may use a flat washer if the surface adjacent to and abutting the bolt head or nut does not have a slope of more than 1:20 with respect to a plane normal to the bolt axis. For slopes greater than 1:20, use smooth, beveled washers to produce parallelism.
- (12) Snug all bolts during installation according to AASHTO LRFD Bridge Construction Specifications, article 11.5.5.4.1.
- (13) Tighten each fastener to provide, if all fasteners in the joint are tight, at least the minimum bolt tension as follows:

TABLE 506-1 BOLT TENSION

| BOLT SIZE | REQUIRED MINIMUM BOLT TENSION ^[1] |
|-----------------|--|
| 1/2-inch..... | 12 kips |
| 5/8-inch..... | 19 kips |
| 3/4-inch..... | 28 kips |
| 7/8-inch..... | 39 kips |
| 1-inch | 51 kips |
| 1 1/8-inch..... | 64 kips |
| 1 1/4-inch..... | 81 kips |
| 1 3/8-inch..... | 97 kips |
| 1 1/2-inch..... | 118 kips |

^[1] Equal to the proof load by the length measurement method as specified in ASTM F3125 for grade A35 bolts.

- (14) Do not reuse galvanized F3125 A325 bolts. The contractor may reuse uncoated F3125 A325 bolts, if the engineer approves, but not more than once. The department will not consider re-tightening previously tightened bolts that become loosened by the tightening of adjacent bolts as reuse.

506.3.19 Welding

Replace subsection title and text with the following effective with the November 2025 letting.

506.3.19.4 Welding Inspection

- (1) Inspect welding according to the current edition of AWS D1.5. Unless specified otherwise, test butt welds in main members by either the radiographic or the ultrasonic method.
- (2) Test fillet welds and groove welds not covered otherwise in main members in a non-destructive manner by the magnetic particle method according to ASTM E709, utilizing the yoke method. This includes, but is not limited to, a minimum of 12 inches in every 10 feet or portion thereof of each weld connecting web to flange, bearing stiffener to web or flange, framing connection bar to web or flange, and longitudinal stiffener to web or vertical bar.

506.3.31 Cleaning of Surfaces

506.3.31.2 Coated Surfaces

Replace subsection with the following effective with the November 2025 letting.

- (1) Blast clean structural steel and ferrous metal products to be coated as specified in 517.3.1.3.3.
- (2) Blast clean steel that will be encased in concrete to SSPC-SP 6 standards or cleaner.

506.3.32 Painting Metal

Replace subsection with the following effective with the November 2025 letting.

- (1) Unless the contract provides otherwise, apply 3 coats of paint to structural steel and ferrous metal products. Furnish and apply paints according to the epoxy system or as specified in the special provisions. The requirements for this system are set forth in 517.
- (2) For structural steel, including weathering steel, and miscellaneous metals that will be encased in concrete, paint as specified in 517.3.1.
- (3) For galvanized surfaces paint as specified in 517.3.1.
- (4) Use the 3-coat epoxy system to paint the end 6 feet of structural weathering steel at the abutments, the 6 feet on each side of piers, joints, downspouts, hinges, and galvanized bearings in contact with weathering

steel. Use a coat of brown urethane matching AMS Standard 595A: AMS-STD 20059. Apply one coat of zinc-rich paint to surfaces of expansion joint assemblies and other surfaces not in contact with the weathering steel but inaccessible after assembly or erection.

- (5) Do not paint structural steel to be welded before completing welding. If welding only in the fabricating shop and subsequently erecting by bolting, coat it after completing shop welding. Apply one coat of weldable primer or other engineer-approved protective coating to steel surfaces to be field welded after completing shop welding and shop fabrication. Protect machine-finished surfaces that do not receive a paint or galvanizing from contamination during the cleaning and painting process.
- (6) Upon fabrication and acceptance, coat pins and pinholes with a plastic or other engineer-approved coating before removing from the shop.
- (7) Mark members weighing 3 tons or more with their weights on areas that will be encased in concrete, or paint with a compatible paint on zinc-rich primer, or mark with soapstone on an epoxy-coated surface. Wait until material is dry, inspected, and approved for shipment before loading for shipment.

509 Concrete Overlay and Structure Repair

509.2 Materials

Replace subsection with the following effective with the November 2025 letting.

- (1) Furnish a neat cement bonding grout. Mix the neat cement in a water-cement ratio approximately equal to 5 gallons of water per 94 pounds of cement. Pre-packaged non-shrink grout from the APL may be used instead of site mixed or ready mixed grout.
- (2) Furnish grade E conforming to 501 for overlays.
- (3) Furnish grade C or E concrete conforming to 501 for surface repairs. The contractor may increase the slump for grade E concrete to a maximum of 4 inches. For vertical and overhead repairs, use pre-packaged vertical and overhead repair material from the APL unless a different material is approved by the engineer in writing.
- (4) Furnish grade C or E concrete conforming to 501 for joint repairs, curb repairs, and full-depth deck repairs; except as follows:
 - 1. The contractor may increase slump of grade E concrete to 3 inches.
 - 2. The contractor may use ready-mixed concrete.
- (5) Provide QMP for class II ancillary concrete as specified in 716 if using concrete mixtures conforming to 501.

513 Railing

513.2.3 Steel Railing

Replace subsection with the following effective with the November 2025 letting.

- (1) Furnish steel railing components as follows:

| | |
|---|------------------------|
| Structural steel | 506.2.2 |
| High strength bolts | 506.2.5 |
| Steel guardrail | 614.2 |
| Round structural steel tubing for steel pipe railing..... | ASTM A500 grade B |
| Structural steel tubing used with other steel railings..... | ASTM A500 grade B or C |
- (2) Furnish a two-coat paint system from the APL for structure painting systems under paint - galvanized surfaces.

517 Paint and Painting

517.3.1.3.3 Blast Cleaning

517.3.1.3.3.2 Epoxy Coating System

Replace subsection with the following effective with the November 2025 letting.

- (1) Blast clean structural steel receiving this coating to a near-white finish according to SSPC-SP 10.
- (2) Solvent clean oil and grease on surfaces receiving this coating according to SSPC-SP 1 and blast clean to a near-white finish according to SSPC-SP 10.
- (3) Remove fins, tears, slivers, and burred or sharp edges present on any steel member, or that appears during blasting, by grinding then re-blast the area to a one to 2 mils surface shape.

-
- (4) If using abrasives for blast cleaning, use either clean dry sand, steel shot, mineral grit, or manufactured grit of a gradation that produces a uniform one to 2 mils profile as measured with a department-approved impregnated surface profile tape.
 - (5) Remove abrasive and paint residue from steel surfaces with a commercial grade vacuum cleaner equipped with a brush-type cleaning tool, or by double blowing. If using the double blowing method, vacuum the top surfaces of structural steel, including top and bottom flanges; longitudinal stiffeners, splice plates, and hangers after completing the double blowing operations. Ensure that the steel is dust free when applying primer. Apply the primer within 8 hours after blast cleaning.
 - (6) Protect freshly coated surfaces from later blast cleaning operations. Brush any blast damaged primed surfaces with a non-rusting tool, or if visible rust occurs, re-blast to a near white condition. Clean the brushed or blast cleaned surfaces and re-prime within the manufacturer's recommended time.
 - (7) When coating galvanized surfaces, ensure tie-coat adhesion by brush blasting the cleaned surface according to SSPC-SP7 to create a slight angular surface profile according to manufacturer's recommendations of 1 mil to 1.5 mils. Blasting must not fracture the galvanized finish or remove dry film thickness. For the tie- and top-coat, furnish an epoxy coating system from the APL for paint systems for galvanized surfaces.

517.3.1.3.5 Galvanizing

Add subsection effective with the November 2025 letting.

- (1) After fabrication, blast clean assemblies per SSPC-SP6 and galvanize according to ASTM A123.
-

526 Temporary Structures

526.3.4 Construction, Backfilling, Inspection and Maintenance

Replace subsection with the following effective with the November 2025 letting.

- (1) Construct temporary structures conforming to 500. Backfill conforming to 206.3.13 with structure backfill conforming to 210.2.
- (2) Temporary highway bridges open to traffic less than or equal to 24 months: inspect temporary bridges conforming to the National Bridge Inspection Standards (NBIS) and the department's Structure Inspection Manual (SIM) before opening to traffic. Perform additional inspections, as the department's SIM requires, based on structure type, condition, and time in service. Submit inspection reports on department form DT2007 to the engineer and electronic copies to the BOS Maintenance Section. Ensure that a department-certified qualified team leader performs the inspections.
- (3) Temporary highway bridges open to traffic greater than 24 months: complete additional inspections and inventory data collection per the NBIS and SIM within 27 months of the bridge being opened to traffic. Contact the Bureau of Structures to have a structure number assigned. Enter the inventory data and element level bridge inspection data in accordance with the SIM into WisDOT's Highway Structures Information System (HSIS) within 90 days of completing the field portion of the inspection. Continue to complete required inspections and data submittal at intervals according to the requirements of the NBIS and SIM.
- (4) Maintain temporary structures and approaches in place until no longer needed. Unless the engineer directs otherwise, completely remove and dispose of as specified in 203.3.5; do not place on the finished surface.

526.5 Payment

Replace paragraph (2) with the following effective with the November 2025 letting.

- (2) Payment for the Temporary Structure bid items is full compensation for providing a temporary structure including design and construction; for construction staking; for temporary shoring and other secondary structure items; for backfilling with structure backfill; for maintaining; and for removing when no longer needed. The department will pay 70 percent of the contract amount when open to traffic and the balance after structure removal and associated site restoration.
-

550 Driven Piles

550.3.9 Pre-Boring

550.3.9.1 General

Add paragraph (2) effective with the February 2026 letting.

- (1) Pre-bore holes to the depth the plans or special provisions require. Submit written requests for pre-boring not required under the contract to the engineer for review and approval. Do not impair the capacity of in-place piles or damage adjacent structures by pre-boring operations.

- (2) Contractor may elect to not perform pre-boring, subject to written approval from the engineer as specified in 104.2.1(2). If the contractor elects to not perform pre-boring and subsequently pre-boring is necessary at any point throughout the project, no additional time or compensation will be granted.

621 Landmark Reference Monuments

Remove Standard Specification 621 (Landmark Reference Monuments) effective with the November 2025 letting. Refer to updated information in this ASP-6 for standard specifications 680 and 682.

643 Traffic Control

643.1 Description

Replace paragraph (1) with the following effective with the November 2025 letting.

- (1) This section describes providing, maintaining, repositioning, and removing temporary traffic control devices as follows:

| | | |
|--------------------------|--|-----------------------------------|
| Drums | Warning lights | 42-inch cones |
| Barricades type III | Connected arrow boards | Portable changeable message signs |
| Flexible tubular markers | Signs | Channelizing curb system |
| Speed feedback trailers | Connected work zone start and end location markers | |

643.2.2 Department's Approved Products List (APL)

Replace paragraph (1) with the following effective with the November 2025 letting.

- (1) Furnish materials from the APL as follows:

- | | |
|--|-------------------------------------|
| - Drums | - Connected arrow boards |
| - Barricades type III | - Sign sheeting |
| - Flexible tubular marker posts including bases | - 42-inch cone assemblies |
| - Warning lights and attachment hardware | - Portable changeable message signs |
| - Channelizing curb systems | - Speed feedback trailers |
| - Connected work zone start and end location markers | |

643.3 Construction

643.3.1 General

Add paragraphs (10), (11), (12) and (13) effective with the November 2025 letting.

- (10) For connected devices provide a local specialist to respond to emergency situations within 2 hours of being notified. Equip local specialists with sufficient resources to correct deficiencies in the connected work zone devices.
- (11) Prior to deployment, test all connected devices with the engineer to ensure the device is showing in the WisDOT approved data feed. Send an email to DOTBTOworkzone@dot.wi.gov to notify BTO that the devices have been turned on.
- (12) Provide a WisDOT approved data feed from connected devices and the remote management software, updated at least every minute.
- (13) If requested by the engineer, provide real-time status change alerts to a list of designated personnel via text or email or both. Send an alert each time a connected device is switched between operating modes which include the current operating mode, the previous operating mode, the date and time of the mode switch, and the location (latitude and longitude) of the device at the time of the mode switch in the alert.

643.3.3 Connected Arrow Boards

Revise subsection title and add paragraphs (3) and (4) effective with the November 2025 letting.

- (3) The connected arrow board may be switched between the following pattern displays per the plan:
- Blank
 - Right arrow static
 - Right arrow flashing
 - Right arrow sequential
 - Left arrow static
 - Left arrow flashing
 - Left arrow sequential
 - Line flashing

- Bi-directional arrow flashing.

- (4) When the connected arrow board is not displaying a pattern, the display shall be blank, and the connected arrow board transmits its status to the data feed. When a connected arrow board is switched to a pattern, the connected arrow board transmits its location and its current operating mode to the data feed.

643.3.7 Temporary Pavement Marking

Add paragraph (9) effective with the November 2025 letting.

- (9) Install temporary markings on the final surface in the same location as permanent markings will be placed or as the plans show.

643.3.10 Connected Work Zone Start and End Location Markers

Add subsection effective with the November 2025 letting.

- (1) Place work zone start location marker at the beginning of the work zone per plan or as the engineer directs. Clearly label the work zone start location marker so that it is easily distinguishable by field personnel.
- (2) Place work zone end location marker at the end of the work zone per plan or as the engineer directs. Clearly label the work zone end location marker so that it is easily distinguishable by field personnel.
- (3) Ensure the connected work zone start and end location markers operate continuously when deployed on the project.
- (4) Ensure the work zone location markers and connected arrow board are from the same manufacturer.
- (5) When the work zone start and end location markers are switched to the ON mode, verify the begin and end location markers transmit their location and identity as begin or end markers to the data feed.
- (6) Switch the work zone start and end location markers to OFF mode when temporary traffic control is removed, and the normal traveled way is restored.

643.4 Measurement

643.4.1 Items Measured by the Day

Add paragraphs (3) and (4) effective with the November 2025 letting.

- (3) The department will measure Traffic Control Connected Arrow Boards by day for the days the device is reporting correct data.
- (4) The department will measure Traffic Control Connected Work Zone Start and End Location Markers by day per roadway segment for the days the devices are reporting correct data.

643.5 Payment

643.5.1 General

Replace paragraph (1) with the following effective with the November 2025 letting.

- (1) The department will pay for measured quantities at the contract unit price under the following bid items:

| <u>ITEM NUMBER</u> | <u>DESCRIPTION</u> | <u>UNIT</u> |
|--------------------|--|-------------|
| 643.0300 | Traffic Control Drums | DAY |
| 643.0420 | Traffic Control Barricades Type III | DAY |
| 643.0500 | Traffic Control Flexible Tubular Marker Posts | EACH |
| 643.0600 | Traffic Control Flexible Tubular Marker Bases | EACH |
| 643.0650 | Traffic Control Channelizing Curb System | LF |
| 643.0700 - 0799 | Traffic Control Warning Lights (type) | DAY |
| 643.0810 | Traffic Control Connected Arrow Boards | DAY |
| 643.0900 | Traffic Control Signs | DAY |
| 643.0910 | Traffic Control Covering Signs Type I | EACH |
| 643.0920 | Traffic Control Covering Signs Type II | EACH |
| 643.1000 | Traffic Control Signs Fixed Message | SF |
| 643.1050 | Traffic Control PCMS | DAY |
| 643.1051 | Traffic Control PCMS with TMC Communications | DAY |
| 643.1070 - 1079 | Traffic Control Cones (height) | DAY |
| 643.1220 | Traffic Control Connected Work Zone Start and End Location Markers | DAY |
| 643.1500 | Traffic Control Speed Feedback Trailer | DAY |
| 643.3100 - 3299 | Temporary Marking Line (material/type) (width) | LF |
| 643.3300 - 3399 | Temporary Marking Crosswalk (material) 6-Inch | LF |
| 643.3500 - 3599 | Temporary Marking Arrow (material) | EACH |

| | | |
|-----------------|---|------|
| 643.3600 - 3699 | Temporary Marking Word (material) | EACH |
| 643.3700 - 3799 | Temporary Marking Raised Pavement Marker (type) | EACH |
| 643.3800 - 3899 | Temporary Marking Stop Line (material) 18-Inch | LF |
| 643.3900 - 3959 | Temporary Marking Diagonal (material) 12-Inch | LF |
| 643.3960 - 3999 | Temporary Marking Removable Mask Out Tape (width) | LF |
| 643.4100 | Traffic Control Interim Lane Closure | EACH |
| 643.5000 | Traffic Control | EACH |

646 Pavement Marking

646.3.1.1 General Marking

Replace paragraph (7) with the following effective with the November 2025 letting. Add paragraph (8) effective with the February 2026 letting.

- (7) Apply marking to the width and color the bid item indicates. Distribute beads uniformly across the line. Provide a sharp cutoff for both sides and ends of the marking with a uniform cross-section. Achieve straight alignment, not to exceed a 3/8-inch variation in any 40-foot section of travelled way. Do not damage existing marking that will remain in place.
- (8) Apply both lines of the centerline marking simultaneously to ensure a consistent gap.

646.3.1.6 Proving Period

646.3.1.6.1 General

Replace paragraph (1) with the following effective with the February 2026 letting.

- (1) The engineer may conduct post acceptance inspections periodically during a proving period to evaluate the physical presence of pavement marking and, for permanent markings, the retroreflectivity. The proving period begins on the last day of the week, for all marking placed within that week. The proving period extends through April 15 of the next calendar year or 180 days, whichever is longer. If weather or road surface conditions prevent the engineer from fully evaluating the marking at the end of the proving period, the engineer may extend the proving period.

646.3.1.6.2 Retroreflectivity

Replace paragraph (1), included with the November 2025 ASP-6, with the following effective with the February 2026 letting.

- (1) For permanent markings, the engineer will also evaluate the percent failing retroreflectivity at the end of the proving period. Ensure that the 180-day reflectivity, in millicandelas/lux/m², meets or exceeds the following:

| <u>MATERIAL</u> | <u>COLOR</u> | <u>180 DAY DRY RETROREFLECTIVITY</u> |
|----------------------|--------------|--|
| Epoxy | White | 150 |
| | Yellow | 100 |
| Wet Reflective Epoxy | White | 250 |
| | Yellow | 150 |
| Permanent Tape | White | 400 |
| | Yellow | 335 |

646.3.2.3.2 Wet Reflective Epoxy

Replace paragraph (1) with the following effective with the February 2026 letting.

- (1) Apply wet reflective epoxy binder in a grooved slot and provide a double drop bead system at the application rate specified in the APL.

646.3.2.4 Black Epoxy

Replace paragraph (1) with the following effective with the November 2024 letting.

- (1) Apply black epoxy in a grooved slot directly after the white marking. Apply epoxy at a wet mil thickness of 20. Apply black aggregate at or exceeding 25 pounds per gallon of epoxy. Do not apply glass beads to black epoxy.

646.3.3 Special Marking

Replace subsection with the following effective with the February 2026 letting.

- (1) Fill in any breaks left from the stencil with the same material to ensure there are no gaps.

-
- (2) Under the Marking Railroad Crossings bid items, apply the RXR symbol and 3 transverse lines as the plans show.
 - (3) Under the Marking Curb bid items, mark the vertical face and the top of the curb.
 - (4) Under the Marking Aerial Enforcement Bars bid items, the department will locate the marking. Notify the engineer at least one week before marking so the State Patrol can provide exact locations.
-

650 Construction Staking

650.3.12 Supplemental Control Staking

Replace paragraph (2) with the following effective with the November 2025 letting.

- (2) Document and provide to the engineer complete descriptions and reference ties of the control points, alignment points, and benchmarks to allow for quick reestablishment of the plan data at any time during construction and upon project completion. Document additional control on department form DT1291 as described in CMM 710, table 710-1.
-

680 Public Land Survey Monuments

Add section 680 (Public Land Survey Monuments) effective with the November 2025 letting.

680.1 Description

- (1) This section describes perpetuating US Public Land Survey System (USPLSS) monuments.

680.2 Materials

- (1) Furnish magnetic survey nails with center point a minimum of 2-1/2 inches long or engineer approved alternative.
- (2) Furnish minimum 3/4-inch reinforcement or 1 inch outside diameter (OD) iron pipe at least 24 inches long.
- (3) Furnish plastic survey marker cap with lettering that reads "Witness Monument".
- (4) Use alternative materials if requested and furnished by the county surveyor.

680.3 Construction

680.3.1 General

- (1) Perform work under the direction and control of a professional land surveyor registered in the state of Wisconsin, following Wisconsin Administrative Code A-E 7 (https://docs.legis.wisconsin.gov/code/admin_code/a_e/7).
- (2) Preserve existing USPLSS monuments and witness monuments (ties) within the construction limits in their original position until monuments are verified and sufficiently tied off.

680.3.2 Pre-Construction

- (1) Notify the county surveyor at least 30 days prior to start of construction operations about all USPLSS monuments within the construction limits that might be disturbed.
- (2) Obtain the existing USPLSS Monument Record from the county surveyor. Verify existing monuments and witness monuments are in place and undisturbed.
- (3) Replace witness monuments that are missing or that could be disturbed by construction operations. Locate new witness monuments near the USPLSS monument but outside the construction limits. Submit a monument record as specified in 680.3.5.
- (4) Temporarily mark the location of all witness monuments to protect them during construction.

680.3.3 Removals

- (1) Remove or abandon existing monument and monument cover that interfere with construction operations. Remove and dispose of surplus excavation and materials as specified in 205.3.12.

680.3.4 Post-Construction

- (1) Verify the location of monuments and witness monuments when construction operations are complete.
- (2) Set new monuments and witness monuments where necessary. Recess magnetic survey nails 1/4 inch below the pavement surface for monuments located in pavement. Use reinforcement or iron pipe for monuments not in pavement and for witness monuments. Locate new witness monuments near the USPLSS monument and outside the roadbed. Install plastic caps on witness monuments.
- (3) Install marker posts next to all witness monuments if required and supplied by the county surveyor.
- (4) Omit setting monuments in the pavement if approved by the department's regional survey coordinator and county surveyor due to traffic or safety concerns.

- (5) Submit a monument record as specified in 680.3.5.

680.3.5 Monument Records

- (1) Submit a monument record on department form DT1291 to the county surveyor at locations where monuments were set. Provide a copy to the engineer and regional survey coordinator.

680.4 Measurement

- (1) The department will measure bid items under this section as each individual monument acceptably completed.

680.5 Payment

- (1) The department will pay for measured quantities at the contract unit price under the following bid items:

| <u>ITEM NUMBER</u> | <u>DESCRIPTION</u> | <u>UNIT</u> |
|--------------------|--|-------------|
| 680.0100 | Public Land Survey Monument Verify and Reset | EACH |

- (2) Payment for the Public Land Survey Monument Verify and Salvage bid item is full compensation for providing all materials; for coordinating with county surveyors; for obtaining existing monument records; for verifying the existing location of monuments and witness monuments; for removing or abandoning existing monuments and monument covers; for resetting monuments; for setting or resetting temporary and permanent witness monuments; and for submitting monument records.

682 Geodetic Survey Monuments

Add section 682 (Geodetic Survey Monuments) effective with the November 2025 letting.

682.1 Description

- (1) This section describes salvaging geodetic survey discs and constructing geodetic survey monuments.

682.2 Materials

- (1) Furnish materials conforming to the following:

| | |
|---------------------------|-------|
| Concrete..... | 501 |
| Reinforcement..... | 505.2 |
| Foundation backfill | 520.2 |

- (2) Furnish grade A concrete as modified in 716. Provide QMP for class III ancillary concrete as specified in 716.

682.3 Construction

- (1) Contact the WisDOT Geodetic Surveys Unit at (866) 568-2852 or “geodetic@dot.wi.gov” as required below.

682.3.1 Salvage Geodetic Survey Discs

- (1) Remove and salvage geodetic survey discs from existing structures or survey monuments being removed at the locations shown in the plan.
- (2) Notify the WisDOT Geodetic Surveys Unit 7 calendar days prior to removal operations.
- (3) Ship or deliver salvaged discs to following address:

WisDOT Bureau of Technical Services
 Geodetic Surveys Unit
 3502 Kinsman Boulevard
 Madison, WI 53704

Provide a tracking number to the Geodetic Surveys Unit upon shipment or contact the Geodetic Surveys Unit to schedule in-person delivery.

682.3.2 Geodetic Survey Monuments

682.3.2.1 Monument Location

- (1) Stake the approximate location of monuments provided in the plan and contact the WisDOT Geodetic Surveys Unit 30 days prior to excavating holes for field verification and delivery of department furnished geodetic survey discs.

682.3.2.2 Placing Monuments

- (1) Excavate holes for monuments by use of a circular auger at the size and depth the plans show or as the engineer directs.
- (2) Remove and dispose of surplus excavation and materials as specified in 205.3.12.

- (3) Fill holes with concrete and strike off flush with the ground surface. Place circular forms and steel reinforcement in the concrete as the plans show. Place geodetic survey discs on monuments while the concrete is still plastic.

682.3.2.3 Protecting and Curing

- (1) Cure exposed portions of cast in place concrete monuments as specified in 415.3.12 except the contractor may use curing compound conforming to 501.2.8.
- (2) Protect placed concrete monuments as specified for concrete pavement as specified in 415.3.14
- (3) Protect cast in place concrete monuments from freezing for 7 days.

682.4 Measurement

- (1) The department will measure bid items under this section as each individual monument acceptably completed.

682.5 Payment

- (1) The department will pay for measured quantities at the contract unit price under the following bid items:

| <u>ITEM NUMBER</u> | <u>DESCRIPTION</u> | <u>UNIT</u> |
|--------------------|------------------------------|-------------|
| 682.0100 | Salvage Geodetic Survey Disc | EACH |
| 682.0200 | Geodetic Survey Monument | EACH |

- (2) Payment for the Salvage Geodetic Survey Disc bid item is full compensation for removing and salvaging; and shipping or delivering the disc to the Geodetic Surveys Unit. Removing existing survey monuments will be paid separately under the Removing Concrete Bases bid item. Removing existing survey marker posts will be paid separately under the Removing Delineators and Markers bid item.
- (3) Payment for the Geodetic Survey Monument bid item is full compensation for staking; providing concrete; providing steel reinforcement; for placing department-furnished geodetic discs; and for excavating and backfilling.

710 General Concrete QMP

710.3 Certification Requirements

Replace paragraph (1) and add paragraph (2) effective with the November 2025 letting.

- (1) Have a person certified from the Highway Technician Certification Program Portland Cement Concrete Technician 1 (HTCP - PCCTEC-1) or Assistant Certified Technician Program - Portland Cement Concrete (ACT-PCC) working under a certified technician, on the project site, prepared and equipped to perform required sampling and testing whenever placing concrete.
- (2) The department will have a certified HTCP Portland Cement Concrete Mix Design Certification (PCC MDC) technician to review and approve concrete mixes.

710.4 Concrete Mixes

Replace subsection with the following effective with the November 2025 letting.

- (1) The contractor is responsible for mix performance.
- (2) At least 7 business days before producing concrete, document that materials conform to 501 unless the engineer allows or individual QMP specifications provide otherwise. Include the following:
 - 1. For mixes: quantities per cubic yard expressed as SSD weights and net water, water to cementitious material ratio, air content, and SAM number.
 - 2. For cementitious materials and admixtures: type, brand, and source.
 - 3. For aggregates: absorption, oven-dried specific gravity, SSD bulk specific gravity, wear, soundness, light weight pieces, freeze thaw test results if required, and air correction factor. Submit component aggregate gradations, aggregate proportions, and target combined blended aggregate gradations using the following:
 - DT2220 for combined aggregate gradations.
 - DT2221 for optimized aggregate gradations.
 - 4. For optimized concrete mixtures:
 - Complete the worksheets within DT2221 according to the directions.
 - Ensure the optimized aggregate gradations and the optimized mix design conform to WisDOT specifications and pass the built-in tests within DT2221.
 - Verify slip-form mixture workability and conformance to specifications through required trial batching.
 - Submit the completed DT2221 to the engineer electronically. Include the trial batch test results with the mix design submittal.

5. For high early strength (HES) concrete mixtures required by contract, complete the HES mix modification section in the DT2220 or DT2221 form.
- (3) Document mix adjustments daily during concrete production.
- (4) Prepare, notify, and submit mixture design modifications to the engineer. Do not place material until the documentation is submitted and, when required, written approval of the mixture design modifications.
- (5) Report concrete mix design modifications as classified in levels as specified in table 710-1.

TABLE 710-1 MIX DESIGN MODIFICATION NOTIFICATION

| NOTIFICATION | LEVEL I | LEVEL II | NEW MIX DESIGN DURING PROJECT |
|--|--------------|------------------------------|-------------------------------|
| Prepare, notify, and submit mix design to Engineer | Prior to use | 3 business days prior to use | 5 business days prior to use |
| Approval required before placement | No | Yes | Yes |

- (6) A mix design modification is when any modification occurs for a specific level as specified in table 710-2.
- (7) Dependent on the modification performed, documentation is required to be submitted to the engineer as specified in table 710-3.
- (8) For HES concrete, conform as specified in table 710-4.
- (9) HES concrete is not eligible for 28-day strength incentives.
- (10) Submit concrete mix designs into MRS as specified in 701.1.2.7.

TABLE 710-2 MATERIAL MIX DESIGN MODIFICATIONS

Replace Table 710-2, included with the November 2025 ASP-6, with the following effective with the February 2026 letting.

| MODIFICATION TYPE | | LEVEL I | LEVEL II | NEW MIX DESIGN DURING PROJECT |
|-------------------|--|------------------|------------------|-------------------------------|
| Change in: | Water source | X | | |
| | Cement source, type, or brand | | | X |
| | Total cementitious | | X ^[1] | X |
| | Aggregate blend | X | | |
| | Aggregate source | | | X |
| | SCM replacement rate | | X | |
| | SCM type and supplier | | | X |
| | Fly ash source (different class) | | | X |
| | Fly ash source (same class for pavements and cast-in-place barriers) | | X | |
| | Fly ash source (same class for structures) | | | X |
| | Slag source (same grade) | | X | |
| | Slag source (different grade) | | X | |
| | Chemical admixture manufacturer or product name ^[2] | | | X |
| | Chemical admixture dosage rates | X ^[3] | | X |
| Removal of: | SCM | | | X |
| | Chemical admixture other than Type B or D | | | X ^[3,4] |
| | Type B or Type D chemical admixture | X ^[3] | X ^[4] | |
| Addition of: | Non-fading, color pigment | X | | |
| | Chemical admixture other than Type B or D | | | X ^[3,4] |
| | Type B or Type D chemical admixture | X ^[3] | X ^[4] | |
| | New SCM | | | X |

^[1] For HES/SHES concrete modification only.

^[2] Not including Type B or Type D chemical admixture.

^[3] When admixture is from the concrete admixture APL and the dosage rate is within recommended dosage rates as specified in the APL. If the admixture dosage rate is outside of recommended dosage rates as specified in the APL, BTS approval is required before use.

^[4] Not furnished from the APL.

TABLE 710-3 MIX DESIGN MODIFICATION DOCUMENTATION

Replace Table 710-3, included with the November 2025 ASP-6, with the following effective with the February 2026 letting.

| NEW REQUIRED DOCUMENTATION | LEVEL I | LEVEL II | NEW MIX DESIGN DURING PROJECT |
|---|------------------|----------------------|-------------------------------|
| Results from trial batching if required | | | X |
| Amendment to the quality control plan | X | X | X |
| Water source name and report | X ^[1] | | |
| Cement mill certification | | | X |
| WisDOT aggregate quality report | | | X |
| SCM mill certification | | X | X |
| Chemical additive product data sheet | X | X | X |
| Updated DT2220 or DT2221 form | X | X | |
| New DT2220 or DT2221 form | | | X |
| New mixture ID: Contractor ID and WisDOT ID | | X | X |
| New maturity curve | X ^[2] | X | X |
| New lot/sublot layout ^[3] | | X ^[3,4,5] | X |

^[1] Water for concrete report conforming to 501.2.6 for private wells or surface water sources.

^[2] Required only when using a retarder.

^[3] Required for HES concrete.

^[4] Required when changing the SCM replacement rate.

^[5] Not required for SCM source change of same Class/Grade in pavements and cast-in-place barrier projects.

TABLE 710-4 OPTIONS FOR HES CONCRETE

| SCENARIO | MIXTURE MODIFICATION | |
|--|--|--|
| When the contract requires, or the HES is directed by the department | OPTION 1 ^[1] | Add 94 to 282 lb/cy of cement ^[2] |
| | OPTION 2 | Use Type III cement |
| When the engineer allows HES when requested by the contractor in writing | Add up to 282 lb/cy of cement ^[1,2] | |

^[1] Adjust water to maintain workability without raising the w/cm ratio.

^[2] Add to a previously accepted mixture.

710.5.6.2 Contractor Control Charts

710.5.6.2.1 General

Replace subsection with the following effective with the November 2025 letting.

- (1) Test aggregate gradations during concrete production except as allowed for small quantities under 710.2. Perform required contractor testing using non-random samples.
- (2) Sample aggregates from either the conveyor belt or from the working face of the stockpiles.
- (3) Complete aggregate testing as specified in table 710-5. Submit one pre-placement test within five days before anticipated placement. Include this gradation on the control charts.
- (4) Report gradation test results and provide control charts to the engineer within 1 business day of obtaining the sample. Submit results to the engineer and electronically into MRS as specified in 701.1.2.7.
- (5) Conduct aggregate testing at the minimum frequency specified in table 710-5 for each mix design, except as allowed for small quantities in 710.2. The contractor's concrete production tests can be used for the same mix design on multiple contracts.

TABLE 710-5 QC AGGREGATE TESTING FREQUENCY

Replace Table 710-5, included with the November 2025 ASP-6, with the following effective with the February 2026 letting.

| CONCRETE CLASSIFICATION | PRE-PLACEMENT TESTING | PLACEMENT TESTING | |
|--|---|--|--|
| Class I: Pavement ^[1] | One pre-placement test per aggregate source | Hand Placement: ≤ 250 CY > 250 CY | One test per cumulative 250 CY One test per day |
| Class I: Structures ^{[2], [3], [4]} | | Slip Formed Placement ≤ 1500 CY > 1500 CY | One test per day Two tests per day |
| Class I: Cast-in Place Barrier ^[1] | | One test per cumulative 150 CY, maximum one test per day | |
| Class II: Base | One pre-placement test per aggregate source | ≤ 250 CY > 250 CY | One test per cumulative 250 CY One test per day |
| Class II: Structure Repair - Joints | | One test per calendar week of production | |
| Class II: Concrete Overlay | | One test per cumulative 150 CY, maximum one test per day | |
| Class II: Pavement Repair | | One test per 400 CY, minimum one test per 10 business days, maximum one test per day | |
| Class II: Pavement Replacement | | | |
| Class II: Base Patching | | | |
| Class II: Ancillary | | | |
| Class II: Structure Repair – Curb & Surface ^[5] | | Replacement testing only | |

^[1] Frequency is based on project daily production rate.

^[2] Aggregate gradation testing must be performed on a per contract basis. If multiple structures are on the same contract and use the same aggregate source, then the samples must be collected based on cumulative concrete contract quantities within the same concrete classification.

^[3] WTM T255 (Fine and Coarse) required for each aggregate sample.

^[4] Calculate trial batch weights for each mix design when production begins and whenever the moisture content of the fine or coarse aggregate changes by more than 0.5 percent, adjust the batch weights to maintain the design w/cr ratio.

^[5] Aggregate gradation must meet the gradation previously approved by the engineer.

710.5.6.3 Department Acceptance Testing

Replace subsection with the following effective with the November 2025 letting.

- (1) Department testing frequency is based on the quantity of each mix design placed under each individual WisDOT contract as specified table 710-6. Aggregate gradation testing must be performed on a per contract basis.
- (2) The department will split each sample, test for acceptance, and retain the remainder for a minimum of 10 calendar days.
- (3) The department will obtain the sample and deliver to the regional testing lab in the same day. The department will report gradation test results to the contractor within 1 business day of being delivered to the lab. The department and contractor can agree to an alternative test result reporting timeframe. Document alternative timeframes in the contractor's quality control plan.
- (4) Additional samples may be taken at the engineer's discretion due to a changed condition.
- (5) If multiple bid items on the same contract use the same aggregate source, then the samples must be collected based on cumulative concrete contract quantities within the same concrete classification.
- (6) Department will test small quantities at the minimum frequency specified in table 710-7.

TABLE 710-6 QV AGGREGATE TESTING FREQUENCY

| CONCRETE CLASSIFICATION | PLACEMENT TESTING |
|--------------------------------|--|
| Class I: Pavement | One test per placement day for first 5 days of placement. - If all samples are passing, reduced testing frequency is applied. - Reduced frequency: One test per calendar week of placement |
| Class I: Structures | One test per 250 CY placed. - Minimum of one test per contract for substructure - Minimum of one test per contract for superstructure |
| Class I: Cast-in-Place Barrier | One test per 500 CY placed |
| Class II: Concrete Overlay | One test per 250 CY - Maximum one test per day |
| Class II: Base | No minimum testing |
| Class II: Structure Repair | |
| Class II: Pavement Repair | |
| Class II: Pavement Replacement | |
| Class II: Base Patching | |
| Class II: Ancillary | |

TABLE 710-7 QV AGGREGATE TESTING FREQUENCY FOR SMALL QUANTITIES

| CONCRETE CLASSIFICATION | PLACEMENT TESTING |
|--------------------------------|---|
| Class I: Pavement | One test on the first day of placement. |
| Class I: Structures | |
| Class I: Cast-in-Place Barrier | |

710.5.7 Corrective Action

710.5.7.1 Optimized Aggregate Gradations

Replace subsection with the following effective with the November 2025 letting.

- (1) If the contractor's 4-point running average or a department test result of the volumetric percent retained exceeds the tarantula curve limits by less than or equal to 1.0 percent on a single sieve size or limits listed in the additional requirements for optimized aggregate gradation in 501.2.7.4.2 table 501-4, notify the other party immediately and do the following:

Option A:

1. Perform corrective action documented in the QC plan or as the engineer approves.
2. Document and provide corrective action results to the engineer as soon as they are available.
3. Department will conduct two tests within the next business day after corrective action. Department will provide test results to contractor after each test is complete.
4. If blended aggregate gradations are within the tarantula curve limits by the second department test:
 - Continue with concrete production.
 - Include a break in the 4-point running average.
 - For Class I Pavements: The department will discontinue reduced frequency testing and will test at a frequency of 1 test per placement day. Once 5 consecutive samples are passing at the 1 test per placement day frequency, the reduced frequency testing will be reapplied.
5. If blended aggregate gradations are not within the tarantula curve limits by the second department test:
 - If the contract does not require optimized aggregate gradation under 501.2.7.4.2.1(2), stop concrete production and submit either a modified optimized aggregate gradation mix design or a new optimized aggregate gradation mix design or a new combined aggregate gradation mix design.
 - If the contract requires optimized aggregate gradations under 501.2.7.4.2.1(2), stop concrete production and submit a modified optimized aggregate gradation mix design or a new optimized aggregate gradation mix design.

Option B:

1. Submit a modified optimized aggregate gradation mix design or a new optimized aggregate gradation mix design.
2. Restart control charts for new mix design.

- (2) If the contractor's 4-point running average or a department test result of the volumetric percent retained exceeds the tarantula curve limits by more than 1.0 percent on one or more sieves, stop concrete production and submit a modified mix design or a new mix design.
- (3) Both the department and contractor must sample and test aggregate of the modified mix design or a new mix design at the frequency specified in 710.5.6.1.

710.5.7.2 Combined Aggregate Gradations

Replace subsection with the following effective with the November 2025 letting.

- (1) If the contractor's 4-point running average or a department test result of the percent passing by weight exceeds the combined aggregate gradation limits by less than or equal to 1.0 percent on a single sieve size, do the following:
1. Notify the other party immediately.
 2. Perform corrective action documented in the QC plan or as the engineer approves.
 3. Document and provide corrective action results to the engineer as soon as they are available.
 4. The department will conduct two tests within the next business day after corrective action is complete.
 5. If blended aggregate gradations are within the combined aggregate gradation limits by the second department test:
 - Continue with concrete production.
 - Include a break in the 4-point running average.
 - For Class I Pavements: The department will discontinue reduced frequency testing and will test at a frequency of 1 test per placement day. Once 5 consecutive samples are passing at the 1 test per placement day frequency, the reduced frequency testing will be reapplied.
 6. If blended aggregate gradations are not within the combined aggregate gradation limits by the second department test, stop concrete production and submit a modified mix design or a new mix design.
- (2) If the contractor's 4-point running average or a department test result of the percent passing by weight exceeds the combined aggregate gradation limits by more than 1.0 percent on one or more sieves, stop concrete production and submit a modified mix design or a new mix design.
- (3) Both the department and contractor must sample and test aggregate of the modified mix design or a new mix design at the frequency specified in 710.5.6.1.

715 QMP Concrete Pavement, Cast-in-Place Barrier and Structures

715.3.1.2 Lot and Sublot Definition

715.3.1.2.1 General

Replace subsection with the following effective with the November 2025 letting.

- (1) Designate the location and size of all lots before placing concrete. Ensure that no lot contains concrete of more than one mix design or placement method defined as follows:

Mix design change A modification to the mix requiring the engineer's approval under 710.4(5).
For paving and barrier mixes, follow 710.4(4) and 710.4(5) for concrete mixture design modifications.

Placement method Either slip-formed, not slip-formed, or placed under water.

- (2) Lots and sublots include ancillary concrete placed integrally with the class I concrete.

715.3.1.2.3 Lots by Cubic Yard

Replace paragraph (3) with the following effective with the November 2025 letting.

- (3) An undersized lot is eligible for incentive payment under 715.5 if the lot has 4 or more sublots for that lot.

715.3.2 Strength Evaluation

715.3.2.1 General

Replace subsection with the following effective with the November 2025 letting.

- (1) The department will make pay adjustments for strength on a lot-by-lot basis using the compressive strength of contractor QC cylinders or the flexural strength of contractor QC beams.
- (2) The department will evaluate the sublot for possible removal and replacement if the 28-day sublot average strength is:
- Pavement (Compressive): < 2500 psi
 - Pavement (Flexural): < 500 psi
 - Structure: < f'_c - 500 psi ^[1]

- Cast-in-Place Barrier: < f'c - 500 psi ^[1]
^[1] f'c is design strength found in plans or specials.

715.5 Payment

715.5.1 General

Replace paragraph (4) and add paragraphs (8) and (9) effective with the November 2025 letting.

- (4) The department will adjust pay for each lot using PWL of the 28-day subplot average strengths for that lot. The department will measure PWL relative to strength lower specification limits as follows:
 - Compressive strength of 3700 psi for pavements.
 - Flexural strength of 650 psi for pavements.
 - Compressive strength of 4000 psi for super structures and barrier, or as shown in the plan details.
 - Compressive strength of 3500 psi for substructures and culverts, or as shown in the plan details.
- (5) The department will not pay a strength incentive for concrete that is nonconforming in another specified property, for ancillary concrete accepted based on tests of class I concrete, or for high early strength concrete unless placed in pavement gaps as allowed under 715.3.1.2.2.
- (6) Submit test results to the department electronically using MRS software. The department will verify contractor data before determining pay adjustments.
- (7) All coring and testing costs under 715.3.2.2 including filling core holes and providing traffic control during coring are incidental to the contract.
- (8) If the contractor combines concrete of varying specified strengths in a single lot/sublot, the highest specified strength of the related concrete shall be used to calculate pay incentive/disincentive.
- (9) The department will apply one price adjustment to a given quantity of material. If the quantity in question is subject to more than one nonconforming test, apply the adjustment with the greater price reduction. In the absence of exact quantities affected by the subplot test results, pay reductions will be applied to the entire subplot.

715.5.4 Pay Adjustments for Nonconforming Air Content, Temperature, and Delivery Time

Add subsection 715.5.4 (Pay Adjustments for Nonconforming Air Content, Temperature, and Delivery Time) effective with the November 2025 letting.

- (1) The department will adjust pay for each subplot with nonconforming QC air content and temperature test results as specified in table 715-2 and table 715-3. If the quantity in question is subject to more than one of the following conditions, apply the adjustment with the greater price reduction.
- (2) For high temperatures, the engineer may consider the effectiveness of the contractor's temperature control plan and the contractor's compliance with their temperature control plan before taking a price reduction.
- (3) A 25% price reduction to the concrete invoice price will be applied if concrete is placed after the delivery time exceeds the limit specified in 501.3.5.2.

TABLE 715-2 PRICE REDUCTIONS FOR NONCONFORMING AIR CONTENT

| LIMITS (%) | | PERCENT PRICE REDUCTION OF THE CONTRACT UNIT PRICE |
|---------------------|---------------------------|--|
| Above Specification | >= 0.5 ^[1] | 10 |
| | 0.1 to 0.4 ^[1] | 5 |
| Below Specification | 0.1 to 0.5 | 20 |
| | 0.6 to 1.0 | 30 |
| | > 1.0 | 50 or remove and replace |

^[1] Evaluate the strength data. If the strengths are acceptable, do not take a price reduction for high air content. Contractor is responsible to provide additional strength data, if necessary.

TABLE 715-3 PRICE REDUCTIONS FOR NONCONFORMING TEMPERATURE

Replace Table 715-3, included with the November 2025 ASP-6, with the following effective with the February 2026 letting.

| CONCRETE TEMPERATURE (F) ^[1] | | PRICE REDUCTION (%) |
|---|---------------|---------------------|
| Upper Temperature Limit ^[2] | > 80 to <= 85 | 10 |
| | > 85 | 25 |
| Lower Temperature Limit | 45 to <= 50 | 10 |
| | < 45 | 25 |

^[1] Applies only for Concrete Structures and Cast-in-Place Barrier.

^[2] If a written temperature control plan outlining the actions by the contractor to control concrete temperature at the point of placement exceeding 80 F is submitted and followed to effectively control the temperature, the upper temperature limit is increased by 10 F for price reductions for nonconforming temperature.

716 QMP Ancillary Concrete

716.2 Materials

716.2.1 Class II Concrete

Replace paragraph (2) with the following effective with the November 2025 letting.

(2) Perform random QC testing at the following frequencies:

1. Test air content, temperature, and slump a minimum of once per 100 cubic yards for each mix design and placement method.
2. Cast one set of 3 cylinders per 200 cubic yards for each mix design and placement method. Cast a minimum of one set of 3 cylinders per contract for each mix design and placement method. Random 28-day compressive strength cylinders are not required for HES or SHES concrete.
3. For deck overlays, perform tests and cast cylinders once per 50 cubic yards of grade E concrete placed.
4. For concrete base, one set of tests and one set of cylinders per 250 cubic yards.

The department will allow concrete startup test results for small quantities as specified in 710.2(1). Cast one set of 3 cylinders if using startup testing for acceptance.

716.2.2 Class III Concrete

Replace paragraph (1) with the following effective with the November 2025 letting.

(1) Acceptance of class III concrete is based on DT2220/ DT2221 certification page. Submit the certificate of compliance at least 3 business days before producing concrete along with the initial concrete mix documentation as required under 710.4(2).

Bid Items

500 Bid Items

Remove the following bid items effective with the February 2026 letting.

| | | |
|----------|--|------|
| 522.2363 | Culvert Pipe Reinforced Concrete Horizontal Elliptical Class HE-III 63x98-Inch | LF |
| 522.2663 | Apron Endwalls for Culvert Pipe Reinforced Concrete Horizontal Elliptical 63x98-Inch | EACH |

600 Bid Items

Remove the following bid item effective with the February 2026 letting.

| | | |
|----------|--|----|
| 608.2363 | Storm Sewer Pipe Reinforced Concrete Horizontal Elliptical Class HE-III 63x98-Inch | LF |
|----------|--|----|

Add the following bid item effective with the November 2025 letting.

| | | |
|----------|----------------------|------|
| 611.0613 | Inlet Covers Type DW | EACH |
|----------|----------------------|------|

Remove the following bid items effective with the November 2025 letting.

| | | |
|----------|---|------|
| 621.0100 | Landmark Reference Monuments | EACH |
| 621.1100 | Landmark Reference Monuments and Cast-Iron Covers | EACH |
| 621.1200 | Landmark Reference Monuments and Aluminum Covers | EACH |

Remove the following bid items effective with the November 2025 letting.

| | | |
|----------|------------------------------------|-----|
| 643.0405 | Traffic Control Barricades Type I | DAY |
| 643.0410 | Traffic Control Barricades Type II | DAY |
| 643.0800 | Traffic Control Arrow Boards | DAY |

Add the following bid items effective with the November 2025 letting.

| | | |
|----------|--|-----|
| 643.0810 | Traffic Control Connected Arrow Boards | DAY |
| 643.1220 | Traffic Control Connected Work Zone Start and End Location Markers | DAY |

Add the following bid item effective with the February 2026 letting.

| | | |
|----------|-------------------------------------|------|
| 657.0348 | Poles Type 9 - Special Over Height | EACH |
| 657.0353 | Poles Type 10 - Special Over Height | EACH |

Add the following bid items effective with the November 2025 letting.

| | | |
|----------|--|------|
| 680.0100 | Public Land Survey Monument Verify and Reset | EACH |
| 682.0100 | Salvage Geodetic Survey Disk | EACH |
| 682.0200 | Geodetic Survey Monuments | EACH |

ERRATA

204.3.1.3 Salvaging or Disposal of Materials

Replace paragraph (2) to correct link from 203.3.4 to 203.3.5 effective with the November 2024 letting.

- (2) Dispose of concrete, stone, brick, and other material not designated for salvage as specified for disposing of materials under 203.3.5.

204.3.2.3 Removing Buildings

Replace paragraph (2) to correct link from 203.3.4 to 203.3.5 effective with the November 2024 letting.

- (2) Buildings removed and materials resulting from building removal become the contractor’s property unless the contract specifies otherwise. Dispose of unclaimed and removed material as specified for disposing of materials in 203.3.5.

335.3.2 Rubblizing

Replace paragraph (6) to correct link from 203.3.4 to 203.3.5 effective with the November 2024 letting.

- (6) Remove reinforcing steel exposed at the surface by cutting below the surface and disposing of the steel as specified in 203.3.5. Do not remove unexposed reinforcing steel.

335.3.3 Compacting

Replace paragraph (2) to correct link from 203.3.4 to 203.3.5 effective with the November 2024 letting.

- (2) Remove loose asphaltic patching material, joint fillers, expansion material, or other similar materials from the compacted surface. Also remove pavement or patches that have a maximum dimension greater than or equal to 6 inches that are either not well seated or projecting more than one inch. Dispose of removed material as specified in 203.3.5.

460.3.3.2 Pavement Density Determination

Replace change description annotation with the following to revise implementation date. This change is effective with the November 2025 letting.

Add information to 460.3.3.2(1) and (3). Add reference to CMM, WTM, and WTP H-002. WTP H-002 contains the subplot layouts formerly in CMM 815. Definition of a lot is now defined here (460.3.3.2(3)) instead of CMM. This change was implemented via ASP-6 with the February 2024 letting.

602.3.6 Concrete Rumble Strips

Replace paragraph (5) to correct link from 203.3.4 to 203.3.5 effective with the November 2024 letting.

- (5) At the end of each workday, move equipment and material out of the clear zone and sweep or vacuum the traveled way pavement and shoulder areas. Sweep away or vacuum up milling debris before opening adjacent lanes to traffic. Dispose of waste material as specified in 203.3.5; do not place on the finished shoulder surface.

604.2 Materials

Replace paragraph (1) with the following information to remove line and link for crushed aggregate effective with the November 2024 letting. The crushed aggregate gradation information for slope paving is now found in 604.2(3).

- (1) Furnish materials conforming to the following:

| | |
|------------------------------|---------|
| Water..... | 501.2 |
| Select crushed material..... | 312.2 |
| Concrete..... | 501 |
| Reinforcement..... | 505 |
| Expansion joint filler..... | 415.2.3 |
| Asphaltic materials..... | 455.2 |

ADDITIONAL SPECIAL PROVISION 7

A. Reporting 1st Tier and DBE Payments During Construction

1. Comply with reporting requirements specified in the department's Civil Rights Compliance, Contractor's User Manual, Sublets and Payments.
2. Report payments to all DBE firms within 10 calendar days of receipt of a progress payment by the department or a contractor for work performed, materials furnished, or materials stockpiled by a DBE firm. Report the payment as specified in A(1) for all work satisfactorily performed and for all materials furnished or stockpiled.
3. Report payments to all first tier subcontractor relationships within 10 calendar days of receipt of a progress payment by the department for work performed. Report the payment as specified in A(1) for all work satisfactorily performed.
4. All tiers shall report payments as necessary to comply with the DBE payment requirement as specified in A(2).
5. DBE firms must enter all payments to DBE and non-DBE firms regardless of tier.
6. Require all first tier relationships, DBE firms and all other tier relationships necessary to comply with the DBE payment requirement in receipt of a progress payment by contractor to acknowledge receipt of payment as specified in A(1), (2), (3) and (4).
7. All agreements made by a contractor shall include the provisions in A(1), (2), (3), (4), (5), and (6), and shall be binding on all first tier subcontractor relationships, all contractors and subcontractors utilizing DBE firms on the project, and all payments from DBE firms.

B. Costs for conforming to this special provision are incidental to the contract.

NOTE: CRCS Prime Contractor payment is currently not automated and will need to be manually loaded into the Civil Rights Compliance System. Copies of prime contractor payments received (check or ACH) will have to be forwarded to paul.ndon@dot.wi.gov within 5 days of payment receipt to be logged manually.

***Additionally, for information on Subcontractor Sublet assignments, Subcontractor Payments and Payment Tracking, please refer to the CRCS Payment and Sublets manual at:

<https://wisconsindot.gov/Documents/doing-bus/civil-rights/labornwage/crcs-payments-sublets-manual.pdf>

ADDITIONAL SPECIAL PROVISION 9

Electronic Certified Payroll or Labor Data Submittal

- (1) Use the department's Civil Rights Compliance System (CRCS) for projects with a LET date on or before December 2024 and AASHTOWare Project Civil Rights and Labor (AWP CRL) for projects with a LET date on or after January 2025 to electronically submit Certified Payroll Reports for contracts with federal funds and labor data for contracts with state funds only. Details are available online through the department's Highway Construction Contractor Information (HCCI) site on the Labor, Wages, and EEO Information page at:
<https://wisconsin.gov/Pages/doing-bus/civil-rights/labornwage/default.aspx>
- (2) Ensure that all tiers of subcontractors, including all trucking firms, either submit their weekly certified payroll reports (contracts with federal funds) or labor data (contracts with state funds only) electronically through CRCS or AWP CRL. These payrolls or labor data are due within seven calendar days following the close of the payroll period. Every firm providing physical labor towards completing the project is a subcontractor under this special provision.
- (3) Upon receipt of contract execution, promptly make all affected firms aware of the requirements under this special provision and arrange for them to receive CRCS or AWP CRL training as they are about to begin their submittals. The department will provide training either in a classroom setting at one of our regional offices, via the online AWP Knowledge Base, or by telephone. to schedule CRCS specific training. The AWP Knowledge Base is at: <https://awpkb.dot.wi.gov/>
- (4) The department will reject all paper submittals for information required under this special provision. All costs for conforming to this special provision are incidental to the contract.
- (5) For firms wishing to export payroll/labor data from their computer system, have their payroll coordinator contact:
 - For CRCS: Paul Ndon at paul.ndon@dot.wi.gov. Information about exporting payroll/labor data. Not every contractor's payroll system can produce export files. For details, see Section 4.8 CPR Auto Submit (Data Mapping) on pages 49-50; 66-71 of the CRCS Payroll Manual at: <https://wisconsin.gov/Documents/doing-bus/civil-rights/labornwage/crcs-payroll-manual.pdf>
 - For AWP CRL: Contact AWP Support at awpsupport@dot.wi.gov. Additional information can be found in the AWP Knowledge Base at <https://awpkb.dot.wi.gov/Content/crl/Payrolls-PrimesAndSubs/PayrollXMLFileCreationProcess.htm>

NON-DISCRIMINATION PROVISIONS

During the performance of this contract, the contractor, for itself, its assignees, and successors in interest (hereinafter referred to as the "contractor") agrees as follows:

1. Compliance with Regulations: The contractor (hereinafter includes consultants) will comply with the Acts and the Regulations relative to Non-discrimination in Federally-assisted programs of the U.S. Department of Transportation, Federal Highway Administration, as they may be amended from time to time, which are herein incorporated by reference and made a part of this contract.

2. Non-discrimination: The contractor, with regard to the work performed by it during the contract, will not discriminate on the grounds of race, color, or national origin in the selection and retention of subcontractors, including procurements of materials and leases of equipment. The contractor will not participate directly or indirectly in the discrimination prohibited by the Acts and the Regulations, including employment practices when the contract covers any activity, project, or program set forth in Appendix B of 49 CFR Part 21.

3. Solicitations for Subcontracts, Including Procurements of Materials and Equipment: In all solicitations, either by competitive bidding, or negotiation made by the contractor for work to be performed under a subcontract, including procurements of materials, or leases of equipment, each potential subcontractor or supplier will be notified by the contractor of the contractor's obligations under this contract and the Acts and the Regulations relative to Non-discrimination on the grounds of race, color, or national origin.

4. Information and Reports: The contractor will provide all information and reports required by the Acts, the Regulations, and directives issued pursuant thereto and will permit access to its books, records, accounts, other sources of information, and its facilities as may be determined by the Recipient or the Federal Highway Administration to be pertinent to ascertain compliance with such Acts, Regulations, and instructions. Where any information required of a contractor is in the exclusive possession of another who fails or refuses to furnish the information, the contractor will so certify to the Recipient or the Federal Highway Administration, as appropriate, and will set forth what efforts it has made to obtain the information.

5. Sanctions for Noncompliance: In the event of a contractor's noncompliance with the Non-discrimination provisions of this contract, the Recipient will impose such contract sanctions as it or the Federal Highway Administration may determine to be appropriate, including, but not limited to:

- a. Withholding payments to the contractor under the contract until the contractor complies; and/or
- b. Cancelling, terminating, or suspending a contract, in whole or in part.

6. Incorporation of Provisions: The contractor will include the provisions of paragraphs one through six in every subcontract, including procurements of materials and leases of equipment, unless exempt by the Acts, the Regulations and directives issued pursuant thereto. The contractor will take action with respect to any subcontract or procurement as the Recipient or the Federal Highway Administration may direct as a means of enforcing such provisions including sanctions for noncompliance. Provided, that if the contractor becomes involved in, or is threatened with litigation by a subcontractor, or supplier because of such direction, the contractor may request the Recipient to enter into any litigation to protect the interests of the Recipient. In addition, the contractor may request the United States to enter into the litigation to protect the interests of the United States.

During the performance of this contract, the contractor, for itself, its assignees, and successors in interest (hereinafter referred to as the "contractor") agrees to comply with the following non-discrimination statutes and authorities; including but not limited to:

Pertinent Non-Discrimination Authorities:

- Title VI of the Civil Rights Act of 1964 (42 U.S.C. § 2000d et seq., 78 stat. 252), (prohibits discrimination on the basis of race, color, national origin); and 49 CFR Part 21.
- The Uniform Relocation Assistance and Real Property Acquisition Policies Act of 1970, (42 U.S.C. § 4601), (prohibits unfair treatment of persons displaced or whose property has been acquired because of Federal or Federal-aid programs and projects);
- Federal-Aid Highway Act of 1973, (23 U.S.C. § 324 et seq.), (prohibits discrimination on the basis of sex);
- Section 504 of the Rehabilitation Act of 1973, (29 U.S.C. § 794 et seq.), as amended, (prohibits discrimination on the basis of disability); and 49 CFR Part 27;
- The Age Discrimination Act of 1975, as amended, (42 U.S.C. § 6101 et seq.), (prohibits discrimination on the basis of age);
- Airport and Airway Improvement Act of 1982, (49 USC § 471, Section 47123), as amended, (prohibits discrimination based on race, creed, color, national origin, or sex);
- The Civil Rights Restoration Act of 1987, (PL 100-209), (Broadened the scope, coverage and applicability of Title VI of the Civil Rights Act of 1964, The Age Discrimination Act of 1975 and Section 504 of the Rehabilitation Act of 1973, by expanding the definition of the terms "programs or activities" to include all of the programs or activities of the Federal-aid recipients, sub-recipients and contractors, whether such programs or activities are Federally funded or not);
- Titles II and III of the Americans with Disabilities Act, which prohibit discrimination on the basis of disability in the operation of public entities, public and private transportation systems, places of public accommodation, and certain testing entities (42 U.S.C. §§ 12131-12189) as implemented by Department of Transportation regulations at 49 C.F.R. parts 37 and 38;
- The Federal Aviation Administration's Non-discrimination statute (49 U.S.C. § 47123) (prohibits discrimination on the basis of race, color, national origin, and sex);
- Executive Order 12898, Federal Actions to Address Environmental Justice in Minority Populations and Low-Income Populations, which ensures Non-discrimination against minority populations by discouraging programs, policies, and activities with disproportionately high and adverse human health or environmental effects on minority and low-income populations;
- Executive Order 13166, Improving Access to Services for Persons with Limited English Proficiency, and resulting agency guidance, national origin discrimination includes discrimination because of Limited English proficiency (LEP). To ensure compliance with Title VI, you must take reasonable steps to ensure that LEP persons have meaningful access to your programs (70 Fed. Reg. at 74087 to 74100);
- Title IX of the Education Amendments of 1972, as amended, which prohibits you from discriminating because of sex in education programs or activities (20 U.S.C. 1681 et seq).

DOMESTIC MATERIALS PREFERENCE PROVISION

Domestic Materials Preference (in accordance with the Buy America Act per [23 CFR 635.410](#), and the Build America-Buy America Act (BABA) per [2 CFR Part 184](#), and [2 CFR Part 200](#)) shall be articles, materials, or supplies permanently incorporated in this project as classified in the following four categories, and as described in the Construction and Materials Manual (CMM):

1. Iron and Steel

To be considered domestic, all steel and iron products used, and all products predominantly manufactured from steel or iron must be produced in the United States in accordance with the steel and iron product standards in 23 CFR 635.410.

This includes smelting, coating, bending, shaping, and all other manufacturing processes performed on the product. Coating includes all processes which protect or enhance the value of the material to which the coating is applied.

Products that are predominantly iron or steel or a combination of both as defined in 23 CFR 635.410 are considered Steel and Iron products and must comply with this section.

2. Construction Materials

To be considered domestic, all construction materials used must be produced in the United States in accordance with the construction material standards in [2 CFR 184.6](#):

- **Non-ferrous metals:** All manufacturing processes, from initial smelting or melting through final shaping, coating, and assembly, occurred in the United States.
- **Plastic and polymer-based products:** All manufacturing processes, from initial combination of constituent plastic or polymer-based inputs, or, where applicable, constituent composite materials, until the item is in its final form, occurred in the United States.
- **Glass:** All manufacturing processes, from initial batching and melting of raw materials through annealing, cooling, and cutting, occurred in the United States.
- **Fiber optic cable (including drop cable):** All manufacturing processes, from the initial ribboning (if applicable), through buffering, fiber stranding and jacketing, occurred in the United States. All manufacturing processes also include the standards for glass and optical fiber, but not for non-ferrous metals, plastic and polymer-based products, or any others.
- **Optical fiber:** All manufacturing processes, from the initial preform fabrication stage through the completion of the draw, occurred in the United States.
- **Lumber:** All manufacturing processes, from initial debarking through treatment and planing, occurred in the United States.
- **Drywall:** All manufacturing processes, from initial blending of mined or synthetic gypsum plaster and additives through cutting and drying of sandwiched panels, occurred in the United States.
- **Engineered wood:** All manufacturing processes from the initial combination of constituent materials until the wood product is in its final form, occurred in the United States.

3. Manufactured Products

To be considered domestic, all manufactured products used must be produced in the United States as defined in [23 CFR 635.410\(c\)\(1\)\(vii\)](#):

- For projects with let dates on or after October 1, 2025, the final step in the manufacturing process must occur in the United States.
- For projects with let dates on or after October 1, 2026, the final step in the manufacturing process must occur in the United States and the cost of the components of the manufactured product that are mined, produced, or manufactured in the United States must be greater than 55 percent of the total cost of all components of the manufactured product.

Manufactured products means articles, materials, or supplies that have been processed into a specific form and shape, or combined with other articles, materials, or supplies to create a product with different properties than the individual articles, materials, or supplies. If an item is classified as an iron or steel product, an excluded material, or construction material, then it is not a manufactured product. An article, material, or supply classified as a manufactured product may include components that are iron or steel

products, excluded materials, or construction materials. Mixtures of excluded materials delivered to a work site without final form for incorporation into a project are not a manufactured product.

Items that consist of two or more construction materials that have been combined together through a manufacturing process, and items that include at least one construction material combined with a material that is not a construction material (including steel/iron) through a manufacturing process are treated as manufactured products, rather than as construction materials.

Products that are classified as predominantly iron or steel do not meet the definition of a manufactured product and must comply with section 1.

With respect to precast concrete products **that are classified as manufactured products**, components of precast concrete products that consist wholly or predominantly of iron or steel or a combination of both shall meet the requirements of section 1. The cost of such components shall be included in the applicable calculation for purposes of determining whether the precast concrete product is produced in the United States.

With respect to intelligent transportation systems and other electronic hardware systems that are installed in the highway right of way or other real property **and classified as manufactured products**, the cabinets or other enclosures of such systems that consist wholly or predominantly of iron or steel or a combination of both shall meet the requirements of section 1. The cost of cabinets or other enclosures shall be included in the applicable calculation for purposes of determining whether systems referred to in the preceding sentence are produced in the United States.

4. Temporary and Excluded Materials

Temporary materials, and excluded materials meeting the definition of Section 70917(c) Materials as defined in [2 CFR 184](#), do not have any domestic materials requirements. Section 70917(c) Materials means cement and cementitious materials; aggregates such as stone, sand, or gravel; or aggregate binding agents or additives. Mixtures of excluded materials delivered to a work site without final form for incorporation into a project are not a manufactured product.

The classification of an article, material, or supply as falling into one of the categories listed in this section will be made based on its status at the time it is brought to the work site for incorporation into the project. Except as otherwise provided, an article, material, or supply incorporated into an infrastructure project must meet the Domestic Material Preference for only the single category in which it is classified.

Requirements do not preclude a minimal use of foreign steel and iron provided the cost of such materials do not exceed 0.1 percent (0.1%) of the total contract cost or \$2500 whichever is greater. The total contract cost is the contract amount at award.

For each iron or steel product subject to meeting domestic materials requirements, that doesn't fully meet Buy America Act requirements, the following documentation must be provided by the Contractor to verify the foreign steel value. Ensure the threshold is not exceeded and place the documentation in the project files.

- Pay Item,
- Description of associated foreign iron or steel product, or component,
- Invoiced cost of associated foreign iron or steel product, or component, and
- Current cumulative list of all foreign iron or steel products with the total dollar amount of foreign products in relation to the total contract amount.

The minimal use of foreign iron or steel under the minimal usage threshold must be approved by the Engineer prior to incorporation into the project and any associated payment under the contract. The use of foreign iron or steel under the minimal usage threshold does not need to be approved by FHWA. This amount is not considered a waiver to the domestic materials requirements. The Contractor must ensure that the minimal usage amount is not exceeded.

The contractor shall take actions and provide documentation conforming to CMM 228.5 to ensure compliance with this Domestic Material provision.

<https://wisconsindot.gov/rdwy/cmm/cm-02-28.pdf>

Effective with October 2025 Letting

Upon completion of the project, certify to the engineer, in writing using department form DT4567 that all iron and steel, construction materials, and manufactured products conform to this domestic material provision.

Form DT4567 is available at: <https://wisconsin.gov/Documents/formdocs/dt4567.docx>

Attach a list of foreign iron or steel and their associated costs to the certification form using the Domestic Material Exemption Tracking Tool, available at:

<https://wisconsin.gov/hccidocs/contracting-info/buy-america-exemption-tracking-tool.xlsx>



Proposal Schedule of Items

Proposal ID: 20260414008 Project(s): 5710-00-72, 5710-00-73

Federal ID(s): N/A, N/A

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

| Proposal Line Number | Item ID Description | Approximate Quantity and Units | Unit Price | Bid Amount |
|----------------------|--|--------------------------------|------------|------------|
| 0002 | 201.0205 Grubbing | 3.000 STA | _____. | _____. |
| 0004 | 203.0100 Removing Small Pipe Culverts | 8.000 EACH | _____. | _____. |
| 0006 | 203.0220 Removing Structure (structure) 01. C-62-327 | 1.000 EACH | _____. | _____. |
| 0008 | 203.0220 Removing Structure (structure) 02. Pedestrian Bridge | 1.000 EACH | _____. | _____. |
| 0010 | 203.0260 Removing Structure Over Waterway Minimal Debris (structure) B-62-238 | 1.000 EACH | _____. | _____. |
| 0012 | 203.0330 Debris Containment (structure) 01. B-62-51 | 1.000 EACH | _____. | _____. |
| 0014 | 204.0100 Removing Concrete Pavement | 3.000 SY | _____. | _____. |
| 0016 | 204.0115 Removing Asphaltic Surface Butt Joints | 3,452.000 SY | _____. | _____. |
| 0018 | 204.0120 Removing Asphaltic Surface Milling | 240,450.000 SY | _____. | _____. |
| 0020 | 204.0150 Removing Curb & Gutter | 104.000 LF | _____. | _____. |
| 0022 | 204.0155 Removing Concrete Sidewalk | 64.000 SY | _____. | _____. |
| 0024 | 204.0165 Removing Guardrail | 1,665.000 LF | _____. | _____. |
| 0026 | 204.0220 Removing Inlets | 1.000 EACH | _____. | _____. |
| 0028 | 204.0245 Removing Storm Sewer (size) 01. 18-Inch | 98.000 LF | _____. | _____. |
| 0030 | 204.0260 Abandoning Inlets | 1.000 EACH | _____. | _____. |



Proposal Schedule of Items

Proposal ID: 20260414008 Project(s): 5710-00-72, 5710-00-73

Federal ID(s): N/A, N/A

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

| Proposal Line Number | Item ID Description | Approximate Quantity and Units | Unit Price | Bid Amount |
|----------------------|--|--------------------------------|------------|------------|
| 0032 | 205.0100 Excavation Common | 882.000 CY | _____. | _____. |
| 0034 | 206.2001 Excavation for Structures Culverts (structure) B-62-238 | 1.000 EACH | _____. | _____. |
| 0036 | 206.5001 Cofferdams (structure) 01. B-62-238 | 1.000 EACH | _____. | _____. |
| 0038 | 210.2500 Backfill Structure Type B | 13.000 TON | _____. | _____. |
| 0040 | 211.0101 Prepare Foundation for Asphaltic Paving (project) 01. 5710-00-72 | 1.000 EACH | _____. | _____. |
| 0042 | 211.0101 Prepare Foundation for Asphaltic Paving (project) 01. 5710-00-73 | 1.000 EACH | _____. | _____. |
| 0044 | 213.0100 Finishing Roadway (project) 01. 5710-00-72 | 1.000 EACH | _____. | _____. |
| 0046 | 213.0100 Finishing Roadway (project) 01. 5710-00-73 | 1.000 EACH | _____. | _____. |
| 0048 | 305.0110 Base Aggregate Dense 3/4-Inch | 13,295.000 TON | _____. | _____. |
| 0050 | 305.0120 Base Aggregate Dense 1 1/4-Inch | 950.000 TON | _____. | _____. |
| 0052 | 311.0110 Breaker Run | 4.000 TON | _____. | _____. |
| 0054 | 325.0100 Pulverize and Relay | 223,560.000 SY | _____. | _____. |
| 0056 | 455.0605 Tack Coat | 16,897.000 GAL | _____. | _____. |
| 0058 | 460.0105.S HMA Percent Within Limits (PWL) Test Strip Volumetrics | 1.000 EACH | _____. | _____. |



Proposal Schedule of Items

Proposal ID: 20260414008 Project(s): 5710-00-72, 5710-00-73

Federal ID(s): N/A, N/A

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

| Proposal Line Number | Item ID Description | Approximate Quantity and Units | Unit Price | Bid Amount |
|----------------------|--|--------------------------------|------------|------------|
| 0060 | 460.0110.S HMA Percent Within Limits (PWL) Test Strip Density | 2.000 EACH | _____. | _____. |
| 0062 | 460.2000 Incentive Density HMA Pavement | 1,960.000 DOL | 1.00000 | 1,960.00 |
| 0064 | 460.2005 Incentive Density PWL HMA Pavement | 42,660.000 DOL | 1.00000 | 42,660.00 |
| 0066 | 460.2007 Incentive Density HMA Pavement Longitudinal Joints | 16,500.000 DOL | 1.00000 | 16,500.00 |
| 0068 | 460.2010 Incentive Air Voids HMA Pavement | 45,310.000 DOL | 1.00000 | 45,310.00 |
| 0070 | 460.5224 HMA Pavement 4 LT 58-28 S | 47,830.000 TON | _____. | _____. |
| 0072 | 465.0105 Asphaltic Surface | 17.000 TON | _____. | _____. |
| 0074 | 465.0110 Asphaltic Surface Patching | 38.000 TON | _____. | _____. |
| 0076 | 465.0120 Asphaltic Surface Driveways and Field Entrances | 480.000 TON | _____. | _____. |
| 0078 | 465.0125 Asphaltic Surface Temporary | 75.000 TON | _____. | _____. |
| 0080 | 465.0560 Asphaltic Rumble Strips, Centerline | 81,352.000 LF | _____. | _____. |
| 0082 | 502.3200 Protective Surface Treatment | 903.000 SY | _____. | _____. |
| 0084 | 502.3210 Pigmented Surface Sealer | 209.000 SY | _____. | _____. |
| 0086 | 504.0100 Concrete Masonry Culverts | 4.000 CY | _____. | _____. |
| 0088 | 504.0900 Concrete Masonry Endwalls | 10.000 CY | _____. | _____. |



Proposal Schedule of Items

Proposal ID: 20260414008 Project(s): 5710-00-72, 5710-00-73

Federal ID(s): N/A, N/A

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

| Proposal Line Number | Item ID Description | Approximate Quantity and Units | Unit Price | Bid Amount |
|----------------------|---|--------------------------------|------------|------------|
| 0090 | 505.0600 Bar Steel Reinforcement HS Coated Structures | 440.000 LB | _____. | _____. |
| 0092 | 509.0301 Preparation Decks Type 1 | 64.000 SY | _____. | _____. |
| 0094 | 509.0302 Preparation Decks Type 2 | 28.000 SY | _____. | _____. |
| 0096 | 509.0500 Cleaning Decks | 903.000 SY | _____. | _____. |
| 0098 | 509.1500 Concrete Surface Repair | 102.000 SF | _____. | _____. |
| 0100 | 509.2000 Full-Depth Deck Repair | 5.000 SY | _____. | _____. |
| 0102 | 509.2500 Concrete Masonry Overlay Decks | 71.000 CY | _____. | _____. |
| 0104 | 509.9025.S Epoxy Injection Crack Repair | 12.000 LF | _____. | _____. |
| 0106 | 509.9026.S Cored Holes 2-Inch Diameter | 2.000 EACH | _____. | _____. |
| 0108 | 511.1200 Temporary Shoring (structure) 01. B-62-238 | 65.000 SF | _____. | _____. |
| 0110 | 516.0500 Rubberized Membrane Waterproofing | 3.000 SY | _____. | _____. |
| 0112 | 520.8700 Cleaning Culvert Pipes | 4.000 EACH | _____. | _____. |
| 0114 | 520.9700.S Culvert Pipe Liners (size) 01. 24-Inch | 64.000 LF | _____. | _____. |
| 0116 | 520.9750.S Cleaning Culvert Pipes for Liner Verification | 1.000 EACH | _____. | _____. |
| 0118 | 521.1018 Apron Endwalls for Culvert Pipe Steel 18-Inch | 4.000 EACH | _____. | _____. |



Proposal Schedule of Items

Proposal ID: 20260414008 Project(s): 5710-00-72, 5710-00-73

Federal ID(s): N/A, N/A

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

| Proposal Line Number | Item ID Description | Approximate Quantity and Units | Unit Price | Bid Amount |
|----------------------|--|--------------------------------|------------|------------|
| 0120 | 521.1024 Apron Endwalls for Culvert Pipe Steel 24-Inch | 2.000 EACH | _____. | _____. |
| 0122 | 521.1030 Apron Endwalls for Culvert Pipe Steel 30-Inch | 6.000 EACH | _____. | _____. |
| 0124 | 521.3118 Culvert Pipe Corrugated Steel 18-Inch | 66.000 LF | _____. | _____. |
| 0126 | 521.3130 Culvert Pipe Corrugated Steel 30-Inch | 182.000 LF | _____. | _____. |
| 0128 | 522.1018 Apron Endwalls for Culvert Pipe Reinforced Concrete 18-Inch | 1.000 EACH | _____. | _____. |
| 0130 | 522.1024 Apron Endwalls for Culvert Pipe Reinforced Concrete 24-Inch | 1.000 EACH | _____. | _____. |
| 0132 | 522.2619 Apron Endwalls for Culvert Pipe Reinforced Concrete Horizontal Elliptical 19x30-Inch | 1.000 EACH | _____. | _____. |
| 0134 | 601.0411 Concrete Curb & Gutter 30-Inch Type D | 737.000 LF | _____. | _____. |
| 0136 | 601.0557 Concrete Curb & Gutter 6-Inch Sloped 36-Inch Type D | 16.000 LF | _____. | _____. |
| 0138 | 601.0584 Concrete Curb & Gutter 4-Inch Sloped 30-Inch Type TBT | 92.000 LF | _____. | _____. |
| 0140 | 601.0600 Concrete Curb Pedestrian | 16.000 LF | _____. | _____. |
| 0142 | 602.0405 Concrete Sidewalk 4-Inch | 829.000 SF | _____. | _____. |
| 0144 | 602.0415 Concrete Sidewalk 6-Inch | 81.000 SF | _____. | _____. |
| 0146 | 602.0505 Curb Ramp Detectable Warning Field Yellow | 60.000 SF | _____. | _____. |



Proposal Schedule of Items

Proposal ID: 20260414008 Project(s): 5710-00-72, 5710-00-73

Federal ID(s): N/A, N/A

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

| Proposal Line Number | Item ID Description | Approximate Quantity and Units | Unit Price | Bid Amount |
|----------------------|---|--------------------------------|------------|------------|
| 0148 | 602.0605 Curb Ramp Detectable Warning Field Radial Yellow | 11.000 SF | _____ | _____ |
| 0150 | 602.1500 Concrete Steps | 60.000 SF | _____ | _____ |
| 0152 | 602.3010 Concrete Surface Drains | 2.000 CY | _____ | _____ |
| 0154 | 603.8000 Concrete Barrier Temporary Precast Delivered | 532.000 LF | _____ | _____ |
| 0156 | 603.8125 Concrete Barrier Temporary Precast Installed | 1,032.000 LF | _____ | _____ |
| 0158 | 606.0200 Riprap Medium | 90.000 CY | _____ | _____ |
| 0160 | 606.0300 Riprap Heavy | 224.000 CY | _____ | _____ |
| 0162 | 608.0418 Storm Sewer Pipe Reinforced Concrete Class IV 18-Inch | 61.000 LF | _____ | _____ |
| 0164 | 608.0424 Storm Sewer Pipe Reinforced Concrete Class IV 24-Inch | 54.000 LF | _____ | _____ |
| 0166 | 608.2414 Storm Sewer Pipe Reinforced Concrete Horizontal Elliptical Class HE-IV 14x23-Inch | 41.000 LF | _____ | _____ |
| 0168 | 608.2419 Storm Sewer Pipe Reinforced Concrete Horizontal Elliptical Class HE-IV 19x30-Inch | 41.000 LF | _____ | _____ |
| 0170 | 611.0545 Manhole Covers Type L | 1.000 EACH | _____ | _____ |
| 0172 | 611.0624 Inlet Covers Type H | 3.000 EACH | _____ | _____ |
| 0174 | 611.0642 Inlet Covers Type MS | 3.000 EACH | _____ | _____ |



Proposal Schedule of Items

Proposal ID: 20260414008 Project(s): 5710-00-72, 5710-00-73

Federal ID(s): N/A, N/A

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

| Proposal Line Number | Item ID Description | Approximate Quantity and Units | Unit Price | Bid Amount |
|----------------------|---|--------------------------------|------------|------------|
| 0176 | 611.2004 Manholes 4-FT Diameter | 1.000 EACH | _____. | _____. |
| 0178 | 611.3004 Inlets 4-FT Diameter | 3.000 EACH | _____. | _____. |
| 0180 | 611.3901 Inlets Median 1 Grate | 1.000 EACH | _____. | _____. |
| 0182 | 611.3902 Inlets Median 2 Grate | 1.000 EACH | _____. | _____. |
| 0184 | 612.0902.S Insulation Board Polystyrene (inch) 01.2-Inch | 194.000 SY | _____. | _____. |
| 0186 | 614.0010 Barrier System Grading Shaping Finishing | 9.000 EACH | _____. | _____. |
| 0188 | 614.0200 Steel Thrie Beam Structure Approach | 21.000 LF | _____. | _____. |
| 0190 | 614.0345 Steel Plate Beam Guard Short Radius | 25.000 LF | _____. | _____. |
| 0192 | 614.0390 Steel Plate Beam Guard Short Radius Terminal | 1.000 EACH | _____. | _____. |
| 0194 | 614.0400 Adjusting Steel Plate Beam Guard | 607.000 LF | _____. | _____. |
| 0196 | 614.0905 Crash Cushions Temporary | 4.000 EACH | _____. | _____. |
| 0198 | 614.0950 Replacing Guardrail Posts and Blocks | 10.000 EACH | _____. | _____. |
| 0200 | 614.0951 Replacing Guardrail Rail and Hardware | 100.000 LF | _____. | _____. |
| 0202 | 614.0952 Replacing Guardrail Reflectors | 6.000 EACH | _____. | _____. |
| 0204 | 614.2300 MGS Guardrail 3 | 875.000 LF | _____. | _____. |



Proposal Schedule of Items

Proposal ID: 20260414008 Project(s): 5710-00-72, 5710-00-73

Federal ID(s): N/A, N/A

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

| Proposal Line Number | Item ID Description | Approximate Quantity and Units | Unit Price | Bid Amount |
|----------------------|--|--------------------------------|------------|------------|
| 0206 | 614.2330 MGS Guardrail 3 K | 488.000 LF | _____. | _____. |
| 0208 | 614.2340 MGS Guardrail 3 L | 339.000 LF | _____. | _____. |
| 0210 | 614.2350 MGS Guardrail Short Radius | 34.000 LF | _____. | _____. |
| 0212 | 614.2500 MGS Thrie Beam Transition | 118.000 LF | _____. | _____. |
| 0214 | 614.2610 MGS Guardrail Terminal EAT | 12.000 EACH | _____. | _____. |
| 0216 | 614.2630 MGS Guardrail Short Radius Terminal | 1.000 EACH | _____. | _____. |
| 0218 | 618.0100 Maintenance and Repair of Haul Roads (project) 01. 5710-00-72 | 1.000 EACH | _____. | _____. |
| 0220 | 619.1000 Mobilization | 1.000 EACH | _____. | _____. |
| 0222 | 624.0100 Water | 639.000 MGAL | _____. | _____. |
| 0224 | 625.0500 Salvaged Topsoil | 769.000 SY | _____. | _____. |
| 0226 | 628.1504 Silt Fence | 1,794.000 LF | _____. | _____. |
| 0228 | 628.1520 Silt Fence Maintenance | 1,794.000 LF | _____. | _____. |
| 0230 | 628.1905 Mobilizations Erosion Control | 4.000 EACH | _____. | _____. |
| 0232 | 628.1910 Mobilizations Emergency Erosion Control | 2.000 EACH | _____. | _____. |
| 0234 | 628.2008 Erosion Mat Urban Class I Type B | 769.000 SY | _____. | _____. |
| 0236 | 628.7005 Inlet Protection Type A | 7.000 EACH | _____. | _____. |



Proposal Schedule of Items

Proposal ID: 20260414008 Project(s): 5710-00-72, 5710-00-73

Federal ID(s): N/A, N/A

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

| Proposal Line Number | Item ID Description | Approximate Quantity and Units | Unit Price | Bid Amount |
|----------------------|---|--------------------------------|------------|------------|
| 0238 | 628.7010 Inlet Protection Type B | 5.000 EACH | _____. | _____. |
| 0240 | 628.7015 Inlet Protection Type C | 19.000 EACH | _____. | _____. |
| 0242 | 628.7504 Temporary Ditch Checks | 38.000 LF | _____. | _____. |
| 0244 | 628.7555 Culvert Pipe Checks | 81.000 EACH | _____. | _____. |
| 0246 | 629.0210 Fertilizer Type B | 0.600 CWT | _____. | _____. |
| 0248 | 630.0120 Seeding Mixture No. 20 | 21.000 LB | _____. | _____. |
| 0250 | 630.0200 Seeding Temporary | 22.000 LB | _____. | _____. |
| 0252 | 630.0500 Seed Water | 17.000 MGAL | _____. | _____. |
| 0254 | 633.5200 Markers Culvert End | 12.000 EACH | _____. | _____. |
| 0256 | 634.0616 Posts Wood 4x6-Inch X 16-FT | 14.000 EACH | _____. | _____. |
| 0258 | 634.0808 Posts Tubular Steel 2x2-Inch X 8-FT | 2.000 EACH | _____. | _____. |
| 0260 | 637.2210 Signs Type II Reflective H | 11.000 SF | _____. | _____. |
| 0262 | 638.2102 Moving Signs Type II | 15.000 EACH | _____. | _____. |
| 0264 | 638.2602 Removing Signs Type II | 4.000 EACH | _____. | _____. |
| 0266 | 638.3000 Removing Small Sign Supports | 18.000 EACH | _____. | _____. |
| 0268 | 642.5001 Field Office Type B | 1.000 EACH | _____. | _____. |



Proposal Schedule of Items

Proposal ID: 20260414008 Project(s): 5710-00-72, 5710-00-73

Federal ID(s): N/A, N/A

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

| Proposal Line Number | Item ID Description | Approximate Quantity and Units | Unit Price | Bid Amount |
|----------------------|---|--------------------------------|------------|------------|
| 0270 | 643.0300 Traffic Control Drums | 2,260.000 DAY | _____. | _____. |
| 0272 | 643.0420 Traffic Control Barricades Type III | 21,997.000 DAY | _____. | _____. |
| 0274 | 643.0705 Traffic Control Warning Lights Type A | 43,994.000 DAY | _____. | _____. |
| 0276 | 643.0715 Traffic Control Warning Lights Type C | 750.000 DAY | _____. | _____. |
| 0278 | 643.0900 Traffic Control Signs | 43,106.000 DAY | _____. | _____. |
| 0280 | 643.0920 Traffic Control Covering Signs Type II | 34.000 EACH | _____. | _____. |
| 0282 | 643.1050 Traffic Control Signs PCMS | 14.000 DAY | _____. | _____. |
| 0284 | 643.1070 Traffic Control Cones 42-Inch | 360.000 DAY | _____. | _____. |
| 0286 | 643.3165 Temporary Marking Line Paint 6-Inch | 209,746.000 LF | _____. | _____. |
| 0288 | 643.3180 Temporary Marking Line Removable Tape 6-Inch | 1,323.000 LF | _____. | _____. |
| 0290 | 643.3805 Temporary Marking Stop Line Paint 18-Inch | 66.000 LF | _____. | _____. |
| 0292 | 643.5000 Traffic Control | 1.000 EACH | _____. | _____. |
| 0294 | 644.1430 Temporary Pedestrian Surface Plate | 525.000 SF | _____. | _____. |
| 0296 | 644.1605 Temporary Pedestrian Detectable Warning Field | 50.000 SF | _____. | _____. |
| 0298 | 644.1810 Temporary Pedestrian Barricade | 802.000 LF | _____. | _____. |



Proposal Schedule of Items

Proposal ID: 20260414008 Project(s): 5710-00-72, 5710-00-73

Federal ID(s): N/A, N/A

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

| Proposal Line Number | Item ID Description | Approximate Quantity and Units | Unit Price | Bid Amount |
|----------------------|---|--------------------------------|------------|------------|
| 0300 | 645.0120 Geotextile Type HR | 404.000 SY | _____. | _____. |
| 0302 | 646.2040 Marking Line Grooved Wet Ref Epoxy 6-Inch | 275,130.000 LF | _____. | _____. |
| 0304 | 646.6120 Marking Stop Line Epoxy 18-Inch | 118.000 LF | _____. | _____. |
| 0306 | 646.7420 Marking Crosswalk Epoxy Transverse Line 6-Inch | 2,120.000 LF | _____. | _____. |
| 0308 | 646.9000 Marking Removal Line 4-Inch | 2,624.000 LF | _____. | _____. |
| 0310 | 648.0100 Locating No-Passing Zones | 15.620 MI | _____. | _____. |
| 0312 | 650.4000 Construction Staking Storm Sewer | 9.000 EACH | _____. | _____. |
| 0314 | 650.5000 Construction Staking Base | 84,471.000 LF | _____. | _____. |
| 0316 | 650.5500 Construction Staking Curb Gutter and Curb & Gutter | 845.000 LF | _____. | _____. |
| 0318 | 650.6000 Construction Staking Pipe Culverts | 5.000 EACH | _____. | _____. |
| 0320 | 650.6501 Construction Staking Structure Layout (structure) 01. B-62-51 | 1.000 EACH | _____. | _____. |
| 0322 | 650.8000 Construction Staking Resurfacing Reference | 84,471.000 LF | _____. | _____. |
| 0324 | 650.9000 Construction Staking Curb Ramps | 7.000 EACH | _____. | _____. |
| 0326 | 650.9500 Construction Staking Sidewalk (project) 01. 5710-00-72 | 1.000 EACH | _____. | _____. |



Proposal Schedule of Items

Proposal ID: 20260414008 Project(s): 5710-00-72, 5710-00-73

Federal ID(s): N/A, N/A

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

| Proposal Line Number | Item ID Description | Approximate Quantity and Units | Unit Price | Bid Amount |
|----------------------|---|--------------------------------|------------|------------|
| 0328 | 650.9911 Construction Staking Supplemental Control (project) 01. 5710-00-72 | 1.000 EACH | _____. | _____. |
| 0330 | 661.0101 Temporary Traffic Signals for Bridges (structure) 01. B-62-51 | 1.000 EACH | _____. | _____. |
| 0332 | 680.0100 Public Land Reference Monument Verify and Reset | 4.000 EACH | _____. | _____. |
| 0334 | 690.0150 Sawing Asphalt | 766.000 LF | _____. | _____. |
| 0336 | 690.0250 Sawing Concrete | 53.000 LF | _____. | _____. |
| 0338 | 740.0440 Incentive IRI Ride | 31,866.670 DOL | 1.00000 | 31,866.67 |
| 0340 | 999.2005.S Maintaining Bird Deterrent System (station) 01. 81+00 | 1.000 EACH | _____. | _____. |
| 0342 | 999.2005.S Maintaining Bird Deterrent System (station) 02. 107+65 Left | 1.000 EACH | _____. | _____. |
| 0344 | SPV.0060 Special 01. Adjusting Water Valve Boxes | 28.000 EACH | _____. | _____. |
| 0346 | SPV.0060 Special 02. Adjusting Sanitary Manhole Covers | 12.000 EACH | _____. | _____. |
| 0348 | SPV.0060 Special 03. Utility Line Opening | 1.000 EACH | _____. | _____. |
| 0350 | SPV.0060 Special 04. Foam Void Filling | 1.000 EACH | _____. | _____. |
| 0352 | SPV.0090 Special 01. Profile Curb Cut | 88.000 LF | _____. | _____. |
| 0354 | SPV.0090 Special 02. Culvert Pipe Reinforced Concrete Horizontal Elliptical Class HE-IV 43x68-Inch | 120.000 LF | _____. | _____. |



Proposal Schedule of Items

Proposal ID: 20260414008 **Project(s):** 5710-00-72, 5710-00-73

Federal ID(s): N/A, N/A

Section: 0001

Total: _____.

Total Bid: _____.

PLEASE ATTACH ADDENDA HERE