



Wisconsin Department of Transportation

August 1, 2024

Division of Transportation Systems Development

Bureau of Project Development
4822 Madison Yards Way, 4th Floor South
Madison, WI 53705

Telephone: (608) 266-1631

Facsimile (FAX): (608) 266-8459

NOTICE TO ALL CONTRACTORS:

Proposal #01: 5105-16-31
Region Wide Tree Clearing
Varies Locations
NON HWY
Southwest Region Wide

Letting of August 13, 2024

This is Addendum No.01, which provides for the following:

Special Provisions:

Added Special Provisions	
Article No.	Description
21	Site Mobilization, Item SPV.0060.16
22	Site Traffic Control, Item SPV.0060.17.
23	Work on Shoulder or Parking Lane, Item SPV.0060.18
24	Shoulder Closure on Divided Roadway, Item SPV.0060.19
25	Lane Closure With Flagging Operation, Item SPV.0060.20

Deleted Special Provisions	
Article No.	Description
18	Mobilization Area 5, Item SPV.0060.01; Mobilization Area 6, Item SPV.0060.02; Mobilization Area 6, Item SPV.0060.03; Mobilization Area 13, Item SPV.0060.04; Mobilization Area 16, Item SPV.0060.05; Mobilization Area 17, Item SPV.0060.06; Mobilization Area 18, Item SPV.0060.07.
19	Traffic Control Area 4, Item SPV.0060.08; Traffic Control Area 5, Item SPV.0060.09; Traffic Control Area 6, Item SPV.0060.10; Traffic Control Area 12, Item SPV.0060.11; Traffic Control Area 16, Item SPV.0060.12; Traffic Control Area 17, Item SPV.0060.13; Traffic Control Area 18, Item SPV.0060.14

Schedule of Items:

Added Bid Item Quantities					
Bid Item	Item Description	Unit	Proposal Total Prior to Addendum	Quantity Added	Proposal Total After Addendum
SPV.0060.16	Site Mobilization	EACH	0	7	7
SPV.0060.17	Site Traffic Control	EACH	0	29	29

SPV.0060.18	Work on Shoulder or Parking Lane	EACH	0	29	29
SPV.0060.19	Shoulder Closure on Divided Roadway	EACH	0	29	29
SPV.0060.20	Lane Closure with Flagging Operation	EACH	0	29	29

Deleted Bid Item Quantities					
Bid Item	Item Description	Unit	Proposal Total Prior to Addendum	Proposal Quantity Change (-)	Proposal Total After Addendum
SPV.0060.01	Mobilization Area 4	EACH	1	-1	0
SPV.0060.02	Mobilization Area 5	EACH	1	-1	0
SPV.0060.03	Mobilization Area 6	EACH	1	-1	0
SPV.0060.04	Mobilization Area 12	EACH	1	-1	0
SPV.0060.05	Mobilization Area 16	EACH	1	-1	0
SPV.0060.06	Mobilization Area 17	EACH	1	-1	0
SPV.0060.07	Mobilization Area 18	EACH	1	-1	0
SPV.0060.08	Traffic Control Area 4	EACH	1	-1	0
SPV.0060.09	Traffic Control Area 5	EACH	1	-1	0
SPV.0060.10	Traffic Control Area 6	EACH	1	-1	0
SPV.0060.11	Traffic Control Area 12	EACH	1	-1	0
SPV.0060.12	Traffic Control Area 16	EACH	1	-1	0
SPV.0060.13	Traffic Control Area 17	EACH	1	-1	0
SPV.0060.14	Traffic Control Area 18	EACH	1	-1	0

Plan Sheets:

Revised Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of changes to sheet)
10	Updated overview table and map to indicate which areas are released with LET and which areas may be included in future work orders.

Added Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of why sheet was added)
10A	Sheet includes area overview of locations released to be LET (Area 4,5, and 6)

Deleted Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of why sheet was deleted)
11	Sheet included area overview locations not released to be LET (Area 1,2,and 3)

The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.

Sincerely,

Mike Coleman

Proposal Development Specialist
Proposal Management Section

ADDENDUM NO. 01

5105-16-61

August 1, 2024

Special Provisions

18. DELETED

19. DELETED

21. Site Mobilization, Item SPV.0060.01.

A Description

This special provision describes providing mobilization conforming to standard spec 619.

B (Vacant)

C (Vacant)

D Measurement

The department will measure Site Mobilization once for each site acceptably completed.

E Payment

The department will pay for measured quantities at the contract unit price under the following bid items:

ITEM NUMBER	DESCRIPTION	UNIT
SPV.0060.01	Site Mobilization	EACH

Payment for Site Mobilization is full compensation for supplying and providing materials, facilities, and services, and for performing all work necessary to complete this contract bid item.

22. Site Traffic Control, Item SPV.0060.02.

A Description

Provide traffic control conforming to standard spec 643.

B (Vacant)

C (Vacant)

D Measurement

The department will measure Site Traffic Control once for each site acceptably completed.

E Payment

The department will pay for measured quantities at the contract unit price under the following bid item:

ITEM NUMBER	DESCRIPTION	UNIT
SPV.0060.02	Site Traffic Control	EACH

Payment is full compensation for supplying and providing all materials, facilities, and services, and for performing all work necessary to complete this contract bid item.

23. Work on Shoulder or Parking Lane, Item SPV.0060.03.

A Description

This special provision describes providing a traffic control setup as shown in SDD 15D28, "Traffic Control, Work on Shoulder or Parking Lane, Undivided Roadway."

B Materials

Furnish traffic control devices, including Drums and Signs according to the pertinent requirements of standard specification 643.

C Construction

Provide and maintain traffic control devices located where the plans show or engineer directs in accordance with standard specification 643.

D Measurement

The department will measure Work on Shoulder or Parking Lane, Undivided Roadway by each site acceptably completed.

E Payment

The department will pay for measured quantities at the contract unit price under the following bid item:

ITEM NUMBER	DESCRIPTION	UNIT
SPV.0060.02	Work on Shoulder or Parking Lane	EACH

Payment is full compensation for furnishing and maintaining devices as well as costs associated with traffic control required under SPV.0060.02 but not included in SPV.0060.02.

24. Shoulder Closure on Divided Roadway, Item SPV.0060.04.

A Description

This special provision describes providing a traffic control setup as shown in SDD 15D27, "Traffic Control, Shoulder Closure on Divided Roadway, Speeds Greater Than 40 M.P.H."

B Materials

Furnish traffic control devices, including Drums and Signs according to the pertinent requirements of standard specification 643.

C Construction

Provide and maintain traffic control devices located where the plans show or engineer directs in accordance with standard specification 643.

D Measurement

The department will measure Work on Shoulder or Parking Lane, Undivided Roadway by each site acceptably completed.

E Payment

The department will pay for measured quantities at the contract unit price under the following bid item:

ITEM NUMBER	DESCRIPTION	UNIT
SPV.0060.03	Shoulder Closure on Divided Roadway	EACH

Payment is full compensation for furnishing and maintaining devices as well as costs associated with traffic control required under SPV.0060.03 but not included in SPV.0060.03.

25. Lane Closure With Flagging Operation, Item SPV.0060.05.

A Description

This special provision describes providing a traffic control setup as shown in SDD 15C12, "Traffic Control for Lane Closure With Flagging Operation".

B Materials

Furnish traffic control devices, including Signs according to the pertinent requirements of standard specification 643.

C Construction

Provide and maintain traffic control devices located where the plans show or engineer directs in accordance with standard specification 643.

D Measurement

The department will measure Lane Closure With Flagging Operation by each site acceptably completed.

E Payment

The department will pay for measured quantities at the contract unit price under the following bid item:

ITEM NUMBER	DESCRIPTION	UNIT
SPV.0060.03	Lane Closure With Flagging Operation	EACH

Payment is full compensation for furnishing and maintaining devices as well as costs associated with traffic control required under SPV.0060.04 but not included in SPV.0060.04.

Schedule of Items

Attached, dated August 1, 2024, are the revised Schedule of Items Pages 1 – 2.

Plan Sheets

The following 8½ x 11-inch sheets are attached and made part of the plans for this proposal:

Revised: 10

Added: 10A

Deleted: 11

END OF ADDENDUM


Addendum No. 01
ID 5105-16-61
Revised Sheet
August 1, 2024




SOURCE WISDOT


AREA	PROJECT ID	COUNTY	HWY
1*	1690-04-62	GREEN	069
2*	5630-06-73	SAUK	078
3*	5630-06-80	COLUMBIA	078
4	5770-02-71	RICHLAND	130
5	5820-01-68	VERNON	162
6	1011-01-70	DANE	039
7*	1112-02-77	DODGE	151
8*	1204-08-73	DANE	018
9*	1204-08-74	DANE	018
10*	1706-03-80	LAFAYETTE	011
11*	3060-00-74	COLUMBIA	073
12	3320-02-71	ROCK	140
13*	5080-09-73	SAUK	023
14*	5155-02-65	DANE	014
15*	5750-06-70	RICHLAND	058
16	5780-03-61	CRAWFORD	131
17	5780-03-72	CRAWFORD	131
18	5780-03-81	CRAWFORD	131
19*	5845-16-72	DANE	051
20*	7605-06-62	MONROE	021
21*	1112-06-75	DODGE	151
22*	1706-06-71	GRANT	011
23*	3060-03-71	DANE	073
24*	5330-02-73	GRANT	080
25*	5710-00-72	VERNON	082
26*	5880-00-75	MONROE	012
27*	5110-06-70	VERNON	131
28*	5180-00-73	CRAWFORD	60
29*	5340-00-74	ROCK	081

* indicates that this area is not part of the initial LET but may be included in future work orders.

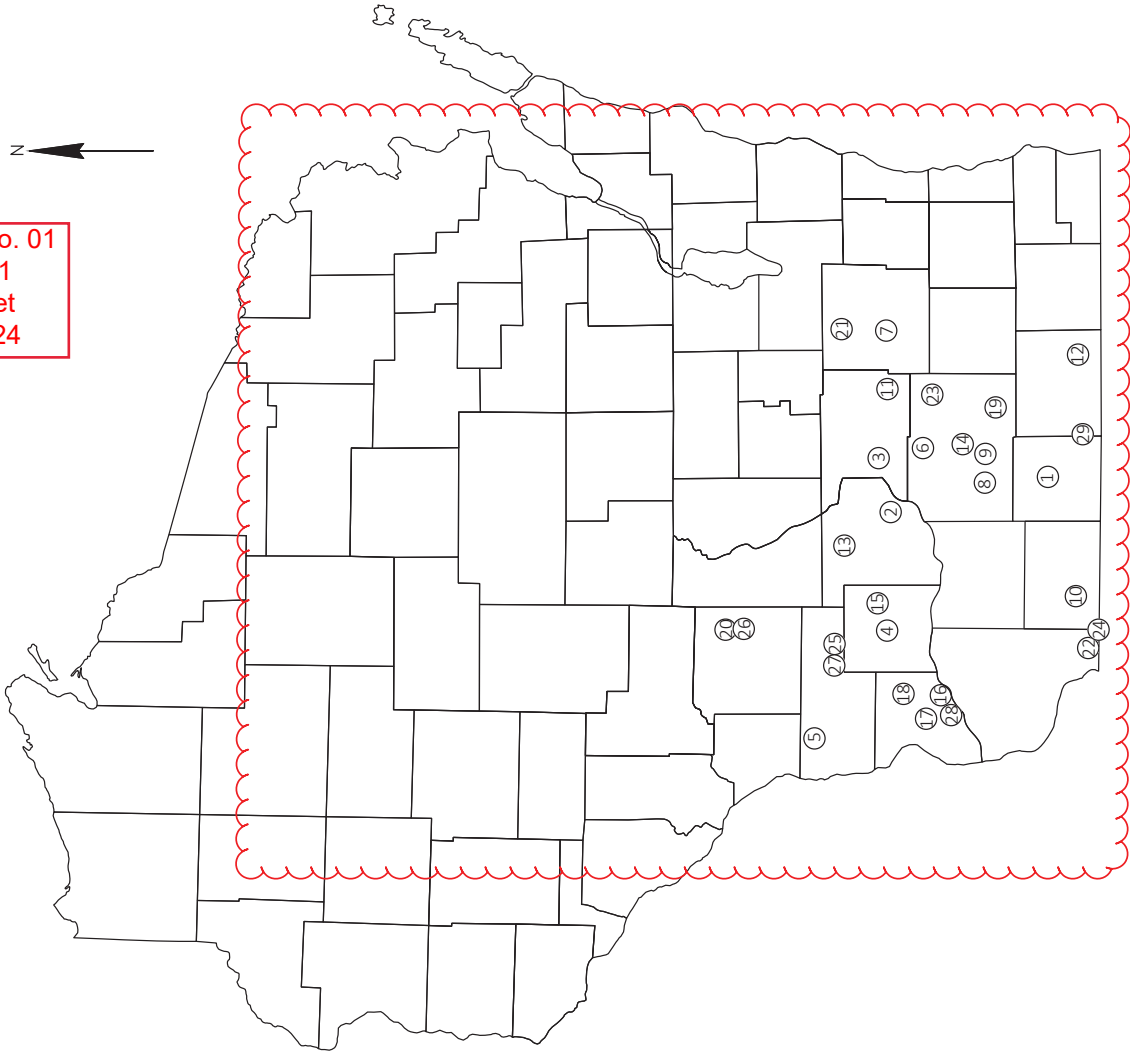

AREA 6
DANE COUNTY
IH 039

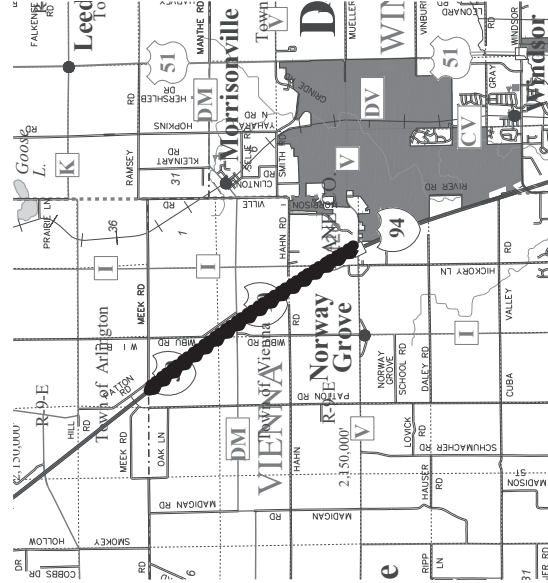

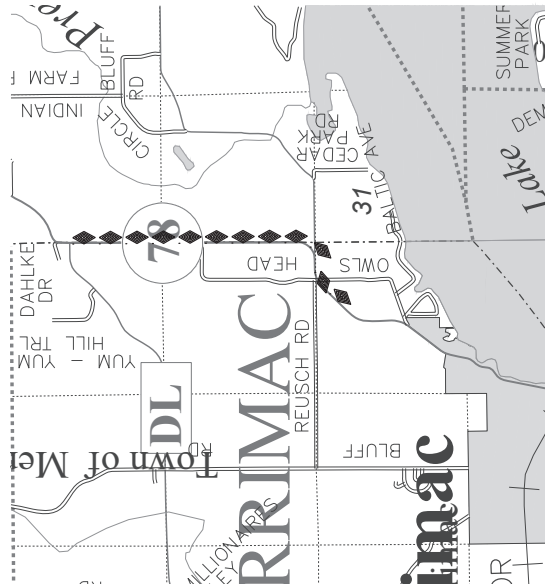

DELETED SHEET

Addendum No. 01
ID 5105-16-61
Deleted Sheet 11
August 1, 2024



Proposal Schedule of Items

Page 1 of 2

Proposal ID: 20240813001 Project(s): 5105-16-61

Federal ID(s): N/A

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0002	201.0105 Clearing	137.000 STA	_____.	_____.
0004	201.0120 Clearing	178.000 ID	_____.	_____.
0006	213.0100 Finishing Roadway (project) 01. 5105-16-61	1.000 EACH	_____.	_____.
0008	618.0100 Maintenance and Repair of Haul Roads (project) 01. 5105-16-61	1.000 EACH	_____.	_____.
0010	627.0200 Mulching	21,875.000 SY	_____.	_____.
0012	628.1504 Silt Fence	875.000 LF	_____.	_____.
0014	628.1520 Silt Fence Maintenance	875.000 LF	_____.	_____.
0016	628.6510 Soil Stabilizer Type B	4.500 ACRE	_____.	_____.
0046	SPV.0060 Special 15. Semi-Permanent Restoration	7.000 EACH	_____.	_____.
0048	SPV.0060 Special 16. Site Mobilization	7.000 EACH	_____.	_____.
0050	SPV.0060 Special 17. Site Traffic Control	29.000 EACH	_____.	_____.
0052	SPV.0060 Special 18. Work on Shoulder or Parking Lane	29.000 EACH	_____.	_____.
0054	SPV.0060 Special 19. Shoulder Closure on Divided Roadway	29.000 EACH	_____.	_____.
0056	SPV.0060 Special 20. Lane Closure with Flagging Operation	29.000 EACH	_____.	_____.

Section: 0001

Total:

_____.

Total Bid: _____.