



Wisconsin Department of Transportation

October 22, 2024

Division of Transportation Systems Development

Bureau of Project Development
4822 Madison Yards Way, 4th Floor South
Madison, WI 53705

Telephone: (608) 266-1631
Facsimile (FAX): (608) 266-8459

NOTICE TO ALL CONTRACTORS:

Proposal #37: 6998-13-73, WISC 2025057
C Stevens Point, West Zinda Drive
Rocky Run Creek Bridge B-49-0061
Local Street
Portage County

Letting of November 12, 2024

This is Addendum No. 01, which provides for the following:

Special Provisions:

Added Special Provisions	
Article No.	Description
18	Asphaltic Surface, Item 465.0105

Schedule of Items:

Revised Bid Item Quantities					
Bid Item	Item Description	Unit	Proposal Total Prior to Addendum	Proposal Quantity Change (-)	Proposal Total After Addendum
509.2500	Concrete Masonry Overlay Decks	CY	51	1	52

Added Bid Item Quantities					
Bid Item	Item Description	Unit	Proposal Total Prior to Addendum	Quantity Added	Proposal Total After Addendum
465.0105	Asphaltic Surface	TON	0	295	295

Deleted Bid Item Quantities					
Bid Item	Item Description	Unit	Proposal Total Prior to Addendum	Proposal Quantity Change (-)	Proposal Total After Addendum
460.6222	HMA Pavement 2 MT 58-28 S	TON	180	-180	0
460.6244	HMA Pavement 4 MT 58-34 S	TON	115	-115	0
502.0100	Concrete Masonry Bridges	CY	1	-1	0

Plan Sheets:

Revised Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of changes to sheet)
2	General Notes (Updated General Notes to include Asphaltic Surface)
4	Typical Sections (Updated legend to include Asphaltic Surface)
5	Typical Sections (Updated legend to include Asphaltic Surface)
15	Miscellaneous Quantities (Updated to Asphaltic Surface Bid Item)
68	Typical Section & Quantities (Updated Concrete Masonry Bid Items)

The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.

Sincerely,

Mike Coleman

Proposal Development Specialist
Proposal Management Section

ADDENDUM NO. 01

6998-13-73

October 22, 2024

Special Provisions

18. Asphaltic Surface.

Replace standard spec 465.2 (1) with the following:

Under the Asphaltic Surface bid item submit a mix design. Furnish asphaltic mixture meeting the requirements specified for HMA Pavement Type HMA MT under standard spec 460.2; except the engineer will not require the contractor to conform to the quality management program specified under standard spec 460.2.8. Use tack coat as required under 450.3.2.7.

ncr-465-005 (20220530)

Schedule of Items

Attached, dated October 22, 2024, are the revised Schedule of Items Pages 1 – 5.

Plan Sheets

The following 8½ x 11-inch sheets are attached and made part of the plans for this proposal:

Revised: 2, 4, 5, 15, and 68.

END OF ADDENDUM

UTILITIES CONTACTS

ATC
AT&T WISCONSIN
COMMUNICATIONS
CHARLES BARTELT
411 7TH STREET
RACINE, WI 53403
PHONE: 920-375-9172
EMAIL: DVOSEB@ATCLLC.COM

SPECTRUM
COMMUNICATIONS
JUSTIN MONROE-JIMENEZ
2701 DANIELS STREET
MADISON, WI 53718
PHONE: 608-288-6843
EMAIL: CHTR_WI_CONST@CHARTER.COM

TDS METROCOM
COMMUNICATIONS
RICKY SCHMIT
7208 SYNERGY COURT, SUITE B
WESTON, WI 54276
PHONE: 715-660-1604
EMAIL: RICKY.SCHMIT@TDS TELECOM.COM

WPS-ELECTRIC
ELECTRIC
UTILITY MANAGER
P.O. BOX 19001
GREEN BAY, WI 54307
PHONE: 920-433-1513
EMAIL: UTILITIESLOCATION@WISCONSINPUBLICSERVICE.COM

WPS-GAS
GAS
UTILITY MANAGER
P.O. BOX 19001
GREEN BAY, WI 54307
PHONE: 920-433-1513
EMAIL: UTILITIESLOCATION@WISCONSINPUBLICSERVICE.COM

WISCONSIN DNR LIAISON

JAY SCHIEFELBEIN
NORTHEAST REGIONAL HEADQUARTERS
2984 SHAWANO AVENUE
GREEN BAY, WI 54313
PHONE: 920-360-3784
EMAIL: JEREMIAH.SCHIEFELBEIN@WISCONSIN.GOV

LOCAL CONTACT

SCOTT BEDUHN
CITY OF STEVENS POINT
1515 STRONGS AVENUE
STEVENS POINT, WI 54481
PHONE: 715-346-1561
EMAIL: SBEDUHN@STEVENSPOINT.COM

DESIGN CONTACT

JAMES RHOD-DRUGALIS
AECOM
1350 DEXING WAY, STE 100
MIDDLETON, WI 53562
PHONE: 570-357-8172
EMAIL: JAMES.DRUGALIS@AECOM.COM

GENERAL NOTES

THE LOCATIONS OF EXISTING UTILITY INSTALLATIONS AS SHOWN ON THE PLANS ARE APPROXIMATE. THERE MAY BE OTHER UTILITY INSTALLATIONS WITHIN THE PROJECT AREA THAT ARE NOT SHOWN. CONTRACTOR WILL BE RESPONSIBLE FOR RESHAPING AND SEEDING ANY PREVIOUSLY GRASSED AREAS WHICH ARE DISTURBED BY OPERATIONS. OUTSIDE OF THE NORMAL CONSTRUCTION LIMITS. BASE AGGREGATE DENSE 3/4-INCH CALCULATIONS ARE BASED ON A UNIT WEIGHT OF 2.1 TONS/CY. BASE AGGREGATE DENSE 1 1/4-INCH CALCULATIONS ARE BASED ON A UNIT WEIGHT OF 2.0 TONS/CY. ASPHALTIC SURFACE WEIGHT CALCULATIONS ARE BASED ON A UNIT WEIGHT OF 112 LBS/SY/INCH. NO TREES OR SHRUBS ARE TO BE REMOVED WITHOUT THE APPROVAL OF THE ENGINEER. RIGHT OF WAY INFORMATION SHOWN ON THE PLANS IS APPROXIMATE.

THE CONTRACTOR SHALL PROTECT ALL SURVEY MARKERS. NO SURVEY MARKERS ARE TO BE REMOVED UNLESS APPROVED BY THE ENGINEER. WHEN THE QUANTITY OF THE ITEMS OF BASE AGGREGATE, SUBBASE OR ASPHALTIC SURFACING IS MEASURED FOR PAYMENT BY THE TON OR CUBIC YARD, THE DEPTH OR THE THICKNESS OF THE MATERIAL AS DIRECTED BY THE ENGINEER.

EROSION CONTROL FEATURES AS SHOWN IN THE PLANS ARE AT APPROXIMATE LOCATIONS. EXACT LOCATIONS WILL BE DETERMINED BY THE CONTRACTOR'S EROSION CONTROL IMPLEMENTATION PLAN (ECIP) AND APPROVED BY THE ENGINEER. MAINTAIN EROSION CONTROL MEASURES UNTIL SUCH A TIME AS THE ENGINEER DETERMINES THE MEASURE IS NO LONGER NECESSARY.

THE CONTRACTOR'S PAVING OPERATION SHALL BE CONSISTENT WITH THE TYPICAL SECTIONS AND CONSTRUCTED TO PREVENT LONGITUDINAL JOINTS FROM BEING LOCATED WITHIN A DRIVING OR TURNING LANE.

PRIOR TO PLACEMENT OF GUARDRAIL, THE SHOULDERS SHALL BE IN PLACE, SHAPED AND COMPACTED.

TRAFFIC CONTROL DEVICES SHALL BE ADJUSTED TO FIT FIELD CONDITIONS AS DIRECTED BY THE ENGINEER. THE CONTRACTOR SHALL NOT OPERATE BEYOND THE SLOPE INTERCEPTS AS SHOWN ON THE PLANS WHEN ADJACENT TO WETLANDS, WATERWAYS, OR ENVIRONMENTALLY SENSITIVE AREAS.

WETLANDS, WATERWAYS, AND OTHER ENVIRONMENTALLY SENSITIVE AREAS SHALL BE PROTECTED AT ALL TIMES. DO NOT DRIVE OR STORE EQUIPMENT, OR STORE CONSTRUCTION MATERIALS IN THESE SITES.

RUNOFF COEFFICIENT TABLE

	HYDROLOGIC SOIL GROUP											
	A			B			C			D		
	SLOPE RANGE (PERCENT)	SLOPE RANGE (PERCENT)	SLOPE RANGE (PERCENT)	SLOPE RANGE (PERCENT)	SLOPE RANGE (PERCENT)	SLOPE RANGE (PERCENT)	SLOPE RANGE (PERCENT)	SLOPE RANGE (PERCENT)	SLOPE RANGE (PERCENT)	SLOPE RANGE (PERCENT)	SLOPE RANGE (PERCENT)	SLOPE RANGE (PERCENT)
LAND USE:	0-2	2-6	6 & OVER	0-2	2-6	6 & OVER	0-2	2-6	6 & OVER	0-2	2-6	6 & OVER
ROW CROPS:	.08	.16	.22	.12	.20	.27	.15	.24	.33	.19	.28	.38
	.22	.30	.38	.26	.34	.44	.30	.37	.50	.34	.41	.56
MEDIAN STRIPTURF:	.19	.20	.24	.19	.22	.26	.20	.23	.30	.20	.25	.30
	.24	.26	.30	.25	.28	.33	.26	.30	.37	.27	.32	.40
SIDE SLOPETURF:			.25			.27			.28			.30
			.32			.34			.36			.38
PAVEMENT:												
ASPHALT:						.70 - .95						
CONCRETE:						.80 - .95						
BRICK:						.70 - .80						
DRIVES, WALKS:						.75 - .85						
ROOFS:						.75 - .95						
GRAVEL ROADS, SHOULDERS:						.40 - .60						
TOTAL PROJECT AREA = 1.54 ACRES												
TOTAL AREA EXPECTED TO BE DISTURBED BY CONSTRUCTION ACTIVITIES = 0.56 ACRES												

STANDARD ABBREVIATIONS


ABUTMENT	ABUT	ACRE	AC	ADJUSTMENT	ADJ	ALUMINUM	AL	ANGLE	ANG	ANNUAL AVERAGE DAILY TRAFFIC	AADT	APRON ENDWALL	AEW	ASPHALTIC	ASPH	BACK	BK	BACK OF CURB	BAC	BASE AGGREGATE DENSE	BAD	BASE LINE	BL	BECHTOLD	BE	BENCH MARK	BW	BOTTOM OF CURB	BOC	CENTRAL ANGLE OR DELTA	CL OR CL	CE	CONCRETE	CONC	CONCRETE SIDEWALK	CSW	CONSTRUCTION	CONST	CONTROL POINT	CP	COUNTRY	CO	COUNTRY TRUCK HIGHWAY	CTH	CUBIC YARD	CY	CULVERT PIPE	CP	CULVERT PIPE CORRUGATED ALUMINUM	CPCA	CULVERT PIPE CORRUGATED POLYETHYLENE	CPPE	CULVERT PIPE CORRUGATED POLYPROPYLENE	CPP	CULVERT PIPE CORRUGATED STEEL	CPSC	CULVERT PIPE CORRUGATED STEEL ALUMINUM COATED	CPSCAC	CULVERT PIPE CORRUGATED STEEL POLYMER COATED	CPSCPC	CULVERT PIPE REINFORCED CONCRETE	CPRC	CULVERT PIPE REINFORCED CONCRETE HORIZONTAL ELIPTICAL	CPRCH	CULVERT PIPE SALVAGED	CPT	CURB AND GUTTER	C & G	DEGREE OF CURVE	D	DESIGN HOUR VOLUME	DHV	DIA	DIRECTIONAL DISTRIBUTION	DD	DRAINAGE EASEMENT	DE	DRIVEWAY	DWY	EAST	EA	EASTBOUND	EB	ELEVATION	ELOR ELEV	EMBANKMENT	EMB	ENDWALL	EW	ENERGY ABSORBING TERMINAL	EAT	EQUIVALENT SINGLE AXLE LOADS	ESALS	EXCAVATION	EXC	EXISTING	EBX	FERTILIZER	FERT	FIELD ENTRANCE	FE	FLOW LINE	FL OR FL	FOOT	FT	FREE TRAFFIC MANAGEMENT SYSTEM	FTMS	HIGHWAY EASEMENT	HES	HIGHWAY EASEMENT WIDTH	HEW	HUNDRED WEIGHT	CWT	IN DIA	IN DIA	INLET	IND	INSIDE DIAMETER	ID	INTERSECTION	INT	INTERSTATE HIGHWAY	IHW	INVERT	INV	JOINT	JT	LEFT	LT	LEFT HAND FORWARD	LHF	LENGTH OF CURVE	L	LINEAR FOOT	LF	LONG CHORD OF CURVE	LC	LUMP SUM	LS	MGAL	ONE THOUSAND GALLONS	MANHOLE	MH	MATCH LINE	ML OR M/L	NOM	NOMINAL	NC	NORTHBOUND	NB	NUMBER OF	NO	OUTSIDE DIAMETER	OD	PAVEMENT	PAVT	PERMANENT LIMITED EASEMENT	PLE	POINT OF CURVATURE	PC	POINT OF INTERSECTION	PT	POINT OF TANGENCY	PCC	PORTLAND CEMENT CONCRETE	PCC	POUND PER SQUARE INCH	PSI	PRIVATE ENTRANCE	PE	PROJECT	PROJ	PROPERTY LINE	PL	PROPOSED RIGHT OF WAY	PRW	RADIUS	R	RADIUS OF CURVE	R OR R/L	REQUIRED	REQD	RIGHT	RT	RIGHT HAND FORWARD	RHF	RIGHT OF WAY	R/W	ROAD	RD	ROADWAY	RDMY	SHOULDER	SHDR	SIDEWALK	SW	SOUTHBOUND	SB	SPECIFICATIONS	SF	SQUARE FEET	SF	SQUARE YARD	SY	STANDARD DETAIL DRAWINGS	STD	STATE TRUNK HIGHWAY	STH	STEEL	STE	STORM SEWER PIPE COMPOSITE	SSPC	STORM SEWER PIPE CORRUGATED POLYETHYLENE	SSCPE	STORM SEWER PIPE CORRUGATED POLYPROPYLENE	SSCPP	STORM SEWER PIPE NON-REINFORCED CONCRETE	SSPNC	STORM SEWER PIPE REINFORCED CONCRETE	SSPRC	STORM SEWER PIPE REINFORCED CONCRETE	SSPRCH	SURFELEVATION	SE	SURVEY LINE	SL OR S/L	TEMP	TEMPORARY	TI	TEMPORARY LIMITED EASEMENT	TLE	TOP OF CURB	TOC	TRUCKS (PERCENT OF)	TYP	TYPICAL	USH	UNITED STATES HIGHWAY	VAR	VARIABLE	V	VERTICAL CURVE	V	VERTICAL POINT OF CURVATURE	VPC	VERTICAL POINT OF INTERSECTION	VPI	VERTICAL POINT OF TANGENCY	VPT	WEST	WB	WESTBOUND	WB
----------	------	------	----	------------	-----	----------	----	-------	-----	------------------------------	------	---------------	-----	-----------	------	------	----	--------------	-----	----------------------	-----	-----------	----	----------	----	------------	----	----------------	-----	------------------------	----------	----	----------	------	-------------------	-----	--------------	-------	---------------	----	---------	----	-----------------------	-----	------------	----	--------------	----	----------------------------------	------	--------------------------------------	------	---------------------------------------	-----	-------------------------------	------	---	--------	--	--------	----------------------------------	------	---	-------	-----------------------	-----	-----------------	-------	-----------------	---	--------------------	-----	-----	--------------------------	----	-------------------	----	----------	-----	------	----	-----------	----	-----------	-----------	------------	-----	---------	----	---------------------------	-----	------------------------------	-------	------------	-----	----------	-----	------------	------	----------------	----	-----------	----------	------	----	--------------------------------	------	------------------	-----	------------------------	-----	----------------	-----	--------	--------	-------	-----	-----------------	----	--------------	-----	--------------------	-----	--------	-----	-------	----	------	----	-------------------	-----	-----------------	---	-------------	----	---------------------	----	----------	----	------	----------------------	---------	----	------------	-----------	-----	---------	----	------------	----	-----------	----	------------------	----	----------	------	----------------------------	-----	--------------------	----	-----------------------	----	-------------------	-----	--------------------------	-----	-----------------------	-----	------------------	----	---------	------	---------------	----	-----------------------	-----	--------	---	-----------------	----------	----------	------	-------	----	--------------------	-----	--------------	-----	------	----	---------	------	----------	------	----------	----	------------	----	----------------	----	-------------	----	-------------	----	--------------------------	-----	---------------------	-----	-------	-----	----------------------------	------	--	-------	---	-------	--	-------	--------------------------------------	-------	--------------------------------------	--------	---------------	----	-------------	-----------	------	-----------	----	----------------------------	-----	-------------	-----	---------------------	-----	---------	-----	-----------------------	-----	----------	---	----------------	---	-----------------------------	-----	--------------------------------	-----	----------------------------	-----	------	----	-----------	----




Dial 811 or (800)242-8511
www.DiggersHotline.com

LEGEND

- 1 5.25" ASPHALTIC SURFACE
- 2 5.25" BASE AGGREGATE DENSE 3/4-INCH
- 3 12" BASE AGGREGATE DENSE 1 1/4-INCH
- 4 CONCRETE CURB & GUTTER
4-INCH SLOPED 36-INCH TYPE TBT
- 5 STA 8+62.05 TO STA 9+20.64 LT & RT
PROPOSED GUARDRAIL
STA 8+30.61 TO STA 9+23.14 LT & RT
STA 10+76.30 TO STA 11+68.82 LT & RT

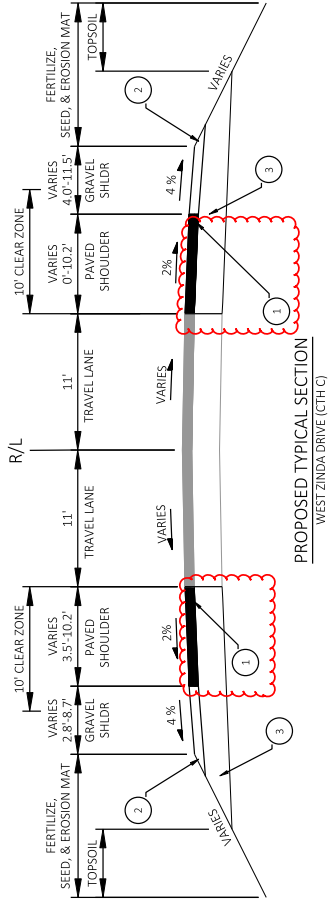

STA 7+11.54 TO STA 8+30.61
STA 11+68.82 TO STA 13+12.74

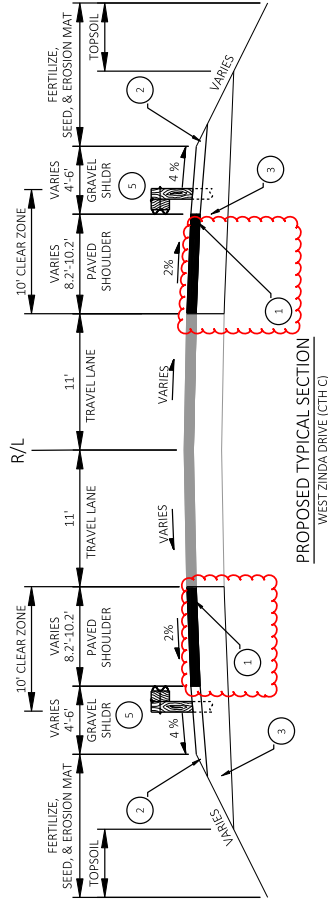


STA 8+30.61 TO STA 8+60.00
STA 11+18.00 TO STA 11+68.82

Addendum No. 01
ID 6998-13-73
Revised Sheet 4
October 22, 2024

PROJECT NO: 6998-13-73	HWY: WEST ZINDA DR	COUNTY: PORTAGE	TYPICAL SECTIONS	SHEET 4	E
FILE NAME: C:\USERS\WROZ\AECOM\60710428-WEST ZINDA DR BRIDGE - STEVENS POINT - GENERAL\900_CAD\69981303\SHEET\PLAN\0301-TSDWG	LAYOUT NAME: 03-10R	PLOT DATE: 10/16/2024 4:22 PM	PLOT BY: MROZ, ZACHARY	PLOT SCALE: 1 IN=10 FT	WISDOT/CAD05 SHEET 42


LEGEND

- 1 5.25" ASPHALTIC SURFACE
- 2 5.25" BASE AGGREGATE DENSE 3/4-INCH
- 3 12" BASE AGGREGATE DENSE 1 1/4-INCH
- 4 CONCRETE CURB & GUTTER
4-INCH SLOPED 36-INCH TYPE TBT
STA 8+62.05 TO STA 9+20.64 LT & RT
PROPOSED GUARDRAIL
- 5 STA 8+30.61 TO STA 9+23.14 LT & RT
STA 10+76.30 TO STA 11+68.82 LT & RT

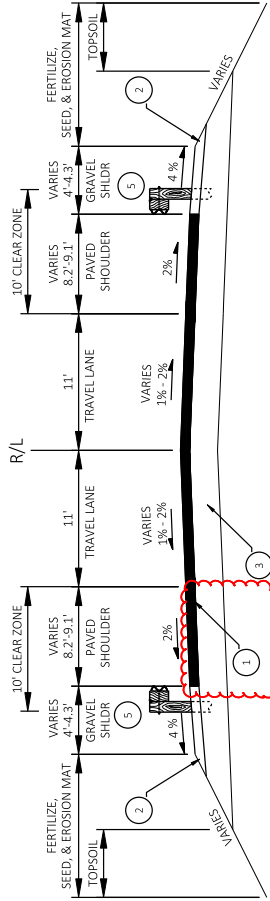

PROPOSED TYPICAL SECTION
WEST ZINDA DRIVE (CTH C)

STA 8+60.00 TO STA 8+62.05
STA 10+67.97 TO STA 11+18.00

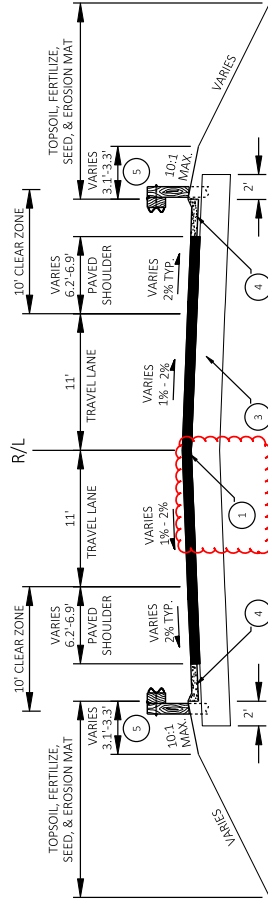

PROPOSED TYPICAL SECTION
WEST ZINDA DRIVE (CTH C)

STA 8+62.05 TO STA 9+31.47

Addendum No. 01
ID 6998-13-73
Revised Sheet 5
October 22, 2024

PROJECT NO:	6998-13-73	HWY:	WEST ZINDA DR	COUNTY:	PORTAGE	TYPICAL SECTIONS	SHEET	5	E
FILE NAME:	C:\USERS\WROZ\AECOM\60710428-WEST ZINDA DR BRIDGE - STEVENS POINT - GENERAL\900_CAD_GS910_CAD\69981303\SHEETS\PLAN\0301-TSDWG								
LAYOUT NAME:	05-10R								
PLOT NAME:									
PLOT BY:	MROZ, ZACHARY								
PLOT SCALE:	1 IN=10 FT								

BASE AGGREGATE DENSE									
STATION - STATION		LOCATION		305.0110		305.0120		624.0100	
				3/4-INCH		1 1/4-INCH		WATER	
				TON		TON		MGAL	
6+76	8+60	SHOULDERS WEST		80		440		8	
8+60	9+31	FULL WEST		0		235		4	
10+68	11+18	FULL EAST		15		190		3	
11+18	13+13	SHOULDERS EAST		75		375		7	
PROJECT 6998-13-73 TOTAL				170		1,240		22	

ASPHALTIC ITEMS									
		LOCATION		455.0605		465.0105		465.0120	
				TACK COAT		ASPHALTIC SURFACE		ASPHALTIC DRIVEWAYS AND FIELD ENTRANCES	
				GAL		TON		TON	
		SHOULDERS WEST		18		73		10	
		FULL WEST		22		86		---	
		FULL EAST		15		63		---	
		SHOULDERS EAST		18		73		---	
PROJECT 6998-13-73 TOTAL				73		295		10	

Addendum No. 01
ID 6998-13-73
Revised Sheet 13
October 22, 2024

CONCRETE CURB & GUTTER									
		601.0588		602.3010		606.0200		645.0120	
		4-INCH SLOPED		CONCRETE		RIPRAP		GEOTEXTILE	
		36-INCH TYPE TBT		SURFACE DRAINS		MEDIUM		TYPE HR	
STATION - STATION		LOCATION		CY		CY		SY	
8+62	- 9+21	LT		2		3		14	
8+62	- 9+21	RT		2		3		14	
PROJECT 6998-13-73 TOTAL				4		6		28	

CONCRETE SURFACE DRAINS									
		602.3010		606.0200		645.0120			
		CONCRETE		RIPRAP		GEOTEXTILE			
		SURFACE DRAINS		MEDIUM		TYPE HR			
STATION		LOCATION		CY		CY		SY	
8+77.5	LT		2		3		14		
8+77.5	RT		2		3		14		
PROJECT 6998-13-73 TOTAL				4		6		28	

EROSION CONTROL MOBILIZATION									
		628.1905		628.1910					
		MOBILIZATIONS		MOBILIZATIONS					
		EROSION CONTROL		EROSION CONTROL					
		EACH		EACH					
PROJECT		6998-13-73		4		3			
PROJECT 6998-13-73 TOTAL				4		4		3	

LANDSCAPING											
		625.0100 TOPSOIL		628.2008 EROSION MAT URBAN CLASS I TYPE B		629.0210 FERTILIZER TYPE B		630.0130 SEEDING MIXTURE NO. 30		630.0500 SEED WATER	
		SY		SY		CWT		LB		MGAL	
LOCATION		SY		SY		CWT		LB		MGAL	
WEST		460		725		0.5		33		17	
EAST		170		420		0.3		19		10	
UNDISTRIBUTED		160		290		0.3		13		7	
PROJECT 6998-13-73 TOTAL		790		1,440		1.1		65		34	

EROSION CONTROL									
		628.1504 SILT FENCE		628.1520 SILT FENCE		628.7504 TEMPORARY DITCH		628.7555 CULVERT PIPE	
		LF		LF		CHECKS		CHECKS	
LOCATION		LF		LF		CHECKS		CHECKS	
WEST		605		605		20		3	
EAST		515		515		---		---	
UNDISTRIBUTED		280		280		5		2	
PROJECT 6998-13-73 TOTAL		1,400		1,400		25		5	

ALL ITEMS ARE CATEGORY 0010 UNLESS OTHERWISE SPECIFIED.



Proposal Schedule of Items

Page 1 of 5

Proposal ID: 20241112037 Project(s): 6998-13-73

Federal ID(s): WISC 2025057

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0002	203.0211.S Abatement of Asbestos Containing Material (structure) 01. B-49-0061	1.000 EACH	_____.	_____.
0004	204.0150 Removing Curb & Gutter	51.000 LF	_____.	_____.
0006	204.0165 Removing Guardrail	380.000 LF	_____.	_____.
0008	205.0100 Excavation Common	722.000 CY	_____.	_____.
0010	213.0100 Finishing Roadway (project) 01. 6998-13-73	1.000 EACH	_____.	_____.
0012	305.0110 Base Aggregate Dense 3/4-Inch	170.000 TON	_____.	_____.
0014	305.0120 Base Aggregate Dense 1 1/4-Inch	1,240.000 TON	_____.	_____.
0016	455.0605 Tack Coat	73.000 GAL	_____.	_____.
0018	460.2000 Incentive Density HMA Pavement	190.000 DOL	1.00000	190.00
0024	465.0120 Asphaltic Surface Driveways and Field Entrances	10.000 TON	_____.	_____.
0028	502.3200 Protective Surface Treatment	580.000 SY	_____.	_____.
0030	502.3205 Pigmented Surface Sealer Reseal	130.000 SY	_____.	_____.
0032	509.0301 Preparation Decks Type 1	216.000 SY	_____.	_____.
0034	509.0302 Preparation Decks Type 2	162.000 SY	_____.	_____.
0036	509.0500 Cleaning Decks	580.000 SY	_____.	_____.



Proposal Schedule of Items

Page 2 of 5

Proposal ID: 20241112037 Project(s): 6998-13-73

Federal ID(s): WISC 2025057

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0038	509.1500 Concrete Surface Repair	133.000 SF	_____.	_____.
0040	509.2000 Full-Depth Deck Repair	2.000 SY	_____.	_____.
0042	509.2500 Concrete Masonry Overlay Decks	52.000 CY	_____.	_____.
0044	509.9020.S Epoxy Crack Sealing	22.000 LF	_____.	_____.
0046	513.9006.S Removing and Resetting Tubular Railing (structure) 01. B-49-0061	1.000 EACH	_____.	_____.
0048	601.0588 Concrete Curb & Gutter 4-Inch Sloped 36-Inch Type TBT	118.000 LF	_____.	_____.
0050	602.3010 Concrete Surface Drains	4.000 CY	_____.	_____.
0052	606.0200 Riprap Medium	6.000 CY	_____.	_____.
0054	614.2500 MGS Thrie Beam Transition	157.600 LF	_____.	_____.
0056	614.2610 MGS Guardrail Terminal EAT	4.000 EACH	_____.	_____.
0058	618.0100 Maintenance and Repair of Haul Roads (project) 01. 6998-13-73	1.000 EACH	_____.	_____.
0060	619.1000 Mobilization	1.000 EACH	_____.	_____.
0062	624.0100 Water	22.000 MGAL	_____.	_____.
0064	625.0100 Topsoil	790.000 SY	_____.	_____.
0066	628.1504 Silt Fence	1,400.000 LF	_____.	_____.



Proposal Schedule of Items

Page 3 of 5

Proposal ID: 20241112037 Project(s): 6998-13-73

Federal ID(s): WISC 2025057

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0068	628.1520 Silt Fence Maintenance	1,400.000 LF	_____.	_____.
0070	628.1905 Mobilizations Erosion Control	4.000 EACH	_____.	_____.
0072	628.1910 Mobilizations Emergency Erosion Control	3.000 EACH	_____.	_____.
0074	628.2008 Erosion Mat Urban Class I Type B	1,440.000 SY	_____.	_____.
0076	628.7504 Temporary Ditch Checks	25.000 LF	_____.	_____.
0078	628.7555 Culvert Pipe Checks	5.000 EACH	_____.	_____.
0080	629.0210 Fertilizer Type B	1.100 CWT	_____.	_____.
0082	630.0130 Seeding Mixture No. 30	65.000 LB	_____.	_____.
0084	630.0500 Seed Water	34.000 MGAL	_____.	_____.
0086	634.0614 Posts Wood 4x6-Inch X 14-FT	2.000 EACH	_____.	_____.
0088	638.2102 Moving Signs Type II	11.000 EACH	_____.	_____.
0090	638.3000 Removing Small Sign Supports	2.000 EACH	_____.	_____.
0092	638.4000 Moving Small Sign Supports	7.000 EACH	_____.	_____.
0094	642.5001 Field Office Type B	1.000 EACH	_____.	_____.
0096	643.0420 Traffic Control Barricades Type III	425.000 DAY	_____.	_____.
0098	643.0705 Traffic Control Warning Lights Type A	650.000 DAY	_____.	_____.



Proposal Schedule of Items

Page 4 of 5

Proposal ID: 20241112037 Project(s): 6998-13-73

Federal ID(s): WISC 2025057

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0100	643.0900 Traffic Control Signs	2,325.000 DAY	_____.	_____.
0102	643.0920 Traffic Control Covering Signs Type II	7.000 EACH	_____.	_____.
0104	643.1000 Traffic Control Signs Fixed Message	36.000 SF	_____.	_____.
0106	643.5000 Traffic Control	1.000 EACH	_____.	_____.
0108	645.0120 Geotextile Type HR	28.000 SY	_____.	_____.
0110	646.2020 Marking Line Epoxy 6-Inch	1,665.000 LF	_____.	_____.
0112	650.4500 Construction Staking Subgrade	500.000 LF	_____.	_____.
0114	650.5000 Construction Staking Base	500.000 LF	_____.	_____.
0116	650.5500 Construction Staking Curb Gutter and Curb & Gutter	118.000 LF	_____.	_____.
0118	650.9911 Construction Staking Supplemental Control (project) 01. 6998-13-73	1.000 EACH	_____.	_____.
0120	650.9920 Construction Staking Slope Stakes	500.000 LF	_____.	_____.
0122	690.0150 Sawing Asphalt	590.000 LF	_____.	_____.
0124	690.0250 Sawing Concrete	3.000 LF	_____.	_____.
0126	715.0502 Incentive Strength Concrete Structures	500.000 DOL	1.00000	500.00
0128	ASP.1T0A On-the-Job Training Apprentice at \$5.00/HR	300.000 HRS	5.00000	1,500.00



Proposal Schedule of Items

Page 5 of 5

Proposal ID: 20241112037 Project(s): 6998-13-73

Federal ID(s): WISC 2025057

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0130	ASP.1T0G On-the-Job Training Graduate at \$5.00/HR	600.000 HRS	5.00000	3,000.00
0132	SPV.0060 Special 01. Foam Void Filling B-49-0061	1.000 EACH	_____.	_____.
0134	SPV.0090 Special 01. Sawing Concrete Curb Head	22.000 LF	_____.	_____.
0136	465.0105 Asphaltic Surface	295.000 TON	_____.	_____.
Section: 0001			Total:	_____.
			Total Bid:	_____.

