



Wisconsin Department of Transportation

December 2, 2024

Division of Transportation Systems Development

Bureau of Project Development
4822 Madison Yards Way, 4th Floor South
Madison, WI 53705

Telephone: (608) 266-1631
Facsimile (FAX): (608) 266-8459

NOTICE TO ALL CONTRACTORS:

Proposal #18: 4540-34-71, WIS2025107
Cedar Grove–Sheboygan Falls
CTH D to STH 28
STH 32
Sheboygan County

4540-36-71, WIS2025108
Cedar Grove–Sheboygan Falls
CTH D to STH 28
STH 32
Sheboygan County

Letting of December 10, 2024

This is Addendum No. 02, which provides for the following:

Schedule of Items:

Added Bid Item Quantities					
Bid Item	Item Description	Unit	Proposal Total Prior to Addendum	Quantity Added	Proposal Total After Addendum
614.8010	Anchor Post Assembly Top Mount	EACH	0	3	3

Deleted Bid Item Quantities					
Bid Item	Item Description	Unit	Proposal Total Prior to Addendum	Proposal Quantity Change (-)	Proposal Total After Addendum
203.0220.08	Removing Structure (Station 189+62)	EACH	1	-1	0

Plan Sheets:

Revised Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of changes to sheet)
113	Miscellaneous Quantity Sheet – Removing Structures Table Revised
117	Miscellaneous Quantity Sheet – Guardrail Table Revised

Schedule of Items

Attached, dated December 2, 2024, are the revised Schedule of Items Pages 1 - 12.

Plan Sheets

The following 8½ x 11-inch sheets are attached and made part of the plans for this proposal:

Revised: 113 and 117.

The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.

Sincerely,

Mike Coleman

Proposal Development Specialist
Proposal Management Section


END OF ADDENDUM

Addendum No. 02
ID 4540-34-71/4540-36-71
Revised Sheet 113
December 2, 2024

[illegible]

NOTE: ALL ITEMS ON THIS SHEET ARE CATEGORY 0010 UNLESS OTHERWISE NOTED.

WISDOT/CADDs SHEET 42

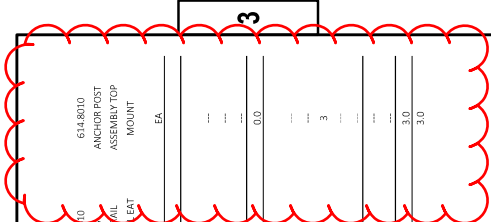

Addendum No. 02
ID 4540-34-71/4540-36-71
Revised Sheet 117
December 2, 2024

STORM SEWER										GUARDRAIL									
608.0330										614.2300									
STORM SEWER										MGS									
PIPE REINFORCED										GUARDRAIL									
CONCRETE										3L									
CL III										SHORT RADIUS									
30-INCH										LF									
STATION - STATION										LF									
4540-36-71										614.2340									
73+20 RT & LT										MGS									
73+25 RT										3K									
99+34 - 100+05										GUARDRAIL									
98+45 RT										3L									
388+15 RT										LF									
388+27 LT										LF									
390+47 LT										LF									
PROJECT TOTALS										SUBTOTAL									
90										RT									
1										LF									
PROJECT TOTALS										SUBTOTAL									
90										RT									
1										LF									
PROJECT TOTALS										SUBTOTAL									
90										RT									
1										LF									
PROJECT TOTALS										SUBTOTAL									
90										RT									
1										LF									
PROJECT TOTALS										SUBTOTAL									
90										RT									
1										LF									
PROJECT TOTALS										SUBTOTAL									
90										RT									
1										LF									
PROJECT TOTALS										SUBTOTAL									
90										RT									
1										LF									
PROJECT TOTALS										SUBTOTAL									
90										RT									
1										LF									
PROJECT TOTALS										SUBTOTAL									
90										RT									
1										LF									
PROJECT TOTALS										SUBTOTAL									
90										RT									
1										LF									
PROJECT TOTALS										SUBTOTAL									
90										RT									
1										LF									
PROJECT TOTALS										SUBTOTAL									
90										RT									
1										LF									
PROJECT TOTALS										SUBTOTAL									
90										RT									
1										LF									
PROJECT TOTALS										SUBTOTAL									
90										RT									
1										LF									
PROJECT TOTALS										SUBTOTAL									
90										RT									
1										LF									
PROJECT TOTALS										SUBTOTAL									
90										RT									
1										LF									
PROJECT TOTALS										SUBTOTAL									
90										RT									
1										LF									
PROJECT TOTALS										SUBTOTAL									
90										RT									
1										LF									
PROJECT TOTALS										SUBTOTAL									
90										RT									
1										LF									
PROJECT TOTALS										SUBTOTAL									
90										RT									
1										LF									
PROJECT TOTALS										SUBTOTAL									
90										RT									
1										LF									
PROJECT TOTALS										SUBTOTAL									
90										RT									
1										LF									
PROJECT TOTALS										SUBTOTAL									
90										RT									
1										LF									
PROJECT TOTALS										SUBTOTAL									
90										RT									
1										LF									
PROJECT TOTALS										SUBTOTAL									
90										RT									
1										LF									
PROJECT TOTALS										SUBTOTAL									
90										RT									
1										LF									
PROJECT TOTALS										SUBTOTAL									
90										RT									
1										LF									
PROJECT TOTALS										SUBTOTAL									
90										RT									
1										LF									
PROJECT TOTALS										SUBTOTAL									
90										RT									
1										LF									
PROJECT TOTALS										SUBTOTAL									
90										RT									
1										LF									
PROJECT TOTALS										SUBTOTAL									
90										RT									
1										LF									
PROJECT TOTALS										SUBTOTAL									
90										RT									
1										LF									
PROJECT TOTALS										SUBTOTAL									
90										RT									
1										LF									
PROJECT TOTALS										SUBTOTAL									
90										RT									
1										LF									
PROJECT TOTALS										SUBTOTAL									
90										RT									
1										LF									
PROJECT TOTALS										SUBTOTAL									
90										RT									
1										LF									
PROJECT TOTALS										SUBTOTAL									
90										RT									
1										LF									
PROJECT TOTALS										SUBTOTAL									
90										RT									
1										LF									
PROJECT TOTALS										SUBTOTAL									
90										RT									
1										LF									
PROJECT TOTALS										SUBTOTAL									
90										RT									
1										LF									
PROJECT TOTALS										SUBTOTAL									
90										RT									
1										LF									
PROJECT TOTALS										SUBTOTAL									
90										RT									
1										LF									
PROJECT TOTALS										SUBTOTAL									
90										RT									
1										LF									
PROJECT TOTALS										SUBTOTAL									
90										RT									
1										LF									
PROJECT TOTALS										SUBTOTAL									
90										RT									
1										LF									
PROJECT TOTALS										SUBTOTAL									
90										RT									
1										LF									
PROJECT TOTALS										SUBTOTAL									
90										RT									
1										LF									
PROJECT TOTALS										SUBTOTAL									
90										RT									
1										LF									
PROJECT TOTALS										SUBTOTAL									
90										RT									
1										LF									
PROJECT TOTALS										SUBTOTAL									
90										RT									
1										LF									
PROJECT TOTALS										SUBTOTAL									
90										RT									
1										LF									
PROJECT TOTALS										SUBTOTAL									
90										RT									
1										LF									
PROJECT TOTALS										SUBTOTAL									
90										RT									
1										LF									
PROJECT TOTALS										SUBTOTAL									
90										RT									
1										LF									
PROJECT TOTALS										SUBTOTAL									
90										RT									
1										LF									
PROJECT TOTALS										SUBTOTAL									
90										RT									
1										LF									
PROJECT TOTALS										SUBTOTAL									
90										RT									
1										LF									
PROJECT TOTALS										SUBTOTAL									
90										RT									
1										LF									
PROJECT TOTALS										SUBTOTAL									
90										RT									
1										LF									
PROJECT TOTALS										SUBTOTAL									
90										RT									
1										LF									



Proposal Schedule of Items

Page 1 of 12

Proposal ID: 20241210018 Project(s): 4540-34-71, 4540-36-71

Federal ID(s): WISC 2025107, WISC 2025108

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0002	201.0110 Clearing	1,926.000 SY	_____.	_____.
0004	201.0210 Grubbing	1,926.000 SY	_____.	_____.
0006	203.0220 Removing Structure (structure) 01. Culvert Pipe at STA 189+62	1.000 EACH	_____.	_____.
0008	203.0220 Removing Structure (structure) 02. Culvert at STA 100+09	1.000 EACH	_____.	_____.
0010	203.0220 Removing Structure (structure) 03. C-59- 0080	1.000 EACH	_____.	_____.
0012	203.0220 Removing Structure (structure) 04. C-59- 2916	1.000 EACH	_____.	_____.
0014	203.0220 Removing Structure (structure) 05. C-59- 2650	1.000 EACH	_____.	_____.
0016	203.0220 Removing Structure (structure) 06. Station 140+34	1.000 EACH	_____.	_____.
0018	203.0220 Removing Structure (structure) 07. Station 180+82	1.000 EACH	_____.	_____.
0022	203.0220 Removing Structure (structure) 09. Station 205+41	1.000 EACH	_____.	_____.
0024	203.0220 Removing Structure (structure) 10. Station 242+23	1.000 EACH	_____.	_____.
0026	203.0220 Removing Structure (structure) 11. Station 259+80	1.000 EACH	_____.	_____.
0028	203.0220 Removing Structure (structure) 12. Station 405+78	1.000 EACH	_____.	_____.



Proposal Schedule of Items

Page 2 of 12

Proposal ID: 20241210018 Project(s): 4540-34-71, 4540-36-71

Federal ID(s): WISC 2025107, WISC 2025108

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0030	203.0220 Removing Structure (structure) 13. Station 585+25	1.000 EACH	_____.	_____.
0032	204.0100 Removing Concrete Pavement	1,726.000 SY	_____.	_____.
0034	204.0115 Removing Asphaltic Surface Butt Joints	254.000 SY	_____.	_____.
0036	204.0120 Removing Asphaltic Surface Milling	186,073.000 SY	_____.	_____.
0038	204.0150 Removing Curb & Gutter	657.000 LF	_____.	_____.
0040	204.0155 Removing Concrete Sidewalk	364.000 SY	_____.	_____.
0042	204.0165 Removing Guardrail	3,495.000 LF	_____.	_____.
0044	204.0180 Removing Delineators and Markers	21.000 EACH	_____.	_____.
0046	204.0245 Removing Storm Sewer (size) 01. 18-Inch	48.000 LF	_____.	_____.
0048	204.0291.S Abandoning Sewer	8.000 CY	_____.	_____.
0050	205.0100 Excavation Common	3,702.000 CY	_____.	_____.
0052	206.2001 Excavation for Structures Culverts (structure) 02. C-59-0121	1.000 EACH	_____.	_____.
0054	206.2001 Excavation for Structures Culverts (structure) 03. C-59-0117	1.000 EACH	_____.	_____.
0056	206.2001 Excavation for Structures Culverts (structure) 04. C-59-0118	1.000 EACH	_____.	_____.



Proposal Schedule of Items

Page 3 of 12

Proposal ID: 20241210018 Project(s): 4540-34-71, 4540-36-71

Federal ID(s): WISC 2025107, WISC 2025108

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0058	206.2001 Excavation for Structures Culverts (structure) 05. C-59-0119	1.000 EACH	_____.	_____.
0060	208.0100 Borrow	3,102.000 CY	_____.	_____.
0062	210.2500 Backfill Structure Type B	6,256.000 TON	_____.	_____.
0064	211.0101 Prepare Foundation for Asphaltic Paving (project) 01. 4540-36-71	1.000 EACH	_____.	_____.
0066	213.0100 Finishing Roadway (project) 01. 4540-36-71	1.000 EACH	_____.	_____.
0068	305.0110 Base Aggregate Dense 3/4-Inch	2,032.000 TON	_____.	_____.
0070	305.0120 Base Aggregate Dense 1 1/4-Inch	5,457.000 TON	_____.	_____.
0072	415.0080 Concrete Pavement 8-Inch	21.000 SY	_____.	_____.
0074	416.0610 Drilled Tie Bars	16.000 EACH	_____.	_____.
0076	450.4000 HMA Cold Weather Paving	5,591.000 TON	_____.	_____.
0078	455.0605 Tack Coat	11,797.000 GAL	_____.	_____.
0080	460.0105.S HMA Percent Within Limits (PWL) Test Strip Volumetrics	1.000 EACH	_____.	_____.
0082	460.0110.S HMA Percent Within Limits (PWL) Test Strip Density	1.000 EACH	_____.	_____.
0084	460.2000 Incentive Density HMA Pavement	410.000 DOL	1.00000	410.00
0086	460.2005 Incentive Density PWL HMA Pavement	15,126.000 DOL	1.00000	15,126.00



Proposal Schedule of Items

Page 4 of 12

Proposal ID: 20241210018 Project(s): 4540-34-71, 4540-36-71

Federal ID(s): WISC 2025107, WISC 2025108

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0088	460.2007 Incentive Density HMA Pavement Longitudinal Joints	10,310.000 DOL	1.00000	10,310.00
0090	460.2010 Incentive Air Voids HMA Pavement	21,402.000 DOL	1.00000	21,402.00
0092	460.5223 HMA Pavement 3 LT 58-28 S	629.000 TON	_____	_____
0094	460.5224 HMA Pavement 4 LT 58-28 S	21,402.000 TON	_____	_____
0096	465.0105 Asphaltic Surface	333.000 TON	_____	_____
0098	465.0110 Asphaltic Surface Patching	873.000 TON	_____	_____
0100	465.0560 Asphaltic Rumble Strips, Centerline	33,515.000 LF	_____	_____
0102	504.0100 Concrete Masonry Culverts	581.000 CY	_____	_____
0104	505.0400 Bar Steel Reinforcement HS Structures	63,600.000 LB	_____	_____
0106	505.0600 Bar Steel Reinforcement HS Coated Structures	12,730.000 LB	_____	_____
0108	513.2001 Railing Pipe	58.000 LF	_____	_____
0110	516.0500 Rubberized Membrane Waterproofing	207.000 SY	_____	_____
0112	516.0600.S Sheet Membrane Waterproofing for Asphalt Overlays	84.000 SY	_____	_____
0114	520.8700 Cleaning Culvert Pipes	15.000 EACH	_____	_____
0116	522.0530 Culvert Pipe Reinforced Concrete Class V 30-Inch	95.000 LF	_____	_____



Proposal Schedule of Items

Page 5 of 12

Proposal ID: 20241210018 Project(s): 4540-34-71, 4540-36-71

Federal ID(s): WISC 2025107, WISC 2025108

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0118	522.1030 Apron Endwalls for Culvert Pipe Reinforced Concrete 30-Inch	5.000 EACH	_____.	_____.
0120	522.2424 Culvert Pipe Reinforced Concrete Horizontal Elliptical Class HE-IV 24x38-Inch	208.000 LF	_____.	_____.
0122	522.2624 Apron Endwalls for Culvert Pipe Reinforced Concrete Horizontal Elliptical 24x38-Inch	10.000 EACH	_____.	_____.
0124	601.0409 Concrete Curb & Gutter 30-Inch Type A	53.000 LF	_____.	_____.
0126	601.0411 Concrete Curb & Gutter 30-Inch Type D	503.000 LF	_____.	_____.
0128	601.0600 Concrete Curb Pedestrian	154.000 LF	_____.	_____.
0130	602.0405 Concrete Sidewalk 4-Inch	3,470.000 SF	_____.	_____.
0132	606.0200 Riprap Medium	55.000 CY	_____.	_____.
0134	606.0300 Riprap Heavy	593.000 CY	_____.	_____.
0136	608.0118 Relaid Storm Sewer 18-Inch	32.000 LF	_____.	_____.
0138	608.0330 Storm Sewer Pipe Reinforced Concrete Class III 30-Inch	90.000 LF	_____.	_____.
0140	611.0430 Reconstructing Inlets	5.000 EACH	_____.	_____.
0142	611.0639 Inlet Covers Type H-S	6.000 EACH	_____.	_____.
0144	611.3230 Inlets 2x3-FT	1.000 EACH	_____.	_____.



Proposal Schedule of Items

Page 6 of 12

Proposal ID: 20241210018 Project(s): 4540-34-71, 4540-36-71

Federal ID(s): WISC 2025107, WISC 2025108

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0146	614.2300 MGS Guardrail 3	575.000 LF	_____.	_____.
0148	614.2330 MGS Guardrail 3 K	1,075.000 LF	_____.	_____.
0150	614.2340 MGS Guardrail 3 L	112.500 LF	_____.	_____.
0152	614.2350 MGS Guardrail Short Radius	144.300 LF	_____.	_____.
0154	614.2500 MGS Thrie Beam Transition	78.800 LF	_____.	_____.
0156	614.2610 MGS Guardrail Terminal EAT	18.000 EACH	_____.	_____.
0158	618.0100 Maintenance and Repair of Haul Roads (project) 01. 4540-34-71	1.000 EACH	_____.	_____.
0160	618.0100 Maintenance and Repair of Haul Roads (project) 02. 4540-36-71	1.000 EACH	_____.	_____.
0162	619.1000 Mobilization	1.000 EACH	_____.	_____.
0164	624.0100 Water	77.500 MGAL	_____.	_____.
0166	625.0100 Topsoil	8,224.000 SY	_____.	_____.
0168	628.1504 Silt Fence	2,752.000 LF	_____.	_____.
0170	628.1520 Silt Fence Maintenance	2,752.000 LF	_____.	_____.
0172	628.1905 Mobilizations Erosion Control	40.000 EACH	_____.	_____.
0174	628.1910 Mobilizations Emergency Erosion Control	11.000 EACH	_____.	_____.



Proposal Schedule of Items

Page 7 of 12

Proposal ID: 20241210018 Project(s): 4540-34-71, 4540-36-71

Federal ID(s): WISC 2025107, WISC 2025108

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0176	628.2006 Erosion Mat Urban Class I Type A	262.000 SY	_____.	_____.
0178	628.2008 Erosion Mat Urban Class I Type B	6,867.000 SY	_____.	_____.
0180	628.2027 Erosion Mat Class II Type C	1,058.000 SY	_____.	_____.
0182	628.7015 Inlet Protection Type C	38.000 EACH	_____.	_____.
0184	628.7504 Temporary Ditch Checks	64.000 LF	_____.	_____.
0186	628.7555 Culvert Pipe Checks	38.000 EACH	_____.	_____.
0188	628.7570 Rock Bags	153.000 EACH	_____.	_____.
0190	629.0210 Fertilizer Type B	5.150 CWT	_____.	_____.
0192	630.0130 Seeding Mixture No. 30	77.000 LB	_____.	_____.
0194	630.0140 Seeding Mixture No. 40	10.000 LB	_____.	_____.
0196	630.0170 Seeding Mixture No. 70	9.000 LB	_____.	_____.
0198	630.0200 Seeding Temporary	222.000 LB	_____.	_____.
0200	630.0500 Seed Water	147.700 MGAL	_____.	_____.
0202	633.5200 Markers Culvert End	31.000 EACH	_____.	_____.
0204	642.5201 Field Office Type C	1.000 EACH	_____.	_____.
0206	643.0300 Traffic Control Drums	608.000 DAY	_____.	_____.



Proposal Schedule of Items

Page 8 of 12

Proposal ID: 20241210018 Project(s): 4540-34-71, 4540-36-71

Federal ID(s): WISC 2025107, WISC 2025108

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0208	643.0420 Traffic Control Barricades Type III	2,846.000 DAY	_____.	_____.
0210	643.0705 Traffic Control Warning Lights Type A	4,473.000 DAY	_____.	_____.
0212	643.0900 Traffic Control Signs	28,608.000 DAY	_____.	_____.
0214	643.0910 Traffic Control Covering Signs Type I	3.000 EACH	_____.	_____.
0216	643.0920 Traffic Control Covering Signs Type II	10.000 EACH	_____.	_____.
0218	643.1000 Traffic Control Signs Fixed Message	125.500 SF	_____.	_____.
0220	643.1050 Traffic Control Signs PCMS	28.000 DAY	_____.	_____.
0222	643.1070 Traffic Control Cones 42-Inch	18.000 DAY	_____.	_____.
0224	643.3165 Temporary Marking Line Paint 6-Inch	154,721.000 LF	_____.	_____.
0226	643.3265 Temporary Marking Line Paint 10-Inch	2,764.000 LF	_____.	_____.
0228	643.5000 Traffic Control	1.000 EACH	_____.	_____.
0230	644.1440 Temporary Pedestrian Surface Matting	490.000 SF	_____.	_____.
0232	644.1601 Temporary Pedestrian Curb Ramp	27.000 DAY	_____.	_____.
0234	644.1605 Temporary Pedestrian Detectable Warning Field	170.000 SF	_____.	_____.
0236	644.1810 Temporary Pedestrian Barricade	1,441.000 LF	_____.	_____.
0238	645.0120 Geotextile Type HR	1,392.000 SY	_____.	_____.



Proposal Schedule of Items

Page 9 of 12

Proposal ID: 20241210018 Project(s): 4540-34-71, 4540-36-71

Federal ID(s): WISC 2025107, WISC 2025108

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0240	646.2020 Marking Line Epoxy 6-Inch	12,973.000 LF	_____.	_____.
0242	646.2040 Marking Line Grooved Wet Ref Epoxy 6-Inch	159,230.000 LF	_____.	_____.
0244	646.4020 Marking Line Epoxy 10-Inch	1,382.000 LF	_____.	_____.
0246	646.5020 Marking Arrow Epoxy	3.000 EACH	_____.	_____.
0248	646.5220 Marking Symbol Epoxy	22.000 EACH	_____.	_____.
0250	646.6466 Cold Weather Marking Epoxy 6-Inch	44,415.000 LF	_____.	_____.
0252	646.7120 Marking Diagonal Epoxy 12-Inch	74.000 LF	_____.	_____.
0254	646.7420 Marking Crosswalk Epoxy Transverse Line 6-Inch	1,077.000 LF	_____.	_____.
0256	648.0100 Locating No-Passing Zones	9.700 MI	_____.	_____.
0258	650.4000 Construction Staking Storm Sewer	3.000 EACH	_____.	_____.
0260	650.5500 Construction Staking Curb Gutter and Curb & Gutter	710.000 LF	_____.	_____.
0262	650.6000 Construction Staking Pipe Culverts	8.000 EACH	_____.	_____.
0264	650.6501 Construction Staking Structure Layout (structure) 02.C-59-0121	1.000 EACH	_____.	_____.
0266	650.6501 Construction Staking Structure Layout (structure) 03. C-59-0117	1.000 EACH	_____.	_____.



Proposal Schedule of Items

Page 10 of 12

Proposal ID: 20241210018 Project(s): 4540-34-71, 4540-36-71

Federal ID(s): WISC 2025107, WISC 2025108

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0268	650.6501 Construction Staking Structure Layout (structure) 04. C-59-0118	1.000 EACH	_____.	_____.
0270	650.6501 Construction Staking Structure Layout (structure) 05. C-59-0119	1.000 EACH	_____.	_____.
0272	650.8000 Construction Staking Resurfacing Reference	51,404.000 LF	_____.	_____.
0274	650.9000 Construction Staking Curb Ramps	16.000 EACH	_____.	_____.
0276	650.9500 Construction Staking Sidewalk (project) 01. 4540-34-71	1.000 EACH	_____.	_____.
0278	650.9500 Construction Staking Sidewalk (project) 02. 4540-36-71	1.000 EACH	_____.	_____.
0280	650.9911 Construction Staking Supplemental Control (project) 01. 4540-34-71	1.000 EACH	_____.	_____.
0282	650.9911 Construction Staking Supplemental Control (project) 02. 4540-36-71	1.000 EACH	_____.	_____.
0284	650.9920 Construction Staking Slope Stakes	3,011.000 LF	_____.	_____.
0286	690.0150 Sawing Asphalt	1,070.000 LF	_____.	_____.
0288	690.0250 Sawing Concrete	948.000 LF	_____.	_____.
0290	715.0502 Incentive Strength Concrete Structures	3,774.000 DOL	1.00000	3,774.00
0292	740.0440 Incentive IRI Ride	77,877.000 DOL	1.00000	77,877.00
0294	999.2000.S Installing and Maintaining Bird Deterrent System (station) 01. 100+09	1.000 EACH	_____.	_____.



Proposal Schedule of Items

Page 11 of 12

Proposal ID: 20241210018 Project(s): 4540-34-71, 4540-36-71

Federal ID(s): WISC 2025107, WISC 2025108

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0296	999.2000.S Installing and Maintaining Bird Deterrent System (station) 02. 393+67	1.000 EACH	_____.	_____.
0298	ASP.1T0A On-the-Job Training Apprentice at \$5.00/HR	2,400.000 HRS	5.00000	12,000.00
0300	ASP.1T0G On-the-Job Training Graduate at \$5.00/HR	2,100.000 HRS	5.00000	10,500.00
0302	SPV.0035 Special 01. Foundation Backfill	2,468.000 CY	_____.	_____.
0304	SPV.0060 Special 01. Temporary Water Diversion C-59-117, Sta 527+65.16	1.000 EACH	_____.	_____.
0306	SPV.0060 Special 02. Temporary Water Diversion C-59-118, Station 393+66.22	1.000 EACH	_____.	_____.
0308	SPV.0060 Special 03. Temporary Water Diversion C-59-119, Station 337+79.75	1.000 EACH	_____.	_____.
0310	SPV.0060 Special 04. Temporary Water Diversion Culvert Pipe, Sta 189+62	1.000 EACH	_____.	_____.
0312	SPV.0060 Special 05. Temporary Water Diversion C-59-121, Station 100+09.05	1.000 EACH	_____.	_____.
0314	SPV.0060 Special 06. Chimney Seals	12.000 EACH	_____.	_____.
0316	SPV.0060 Special 07. Adjusting Water Valve Box	24.000 EACH	_____.	_____.
0318	SPV.0060 Special 08. Apron Endwalls for Culvert Pipe Reinforced Concrete Horizontal Elliptical	2.000 EACH	_____.	_____.
0320	SPV.0060 Special 09. Adjusting Sanitary Manhole Covers	4.000 EACH	_____.	_____.



Proposal Schedule of Items

Page 12 of 12

Proposal ID: 20241210018 Project(s): 4540-34-71, 4540-36-71

Federal ID(s): WISC 2025107, WISC 2025108

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0322	SPV.0090 Special 01. Culvert Pipe Reinforced Concrete Horizontal Elliptical 72x113-Inch	102.000 LF	_____.	_____.
0324	SPV.0180 Special 01. Removing Distressed Asphaltic Surface Milling	7,595.000 SY	_____.	_____.
0326	614.8010 Anchor Post Assembly Top Mount	3.000 EACH	_____.	_____.
Section: 0001			Total:	_____.
			Total Bid:	_____.