



Wisconsin Department of Transportation

December 5, 2024

Division of Transportation Systems Development

Bureau of Project Development
4822 Madison Yards Way, 4th Floor South
Madison, WI 53705

Telephone: (608) 266-1631
Facsimile (FAX): (608) 266-8459

NOTICE TO ALL CONTRACTORS:

Proposal #31: Project ID 1050-00-62
Chippewa Falls – Abbotsford
Koser Ave to CTH D (EB&WB)
STH 29
Clark County

Letting of December 10, 2024

This is Addendum No. 02, which provides for the following:

Schedule of Items:

Revised Bid Item Quantities					
Bid Item	Item Description	Unit	Proposal Total Prior to Addendum	Proposal Quantity Change (-)	Proposal Total After Addendum
509.2100.S	Concrete Masonry Deck Repair	CY	79	-55	24

Plan Sheets:

Revised Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of changes to sheet)
282	B-10-19: Cross Section, General Notes & Quantities (revised Concrete Masonry Deck Repair quantity)
293	B-10-170: Cross Section, General Notes & Quantities (revised Concrete Masonry Deck Repair quantity)

Schedule of Items

Attached, dated December 5, 2024, are the revised Schedule of Items Page 4.

Plan Sheets

The following 8½ x 11-inch sheets are attached and made part of the plans for this proposal:

Revised: 282 and 293.

The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.

Sincerely,

Mike Coleman

Proposal Development Specialist
Proposal Management Section

END OF ADDENDUM

TOTAL ESTIMATED QUANTITIES

BID ITEM NUMBER	BID ITEMS	UNIT	TOTALS
502.3101	EXPANSION DEVICE B-10-19	LF	69
502.3200	PROTECTIVE SURFACE TREATMENT	SV	27
502.3210	PIGMENTED SURFACE SEALER	SV	7
502.4205	ADHESIVE ANCHORS NO. 5 BAR	EA	64
505.0600	BAR STEEL REINFORCEMENT HS COATED STRUCTURES	LB	2020
505.0904	BAR COUPLERS NO. 4	EA	8
505.0905	BAR COUPLERS NO. 5	EA	24
505.0906	BAR COUPLERS NO. 6	EA	10
509.1000	JOINT REPAIR	SV	29
509.2100.S	CONCRETE MASONRY DECK REPAIR	CY	10

GENERAL NOTES

DIMENSIONS SHOWN ARE BASED ON THE ORIGINAL STRUCTURE PLANS.

DRAWINGS SHALL NOT BE SCALED.

BAR STEEL REINFORCEMENT SHALL BE EMBEDDED 2" CLEAR UNLESS OTHERWISE SHOWN OR NOTED.

ALL CONCRETE REMOVAL SHALL BE DEFINED BY A 1 INCH SAW CUT UNLESS SPECIFIED OTHERWISE.

ROUGHEN EXISTING CONCRETE 1/2" MIN. EVERYWHERE NEW CONCRETE COMES INTO CONTACT WITH EXISTING CONCRETE.

STRIP SEAL EXPANSION JOINT ASSEMBLY, INCLUDING ANCHOR STUDS, HARDWARE AND COVER PLATES WILL BE PAID FOR AT THE PER LINEAR FOOT BID PRICE FOR "EXPANSION DEVICE B-10-19." ANY EXCAVATION REQUIRED TO COMPLETE THE JOINT REPAIRS AT THE ABUTMENTS IS INCIDENTAL TO THE BID ITEM "JOINT REPAIR".

UTILIZE EXISTING BAR STEEL REINFORCEMENT WHERE SHOWN AND EXTEND 24 BAR DIAMETERS INTO NEW WORK, UNLESS SPECIFIED OTHERWISE.


IF EXISTING BAR STEEL REINFORCEMENT IS SEVERELY CORRODED OR DAMAGED DURING CONCRETE REMOVAL, REPLACE WITH EPOXY ANCHORED BARS OF THE SAME SIZE AT THE DIRECTION OF THE ENGINEER. EMBED 1'-6" INTO EXISTING CONCRETE.

PROTECTIVE SURFACE TREATMENT SHALL BE APPLIED TO THE TOP OF DECK AND PAVING BLOCK IN THE JOINT REPAIR AREAS.

PIGMENTED SURFACE SEALER SHALL BE APPLIED TO FRONT FACE AND TOP OF PARAPET SURFACES IN THE JOINT REPAIR AREAS.

THE EXISTING STRUCTURE B-10-19 IS A THREE SPAN STEEL GIRDER STRUCTURE WITH AN OVERALL WIDTH OF 35'-0" AND AN OVERALL LENGTH OF 325'-4". THE EXPANSION JOINTS SHALL BE REPLACED.

Addendum No. 02
ID 1050-00-62
Revised Sheet 282
December 5, 2024

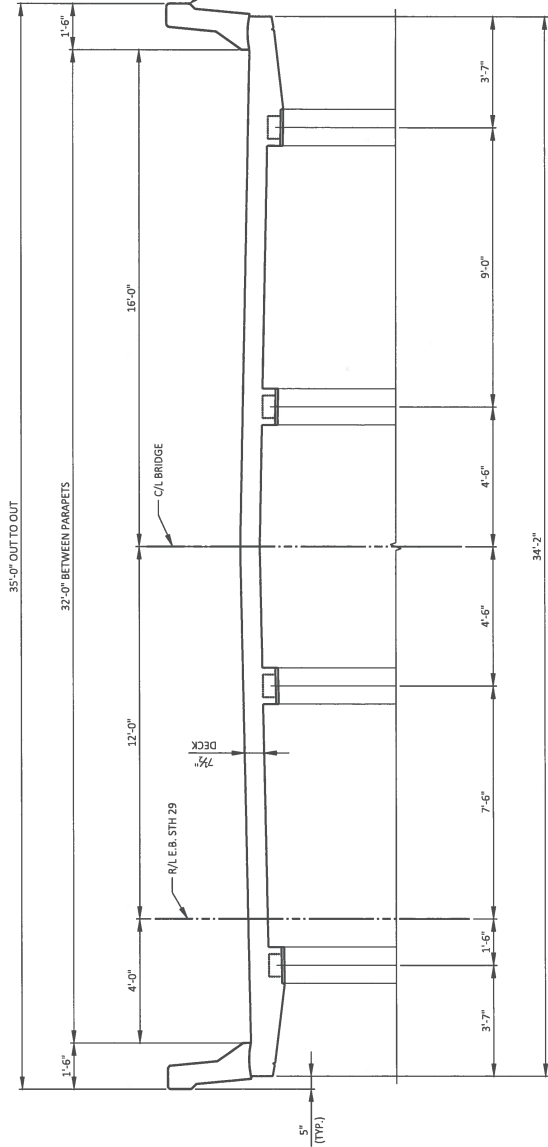

CROSS SECTION THRU ROADWAY
(LOOKING EAST)

12/04/24



SURFACE SEALER TREATMENT AT
JOINT REPAIR LOCATIONS


NO.	DATE	REV.	DECK REPAIR	QTY	JLA
BY	REVISION				
STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION					
STRUCTURE B-10-19					
CROSS SECTION, GENERAL NOTES, & QUANTITIES					
SHEET 2					
282					

STATE PROJECT NUMBER
1050-00-62

GENERAL NOTES


- DRAWINGS SHALL NOT BE SCALED
- BAR STEEL REINFORCEMENT SHALL BE EMBEDDED 2" CLEAR UNLESS OTHERWISE NOTED.
- UTILIZE EXISTING BAR STEEL REINFORCEMENT WHERE SHOWN AND EXTEND 24 BAR DIAMETERS INTO NEW WORK, UNLESS SPECIFIED OTHERWISE.
- IF EXISTING BAR STEEL REINFORCEMENT IS SEVERELY CORRODED OR DAMAGED DURING CONCRETE REMOVAL, REPLACE WITH EPOXY ANCHORED BARS OF THE SAME SIZE AT THE DIRECTION OF THE ENGINEER. EMBED 1'-6" INTO EXISTING CONCRETE.
- DIMENSIONS SHOWN ARE BASED ON THE ORIGINAL STRUCTURE PLANS.
- ALL CONCRETE REMOVAL SHALL BE DEFINED BY A 1 INCH SAW CUT, UNLESS SPECIFIED OTHERWISE.
- ROUGHEN EXISTING CONCRETE 1/2" MIN. EVERYWHERE NEW CONCRETE COMES INTO CONTACT WITH EXISTING CONCRETE.
- STRIP SEAL EXPANSION JOINT ASSEMBLY, INCLUDING ANCHOR STUDS, HARDWARE AND COVER PLATES WILL BE PAID FOR AT THE PER LINEAR FOOT BID PRICE FOR "EXPANSION DEVICE B-10-170."
- ANY EXCAVATION REQUIRED TO COMPLETE THE JOINT REPAIRS AT THE ABUTMENTS INCIDENTAL TO THE BID ITEM "JOINT REPAIR."
- PROTECTIVE SURFACE TREATMENT SHALL BE APPLIED TO THE TOP OF DECK AND PAVING BLOCK IN THE JOINT REPAIR AREAS.
- PIGMENTED SURFACE SEALER SHALL BE APPLIED TO FRONT FACE AND TOP OF PARAPET SURFACES IN THE JOINT REPAIR AREAS.
- THE EXISTING STRUCTURE B-10-170 IS A THREE SPAN 70" PRESTRESSED CONCRETE GIRDER STRUCTURE WITH AN OVERALL WIDTH OF 43'-0" AND AN OVERALL LENGTH OF 324'-10". THE EXPANSION JOINTS SHALL BE REPLACED.

SURFACE SEALER TREATMENT AT JOINT REPAIR LOCATIONS

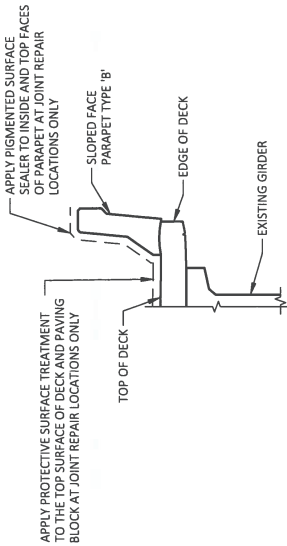


TOTAL ESTIMATED QUANTITIES

BID ITEM NUMBER	BID ITEMS	UNIT	TOTALS
502.3101	EXPANSION DEVICE B-10-170	LF	65
502.3200	PROTECTIVE SURFACE TREATMENT	SY	34
502.3210	PIGMENTED SURFACE SEALER	SY	7
502.4205	ADHESIVE ANCHORS NO. 5 BAR	EA	80
505.0900	BAR STEEL REINFORCEMENT HS COATED STRUCTURES	LB	2480
505.0904	BAR COUPLERS NO. 4	EA	8
505.0905	BAR COUPLERS NO. 5	EA	6
505.0906	BAR COUPLERS NO. 6	EA	24
509.1000	JOINT REPAIR	SY	38
509.2100.S	CONCRETE MASONRY DECK REPAIR	CY	14

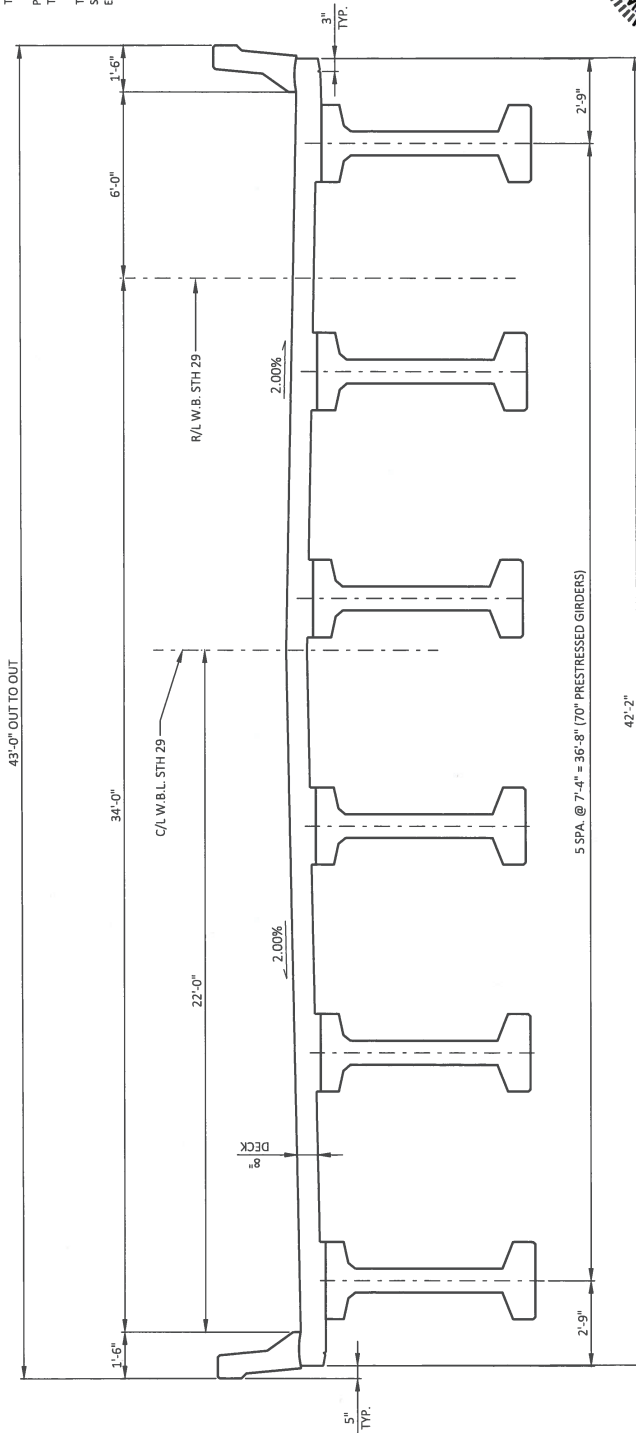

Addendum No. 02
ID 1050-00-62
Revised Sheet 293
December 5, 2024



12/04/24

CROSS SECTION THRU ROADWAY
(LOOKING EAST)

NO.	DATE	REV.	DECK REPAIR QTY.	JLA
2	12/04/24			
STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION				
STRUCTURE B-10-170				
CROSS SECTION, GENERAL NOTES & QUANTITIES				
SHEET 2				
293				



Proposal Schedule of Items

Page 4 of 12

Proposal ID: 20241210031 Project(s): 1050-00-62

Federal ID(s): WISC 2025122

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0090	502.3210 Pigmented Surface Sealer	14.000 SY	_____.	_____.
0092	502.4205 Adhesive Anchors No. 5 Bar	144.000 EACH	_____.	_____.
0094	504.0100 Concrete Masonry Culverts	84.000 CY	_____.	_____.
0096	505.0600 Bar Steel Reinforcement HS Coated Structures	11,100.000 LB	_____.	_____.
0098	505.0904 Bar Couplers No. 4	16.000 EACH	_____.	_____.
0100	505.0905 Bar Couplers No. 5	30.000 EACH	_____.	_____.
0102	505.0906 Bar Couplers No. 6	34.000 EACH	_____.	_____.
0104	509.1000 Joint Repair	65.000 SY	_____.	_____.
0106	509.2100.S Concrete Masonry Deck Repair 01.	24.000 CY	_____.	_____.
0108	511.1200 Temporary Shoring (structure) 01. B-10-153	1,200.000 SF	_____.	_____.
0110	516.0500 Rubberized Membrane Waterproofing	31.000 SY	_____.	_____.
0112	520.8000 Concrete Collars for Pipe	12.000 EACH	_____.	_____.
0114	520.8700 Cleaning Culvert Pipes	14.000 EACH	_____.	_____.
0116	522.1036 Apron Endwalls for Culvert Pipe Reinforced Concrete 36-Inch	1.000 EACH	_____.	_____.
0118	524.0118 Culvert Pipe Salvaged 18-Inch	16.000 LF	_____.	_____.

