



Wisconsin Department of Transportation

March 5, 2025

Division of Transportation Systems Development

Bureau of Project Development
4822 Madison Yards Way, 4th Floor South
Madison, WI 53705

Telephone: (608) 266-1631
Facsimile (FAX): (608) 266-8459

NOTICE TO ALL CONTRACTORS:

Proposal #26: 4589-01-72, WISC 2025382
Brown Co, CTH PP
Man Cal Road to STH 96
CTH PP
Brown County

Letting of March 11, 2025

This is Addendum No. 01, which provides for the following:

Special Provisions:

Revised Special Provisions	
Article No.	Description
3	Prosecution and Progress

Schedule of Items:

Revised Bid Item Quantities					
Bid Item	Item Description	Unit	Proposal Total Prior to Addendum	Proposal Quantity Change (-)	Proposal Total After Addendum
205.0100	Common Excavation	CY	14,100	-7,000	7,100
305.0110	Base Aggregate Dense ¾-Inch	TON	1,210	-285	925
305.0120	Base Aggregate Dense 1 ¼-Inch	TON	7,815	-3,815	4,000
311.0110	Breaker Run	TON	16,450	-8,130	8,320
460.2000	Incentive Density HMA Pavement	DOL	3,080	-1,580	1,500
460.2005	Incentive Density PWL HMA Pavement	DOL	8,210	1,010	9,220
455.0605	Tack Coat	GAL	7,770	-700	7,070
460.5223	HMA Pavement 3 LT 58-28S	TON	2,740	-1,445	1,295
624.0100	Water	MGAL	90	-41	49
625.0100	Topsoil	SY	500	2,500	3,000
628.2008	Erosion Mat Urban Class I Type B	SY	500	2,500	3,000
629.0210	Fertilizer Type B	CWT	0.3	1.6	1.9
630.0130	Seeding Mixture #30	LB	23	112	135
630.0500	Seed Water	MGAL	11	56	67
645.0220	Geogrid Type SR	SY	24,370	-12,070	12,300

650.4500	Construction Staking Subgrade	LF	5,350	-2,650	2,700
650.5000	Construction Staking Base	LF	5,350	-2,650	2,700
SPV.0090.01	Construction Staking Subgrade Improvement Reference	LF	5,350	-2,650	2,700

Plan Sheets:

Revised Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of changes to sheet)
3	Typical Sections, revised proposed shoulder depth in overlay areas
14,15,17,18	Misc Qty, revised shouldering and EBS-related quantities

Other

Bid items associated with the EBS and roadway reconstruction were revised to reflect a more accurate determination of the EBS limits after further review of soils data.

The depth of the new gravel shoulder adjacent to overlay areas was adjusted to more accurately reflect the amount of material that will be needed to bring the shoulder to grade with the new pavement.

The restoration quantities were revised to use a more realistic disturbed area next to the adjusted EBS limits.

The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.

Sincerely,

Mike Coleman

Proposal Development Specialist
Proposal Management Section

ADDENDUM NO. 01

4589-01-72

March 5, 2025

Special Provisions

3. Prosecution and Progress.

*Add the following under section titled **Surface Restrictions** with the following:*

The 96-hour restriction may be lengthened with the approval of the engineer if warranted by EBS operations and field conditions allow additional traffic without damage to the milled surface.

Schedule of Items


Attached, dated March 5, 2025, are the revised Schedule of Items Pages

Plan Sheets

The following 8½ x 11-inch sheets are attached and made part of the plans for this proposal:


Revised: 3, 14, 15, 17, and 18.

END OF ADDENDUM

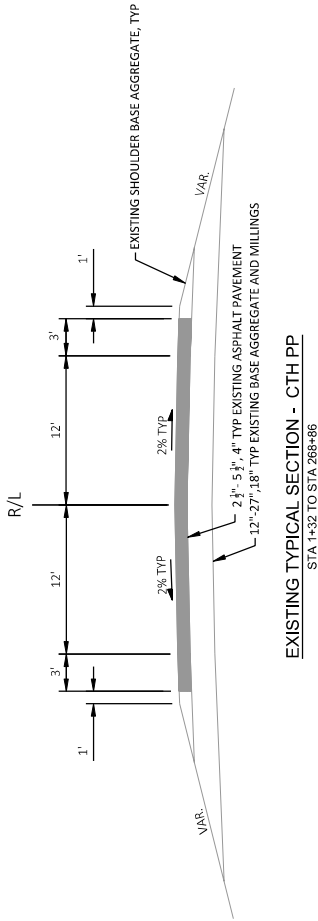

EXISTING TYPICAL SECTION - CTH PP

STA 1+32 TO STA 268+86

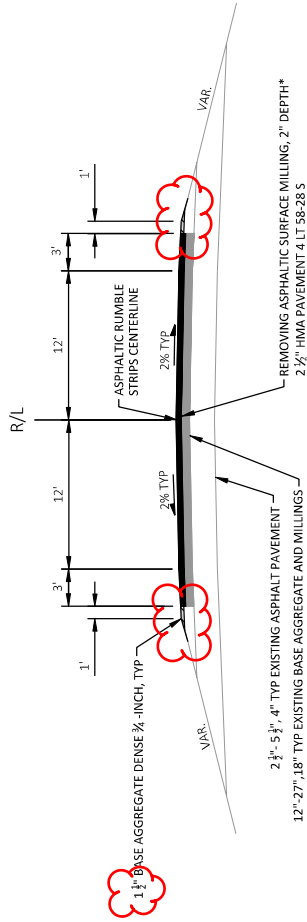

FINISHED TYPICAL SECTION - CTH PP

STA 1+32 TO STA 268+86

* STA 16+50 TO STA 28+00
VARIABLE DEPTH MILLING (0.2' - 4.4' DEPTH) AND WEDGING (1.3' - 4' DEPTH) REQUIRED
SEE CROSS SECTIONS

Addendum No. 01
ID 4589-01-72
Revised Sheet 3
March 5, 2025

PROJECT NO: 4589-01-72	HWY: CTH PP	COUNTY: BROWN	TYPICAL SECTIONS	SHEET 3	E
FILE NAME: N:\3001545\00\CIVIL 30\01545\SP\ANSOUTH PROJECT DOT\45890172-000301.TS.DWG	2/28/2025 6:40 AM	2/28/2025 6:40 AM	ANDY WESTBROOK	1 IN=10 FT	WISDOT/CADDSS-SHEET 42
LAYOUT NAME: 45890172-000301.LS					

REMOVING ASPHALTIC SURFACE

STATION	TO	STATION	ROADWAY	204.0115 REMOVING ASPHALTIC SURFACE BUTT JOINTS SY	204.0120 REMOVING ASPHALTIC MILLING SY	COMMENTS
PROJECT 4589-01-72						
CATEGORY 0010						
1+32	-	268+86	CTH PP	410	90,940	
---	-	---	SIDEROADS	185	---	
---	-	---	DRIVEWAYS	425	---	
PROJECT TOTALS						
				1,020	90,940	

EXCAVATION COMMON

STATION	TO	STATION	ROADWAY	205.0100 CY	COMMENTS
PROJECT 4589-01-72					
CATEGORY 0010					
1+32	-	15+00	CTH PP	3,600	SUBGRADE IMPROVEMENT
UNDISTRIBUTED			CTH PP	3,500	SUBGRADE IMPROVEMENT (ASSUMED 5% OF PROJECT LENGTH)
PROJECT TOTAL					7,100

PREPARE FOUNDATION FOR ASPHALTIC PAVING

STATION	TO	STATION	ROADWAY	211.0101 EA	COMMENTS
PROJECT 4589-01-72					
CATEGORY 0010					
UNDISTRIBUTED			CTH PP	1	
PROJECT TOTAL					1

Addendum No. 01
ID 4589-01-72
Revised Sheet 14
March 5, 2025

BASE AGGREGATE DENSE

STATION	TO	STATION	ROADWAY	305.0110 3/4-INCH TON	305.0120 1 1/4-INCH TON	311.0110 BREAKER RUN TON	624.0100 WATER MGAL	COMMENTS
PROJECT 4589-01-72								
CATEGORY 0010								
15+00	-	268+86	CTH PP	600	---	---	6	SHOULDER 2" DEPTH
---	-	---	DRIVEWAYS	---	110	---	1	
1+32	-	15+00	CTH PP	165	1,970	4,210	21	SUBGRADE IMPROVEMENT
UNDISTRIBUTED			CTH PP	160	1,920	4,110	21	SUBGRADE IMPROVEMENT (ASSUMED 5% OF PROJECT LENGTH)
PROJECT TOTALS				925	4,000	8,320	49	

ASPHALTIC ITEMS

STATION TO	STATION	ROADWAY	455.0605 TACK COAT	460.5223 HMA PAVEMENT 3 LT 58-28 S	460.5224 HMA PAVEMENT 4 LT 58-28 S	465.0105 ASPHALTIC SURFACE	465.0120 ASPHALTIC SURFACE DRIVEWAYS AND FIELD ENTRANCES	465.0560 ASPHALTIC RUMBLE STRIPS CENTERLINE	COMMENTS
			GAL	TON	TON	TON	TON	LF	
PROJECT 4589-01-72									
CATEGORY 0010									
1+32	-	268+86	CTH PP	6.410	---	---	---	24,060	OVERLAY
16+50	-	27+50	CTH PP	30	---	---	60	---	2.5" DEPTH
1+32	-	15+00	CTH PP	320	---	40	---	---	WEDGING FOR SE CORRECTION
UNDISTRIBUTED			CTH PP	640	---	---	---	---	2.5" DEPTH IN SUBGRADE IMPROVEMENT AREAS
PROJECT TOTALS			7,070	1,295	13,165	40	60	24,060	

HMA MIXTURE ACCEPTANCE

STATION TO	STATION	ROADWAY	LOCATION	UNDERLAYING SURFACE	MIXTURE USE	BTD ITEM	LAYER DEPTH (IN)	TONNAGE	MIXTURE ACCEPTANCE	DENSITY ACCEPTANCE
PROJECT 4589-01-72										
CATEGORY 0010										
1+32	-	268+86	CTH PP	DRIVING LANE	MILLED HMA	UPPER	4 LT 58-28 S	2.50	9,219	PWL INCENTIVE AIR VOIDS HMA PAVEMENT 460.2010
				SHLDS / SIDE ROADS	MILLED HMA	UPPER	4 LT 58-28 S	2.50	2,909	
				EBS AREA UPPER LIFT	3 LT 58-28 S	UPPER	4 LT 58-28 S	2.50	1,037	PWL INCENTIVE HMA PAVEMENT 460.2000
				EBS AREA LOWER LIFT	BASE COURSE	LOWER	3 LT 58-28 S	2.50	1,295	

ASPHALTIC SURFACE PATCHING

STATION	TO	STATION	ROADWAY	465.0110 TON	COMMENT
PROJECT 4589-01-72					
CATEGORY 0010					
UNDISTRIBUTED			CTH PP	40	TEMP RAMPING
UNDISTRIBUTED			CTH PP	200	MINOR REPAIRS
PROJECT TOTAL				240	

HMA PAVEMENT PWL TEST STRIP

ROADWAY	460.0105.S VOLUMETRICS EACH	460.0110.S DENSITY EACH	COMMENTS
PROJECT 4589-01-72			
CATEGORY 0010			
STH 153	1	1	
PROJECT TOTALS		1	1

Addendum No. 01
ID 4589-01-72
Revised Sheet 15
March 5, 2025

Addendum No. 01
ID 4589-01-72
Revised Sheet 17
March 5, 2025

PERMANENT SIGNS - CONTINUED

SIGN NO.	STATION	FACE TRAFFIC DIRECTION	LOCATION	SIGN CODE	W X H	SIGNS		637.2210 REFLECTIVE H SF	637.2230 TYPE II REFLECTIVE F SF		634.0614 POSTS WOOD 4x6x14 EA		REMARKS
						637.2210 REFLECTIVE H SF	TYPE II REFLECTIVE F SF		637.2230 TYPE II REFLECTIVE F SF	634.0614 POSTS WOOD 4x6x14 EA			

PROJECT 4589-01-72													
CATEGORY 0010													
250	12+30	RT	NB	CTH PP	R4-1	24"x30"	5.00	---	---	---	1		
251	12+30	LT	NB	CTH PP	W14-3	48"x36"	---	---	5.56	---	1		
252	20+40	LT	SB	CTH PP	R4-2	24"x30"	5.00	---	---	---	1		
253	24+35	RT	NB	CTH PP	R4-2	24"x30"	5.00	---	---	---	1		
254	30+94	RT	SB	CTH PP	W14-3	48"x36"	---	---	5.56	---	1		
255	30+94	LT	SB	CTH PP	R4-1	24"x30"	5.00	---	---	---	1		
256	69+16	RT	NB	CTH PP	R4-1	24"x30"	5.00	---	---	---	1		
257	69+16	LT	NB	CTH PP	W14-3	48"x36"	---	---	5.56	---	1		
258	74+93	RT	NB	CTH PP	R4-2	24"x30"	5.00	---	---	---	1		
259	76+98	LT	SB	CTH PP	R4-2	24"x30"	5.00	---	---	---	1		
260	83+30	RT	SB	CTH PP	W14-3	48"x36"	---	---	5.56	---	1		
261	83+30	LT	SB	CTH PP	R4-1	24"x30"	5.00	---	---	---	1		
262	184+40	RT	NB	CTH PP	R4-1	24"x30"	5.00	---	---	---	1		
263	184+40	LT	NB	CTH PP	W14-3	48"x36"	---	---	5.56	---	1		
264	192+50	LT	SB	CTH PP	R4-2	24"x30"	5.00	---	---	---	1		
265	195+09	RT	NB	CTH PP	R4-2	24"x30"	5.00	---	---	---	1		
266	203+70	RT	SB	CTH PP	W14-3	48"x36"	---	---	5.56	---	1		
267	203+70	LT	SB	CTH PP	R4-1	24"x30"	5.00	---	---	---	1		
268	225+30	RT	NB	CTH PP	R4-1	24"x30"	5.00	---	---	---	1		
269	225+30	LT	NB	CTH PP	W14-3	48"x36"	---	---	5.56	---	1		
270	231+10	RT	NB	CTH PP	R4-2	24"x30"	5.00	---	---	---	1		
271	233+40	LT	SB	CTH PP	R4-2	24"x30"	5.00	---	---	---	1		
272	238+56	RT	SB	CTH PP	W14-3	48"x36"	---	---	5.56	---	1		
273	238+56	LT	SB	CTH PP	R4-1	24"x30"	5.00	---	---	---	1		

RESTORATION AND EROSION CONTROL

STATION TO STATION	DIR	ROADWAY	TOPSOIL	SILT FENCE	SILT FENCE MAINTENANCE	EROSION MAT URBAN CLASS I TYPE B	628.1905 MOBILIZATIONS EROSION CONTROL	628.1910 MOBILIZATIONS EROSION CONTROL	TEMPORARY DITCH CHECKS	FERTILIZER TYPE B	SEEDING MIXTURE #30	SEED WATER	COMMENT
625.0100			SY	LF	LF	SY	EA	EA	LF	CWT	LB	MGAL	
PROJECT 4589-01-72													
CATEGORY 0010													
UNDISTRIBUTED	CTH PP	3,000	500	500	3,000	1	1	1	50	1.9	135	67	SUBGRADE IMPROVEMENT AREAS
PROJECT TOTALS		3,000	500	500	3,000	1	1	1	50	1.9	135	67	

3

STAGE

PROJECT 4589-01-72

LOCATION

APPROX. SERVICE PERIOD

DAYS

643.0900

SIGNS

NO. DAYS

643.1050

SIGNS PCMS

NO. DAYS

643.0300

DRUMS

NO. DAYS

NOTES

TRAFFIC CONTROL

PROJECT 4589-01-72

CATEGORY 0010

NO DETOUR

CTH PP AT MAN CAL RD

62

5

310

1

7

5

35

INSTALL PCMS 7 DAYS PRIOR TO CONSTRUCTION AND REMOVE WHEN CONSTRUCTION BEGINS PCMS MESSAGE: "ROADWORK BEGINS XX/XX/XX"

CTH PP AT STH 96

62

5

310

1

7

5

35

SIDEROADS

62

9

558

--

--

--

--

CTH PP (GROOVED PAVEMENT)

62

11

682

--

--

--

--

CTH PP (UNEVEN LANES)

62

11

682

--

--

--

--

SUBGRADE IMPROVEMENT AREAS

12

--

--

--

--

25

300

SUBTOTALS

2,542

14

370

UNDISTRIBUTED

254

0

0

PROJECT TOTALS

2,796

14

370

PAVEMENT MARKING

STATION TO STATION

LOCATION

LF

646.2020

MARKING LINE EPOXY 6-INCH (WHITE)

LF

646.4720

MARKING LINE SAME DAY EPOXY 6-INCH (YELLOW)

LF

643.3165

TEMPORARY MARKING LINE PAINT 6-INCH (YELLOW)

LF

648.0100

LOCATING NO PASSING ZONES

MI

PROJECT 4589-01-72

CATEGORY 0010

1+32

-

268+86

CTH PP

52,610

15,000

10,600

5.07

PROJECT TOTALS

52,610

15,000

10,600

5.07

CONSTRUCTION STAKING

STATION TO STATION

LOCATION

LF

650.4500

SUBGRADE

LF

650.5000

BASE

LF

650.8000

RESURFACING IMPROVEMENT REFERENCE

LF

SPV.0090.01

SUBGRADE IMPROVEMENT REFERENCE

LF

PROJECT 4589-01-72

CATEGORY 0010

1+32

-

268+86

CTH PP

2,700

2,700

2,700

26,754

2,700

2,700

2,700

PROJECT TOTALS

2,700

2,700

2,700

26,754

2,700

2,700

2,700

3

STATION TO STATION

LOCATION

CTH PP

12,300

SUBGRADE IMPROVEMENT

PROJECT 4589-01-72

CATEGORY 0010

UNDISTRIBUTED

CTH PP

12,300

SUBGRADE IMPROVEMENT

PROJECT TOTAL

12,300

GEGRID

STATION TO STATION

LOCATION

TYPE SR

645.0220

SY

PROJECT NO: 4589-01-72

HWY: CTH PP

COUNTY: BROWN

MISCELLANEOUS QUANTITIES

SHEET 18

E

FILE NAME: N:\3001545.00\Cal 3D\Sheets\Plan\South Project\DOT45890172-30201-mcppt

ORIGINATOR: OMNII ASSOCIATES

REV. DATE: February 28, 2025

PRINT DATE: February 28, 2025



Proposal Schedule of Items

Page 1 of 4

Proposal ID: 20250311026 Project(s): 4589-01-72

Federal ID(s): WISC 2025382

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0002	204.0115 Removing Asphaltic Surface Butt Joints	1,020.000 SY	_____.	_____.
0004	204.0120 Removing Asphaltic Surface Milling	90,940.000 SY	_____.	_____.
0006	205.0100 Excavation Common	7,100.000 CY	_____.	_____.
0008	211.0101 Prepare Foundation for Asphaltic Paving (project) 01. 4589-01-72	1.000 EACH	_____.	_____.
0010	213.0100 Finishing Roadway (project) 01. 4589-01-72	1.000 EACH	_____.	_____.
0012	305.0110 Base Aggregate Dense 3/4-Inch	925.000 TON	_____.	_____.
0014	305.0120 Base Aggregate Dense 1 1/4-Inch	4,000.000 TON	_____.	_____.
0016	311.0110 Breaker Run	8,320.000 TON	_____.	_____.
0018	455.0605 Tack Coat	7,070.000 GAL	_____.	_____.
0020	460.0105.S HMA Percent Within Limits (PWL) Test Strip Volumetrics	1.000 EACH	_____.	_____.
0022	460.0110.S HMA Percent Within Limits (PWL) Test Strip Density	1.000 EACH	_____.	_____.
0024	460.2000 Incentive Density HMA Pavement	1,500.000 DOL	1.00000	1,500.00
0026	460.2005 Incentive Density PWL HMA Pavement	9,220.000 DOL	1.00000	9,220.00
0028	460.2007 Incentive Density HMA Pavement Longitudinal Joints	5,360.000 DOL	1.00000	5,360.00
0030	460.2010 Incentive Air Voids HMA Pavement	13,180.000 DOL	1.00000	13,180.00



Proposal Schedule of Items

Page 2 of 4

Proposal ID: 20250311026 Project(s): 4589-01-72

Federal ID(s): WISC 2025382

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0032	460.5223 HMA Pavement 3 LT 58-28 S	1,295.000 TON	_____.	_____.
0034	460.5224 HMA Pavement 4 LT 58-28 S	13,165.000 TON	_____.	_____.
0036	465.0105 Asphaltic Surface	40.000 TON	_____.	_____.
0038	465.0110 Asphaltic Surface Patching	240.000 TON	_____.	_____.
0040	465.0120 Asphaltic Surface Driveways and Field Entrances	60.000 TON	_____.	_____.
0042	465.0560 Asphaltic Rumble Strips, Centerline	24,060.000 LF	_____.	_____.
0044	619.1000 Mobilization	1.000 EACH	_____.	_____.
0046	624.0100 Water	49.000 MGAL	_____.	_____.
0048	625.0100 Topsoil	3,000.000 SY	_____.	_____.
0050	628.1504 Silt Fence	3,000.000 LF	_____.	_____.
0052	628.1520 Silt Fence Maintenance	500.000 LF	_____.	_____.
0054	628.1905 Mobilizations Erosion Control	1.000 EACH	_____.	_____.
0056	628.1910 Mobilizations Emergency Erosion Control	1.000 EACH	_____.	_____.
0058	628.2008 Erosion Mat Urban Class I Type B	500.000 SY	_____.	_____.
0060	628.7504 Temporary Ditch Checks	50.000 LF	_____.	_____.
0062	629.0210 Fertilizer Type B	1.900 CWT	_____.	_____.



Proposal Schedule of Items

Page 3 of 4

Proposal ID: 20250311026 Project(s): 4589-01-72

Federal ID(s): WISC 2025382

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0064	630.0130 Seeding Mixture No. 30	135.000 LB	_____.	_____.
0066	630.0500 Seed Water	67.000 MGAL	_____.	_____.
0068	634.0614 Posts Wood 4x6-Inch X 14-FT	52.000 EACH	_____.	_____.
0070	637.2210 Signs Type II Reflective H	167.040 SF	_____.	_____.
0072	637.2230 Signs Type II Reflective F	161.480 SF	_____.	_____.
0074	638.2602 Removing Signs Type II	44.000 EACH	_____.	_____.
0076	638.3000 Removing Small Sign Supports	28.000 EACH	_____.	_____.
0078	642.5001 Field Office Type B	1.000 EACH	_____.	_____.
0080	643.0300 Traffic Control Drums	370.000 DAY	_____.	_____.
0082	643.0900 Traffic Control Signs	2,796.000 DAY	_____.	_____.
0084	643.1050 Traffic Control Signs PCMS	14.000 DAY	_____.	_____.
0086	643.3165 Temporary Marking Line Paint 6-Inch	10,600.000 LF	_____.	_____.
0088	643.5000 Traffic Control	1.000 EACH	_____.	_____.
0090	645.0220 Geogrid Type SR	12,300.000 SY	_____.	_____.
0092	646.2020 Marking Line Epoxy 6-Inch	52,610.000 LF	_____.	_____.
0094	646.4720 Marking Line Same Day Epoxy 6-Inch	15,000.000 LF	_____.	_____.



Proposal Schedule of Items

Page 4 of 4

Proposal ID: 20250311026 Project(s): 4589-01-72

Federal ID(s): WISC 2025382

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0096	648.0100 Locating No-Passing Zones	5.070 MI	_____.	_____.
0098	650.4500 Construction Staking Subgrade	2,700.000 LF	_____.	_____.
0100	650.5000 Construction Staking Base	2,700.000 LF	_____.	_____.
0102	650.8000 Construction Staking Resurfacing Reference	26,754.000 LF	_____.	_____.
0104	740.0440 Incentive IRI Ride	20,270.000 DOL	1.00000	20,270.00
0106	ASP.1T0A On-the-Job Training Apprentice at \$5.00/HR	2,000.000 HRS	5.00000	10,000.00
0108	ASP.1T0G On-the-Job Training Graduate at \$5.00/HR	1,200.000 HRS	5.00000	6,000.00
0110	SPV.0090 Special 01. Construction Staking Subgrade Improvement Reference	2,700.000 LF	_____.	_____.
Section: 0001			Total:	_____.
			Total Bid:	_____.