



Wisconsin Department of Transportation

March 3, 2025

Division of Transportation Systems Development

Bureau of Project Development
4822 Madison Yards Way, 4th Floor South
Madison, WI 53705

Telephone: (608) 266-1631
Facsimile (FAX): (608) 266-8459

NOTICE TO ALL CONTRACTORS:

Proposal #40: 1196-04-77
New Auburn – Rice Lake
B-03-14,16,18,20,26,30,37,218
USH 53
Barron County

Letting of March 11, 2025

This is Addendum No. 01, which provides for the following:

Special Provisions:

Added Special Provisions	
Article No.	Description
36	Removing Bearings B-3-16, Item 506.7050.S.01; Removing Bearings B-3-18, Item 506.7050.S.02; Removing Bearings B-3-30, Item 506.7050.S.04.

Deleted Special Provisions	
Article No.	Description
16	Removing Bearings B-3-16, Item 506.7050.S.01; Removing Bearings B-3-18, Item 506.7050.S.02; Removing Bearings B-3-26, Item 506.7050.S.03; Removing Bearings B-3-30, Item 506.7050.S.04.

Schedule of Items:

Revised Bid Item Quantities					
Bid Item	Item Description	Unit	Proposal Total Prior to Addendum	Proposal Quantity Change (-)	Proposal Total After Addendum
643.3170	Temporary Marking Line Epoxy 6-Inch	LF	53,010	-152	52,858

Deleted Bid Item Quantities					
Bid Item	Item Description	Unit	Proposal Total Prior to Addendum	Proposal Quantity Change (-)	Proposal Total After Addendum
506.7050.S.03	Removing Bearings B-3-26	Each	4	-4	0

Plan Sheets:

Revised Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of changes to sheet)
77	Miscellaneous Quantities: Temporary Marking Line miscellaneous quantity table update (643.3170 Temporary Marking Line Epoxy 6-Inch quantity between Station 843+23 SB and Station 856+36 SB updated to account for 3-foot segment/9-foot gap within lane drop).
296	Structure Plan Sheet: B-3-26 (eliminated north abutment bearing removals).
297	Structure Plan Sheet: B-3-26 (eliminated north abutment bearing removals).

Added Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of why sheet was added)
186A	Added Standard Detail Drawing "Pavement Marking, Entrance Ramp and Parallel Entrance Ramp."

The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.

Sincerely,

Mike Coleman

Proposal Development Specialist
Proposal Management Section

ADDENDUM NO. 01

ID 1196-04-77

March 3, 2025

Special Provisions

16. Deleted

36. Removing Bearings B-3-16, Item 506.7050.S.01; Removing Bearings B-3-18, Item 506.7050.S.02; Removing Bearings B-3-30, Item 506.7050.S.04.

A Description

This special provision describes raising the girders and removing the existing bearings, as the plans show.

B (Vacant)

C Construction

Raise the structure's girders and remove the existing bearings as the plans show

Obtain prior approval from the engineer for the method of jacking the girders and of supporting them as required.

D Measurement

The department will measure Removing Bearings (Structure) by the unit for each bearing removed, acceptably completed.

E Payment

The department will pay for measured quantities at the contract unit price under the following bid item:

ITEM NUMBER	DESCRIPTION	UNIT
506.7050.S.01	Removing Bearings B-3-16	EACH
506.7050.S.02	Removing Bearings B-3-18	EACH
506.7050.S.04	Removing Bearings B-3-30	EACH

Payment is full compensation for raising the bridge girders; and for removing the old bearings.

Cost of furnishing and installing the bearings will be paid for under separate bid items.

stp-506-035 (20130615)

Schedule of Items

Attached, dated March 3, 2025, are the revised Schedule of Items Pages 1 – 16..

Plan Sheets

The following 8½ x 11-inch sheets are attached and made part of the plans for this proposal:

Revised: 77, 296, and 297.

Added: 186A.

END OF ADDENDUM

TRAFFIC CONTROL

CATEGORY	TRAFFIC CONTROL OPERATIONS		643.0300		643.0420		643.0705		643.0715		643.0800		643.0900		643.1050	
	DURATION (DAYS)		EACH	DAY	EACH	DAY	EACH	DAY	EACH	DAY	EACH	DAY	EACH	DAY	EACH	DAY
0010	ADVANCE WARNING		291	---	---	---	---	---	---	---	---	---	128	37,274	2	14
	WIDTH RESTRICTION		291	---	---	---	---	---	---	---	---	---	26	7,571	---	---
	PRE-STAGE		24	475	11,397	35	840	1,680	52	1,248	4	96	67	1,608	---	---
	STAGE 1		123	574	70,777	45	5,544	11,088	175	21,560	4	493	100	12,320	---	---
	STAGE 2		105	592	62,211	49	5,145	10,290	135	14,175	4	420	112	11,760	---	---
	STAGE 3		24	475	11,302	35	833	1,666	52	1,238	4	95	67	1,595	---	---
	CTH AA CLOSURE		21	---	---	18	378	588	28	---	---	---	14	294	2	56
	CTH A CLOSURE		21	---	---	18	378	588	28	---	---	---	14	294	2	56
	20TH STREET CLOSURE		15	---	---	18	270	420	28	---	---	---	14	210	2	100
	CTH I CLOSURE		60	30	1,800	5	300	600	---	---	---	---	20	1,200	---	---
0010	USH 53 SB ENTRANCE RAMP FROM CTH I CLOSURE		60	---	---	---	---	---	---	---	---	---	51	3,060	1	7
	DETOUR ROUTE - CTH I ENTRANCE RAMP TO USH 53 SB		56	60	3,360	4	224	448	12	672	1	56	20	1,120	---	---
	CTH I INSIDE LANE CLOSURE		56	100	5,600	2	112	336	12	672	1	56	18	1,008	---	---
	CTH I OUTSIDE LANE CLOSURE		56	100	5,600	2	112	336	12	672	1	56	18	1,008	---	---
TOTALS			166,447		14,402		28,292		39,565		1,216		79,607		289	

TRAFFIC CONTROL COVERING SIGNS TYPE II

CATEGORY	TRAFFIC CONTROL OPERATION	NO. OF CYCLES	NO. OF SIGNS	643.0920		643.3170												643.3180				643.3270																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																						
				EACH		EPOXY 6-INCH (WHITE)				(YELLOW)				REMOVABLE TAPE 6-INCH (WHITE)				EPOXY 10-INCH (WHITE)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
						LF	STAGE	LOCATION	LF	LF	LF	LF	LF	LF	LF	LF	LF	LF	LF	LF	LF	LF																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																						
0010	DETOUR AND CLOSURE UNDISTRIBUTED	1	10	10																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																								

TEMPORARY MARKING LINE

CATEGORY	STAGE	LOCATION	643.3170		643.3180		643.3270		
			EPOXY 6-INCH		REMOVABLE TAPE 6-INCH		EPOXY 10-INCH		
			(WHITE)	(YELLOW)	(WHITE)	(YELLOW)	(WHITE)	(WHITE)	
0010	1	62+25 SB - 79+76 SB	1,750	---	---	---	---	---	
		215+30 SB - 234+25 SB	1,890	---	1,750	---	---	---	
		357+92 SB - 379+28 SB	2,140	---	1,900	---	---	---	
		407+17 SB - 441+92 SB	2,970	---	---	---	---	---	
		486+46 SB - 504+22 SB	1,780	---	---	---	---	205	
		791+26 SB - 810+24 SB	1,900	---	---	---	---	---	
		864+84 SB - 883+51 SB	1,870	---	---	---	---	---	
		CTH I	---	---	1,320	---	---	---	
		STAGE 1 SUBTOTALS		14,300	---	14,820	0	---	205
		0010	2	62+93 SB - 79+05 SB	1,420	---	---	195	---
215+42 SB - 233+01 SB	1,550			---	1,420	---	---	---	
359+12 SB - 377+46 SB	1,460			---	1,560	210	200	---	
410+44 SB - 440+81 SB	2,560			---	1,470	375	365	---	
444+52 SB - 452+00 SB	200			---	2,560	475	475	---	
487+16 SB - 503+45 SB	1,420			---	---	---	---	400	
792+50 SB - 809+04 SB	1,420			---	1,430	205	200	---	
843+23 SB - 856+36 SB	300			---	---	235	225	---	
865+68 SB - 882+86 SB	1,430			---	---	---	---	250	
889+31 SB - 896+81 SB	200			---	1,430	290	290	---	
STAGE 2 SUBTOTALS		11,960	---	---	---	---	400		
CTH I		---	---	---	1,320	---	---		
STAGE 2 SUBTOTALS		11,960	---	11,615	1,985	3,270	1,050		
TOTALS		26,260		26,435		1,255			

Addendum No. 01
ID 1196-04-77
Revised Sheet 77
March 3, 2025


GENERAL NOTES

PLACE GROOVE 3 INCHES LEFT OF JOINT.


LEGEND



*CONFIRM MARKING LINE WIDTH WITH THE MISCELLANEOUS QUANTITIES

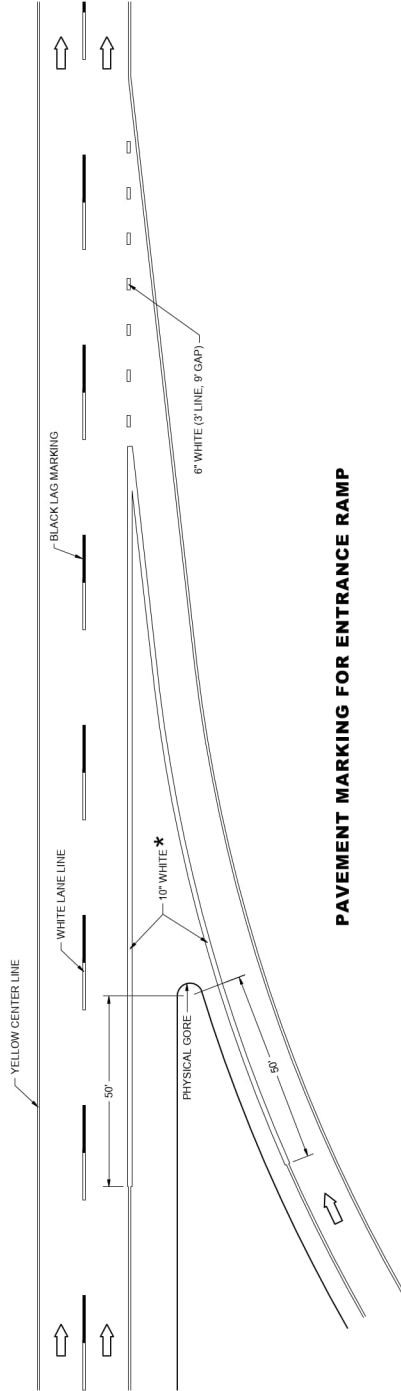

PAVEMENT MARKING FOR ENTRANCE RAMP

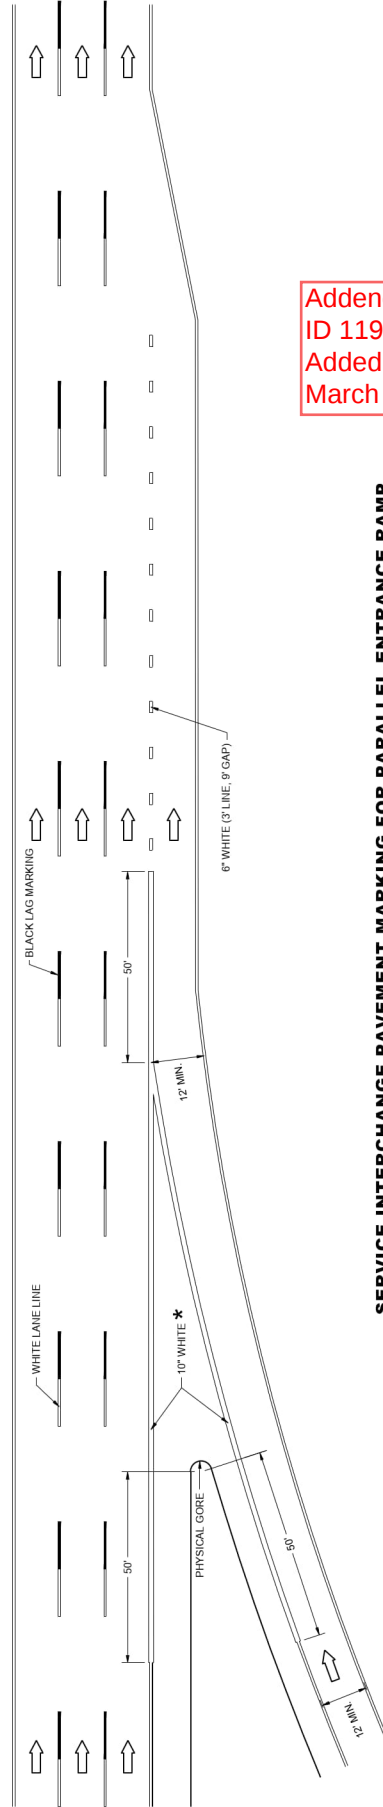

SERVICE INTERCHANGE PAVEMENT MARKING FOR PARALLEL ENTRANCE RAMP

Addendum No. 01
ID 1196-04-77
Added Sheet 186A
March 3, 2025

PAVEMENT MARKING,
ENTRANCE RAMP AND
PARALLEL ENTRANCE RAMP

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

186A

DESIGN DATA

LIVE LOAD: HS20
DESIGN LOADING: HS15
INVENTORY RATING: HS15
OPERATING RATING: HS24
WISCONSIN STANDARD PERMIT
VEHICLE (WIS-SPV): 160 KIPS

MATERIAL PROPERTIES:
CONCRETE SUPERSTRUCTURE: $f'_c = 4,000$ PSI
CONCRETE SUBSTRUCTURE: $f'_c = 3,500$ PSI
CONCRETE MASONRY OVERLAY DECKS: $f'_c = 4,000$ PSI
HIGH STRENGTH BAR STEEL: $f_y = 60,000$ PSI
REINFORCEMENT (GRADE 60): $f_y = 60,000$ PSI

TRAFFIC DATA

USH 53 SB
A.D.T. (2025) = 9,660
DESIGN SPEED = 70 MPH
KNAPP ST.
L.A.N.E. (2025) = 2,500
DESIGN SPEED = 60 MPH

LEGEND

* LOCATION OF ANCHOR ASSEMBLIES FOR THREE BEAM ATTACHMENT.

(X) DENOTES WINGWALL NUMBER.

MIN. VERTICAL CLEARANCE BASED ON INFORMATION OBTAINED FROM WISDOT HIGHWAY STRUCTURES INFORMATION SYSTEM.

LIST OF DRAWINGS

1. GENERAL PLAN
2. CROSS SECTION & QUANTITIES
3. CONSTRUCTION STAGING
4. NORTH ABUTMENT
5. SOUTH ABUTMENT
6. SOUTH ABUTMENT DETAILS
7. NORTH ABUTMENT
8. NORTH ABUTMENT DETAILS
9. SUPERSTRUCTURE DETAILS
10. STRIP SEAL EXPANSION JOINT
11. COVER PLATE DETAILS
12. MODIFIED CONCRETE PARAPET - 1
13. MODIFIED CONCRETE PARAPET - 2
14. CATHODIC PROTECTION

STRUCTURE DESIGN CONTACTS

BRIDGE OFFICE CONTACT:
AARON BONK (608) 261-0261

DESIGN CONSULTANT CONTACT:
BRETT OFTEDAHL (608) 251-4843

NO.	DATE	REVISION	BY
1	1/26/24	ELIMINATE BEARING REMOVAL	BMO



900 WEST WINGRA DRIVE
MADISON, WISCONSIN 53715
(608) 251-4843
WWW.SAI-STRATEGIC.COM

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

ACCEPTED CHIEF STRUCTURES DESIGN ENGINEER

STRUCTURE B-3-26

USH 53 SB OVER KNAPP ST.

COUNTY: BARREN

DESIGN SPEC: TOWN OF WINGRA LAKE

REHABILITATION N/A

SIGNED JFC

DESIGNED JFC

BY JFC

PLANS

BY JFC

BMO

SHEET 1 OF 13


GENERAL PLAN

296


Addendum No. 01
ID 1196-04-77
Revised Sheet 296
March 3, 2025



02/27/25

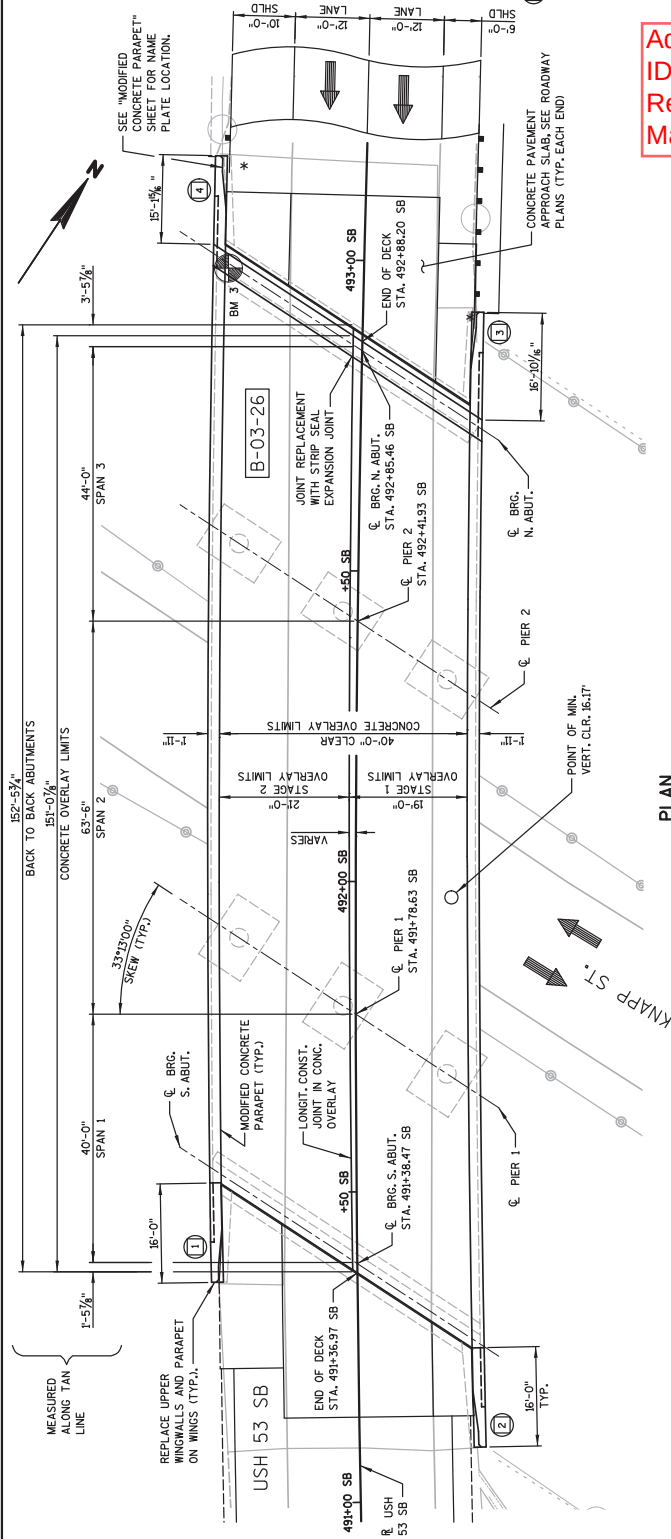

PLAN
(CONCRETE OVERLAY - 3 SPAN 45' PRESTRESSED GIRDERS)

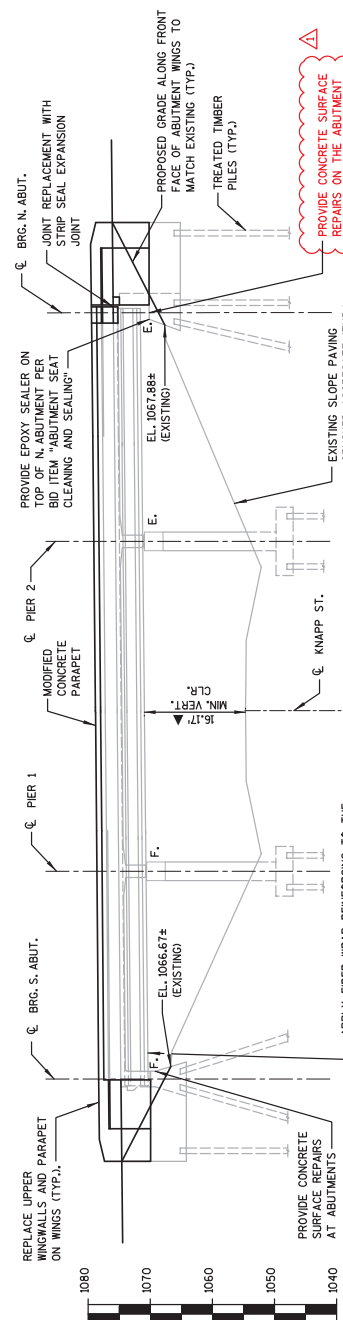


ELEVATION
(NORMAL TO CL KNAPP ST.)

BM NO.	COORDINATES	DESCRIPTION	ELEV.
BM 1	X: 521,729.63 Y: 52,172.63	NW CORNER BRIDGE DECK B-3-24 (CTH I)	1065.33
BM 2	X: 61,303.85 Y: 355,782.67	NW CORNER BRIDGE DECK B-3-20 (CHETEK RIVER)	1043.36
BM 3	X: 66,181.31 Y: 349,955.75	NW CORNER BRIDGE DECK B-3-26 (KNAPP STREET)	1077.68


NOTE: BM 1 AND BM 2 ARE OUTSIDE OF PLAN EXTENTS. SEE ROADWAY PLANS FOR ADDITIONAL INFORMATION.

Addendum No. 01
ID 1196-04-77
Revised Sheet 297
March 3, 2025

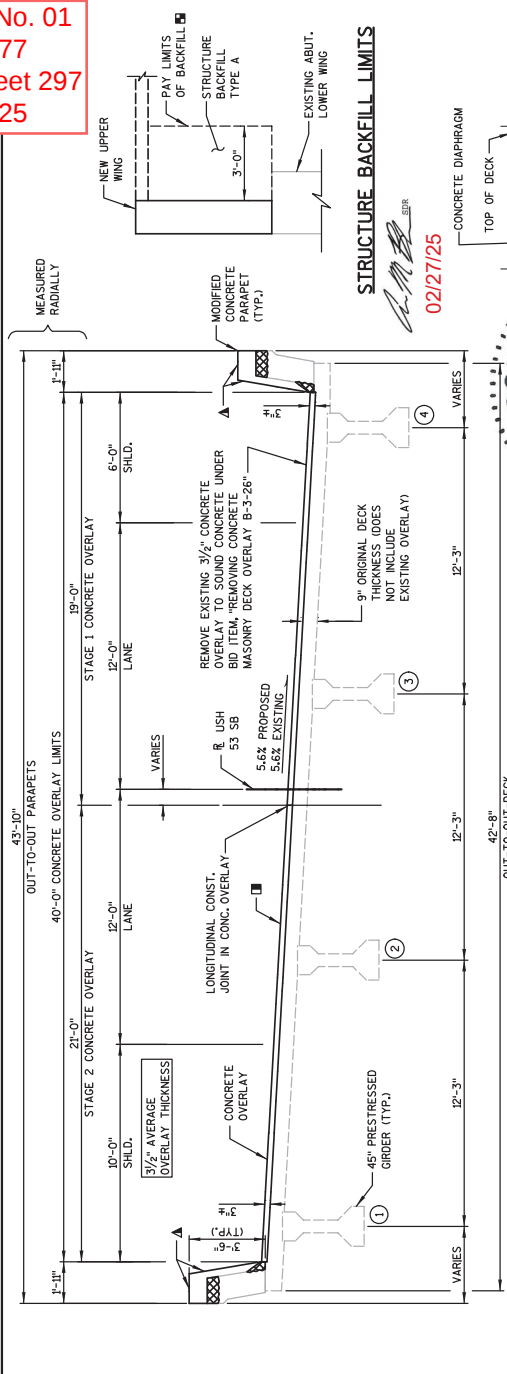

TOTAL ESTIMATED QUANTITIES

BID ITEM NUMBER	BID ITEMS	S. ABUT.	N. ABUT.	SUPERSTRUCTURE	TOTAL	UNIT
203.0215.02	ABATEMENT OF ASBESTOS CONTAINING MATERIAL B-3-26	----	----	---	1	EACH
203.0220.05	REMOVING STRUCTURE B-3-26	----	----	---	1	EACH
206.1001.06	EXCAVATION FOR STRUCTURES BRIDGES B-3-26	----	----	---	1	EACH
210.1500	BACKFILL STRUCTURE TYPE A	28	29	---	57	TON
502.0100	CONCRETE MASONRY BRIDGES	14.0	14.8	29.6	58	CY
502.3101	EXPANSION DEVICE	----	----	48	48	LF
502.3200	PROTECTIVE SURFACE TREATMENT	----	----	690	690	SY
502.3210	PIGMENTED SURFACE SEALER	15	15	128	158	SY
502.4204	ADHESIVE ANCHORS NO. 4 BAR	20	21	---	41	EACH
502.4205	ADHESIVE ANCHORS NO. 5 BAR	20	21	42	83	EACH
505.0400	BAR STEEL REINFORCEMENT HS STRUCTURES	1460	1490	6,500	14,950	LB
505.0904	BAR COUPLERS NO. 4	----	----	2	2	EACH
505.0905	BAR COUPLERS NO. 5	----	----	3	3	EACH
505.0906	BAR COUPLERS NO. 6	----	----	11	11	EACH
505.0908	BAR COUPLERS NO. 8	----	----	6	6	EACH
509.0301	PREPARATION DECKS TYPE 1	----	----	30	30	SY
509.0302	PREPARATION DECKS TYPE 2	----	----	15	15	SY
509.0505.S	CLEANING DECKS TO REPLY CONCRETE MASONRY OVERLAY	----	----	671	671	SY
509.1500	JOINT REPAIR	----	----	24	24	SY
509.2000	CONCRETE SURFACE REPAIR	10	30	195	235	SF
509.2500	FULL-DEPTH DECK REPAIR	----	----	1	1	SY
509.2600	CONCRETE MASONRY OVERLAY DECKS	----	----	74.5	75	CY
509.9005.S.02	REMOVING CONCRETE MASONRY DECK OVERLAY B-3-26	----	----	671	671	SY
509.9005.S	CLEANING PARAPETS	----	----	303	303	LF
516.0500	RUBBERIZED MEMBRANE WATERPROOFING	7	6	---	13	SY
614.0180	ANCHOR ASSEMBLIES FOR STEEL PLATE BEAM GUARD	2	2	---	2	EACH
SPV.0060.02	EMBEDDED GALVANIC ANODES	6	16	302	324	EACH
SPV.0065.01	FIBER WRAP REINFORCING NON-STRUCTURAL	120	120	---	240	SF
SPV.0080.01	ABUTMENT SEAT CLEANING AND SEALING	----	14	---	14	SY
	NON-BID ITEMS	----	----	---	---	---
	FILLER	----	----	---	1/2", 3/4"	SIZE

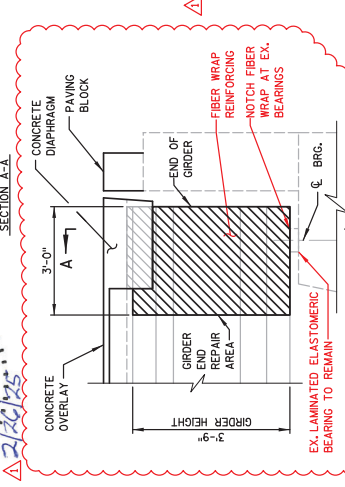

TYPICAL PRESTRESSED GIRDER FIBER WRAP REINFORCING REPAIR
EACH GIRDER END REPAIR IS PAID PER SQUARE FOOT UNDER FIBER WRAP REINFORCING NON-STRUCTURAL BID ITEM.
REPAIR AREA SHOWN IS FOR REFERENCE ONLY. LIMITS OF "REPAIR AREA" AT EACH GIRDER ARE TO BE COORDINATED WITH THE FIELD ENGINEER.

- LEGEND**
(X) DENOTES GIRDER NUMBER.
■ PROTECTIVE SURFACE TREATMENT SHALL BE APPLIED TO THE TOP OF DECK, AND THE VERTICAL AND HORIZONTAL SURFACES OF PAVING NOTCHES.
▲ PIGMENTED SURFACE SEALER SHALL BE APPLIED TO THE INSIDE, TOP, AND ENDS OF PARAPETS.
■ BACKFILL PAY LIMITS. BACKFILL BEYOND BACKFILL PAY LIMITS SHALL BE INCIDENTAL TO EXCAVATION FOR STRUCTURES. LIMITS OF EXCAVATION SHALL BE DETERMINED BY THE CONTRACTOR.

GENERAL NOTES
THE PROPOSED WORK INCLUDES REMOVING EXISTING CONCRETE OVERLAY, PLACING A NEW CONCRETE OVERLAY, JOINT REPLACEMENT AT NORTH ABUTMENT, CONCRETE SURFACE REPAIR AT ABUTMENTS AND PARAPETS, INSTALLING EMBEDDED GALVANIC ANODES IN CONCRETE SURFACE REPAIR AT ABUTMENTS AND PARAPETS, FIBER WRAP REPAIR AT GIRDER ENDS, EPOXY SEALING TOP OF N. ABUT., MODIFYING PARAPETS, AND REPLACING UPPER WINGWALLS. DRAWINGS SHALL NOT BE SCALED.
DIMENSIONS SHOWN ARE BASED ON THE ORIGINAL STRUCTURE PLANS AND SUBSEQUENT REHABILITATION PLANS.
ALL DIMENSIONS ARE IN FEET AND INCHES UNLESS OTHERWISE NOTED. ALL STATIONS ARE IN FEET.
THE FIRST OR FIRST TWO DIGITS OF THE BAR MARK SIGNIFIES THE BAR SIZE.
BAR STEEL SHALL BE EMBEDDED 2" CLEAR UNLESS OTHERWISE SHOWN OR NOTED.
ALL CONCRETE REMOVAL NOT COVERED WITH A CONCRETE OVERLAY SHALL BE DEFINED BY A 1 INCH DEEP SAW CUT.
UTILIZE EXISTING BAR STEEL REINFORCEMENT WHERE SHOWN AND EXTEND 24 BAR DIAMETERS INTO NEW WORK, UNLESS SPECIFIED OTHERWISE.
PARAPETS SHALL BE CLEANED PER "CLEANING PARAPETS" BID ITEM PRIOR TO MODIFICATIONS SHOWN.
SEAL OVERLAY CONSTRUCTION JOINTS ACCORDING TO SECTION 502.3.1.3.1 OF THE STANDARD SPECIFICATIONS. COST INCIDENTAL TO BID ITEM "CONCRETE MASONRY OVERLAY DECKS".
THE ORIGINAL CONCRETE OVERLAY SHALL BE REMOVED FROM THE ENTIRE BRIDGE DECK UNDER THE BID ITEM "REMOVING CONCRETE MASONRY OVERLAY DECKS".
AFTER REMOVAL OF THE EXISTING CONCRETE OVERLAY AND PRIOR TO NEW CONCRETE WORK, THE ENTIRE BRIDGE DECK SHALL BE CLEANED PER BID ITEM, "CLEANING DECKS TO REAPPY CONCRETE MASONRY OVERLAY".
THE AVERAGE OVERLAY THICKNESS IS BASED ON THE MINIMUM OVERLAY THICKNESS PLUS 1/2-INCH TO ACCOUNT FOR VARIATIONS IN THE DECK SURFACE.
PREPARATION DECKS TYPE 1, PREPARATION DECKS TYPE 2, AND FULL-DEPTH DECK REPAIR AREAS AS DETERMINED BY THE ENGINEER, DECK PREPARATION AND FULL-DEPTH DECK REPAIRS SHALL BE FILLED WITH "CONCRETE MASONRY OVERLAY DECKS".
PROFILE GRADE LINE SHALL BE DETERMINED IN THE FIELD TO MATCH EXISTING PROFILE. OVERLAY THICKNESS IS APPROXIMATELY 3" ABOVE THE DECK SURFACE AFTER SURFACE PREPARATION. EXPECTED AVERAGE OVERLAY THICKNESS IS 3/2". THE OVERLAY THICKNESSES INCLUDE 1/2" DEPTH ASSUMED TO HAVE BEEN REMOVED AS PART OF THE PREVIOUS CONCRETE OVERLAY. EXISTING OVERLAY THICKNESS IS EXCEEDED BY MORE THAN 1/2" CONTACT THE STRUCTURES DESIGN SECTION.
THE GRAY CAULK LOCATED IN BRIDGE DECK PARAPET JOINTS AND DECK TO ABUTMENT JOINTS TESTED POSITIVE FOR ASBESTOS GREATER THAN 1% AND IS THEREFORE REGULATED A.C.M. SEE TESTING REPORT COMPLETED BY GEI CONSULTANTS INC. FOR ADDITIONAL INFORMATION.
THE CONTRACTOR SHALL SUPPLY A NEW NAME PLATE IN ACCORDANCE WITH SECTION 502.3.1.3.1 OF THE STANDARD SPECIFICATIONS. THE STANDARD DETAIL DRAWING, NAME PLATE TO SHOW ORIGINAL CONSTRUCTION YEAR 1972.
PERFORM CONCRETE SURFACE REPAIR AS DIRECTED BY THE FIELD ENGINEER. QUANTITY SHOWN IS APPROXIMATE. CONCRETE SURFACE REPAIR AT N. ABUT. REQUIRES JACKING TO RAISE ORDER 4 TO REPAIR THE BEAM SEAT CONCRETE UNDER THE BEARING.
BEVEL ALL EXPOSED EDGES OF CONCRETE 3/4" UNLESS OTHERWISE NOTED.
AT ABUTMENTS, ALL EXCAVATED VOLUME NOT OCCUPIED BY THE NEW STRUCTURE SHALL BE BACKFILLED WITH STRUCTURE BACKFILL TYPE A.
THE EXISTING GROUNDLINE SHALL BE THE UPPER LIMITS OF EXCAVATION FOR STRUCTURES.

STATE PROJECT NUMBER
1196-04-77

NO. DATE
1 2/28/25

ELIMINATE BEARING REMOVAL
BY

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

STRUCTURE B-3-26
DRAWN BY JFC

CROSS SECTION AND QUANTITIES
SHEET 2 OF 13

297



Proposal Schedule of Items

Page 1 of 16

Proposal ID: 20250311040 Project(s): 1196-04-77

Federal ID(s): N/A

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0002	203.0211.S Abatement of Asbestos Containing Material (structure) 01. B-3-18	1.000 EACH	_____.	_____.
0004	203.0211.S Abatement of Asbestos Containing Material (structure) 02. B-3-26	1.000 EACH	_____.	_____.
0006	203.0211.S Abatement of Asbestos Containing Material (structure) 03. B-3-30	1.000 EACH	_____.	_____.
0008	203.0220 Removing Structure (structure) 01. B-3-14	1.000 EACH	_____.	_____.
0010	203.0220 Removing Structure (structure) 02. B-3-16	1.000 EACH	_____.	_____.
0012	203.0220 Removing Structure (structure) 03. B-3-18	1.000 EACH	_____.	_____.
0014	203.0220 Removing Structure (structure) 04. B-3-24	1.000 EACH	_____.	_____.
0016	203.0220 Removing Structure (structure) 05. B-3-26	1.000 EACH	_____.	_____.
0018	203.0220 Removing Structure (structure) 06. B-3-30	1.000 EACH	_____.	_____.
0020	203.0220 Removing Structure (structure) 07. B-3-37	1.000 EACH	_____.	_____.
0022	203.0270 Removing Structure Over Waterway Debris Capture (structure) 01. B-3-20	1.000 EACH	_____.	_____.
0024	203.0330 Debris Containment (structure) 02. B-3-24	1.000 EACH	_____.	_____.
0026	203.0330 Debris Containment (structure) 03. B-3-30	1.000 EACH	_____.	_____.



Proposal Schedule of Items

Page 2 of 16

Proposal ID: 20250311040 Project(s): 1196-04-77

Federal ID(s): N/A

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0028	204.0100 Removing Concrete Pavement	1,510.000 SY	_____.	_____.
0030	204.0105 Removing Concrete Pavement Butt Joints	525.000 SY	_____.	_____.
0032	204.0110 Removing Asphaltic Surface	7,258.000 SY	_____.	_____.
0034	204.0115 Removing Asphaltic Surface Butt Joints	6,400.000 SY	_____.	_____.
0036	204.0120 Removing Asphaltic Surface Milling	50,950.000 SY	_____.	_____.
0038	204.0150 Removing Curb & Gutter	56.000 LF	_____.	_____.
0040	204.0155 Removing Concrete Sidewalk	310.000 SY	_____.	_____.
0042	204.0165 Removing Guardrail	9,110.000 LF	_____.	_____.
0044	204.0170 Removing Fence	595.000 LF	_____.	_____.
0046	204.0180 Removing Delineators and Markers	5.000 EACH	_____.	_____.
0048	204.0190 Removing Surface Drains	3.000 EACH	_____.	_____.
0050	204.0220 Removing Inlets	10.000 EACH	_____.	_____.
0052	204.0245 Removing Storm Sewer (size) 01. 15-Inch	114.000 LF	_____.	_____.
0054	204.0245 Removing Storm Sewer (size) 02. 18-Inch	200.000 LF	_____.	_____.
0056	204.0270 Abandoning Culvert Pipes	5.000 EACH	_____.	_____.



Proposal Schedule of Items

Page 3 of 16

Proposal ID: 20250311040 Project(s): 1196-04-77

Federal ID(s): N/A

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0058	205.0100 Excavation Common	27.000 CY	_____.	_____.
0060	206.1001 Excavation for Structures Bridges (structure) 01. B-3-14	1.000 EACH	_____.	_____.
0062	206.1001 Excavation for Structures Bridges (structure) 02. B-3-16	1.000 EACH	_____.	_____.
0064	206.1001 Excavation for Structures Bridges (structure) 03. B-3-18	1.000 EACH	_____.	_____.
0066	206.1001 Excavation for Structures Bridges (structure) 04. B-3-20	1.000 EACH	_____.	_____.
0068	206.1001 Excavation for Structures Bridges (structure) 05. B-3-218	1.000 EACH	_____.	_____.
0070	206.1001 Excavation for Structures Bridges (structure) 06. B-3-26	1.000 EACH	_____.	_____.
0072	206.1001 Excavation for Structures Bridges (structure) 07. B-3-30	1.000 EACH	_____.	_____.
0074	206.1001 Excavation for Structures Bridges (structure) 08. B-3-37	1.000 EACH	_____.	_____.
0076	210.1500 Backfill Structure Type A	1,041.000 TON	_____.	_____.
0078	211.0101 Prepare Foundation for Asphaltic Paving (project) 01. 1196-04-77	1.000 EACH	_____.	_____.
0080	211.0400 Prepare Foundation for Asphaltic Shoulders	141.000 STA	_____.	_____.
0082	213.0100 Finishing Roadway (project) 01. 1196-04-77	1.000 EACH	_____.	_____.



Proposal Schedule of Items

Page 4 of 16

Proposal ID: 20250311040 Project(s): 1196-04-77

Federal ID(s): N/A

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0084	305.0110 Base Aggregate Dense 3/4-Inch	1,290.000 TON	_____.	_____.
0086	305.0120 Base Aggregate Dense 1 1/4-Inch	759.000 TON	_____.	_____.
0088	305.0500 Shaping Shoulders	40.000 STA	_____.	_____.
0090	415.0070 Concrete Pavement 7-Inch	405.000 SY	_____.	_____.
0092	415.0100 Concrete Pavement 10-Inch	250.000 SY	_____.	_____.
0094	415.0410 Concrete Pavement Approach Slab	1,170.000 SY	_____.	_____.
0096	450.4000 HMA Cold Weather Paving	700.000 TON	_____.	_____.
0098	455.0605 Tack Coat	5,950.000 GAL	_____.	_____.
0100	460.2000 Incentive Density HMA Pavement	6,380.000 DOL	1.00000	6,380.00
0102	460.6224 HMA Pavement 4 MT 58-28 S	3,556.000 TON	_____.	_____.
0104	460.6244 HMA Pavement 4 MT 58-34 S	2,785.000 TON	_____.	_____.
0106	460.6645 HMA Pavement 5 MT 58-34 V	3,569.000 TON	_____.	_____.
0108	465.0110 Asphaltic Surface Patching	8.000 TON	_____.	_____.
0110	465.0510 Asphaltic Rumble Strips, Shoulder Divided Roadway	26,230.000 LF	_____.	_____.
0112	502.0100 Concrete Masonry Bridges	2,211.000 CY	_____.	_____.



Proposal Schedule of Items

Page 5 of 16

Proposal ID: 20250311040 Project(s): 1196-04-77

Federal ID(s): N/A

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0114	502.2000 Compression Joint Sealer Preformed Elastomeric (width) 01. 2-1/4 Inch	106.000 LF	_____.	_____.
0116	502.3101 Expansion Device	472.000 LF	_____.	_____.
0118	502.3200 Protective Surface Treatment	7,462.000 SY	_____.	_____.
0120	502.3210 Pigmented Surface Sealer	1,680.000 SY	_____.	_____.
0122	502.4106 Adhesive Anchors 3/4-inch	5.000 EACH	_____.	_____.
0124	502.4204 Adhesive Anchors No. 4 Bar	296.000 EACH	_____.	_____.
0126	502.4205 Adhesive Anchors No. 5 Bar	1,038.000 EACH	_____.	_____.
0128	503.0137 Prestressed Girder Type I 36W-Inch	1,049.000 LF	_____.	_____.
0130	503.0145 Prestressed Girder Type I 45-Inch	67.000 LF	_____.	_____.
0132	505.0400 Bar Steel Reinforcement HS Structures	18,750.000 LB	_____.	_____.
0134	505.0600 Bar Steel Reinforcement HS Coated Structures	441,110.000 LB	_____.	_____.
0136	505.0800.S Bar Steel Reinforcement HS Stainless Structures	1,500.000 LB	_____.	_____.
0138	505.0904 Bar Couplers No. 4	42.000 EACH	_____.	_____.
0140	505.0905 Bar Couplers No. 5	2,662.000 EACH	_____.	_____.
0142	505.0906 Bar Couplers No. 6	67.000 EACH	_____.	_____.



Proposal Schedule of Items

Page 6 of 16

Proposal ID: 20250311040 Project(s): 1196-04-77

Federal ID(s): N/A

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0144	505.0907 Bar Couplers No. 7	22.000 EACH	_____.	_____.
0146	505.0908 Bar Couplers No. 8	42.000 EACH	_____.	_____.
0148	506.2605 Bearing Pads Elastomeric Non-Laminated	25.000 EACH	_____.	_____.
0150	506.2610 Bearing Pads Elastomeric Laminated	19.000 EACH	_____.	_____.
0152	506.4000 Steel Diaphragms (structure) 01. B-3-16	9.000 EACH	_____.	_____.
0154	506.4000 Steel Diaphragms (structure) 02. B-3-20	15.000 EACH	_____.	_____.
0156	506.4000 Steel Diaphragms (structure) 03. B-3-218	20.000 EACH	_____.	_____.
0158	506.4000 Steel Diaphragms (structure) 04. B-3-30	12.000 EACH	_____.	_____.
0160	506.6000 Bearing Assemblies Expansion (structure) 01. B-3-16	1.000 EACH	_____.	_____.
0162	506.7050.S Removing Bearings (structure) 01. B-3-16	4.000 EACH	_____.	_____.
0164	506.7050.S Removing Bearings (structure) 02. B-3-18	10.000 EACH	_____.	_____.
0168	506.7050.S Removing Bearings (structure) 04. B-3-30	5.000 EACH	_____.	_____.
0170	509.0301 Preparation Decks Type 1	275.000 SY	_____.	_____.
0172	509.0302 Preparation Decks Type 2	138.000 SY	_____.	_____.



Proposal Schedule of Items

Page 7 of 16

Proposal ID: 20250311040 Project(s): 1196-04-77

Federal ID(s): N/A

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0174	509.0505.S Cleaning Decks to Reapply Concrete Masonry Overlay	2,360.000 SY	_____.	_____.
0176	509.1000 Joint Repair	76.000 SY	_____.	_____.
0178	509.1500 Concrete Surface Repair	651.000 SF	_____.	_____.
0180	509.2000 Full-Depth Deck Repair	8.000 SY	_____.	_____.
0182	509.2500 Concrete Masonry Overlay Decks	339.000 CY	_____.	_____.
0184	509.9005.S Removing Concrete Masonry Deck Overlay (structure) 01. B-3-14	615.000 SY	_____.	_____.
0186	509.9005.S Removing Concrete Masonry Deck Overlay (structure) 02. B-3-26	671.000 SY	_____.	_____.
0188	509.9005.S Removing Concrete Masonry Deck Overlay (structure) 03. B-3-37	1,074.000 SY	_____.	_____.
0190	509.9020.S Epoxy Crack Sealing	66.000 LF	_____.	_____.
0192	509.9050.S Cleaning Parapets	1,066.000 LF	_____.	_____.
0194	511.1200 Temporary Shoring (structure) 01. B-3-20	720.000 SF	_____.	_____.
0196	511.1200 Temporary Shoring (structure) 02. B-3-218	1,020.000 SF	_____.	_____.
0198	511.1200 Temporary Shoring (structure) 03. B-3-30	264.000 SF	_____.	_____.
0200	514.0450 Floor Drains Type WF	3.000 EACH	_____.	_____.
0202	514.2608 Downspout 8-Inch	113.000 LF	_____.	_____.



Proposal Schedule of Items

Page 8 of 16

Proposal ID: 20250311040 Project(s): 1196-04-77

Federal ID(s): N/A

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0204	516.0500 Rubberized Membrane Waterproofing	114.000 SY	_____.	_____.
0206	517.0901.S Preparation and Coating of Top Flanges (structure) 01. B-3-18	1.000 EACH	_____.	_____.
0208	517.3001.S Structure Overcoating Cleaning and Priming (structure) 01. B-3-18	1.000 EACH	_____.	_____.
0210	517.3001.S Structure Overcoating Cleaning and Priming (structure) 02. B-3-37	1.000 EACH	_____.	_____.
0212	517.4001.S Containment and Collection of Waste Materials (structure) 01. B-3-18	1.000 EACH	_____.	_____.
0214	517.4001.S Containment and Collection of Waste Materials (structure) 02. B-3-37	1.000 EACH	_____.	_____.
0216	521.1018 Apron Endwalls for Culvert Pipe Steel 18-Inch	7.000 EACH	_____.	_____.
0218	530.0118 Culvert Pipe Corrugated Polyethylene 18-Inch	378.000 LF	_____.	_____.
0220	550.0010 Pre-Boring Unconsolidated Materials	618.000 LF	_____.	_____.
0222	550.0020 Pre-Boring Rock or Consolidated Materials	135.000 LF	_____.	_____.
0224	550.1100 Piling Steel HP 10-Inch X 42 Lb	753.000 LF	_____.	_____.
0226	601.0551 Concrete Curb & Gutter 4-Inch Sloped 36-Inch Type A	28.000 LF	_____.	_____.
0228	601.0553 Concrete Curb & Gutter 4-Inch Sloped 36-Inch Type D	112.000 LF	_____.	_____.



Proposal Schedule of Items

Page 9 of 16

Proposal ID: 20250311040 Project(s): 1196-04-77

Federal ID(s): N/A

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0230	601.0588 Concrete Curb & Gutter 4-Inch Sloped 36-Inch Type TBT	202.000 LF	_____.	_____.
0232	601.0590 Concrete Curb & Gutter 4-Inch Sloped 36-Inch Type TBTT	94.000 LF	_____.	_____.
0234	602.3010 Concrete Surface Drains	12.000 CY	_____.	_____.
0236	603.8000 Concrete Barrier Temporary Precast Delivered	8,315.000 LF	_____.	_____.
0238	603.8125 Concrete Barrier Temporary Precast Installed	15,480.000 LF	_____.	_____.
0240	603.8500 Anchoring Concrete Barrier Temporary Precast	8,995.000 LF	_____.	_____.
0242	603.8505 Anchoring Concrete Barrier Temporary Precast on Bridge Decks	2,235.000 LF	_____.	_____.
0244	604.0500 Slope Paving Crushed Aggregate	365.000 SY	_____.	_____.
0246	606.0100 Riprap Light	4.000 CY	_____.	_____.
0248	606.0200 Riprap Medium	64.000 CY	_____.	_____.
0250	611.0615 Inlet Covers Type F	4.000 EACH	_____.	_____.
0252	611.0654 Inlet Covers Type V	3.000 EACH	_____.	_____.
0254	611.3225 Inlets 2x2.5-FT	3.000 EACH	_____.	_____.
0256	611.3253 Inlets 2.5x3-FT	4.000 EACH	_____.	_____.



Proposal Schedule of Items

Page 10 of 16

Proposal ID: 20250311040 Project(s): 1196-04-77

Federal ID(s): N/A

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0258	612.0406 Pipe Underdrain Wrapped 6-Inch	370.000 LF	_____.	_____.
0260	614.0150 Anchor Assemblies for Steel Plate Beam Guard	17.000 EACH	_____.	_____.
0262	614.0220 Steel Thrie Beam Bullnose Terminal	2.000 EACH	_____.	_____.
0264	614.0230 Steel Thrie Beam	400.000 LF	_____.	_____.
0266	614.0396 Guardrail Mow Strip Asphalt	460.000 SY	_____.	_____.
0268	614.0397 Guardrail Mow Strip Emulsified Asphalt	3,750.000 SY	_____.	_____.
0270	614.0400 Adjusting Steel Plate Beam Guard	2,410.000 LF	_____.	_____.
0272	614.0905 Crash Cushions Temporary	17.000 EACH	_____.	_____.
0274	614.2300 MGS Guardrail 3	6,889.000 LF	_____.	_____.
0276	614.2500 MGS Thrie Beam Transition	640.000 LF	_____.	_____.
0278	614.2610 MGS Guardrail Terminal EAT	16.000 EACH	_____.	_____.
0280	614.2620 MGS Guardrail Terminal Type 2	1.000 EACH	_____.	_____.
0282	616.0100 Fence Woven Wire (height) 01. 4-FT	1,610.000 LF	_____.	_____.
0284	618.0100 Maintenance and Repair of Haul Roads (project) 01. 1196-04-77	1.000 EACH	_____.	_____.
0286	619.1000 Mobilization	1.000 EACH	_____.	_____.



Proposal Schedule of Items

Page 11 of 16

Proposal ID: 20250311040 Project(s): 1196-04-77

Federal ID(s): N/A

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0288	624.0100 Water	50.000 MGAL	_____.	_____.
0290	625.0500 Salvaged Topsoil	4,730.000 SY	_____.	_____.
0292	628.1504 Silt Fence	3,960.000 LF	_____.	_____.
0294	628.1520 Silt Fence Maintenance	3,960.000 LF	_____.	_____.
0296	628.1905 Mobilizations Erosion Control	9.000 EACH	_____.	_____.
0298	628.1910 Mobilizations Emergency Erosion Control	9.000 EACH	_____.	_____.
0300	628.2004 Erosion Mat Class I Type B	4,730.000 SY	_____.	_____.
0302	628.7005 Inlet Protection Type A	11.000 EACH	_____.	_____.
0304	628.7010 Inlet Protection Type B	13.000 EACH	_____.	_____.
0306	628.7504 Temporary Ditch Checks	220.000 LF	_____.	_____.
0308	629.0210 Fertilizer Type B	3.000 CWT	_____.	_____.
0310	630.0120 Seeding Mixture No. 20	214.000 LB	_____.	_____.
0312	630.0200 Seeding Temporary	127.000 LB	_____.	_____.
0314	630.0500 Seed Water	105.000 MGAL	_____.	_____.
0316	633.5200 Markers Culvert End	7.000 EACH	_____.	_____.
0318	642.5201 Field Office Type C	1.000 EACH	_____.	_____.



Proposal Schedule of Items

Page 12 of 16

Proposal ID: 20250311040 Project(s): 1196-04-77

Federal ID(s): N/A

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0320	643.0300 Traffic Control Drums	166,447.000 DAY	_____.	_____.
0322	643.0420 Traffic Control Barricades Type III	14,402.000 DAY	_____.	_____.
0324	643.0705 Traffic Control Warning Lights Type A	28,292.000 DAY	_____.	_____.
0326	643.0715 Traffic Control Warning Lights Type C	39,565.000 DAY	_____.	_____.
0328	643.0800 Traffic Control Arrow Boards	1,216.000 DAY	_____.	_____.
0330	643.0900 Traffic Control Signs	79,607.000 DAY	_____.	_____.
0332	643.0920 Traffic Control Covering Signs Type II	15.000 EACH	_____.	_____.
0334	643.1050 Traffic Control Signs PCMS	289.000 DAY	_____.	_____.
0336	643.3170 Temporary Marking Line Epoxy 6-Inch	52,858.000 LF	_____.	_____.
0338	643.3180 Temporary Marking Line Removable Tape 6-Inch	6,575.000 LF	_____.	_____.
0340	643.3270 Temporary Marking Line Epoxy 10-Inch	1,255.000 LF	_____.	_____.
0342	643.5000 Traffic Control	1.000 EACH	_____.	_____.
0344	645.0111 Geotextile Type DF Schedule A	78.000 SY	_____.	_____.
0346	645.0120 Geotextile Type HR	149.000 SY	_____.	_____.
0348	646.2020 Marking Line Epoxy 6-Inch	36,006.000 LF	_____.	_____.
0350	646.4020 Marking Line Epoxy 10-Inch	2,360.000 LF	_____.	_____.



Proposal Schedule of Items

Page 13 of 16

Proposal ID: 20250311040 Project(s): 1196-04-77

Federal ID(s): N/A

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0352	646.9000 Marking Removal Line 4-Inch	20,119.000 LF	_____.	_____.
0354	646.9100 Marking Removal Line 8-Inch	1,320.000 LF	_____.	_____.
0356	650.4000 Construction Staking Storm Sewer	14.000 EACH	_____.	_____.
0358	650.5500 Construction Staking Curb Gutter and Curb & Gutter	350.000 LF	_____.	_____.
0360	650.6501 Construction Staking Structure Layout (structure) 01. B-3-16	1.000 EACH	_____.	_____.
0362	650.6501 Construction Staking Structure Layout (structure) 02. B-3-18	1.000 EACH	_____.	_____.
0364	650.6501 Construction Staking Structure Layout (structure) 03. B-3-20	1.000 EACH	_____.	_____.
0366	650.6501 Construction Staking Structure Layout (structure) 04. B-3-218	1.000 EACH	_____.	_____.
0368	650.6501 Construction Staking Structure Layout (structure) 05. B-3-30	1.000 EACH	_____.	_____.
0370	650.7000 Construction Staking Concrete Pavement	415.000 LF	_____.	_____.
0372	650.8000 Construction Staking Resurfacing Reference	15,779.000 LF	_____.	_____.
0374	650.9911 Construction Staking Supplemental Control (project) 01. 1196-04-77	1.000 EACH	_____.	_____.
0376	650.9920 Construction Staking Slope Stakes	770.000 LF	_____.	_____.
0378	690.0150 Sawing Asphalt	19,104.000 LF	_____.	_____.



Proposal Schedule of Items

Page 14 of 16

Proposal ID: 20250311040 Project(s): 1196-04-77

Federal ID(s): N/A

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0380	690.0250 Sawing Concrete	1,360.000 LF	_____.	_____.
0382	715.0502 Incentive Strength Concrete Structures	13,266.000 DOL	1.00000	13,266.00
0384	715.0720 Incentive Compressive Strength Concrete Pavement	548.000 DOL	1.00000	548.00
0386	740.0440 Incentive IRI Ride	2,315.000 DOL	1.00000	2,315.00
0388	999.2005.S Maintaining Bird Deterrent System (station) 01. 68+00 SB	1.000 EACH	_____.	_____.
0390	999.2005.S Maintaining Bird Deterrent System (station) 02. 221+50 SB	1.000 EACH	_____.	_____.
0392	999.2005.S Maintaining Bird Deterrent System (station) 03. 365+00 SB	1.000 EACH	_____.	_____.
0394	999.2005.S Maintaining Bird Deterrent System (station) 04. 429+00 SB	1.000 EACH	_____.	_____.
0396	999.2005.S Maintaining Bird Deterrent System (station) 05. 492+00 SB	1.000 EACH	_____.	_____.
0398	999.2005.S Maintaining Bird Deterrent System (station) 06. 797+50 SB	1.000 EACH	_____.	_____.
0400	999.2005.S Maintaining Bird Deterrent System (station) 07. 415+50 SB	1.000 EACH	_____.	_____.
0402	999.2005.S Maintaining Bird Deterrent System (station) 08. 871+00 SB	1.000 EACH	_____.	_____.
0404	SPV.0060 Special 01. Cleaning and Painting Bearings	21.000 EACH	_____.	_____.



Proposal Schedule of Items

Page 15 of 16

Proposal ID: 20250311040 Project(s): 1196-04-77

Federal ID(s): N/A

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0406	SPV.0060 Special 02. Embedded Galvanic Anodes	495.000 EACH	_____.	_____.
0408	SPV.0060 Special 03. Temporary Support B-3-16	1.000 EACH	_____.	_____.
0410	SPV.0060 Special 04. Temporary Support B-3-18	1.000 EACH	_____.	_____.
0412	SPV.0060 Special 05. Temporary Support B-3-218 (Existing Deck)	1.000 EACH	_____.	_____.
0414	SPV.0060 Special 06. Temporary Support B-3-30	1.000 EACH	_____.	_____.
0416	SPV.0060 Special 07. Temporary Support B-3-218 (New Deck)	1.000 EACH	_____.	_____.
0418	SPV.0060 Special 08. Temporary Pier Support B-3-218	1.000 EACH	_____.	_____.
0420	SPV.0060 Special 09. Inlet Covers Type DW	4.000 EACH	_____.	_____.
0422	SPV.0060 Special 10. Salvage and Reinstall EAT Terminal	8.000 EACH	_____.	_____.
0424	SPV.0090 Special 01. PVC Waterstop	34.000 LF	_____.	_____.
0426	SPV.0090 Special 02. Concrete Curb & Gutter 30-Inch Type DW	36.000 LF	_____.	_____.
0428	SPV.0090 Special 03. Profile Curb Cut	880.000 LF	_____.	_____.
0430	SPV.0165 Special 01. Fiber Wrap Reinforcing Non-Structural	900.000 SF	_____.	_____.
0432	SPV.0180 Special 01. Abutment Seat Cleaning and Sealing	141.000 SY	_____.	_____.



Proposal Schedule of Items

Page 16 of 16

Proposal ID: 20250311040 Project(s): 1196-04-77

Federal ID(s): N/A

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0434	SPV.0180 Special 02. Epoxy Sealer	29.000 SY	_____.	_____.
Section: 0001			Total:	_____.
			Total Bid:	_____.

