



Wisconsin Department of Transportation

May 8, 2025

Division of Transportation Systems Development

Bureau of Project Development
4822 Madison Yards Way, 4th Floor South
Madison, WI 53705

Telephone: (608) 266-1631
Facsimile (FAX): (608) 266-8459

NOTICE TO ALL CONTRACTORS:

Proposal #20: 1130-68-77, WISC 2025473
Appleton – De Pere
SBC Interchange
LOC STR
Brown County

Letting of May 13, 2025

This is Addendum No. 02, which provides for the following:

Special Provisions:

Added Special Provisions	
Article No.	Description
16.10	Conduit Rigid Nonmetallic Schedule 40 2-Inch, Item 652.0225, Conduit Rigid Nonmetallic Schedule 40 3-Inch, Item 652.0235, Conduit Rigid Nonmetallic Schedule 80 3-Inch, Item 652.0335.

Schedule of Items:

Revised Bid Item Quantities					
Bid Item	Item Description	Unit	Proposal Total Prior to Addendum	Proposal Quantity Change (-)	Proposal Total After Addendum
204.0210	Removing Manholes	Each	1	2	3
204.0220	Removing Inlets	Each	1	2	3
205.0100	Excavation Common	CY	103,815	155	103,970
608.0318	Storm Sewer Pipe Reinforced Concrete Class III 18-Inch	LF	3,170	-57	3,113
608.0324	Storm Sewer Pipe Reinforced Concrete Class III 24-Inch	LF	2,289	57	2,346
608.0330	Storm Sewer Pipe Reinforced Concrete Class III 30-Inch	LF	12	54	66
611.0530	Manhole Covers Type J	Each	2	1	3
611.2005	Manholes 5-FT Diameter	Each	1	1	2
645.0111	Geotextile Type DF Schedule A	SY	168	1,883	2,051
655.0610	Electrical Wire 12 AWG	LF	16,683	1,092	17,775

Added Bid Item Quantities					
Bid Item	Item Description	Unit	Proposal Total Prior to Addendum	Quantity Added	Proposal Total After Addendum
204.0245.01	Removing Storm Sewer (01. 21-Inch)	LF	0	30	30
204.0245.02	Removing Storm Sewer (02. 24-Inch)	LF	0	139	139
204.0245.03	Removing Storm Sewer (03. 30-Inch)	LF	0	40	40
310.0115	Base Aggregate Open-Graded	CY	0	73.7	73.7
611.2008	Manholes 8-FT Diameter	Each	0	1	1
612.0106	Pipe Underdrain 6-Inch	LF	0	4,100	4,100

Deleted Bid Item Quantities					
Bid Item	Item Description	Unit	Proposal Total Prior to Addendum	Proposal Quantity Change (-)	Proposal Total After Addendum
611.2006	Manholes 6-FT Diameter	Each	1	-1	0

Plan Sheets:

Revised Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of changes to sheet)
160	Storm Sewer Plan – Adjusted storm sewer elevations at 31-D
161	Storm Sewer Plan – Adjusted storm sewer elevations at 31-D, tie to existing system at 31-E
188	Lighting Plans Title Sheet - Added Tracer Wire Only to abbreviations
191	Lighting Plans - Anchor Bolt Cover Shroud Detail - Added to the construction notes
192	Lighting Plans Cabinet Map - Added structure linework
196	Lighting Plans - Added structure linework and updated station and offset for SL2414 and SL2415
202	Lighting Plans - Updated station and offset for SL115 and referenced surveyed gas line near SL117
315	Miscellaneous Quantities – Revised ramp stationing for aggregate quantities
316	Miscellaneous Quantities – Added earthwork for Innovation Temp Widening
323	Miscellaneous Quantities – Updated elevation and slope for 31-B to 31-D
324	Miscellaneous Quantities – Updated elevation and slope for 31-DA to 31 D, added 31-E and connections
328	Miscellaneous Quantities – Added 31-E cover
332	Miscellaneous Quantities – Added 31-E manhole
348	Miscellaneous Quantities - Added column for 655.0610 Electrical Wire Lighting 12 AWG
349	Miscellaneous Quantities - Added column and quantity for 655.0610 Electrical Wire Lighting 12 AWG. Updated the remarks.
350	Miscellaneous Quantities - Added column for 655.0610 Electrical Wire Lighting 12 AWG
351	Miscellaneous Quantities - Added column and quantity for 655.0610 Electrical Wire Lighting 12 AWG. Updated the remarks.
353	Miscellaneous Quantities - Updated station and offset for SL2414 and SL2415
354	Miscellaneous Quantities - Updated station and offset for SL115
740	Earthwork Data – Added earthwork for Innovation Temp Widening
757, 775	Cross Sections – Slope Paving at B-05-0696

Added Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of why sheet was added)
315a	Miscellaneous Quantities – Added quantities for removing manhole & inlet and removing storm sewer item along Innovation Court
332a-b	Miscellaneous Quantities – Added underdrain quantity sheet
749a	Earthwork Data – Added earthwork for Innovation Temp Widening
775a, 874a-d	Cross Sections – Slope Paving at B-05-0696

The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.

Sincerely,

Mike Coleman

Proposal Development Specialist
Proposal Management Section

ADDENDUM NO. 02

1130-68-77

May 8, 2025

Special Provisions

16.10 Conduit Rigid Nonmetallic Schedule 40 2-Inch, Item 652.0225, Conduit Rigid Nonmetallic Schedule 40 3-Inch, Item 652.0235, Conduit Rigid Nonmetallic Schedule 80 3-Inch, Item 652.0335.

This article describes modifications to items 652.0225, 652.0235, and 652.0335 of the standard specifications and QPL for lighting work identified in project 1130-68-77.

Modify the following paragraph from standard spec 652.3.1.1 General:

(3) Install tracer wire in each conduit run that will receive future conductors as the conduit is laid. Unless the contract specifies wire or cable, install a 12 AWG. XLP insulated, green, stranded, copper, 600-volt AC, wire. Provide wire slack in pull boxes per WISDOT SDD 9B16. Tracer wire shall be continuously connected throughout the system and tied into the system ground at the nearest above ground access point. Tracer wire may be spliced below grade in pull boxes only using wet location gel filled wire nuts. Fasten tracer wire near the top of pull box. Tracer wire is the only conductor that will be allowed to be spliced below grade on this project.

Schedule of Items

Attached, dated May 8, 2025, are the revised Schedule of Items Pages 1 – 21.


Plan Sheets

The following 8½ x 11-inch sheets are attached and made part of the plans for this proposal:

Revised: 160, 161, 188, 191-192, 196, 202, 315-316, 323-324, 328, 332, 348-351, 353-354, 740, 757, 775


Added: 315A, 332A-B, 749A, 775A, 874A-D

END OF ADDENDUM

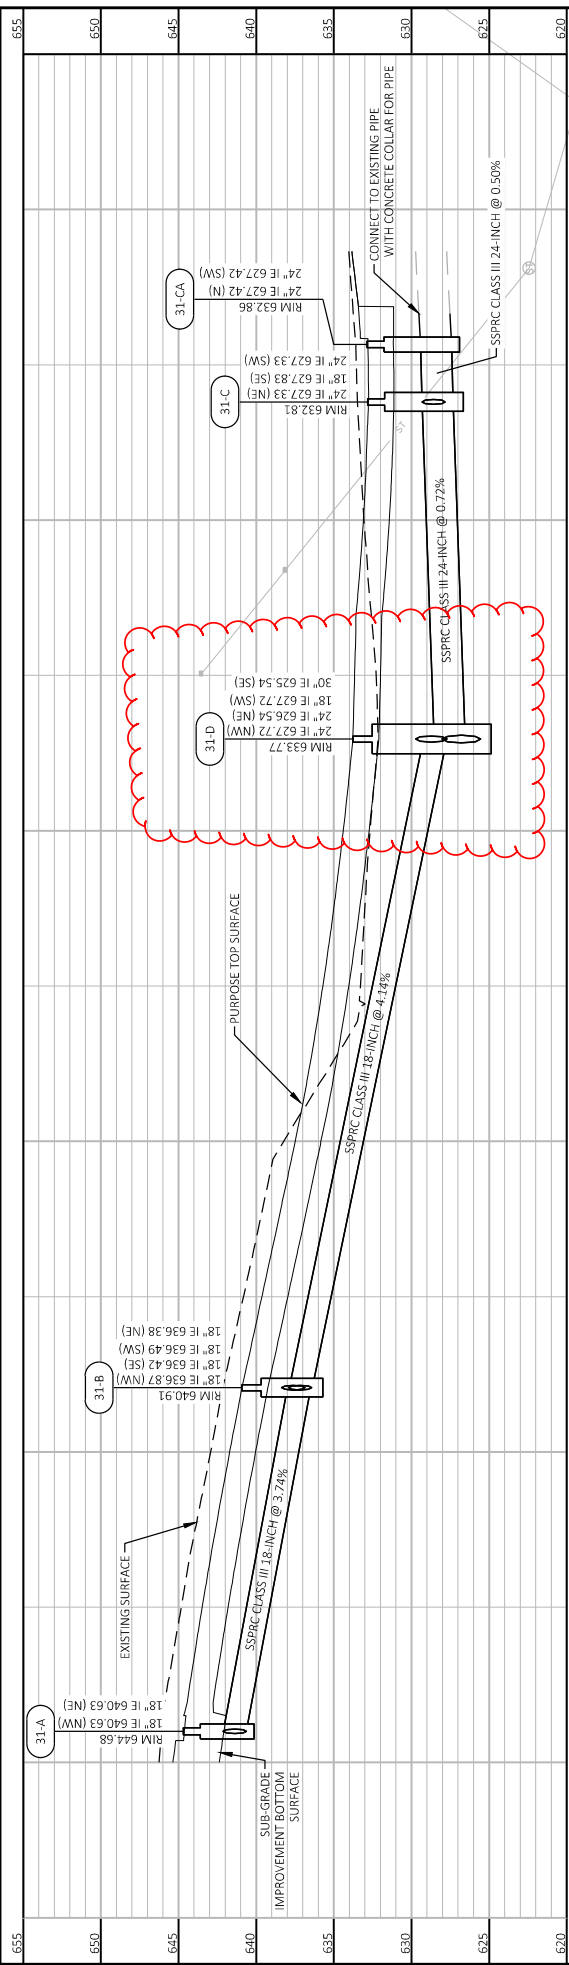



STREET LIGHTING PLANS PREPARED BY



5/2/2025

(DATE) (SIGNATURE)

Watt - May


(SIGNATURE)

LIGHTING PLAN LEGEND


- | | |
|---|--|
|  | PROPOSED CONCRETE CONTROL CABINET BASE (ELEC. SERVICE) |
|  | PROPOSED PULL BOX NON-CONDUCTIVE (24"x42") |
|  | PROPOSED LIGHTING CONDUIT (SCHEDULE 40 PVC) |
|  | PROPOSED LIGHTING CONDUIT (SCHEDULE 80) |
|  | PROPOSED SINGLE ARM LUMINAIRE |
|  | PROPOSED TWIN ARM LUMINAIRE |
|  | LUMINAIRE INSTALLED WITH OTHER PROJECT |
|  | EXISTING LUMINAIRE LOCAL |
|  | EXISTING PULL BOX NON-CONDUCTIVE (24"x42") |
|  | EXISTING LIGHTING CONDUIT (SCHEDULE 40 PVC) |
|  | EXISTING LIGHTING CONDUIT (SCHEDULE 80) |

ABBREVIATIONS

PWO = PULL WIRE / TRACER WIRE ONLY
STR = STRUCTURE MOUNT (REFER TO STRUCTURE PLANS)



CONDUIT/CONDUCTOR LEGEND



GENERAL STREET LIGHTING NOTES:

- 1) WISCONSIN DOT NORTHEAST REGION ELECTRICAL UNIT SHALL APPROVE THE FINAL LOCATION FOR ALL CONCRETE BASES IN THE FIELD PRIOR TO INSTALLATION. CONTACT THEM 3 DAYS IN ADVANCE AT (320) 492-5654 OR (320) 492-5628.
- 2) THE LOCATION OF EXISTING AND PROPOSED UTILITIES AS SHOWN ON THE PLANS ARE APPROXIMATE. IN ADDITION, THERE MAY BE OTHER UTILITIES WITHIN THE PROJECT AREA WHICH ARE NOT SHOWN. THE CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITIES PRIOR TO CONSTRUCTION.
- 3) PITCH ALL CONDUITS TOWARD PULL BOXES. INSTALL A 2" DRAIN DUCT TO DITCH OR STORM SEWER AS REQUIRED FOR DRAINAGE. THIS 2" DRAIN DUCT IS INCIDENTAL TO THE PULL BOX BID ITEM. DRAIN DUCT IS NOT SHOWN.
- 4) SEE ITS PLANS FOR ADDITIONAL ELECTRICAL INFRASTRUCTURE.
- 5) PROPOSED STORM SEWER, PAVEMENT MARKING, AND FTMS PLANS SHOWN IN GRAYSHADE FOR PLAN CLARITY.
- 6) CONDUIT RIGID METALLIC MAY BE REQUIRED ACROSS STRUCTURE JOINTS AT CERTAIN LOCATIONS. FIVE FEET (MINIMUM) ON EITHER SIDE OF THE JOINT REQUIRED. APPLY ASPHALTIC SEALANT TO EXPOSED METALLIC CONDUIT. EXPANSION FITTING FORDING JUMPER TO EXPANSION FITTING SEALANT TO BE CONSIDERED INCIDENTAL TO THE CONDUIT. REFER TO LOCATIONS SHOWN IN THE PLANS FOR RIGID METALLIC CONDUIT LOCATIONS.
- 7) CABINET BASES AND THE PULL BOXES CONDUIT WITHIN THE AREA OF CABINET BASES SHALL BE INSTALLED PER FIELD CONDITIONS (WITH ENGINEER APPROVAL). VERIFY THE LOCATION OF ALL ELECTRICAL FACILITIES WITH THE ENGINEER PRIOR TO INSTALLING.

Addendum No. 02
ID 1130-68-77
Revised Sheet 188
May 8, 2025

SHEET 1 OF 16

PROJECT NO: 1130-68-77

HWY: SOUTHBRIDGE RD - INTERCHANGE

COUNTY: BROWN

LIGHTING PLANS TITLE SHEET

SHEET

188




FILE NAME: C:\USERS\MJIMAN\DCV
LAYOUT NAME: TITLE

5/2/2025 11:23 AM

PLOT BY : MATTHEW MAY
PLOT NAME :

PLOT SCALE: NOT TO SCALE


WISDOT/CADDs SHEET 42

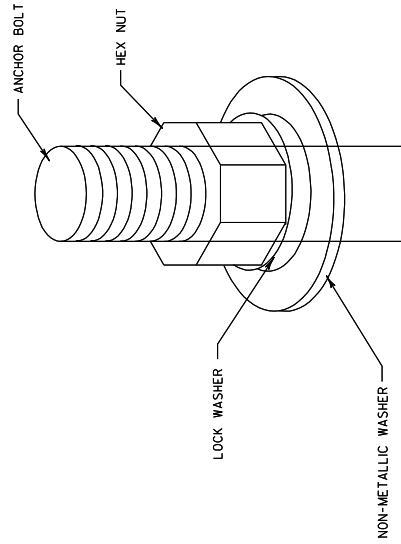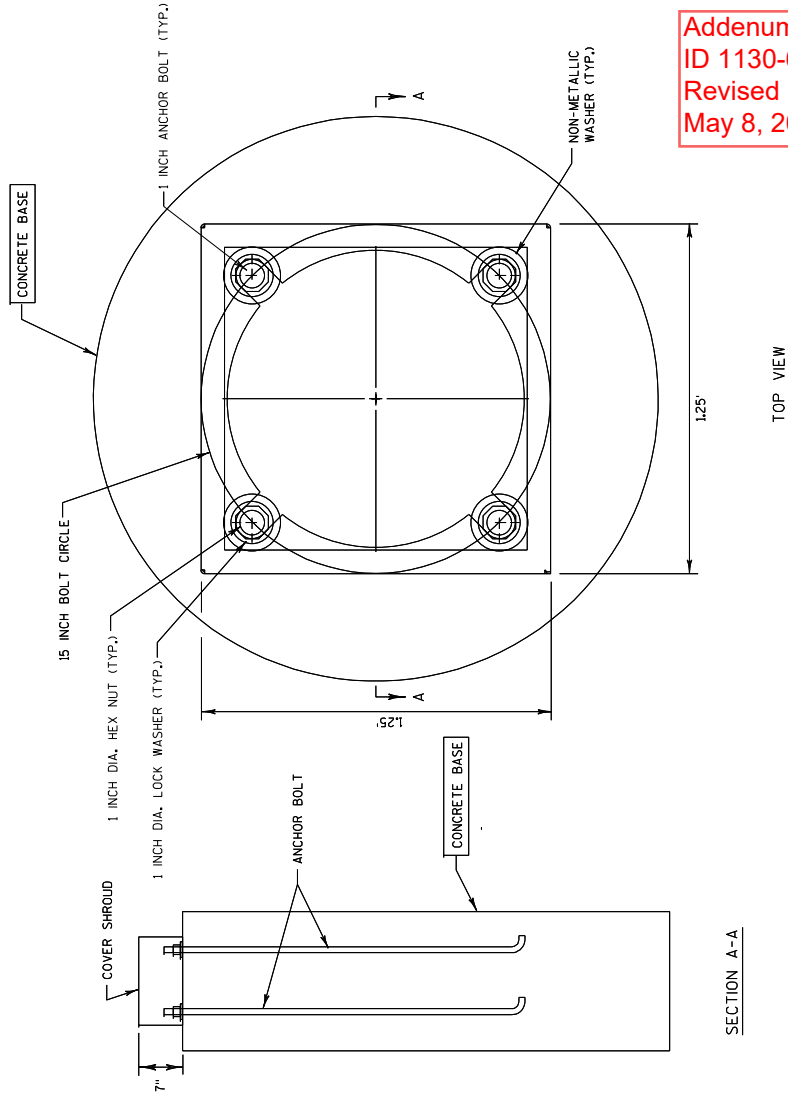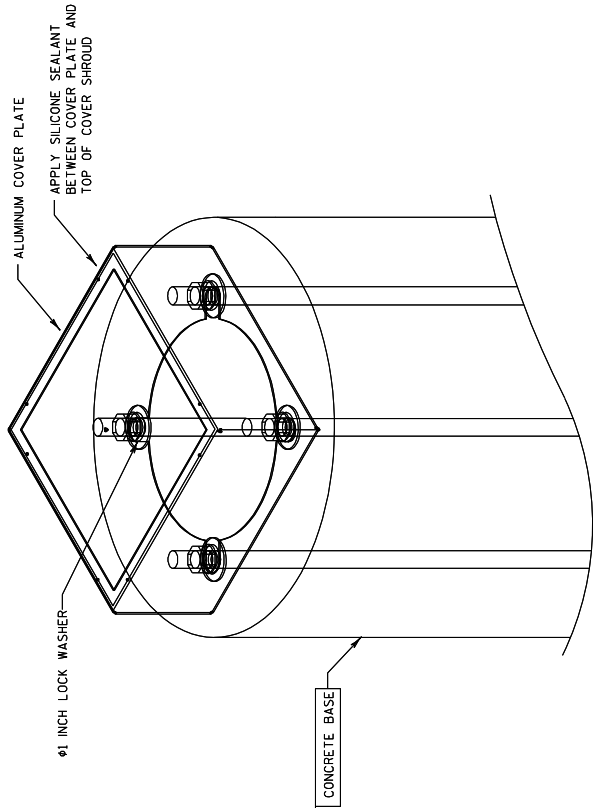

Addendum No. 02
ID 1130-68-77
Revised Sheet 191
May 8, 2025

ANCHOR BOLT COVER SHROUD
NO SCALE
SPV.0060.01

SHEET 4 OF 16

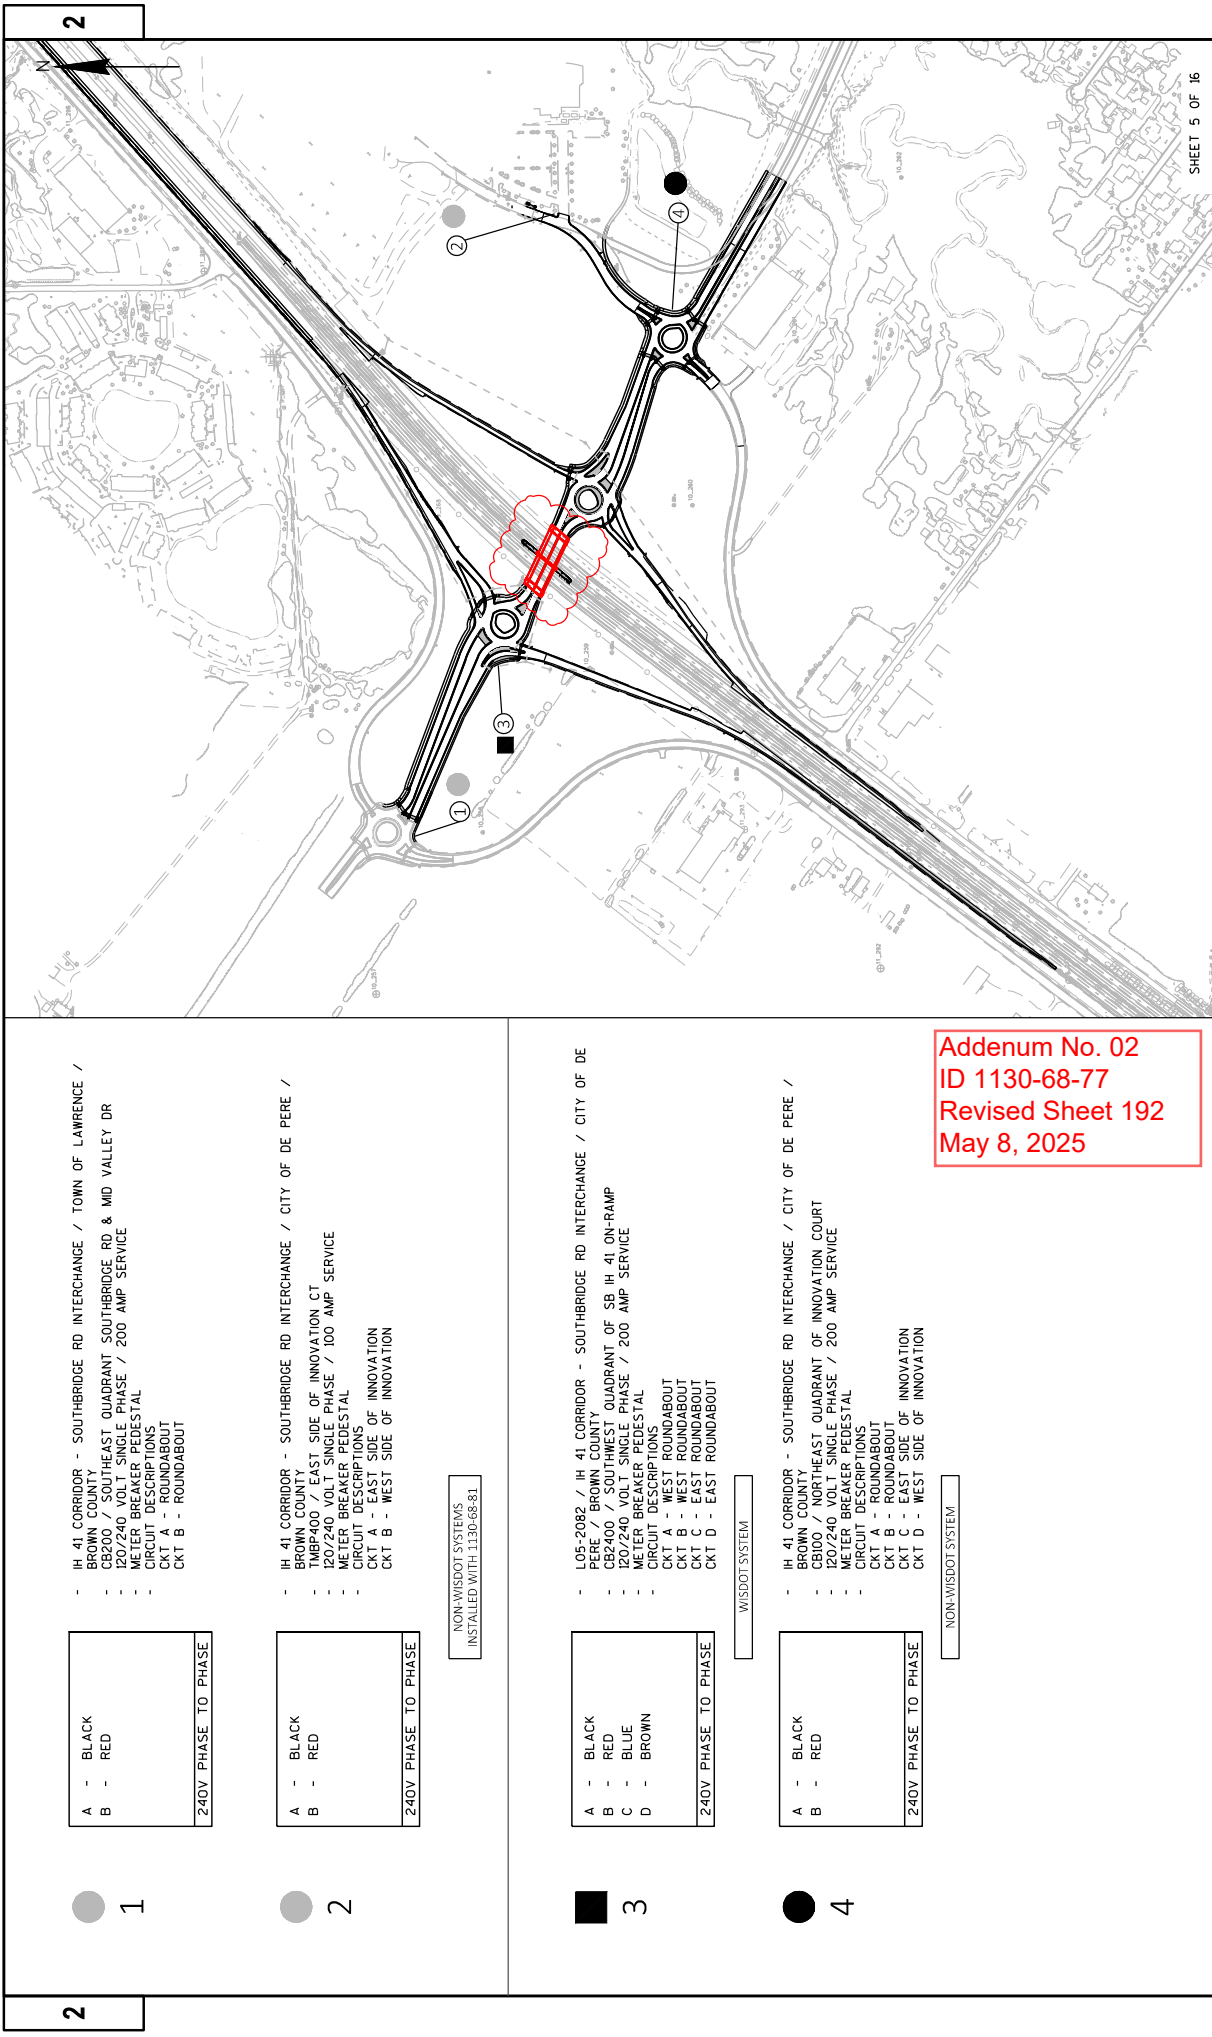

1

A - BLACK

B - RED

240V PHASE TO PHASE

2

A - BLACK

B - RED

240V PHASE TO PHASE

NON-WISDOT SYSTEMS
INSTALLED WITH 1130-68-81

3

A - BLACK

B - RED

C - BLUE

D - BROWN

240V PHASE TO PHASE

4

A - BLACK


B - RED

240V PHASE TO PHASE

WISDOT SYSTEM

NON-WISDOT SYSTEM

Addendum No. 02
ID 1130-68-77
Revised Sheet 192
May 8, 2025

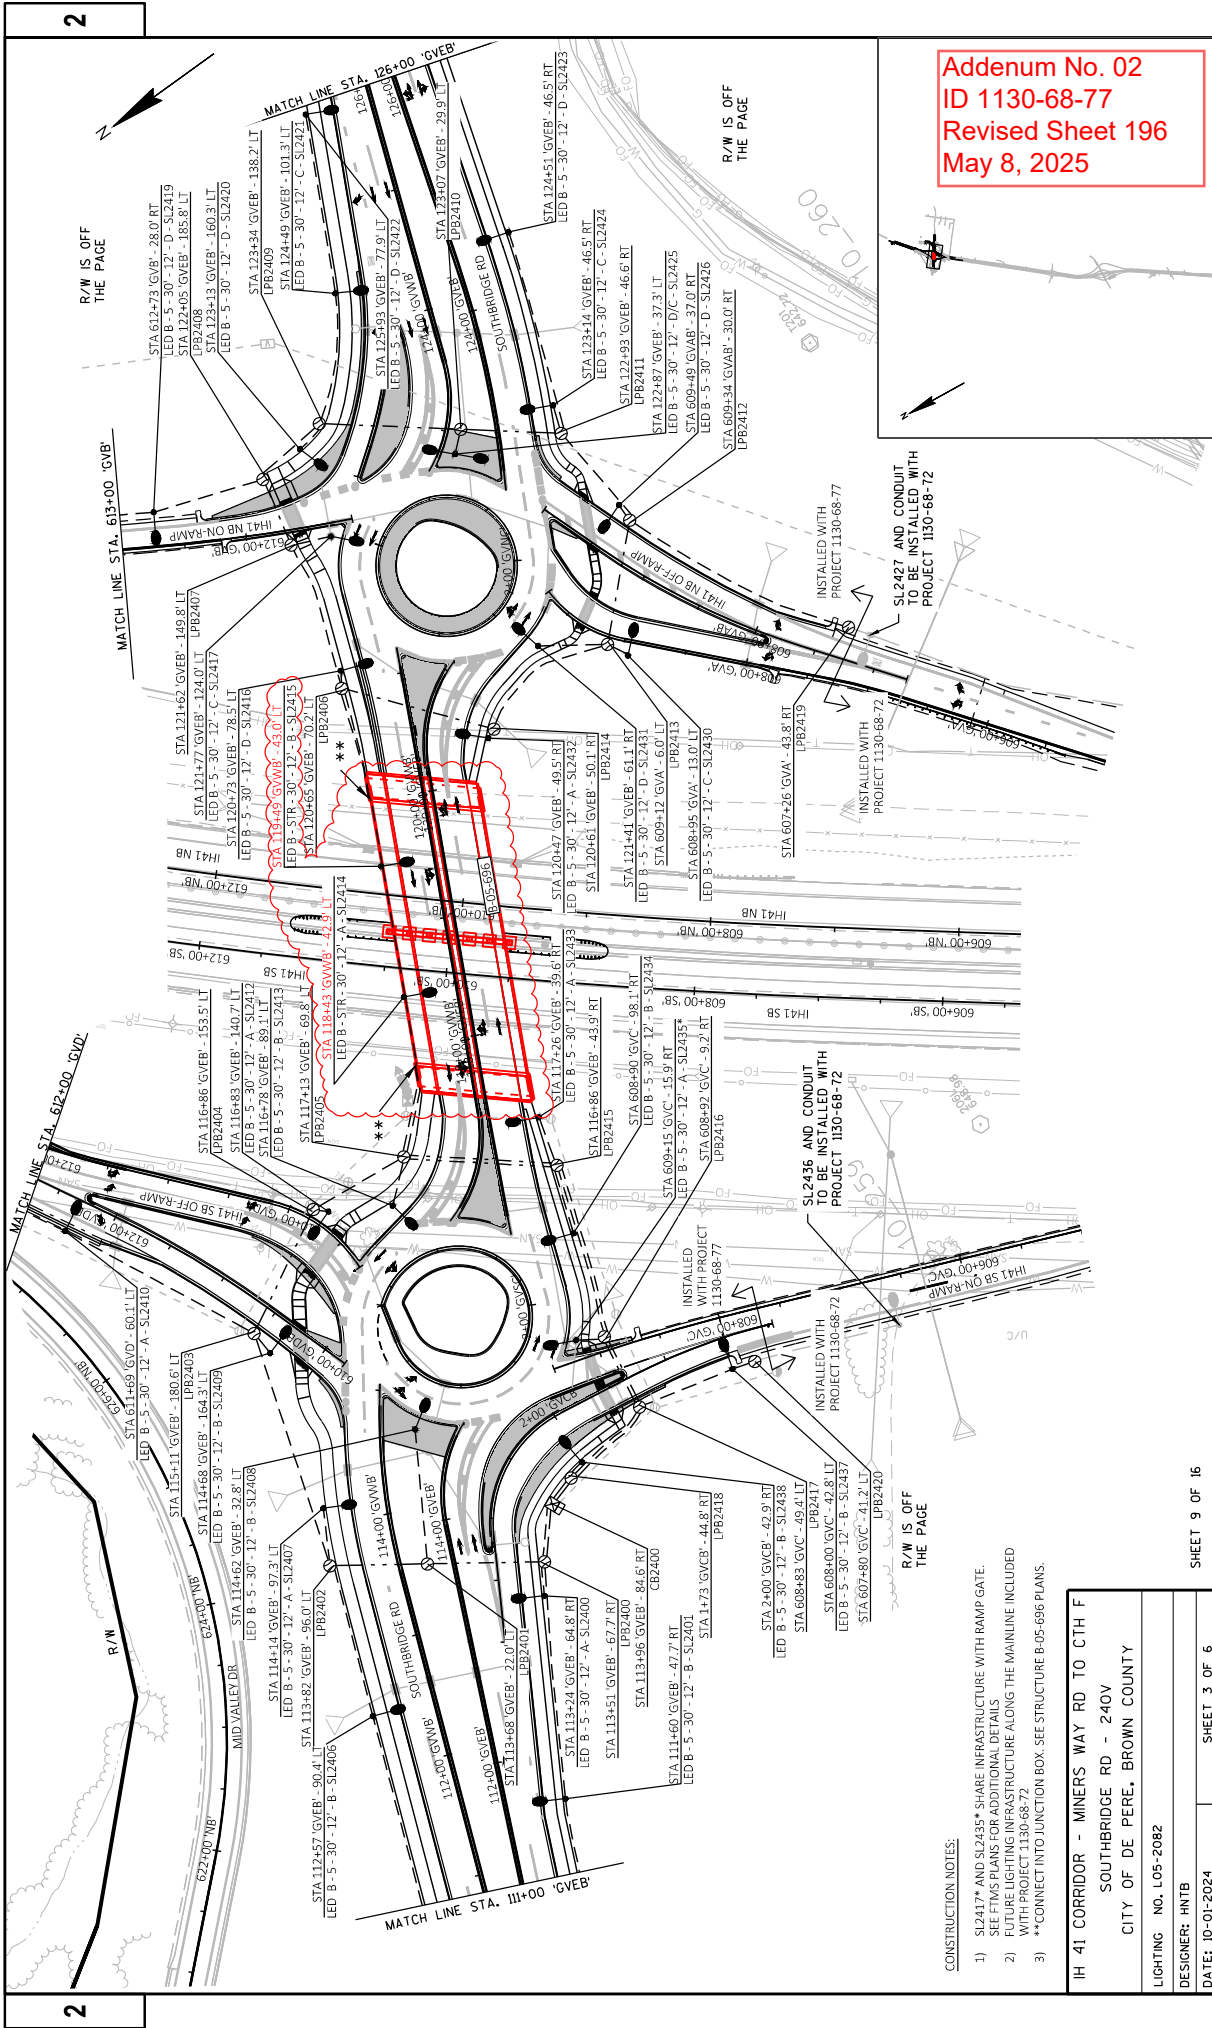

CONSTRUCTION NOTES:

- 1) SL247* AND SL245* SHARE INFRASTRUCTURE WITH RAMP GATE. SEE ITAS FOR ADDITIONAL DETAILS.
- 2) FUTURE LIGHTING INFRASTRUCTURE ALONG THE MAINLINE INCLUDED WITH PROJECT 1130-68-72.
- 3) **CONNECT INTO JUNCTION BOX. SEE STRUCTURE B-05-696 PLANS.

IH 41 CORRIDOR - MINERS WAY RD TO CTH F
SOUTHBRIDGE RD - 240V
CITY OF DE PERE, BROWN COUNTY

LIGHTING NO. L05-2082

DESIGNER: HNTB

DATE: 10-01-2024

SHEET 3 OF 6

PROJECT NO: 1130-68-77

COUNTY: BROWN

INTERCHANGE

HWY: SOUTHBRIDGE RD -

SHEET 9 OF 16

LIGHTING PLANS

PLOT NAME:


1 IN=100 FT

SHEET

196

E

FILE NAME: C:\USERS\WIMAY\DC\PROJECTS\11306801\PROJECT FILES\LIGHTING\11306801\PROJECT FILES\LIGHTING\11306801\PROJECT FILES\1130-68-77 SOUTHBRIDGE INTERCHANGE\028001-1P (1130-68-77) 5/2/2025 2:14 PM LAYOUT NAME: E-26



WISDOT/CADDs SHEET 422

Addendum No. 02
ID 1130-68-77
Added Sheet 315A
May 8, 2025

REMOVE STORM SEWER STRUCTURES									
STATION	TO	STATION	OFFSET	LOCATION	204.0210		204.0220		REMARKS
					REMOVING MANHOLES*	INLETS*	REMOVING STORM SEWER PIPE 21 INCH	REMOVING STORM SEWER PIPE 24 INCH	
620+35	-	620+42	--	LCL-FRENCH-GV-NB-BCO-71	--	--	30	--	--
620+35	-	621+89	--	LCL-FRENCH-GV-NB-BCO-72	--	--	--	139	--
620+35	-	621+28	--	LCL-FRENCH-GV-NB-BCO-73	--	--	--	--	40
--	-	620+34	15.9' RT	LCL-FRENCH-GV-NB-BCO-78	1	--	--	--	--
--	-	620+35	27.2' RT	LCL-FRENCH-GV-NB-BCO-79	--	1	--	--	--
--	-	620+42	59.9' RT	LCL-FRENCH-GV-NB-BCO-80	--	1	--	--	--
--	-	621+28	9.5' LT	LCL-FRENCH-GV-NB-BCO-81	2	--	--	--	--
TOTAL					2	2	30	139	40

* ADDITIONAL QUANTITIES LISTED ELSEWHERE

DIVISION 1 SUBTOTAL

(1) CUT - VOLUME EXCAVATION IS THE SUM OF THE CUT AND EBS EXCAVATION COLUMNS. ITEM NUMBER 205.0100
APPLICABLE TO ALL PROJECTS.
(2) SAVAGED UNUSABLE PAVEMENT MATERIAL IS INCLUDED IN CUT.
(3) SAVAGED UNUSABLE PAVEMENT MATERIAL IS INCLUDED IN CUT.
(4) AVAILABLE MATERIAL = CUT - SAVAGED UNUSABLE PAVEMENT MATERIAL
(5) EXPANDED FILL FACTOR = 1.00
(6) EXPANDED FILL FACTOR = 1.00
(7) EXPANDED FILL FACTOR = 1.00
(8) MASS ORIGINATE + COMBINATION CALCULATED FOR THE DIVISION. PLUS QUANTITY INDICATES AN EXCESS OF FILL
(9) MASS ORIGINATE + COMBINATION CALCULATED FOR THE DIVISION. PLUS QUANTITY INDICATES AN EXCESS OF FILL
(10) MASS ORIGINATE + COMBINATION CALCULATED FOR THE DIVISION. PLUS QUANTITY INDICATES AN EXCESS OF FILL

NOTE: ALL BID ITEMS LISTED ARE CATEGORY 1000 UNLESS NOTED OTHERWISE

Addendum No. 02
ID 1130-68-77
Revised Sheet 323
May 8, 2025

STORM SEWER PIPES																	
		608.0312		608.0315		608.0318		608.0321		608.0324		608.0330		608.0424		608.3012	
		STORM SEWER PIPE REINFORCED CONCRETE CLASS III 12-INCH		STORM SEWER PIPE REINFORCED CONCRETE CLASS III 15-INCH		STORM SEWER PIPE REINFORCED CONCRETE CLASS III 18-INCH		STORM SEWER PIPE REINFORCED CONCRETE CLASS III 21-INCH		STORM SEWER PIPE REINFORCED CONCRETE CLASS III 24-INCH		STORM SEWER PIPE REINFORCED CONCRETE CLASS III 30-INCH		STORM SEWER PIPE REINFORCED CONCRETE CLASS IV 24-INCH		STORM SEWER PIPE REINFORCED CONCRETE CLASS 12-INCH	
STAGE	LF	LOCATION	LF	TO	LF	LOCATION	LF	TO	LF	LOCATION	LF	TO	LF	LOCATION	LF	TO	LF
27-E - 27-F	3A	CTY-GV-EB-BCO-68	--		--		34		--		--		--		--		641.74
27-F - 27-G	3A	CTY-GV-EB-BCO-68	--		--		41		--		--		--		--		641.59
28-A - 28-B	3A	CTY-GV-EB-BCO-68	34		--		--		--		--		--		--		639.89
28-B - 28-C	3A	CTY-GV-EB-BCO-68	27		--		--		--		--		--		--		639.73
28-BA - 28-B	3A	CTY-GV-EB-BCO-68	--		--		--		--		--		--		--		639.85
28-C - 28-D	3A	CTY-GV-EB-BCO-68	--		--		55		--		--		--		--		639.60
28-CA - 28-C	3A	CTY-GV-EB-BCO-68	32		--		--		--		--		--		--		639.75
28-D - 28-E	3A	CTY-GV-EB-BCO-68	--		--		10		--		--		--		--		638.83
28-E - 28-F	3A	CTY-GV-EB-BCO-68	--		--		78		--		--		--		--		638.80
28-F - 28-G	3A	LCL-FRENCH-GV-NB-BCO-68	--		--		11		--		--		--		--		638.40
28-FA - 28-F	3A	LCL-FRENCH-GV-NB-BCO-68	--		--		22		--		--		--		--		638.50
28-G - 28-H	3A	LCL-FRENCH-GV-NB-BCO-68	--		--		107		--		--		--		--		637.86
28-GA - 28-GB	3A	LCL-FRENCH-GV-NB-BCO-68	25		--		--		--		--		--		--		638.51
28-GB - 28-G	3A	LCL-FRENCH-GV-NB-BCO-68	8		--		--		--		--		--		--		638.40
28-H - 28-I	3A	LCL-FRENCH-GV-NB-BCO-68	--		--		7		--		--		--		--		636.79
28-I - 28-J	3A	LCL-FRENCH-GV-NB-BCO-68	--		--		51		--		--		--		--		636.75
29-A - 29-B	3A	CTY-GV-EB-BCO-68	--		--		29		--		--		--		--		632.03
29-B - 29-C	4A	CTY-GV-EB-BCO-68	--		--		13		--		--		--		--		631.89
29-C - 29-D	4A	CTY-GV-EB-BCO-68	--		--		29		--		--		--		--		631.82
29-D - 29-E	4A	CTY-GV-EB-BCO-68	--		--		51		--		--		--		--		631.68
30-A - 30-B	4A	CTY-GV-EB-BCO-68	--		--		29		--		--		--		--		625.23
30-B - 30-C	4A	CTY-GV-EB-BCO-68	--		--		13		--		--		--		--		625.08
30-C - 30-D	4A	CTY-GV-EB-BCO-68	--		--		29		--		--		--		--		625.04
30-D - 30-E	4A	CTY-GV-EB-BCO-68	--		--		41		--		--		--		--		624.90
31-A - 31-B	3A	LCL-FRENCH-GV-NB-BCO-68	--		--		111		--		--		--		--		640.63
31-AA - 31-AB	3A	LCL-FRENCH-GV-NB-BCO-68	--		--		21		--		--		--		--		640.77
31-AB - 31-A	3A	LCL-FRENCH-GV-NB-BCO-68	--		--		7		--		--		--		--		640.66
31-B - 31-D	3A	LCL-FRENCH-GV-NB-BCO-68	--		--		209		--		--		--		--		636.38
31-BA - 31-B	3A	LCL-FRENCH-GV-NB-BCO-68	--		--		31		--		--		--		--		637.02
31-BB - 31-B	3A	LCL-FRENCH-GV-NB-BCO-68	--		--		13		--		--		--		--		636.49
SHEET TOTAL																	
			126		0		1042		0		0		0		0		25

NOTE: ALL BID ITEMS LISTED ARE CATEGORY 1000 UNLESS NOTED OTHERWISE

PROJECT NO: 1103-68-77

HWY: IH41

COUNTY: BROWN

MISCELLANEOUS QUANTITIES

PLOT BY: GETLINGER, BRADLEY S

PLOT SCALE: 1" = 1'

SHEET 323

E

NOTE: ALL BID ITEMS LISTED ARE CATEGORY 1000 UNLESS NOTED OTHERWISE

PROJECT NO: 1103-68-77		COUNTY: BROWN		MISCELLANEOUS QUANTITIES		SHEET 323	
FILE NAME: C:\BIDDING\BIDS\PROJECTS-PUBLIC\1103-68-77 (MINERS WAY - CTH 17)\DESIGN\QUANTITIES\1103-68-77 (GRANT OVERPASS) SHEET 323.DWG		HWY: IH41		PLOT BY: GETLINGER, BRADLEY S		PLOT SCALE: 1" = 1'	
LAYOUT NAME: 9						WSDOT/CADDS-SHEET 42	

Addendum No. 02
ID 1130-68-77
Revised Sheet 324
May 8, 2025

NOTE: ALL BID ITEMS LISTED ARE CATEGORY 1000 UNLESS NOTED OTHERWISE

Addendum No. 02
ID 1130-68-77
Revised Sheet 328
May 8, 2025

STORM SEWER STRUCTURES															Table 1 of 2																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																						
520.8000					522.1018					611.0530					611.0600					611.0610					611.0642																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
CONCRETE COLLARS FOR PIPE					APRON ENDWALLS FOR CULVERT PIPE REINFORCED CONCRETE 18-INCH					APRON ENDWALLS FOR CULVERT PIPE REINFORCED CONCRETE 21-INCH					MANHOLE COVERS TYPE J					INLET COVERS TYPE A					INLET COVERS TYPE BW					INLET COVERS TYPE MS					RIM* ELEVATION					INVERT** ELEVATION					DEPTH*** FT																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																								
STRUCTURE	STATION	OFFSET	LOCATION	STAGE	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH

3

WISDOT/CADDs SHEET 42

Addendum No. 02
ID 1130-68-77
Added Sheet 332A
May 8, 2025

PIPE UNDERDRAINS									
ALT	STATION	STATION	OFFSET	INLET STRUCTURE	PIPE UNDERDRAIN 6-INCH	BASE AGGREGATE OPEN-GRADED	GEOTEXTILE TYPE DF SCHEDULE A*	SV	
Cty-GV-EB-8Co-68	107+60	-	108+10	27.5 RT	21-B	50	0.9	23	645.0111
	107+68	-	107+18	1.5 LT	21-C	50	0.9	23	
	107+71	-	108+21	15.1 LT	21-D	50	0.9	23	
	107+78	-	108+28	43.2 LT	21-E	50	0.9	23	
109+75	-	-	110+25	27.5 RT	5-A	50	0.9	23	
	-	-	110+25	1.5 LT	5-B	50	0.9	23	
	-	-	110+25	24.8 LT	5-C	50	0.9	23	
	-	-	110+25	53.9 LT	5-D	50	0.9	23	
112+75	-	-	113+25	40.6 RT	6-A	50	0.9	23	
	-	-	113+25	1.5 LT	6-B	50	0.9	23	
	-	-	113+25	39.1 LT	6-C	50	0.9	23	
	-	-	113+25	68.2 LT	6-D	50	0.9	23	
115+35	-	-	116+43	109.3 LT	7-A	50	0.9	23	
	-	-	115+57	27.5 RT	7-B	25	0.5	12	
	-	-	115+35	22.1 LT	7-C	100	1.7	45	
	-	-	114+72	20.3 LT	7-D	40	0.7	18	
116+70	-	-	114+29	33.4 RT	7-EA	50	0.9	23	
	-	-	114+30	25.8 RT	7-EB	50	0.9	23	
	-	-	114+82	78.3 LT	7-F	50	0.9	23	
	-	-	116+95	31.5 LT	8-B	25	0.5	12	
120+33	-	-	116+56	31.0 LT	8-BA	25	0.5	12	
	-	-	116+81	1.5 LT	8-C	25	0.5	12	
	-	-	120+88	74.4 LT	23-A	50	0.9	23	
	-	-	120+83	29.3 LT	23-B	50	0.9	23	
122+07	-	-	120+84	1.5 LT	23-C	50	0.9	23	
	-	-	120+89	31.5 RT	23-D	50	0.9	23	
	-	-	121+73	58.0 RT	24-A	50	0.9	23	
	-	-	122+34	42.1 RT	24-B	15	0.3	7	
122+07	-	-	122+36	23.6 LT	24-C	50	0.9	23	
	-	-	122+36	33.3 LT	24-CB	50	0.9	23	
	-	-	122+79	27.8 LT	24-D	45	0.8	20	
	-	-	124+10	89.9 LT	24-EA	50	0.9	23	
123+51	-	-	124+04	69.6 LT	24-EB	50	0.9	23	
	-	-	124+01	60.6 LT	24-EC	50	0.9	23	
	-	-	123+92	32.5 LT	24-ED	50	0.9	23	
	-	-	123+82	1.5 LT	24-F	50	0.9	23	
126+25	-	-	123+73	27.5 RT	24-G	50	0.9	23	
	-	-	126+75	47.7 LT	26-A	50	0.9	23	
	-	-	126+75	18.7 LT	26-B	50	0.9	23	
	-	-	126+75	1.5 LT	26-C	50	0.9	23	
128+49	-	-	126+75	27.5 RT	26-D	50	0.9	23	
	-	-	128+51	73.2 LT	27-A	50	0.9	23	
	-	-	128+07	50.5 LT	27-B	50	0.9	23	
	-	-	128+14	23.2 LT	27-C	50	0.9	23	
127+65	-	-	128+58	24.0 LT	27-DA	40	0.7	18	
	-	-	128+15	1.5 LT	27-E	50	0.9	23	
	-	-	128+09	31.5 RT	27-F	50	0.9	23	
	-	-	130+62	59.8 LT	28-A	50	0.9	23	
130+22	-	-	130+37	20.0 LT	28-BA	35	0.6	16	
	-	-	130+41	29.6 RT	28-CA	40	0.7	18	
	-	-	SUBTOTAL					2365	42.6
	-	-						1087	

PROJECT NO: 1103-68-77	HWY: IH41	COUNTY: BROWN	MISCELLANEOUS QUANTITIES	SHEET	E
TITLE NAME : C:\BROOKVIEW\BOX\DTSD-PROJECTS-PUBLIC\DTSD-PROJECTS-REGADON\NER-141-MAJOR-PUBLIC\1103630\1130-68-XX (OWNERS WAY - CTH F)\DESIGN\QUANTITIES\700023\1130-68-77 QUANTITY SHEETING.RST LAYOUT NAME : 29 (3) PLOT SCALE : 1" = 1'					

Addendum No. 02
ID 1130-68-77
Revised Sheet 348
May 8, 2025

LIGHTING CONDUIT AND WIRE

204.9090.S.01* REMOVING ELECTRICAL CONDUCTORS FROM EXISTING CONDUIT		652.0225* CONDUIT RIGID NONMETALLIC SCHEDULE 40 2-INCH		652.0235* CONDUIT RIGID NONMETALLIC SCHEDULE 40 3-INCH		652.0335* CONDUIT RIGID NONMETALLIC SCHEDULE 80 3-INCH		652.0700.S* INSTALL CONDUIT INTO EXISTING ITEM		655.0610* ELECTRICAL WIRE LIGHTING 12 AWG		655.0620* ELECTRICAL WIRE LIGHTING 8 AWG		655.0625* ELECTRICAL WIRE LIGHTING 6 AWG		REMARKS
FROM	TO	LF		LF		LF		ITEM	EACH	LF		LF		LF		
CB2400	LPB2400	--	--	48	--	--	--	--	--	--	--	--	--	353	--	PULL WIRE ONLY
CB2400	LPB2400	--	--	48	--	--	--	--	--	--	--	--	--	--	--	
LPB2400	SL2400	--	--	27	--	--	--	--	--	--	--	--	--	638	--	
LPB2400	SL2401	--	192	--	--	--	--	--	--	--	--	--	--	1038	--	
SL2401	SL2402	--	166	--	--	--	--	--	--	--	--	--	--	910	--	
SL2402	SL2403	--	171	--	--	--	--	--	--	--	--	--	--	561	--	
LPB2400	LPB2401	--	--	--	--	--	--	--	--	--	--	--	--	530	--	
LPB2401	SL2408	--	109	--	--	--	--	--	--	--	--	--	--	1245	--	
LPB2401	LPB2402	--	--	--	--	--	--	--	--	--	--	--	--	450	--	
LPB2402	SL2407	--	--	47	--	--	--	--	--	--	--	--	--	938	--	
LPB2402	SL2408	--	125	--	--	--	--	--	--	--	--	--	--	703	--	
SL2406	SL2405	--	171	--	--	--	--	--	--	--	--	--	--	935	--	
SL2405	SL2404	--	174	--	--	--	--	--	--	--	--	--	--	570	--	
LPB2402	LPB2403	--	199	--	--	--	--	--	--	--	--	--	--	1070	--	
LPB2403	SL2409	--	--	21	--	--	--	--	--	--	--	--	--	548	--	
LPB2403	SL2410	--	173	--	--	--	--	--	--	--	--	--	--	943	--	
SL2410	SL2411	--	232	--	--	--	--	--	--	--	--	--	--	744	--	
LPB2403	LPB2404	--	--	--	--	--	--	--	--	--	--	--	--	610	--	
LPB2404	SL2412	--	13	--	--	--	--	--	--	--	--	--	--	285	--	
LPB2404	LPB2405	--	89	--	--	--	--	--	--	--	--	--	--	520	--	
SL2413	SL2413	--	41	--	--	--	--	--	--	--	--	--	--	848	--	
LPB2405	LPB2406	--	168	--	--	--	--	--	--	--	--	--	--	2210	--	CONDUIT IN STRUCTURE B-05-696
LPB2405	SL2414	--	77	--	--	--	--	--	--	--	--	--	--	748	--	CONDUIT IN STRUCTURE B-05-696
SL2414	SL2415	--	--	--	--	--	--	--	--	--	--	--	--	645	--	CONDUIT IN STRUCTURE B-05-696
SL2415	LPB2406	--	91	--	--	--	--	--	--	--	--	--	--	548	--	
LPB2406	SL2416	--	16	--	--	--	--	--	--	--	--	--	--	315	--	
LPB2406	LPB2407	--	124	--	--	--	--	--	--	--	--	--	--	695	--	
LPB2407	SL2417	--	--	30	--	--	--	--	--	--	--	--	--	683	--	
LPB2407	LPB2408	--	--	--	--	--	--	--	--	--	--	--	--	710	--	
LPB2408	SL2419	--	95	--	--	--	--	--	--	--	--	--	--	553	--	
SL2419	SL2418	--	148	--	--	--	--	--	--	--	--	--	--	820	--	
LPB2408	LPB2409	--	64	--	--	--	--	--	--	--	--	--	--	395	--	
LPB2409	SL2420	--	--	28	--	--	--	--	--	--	--	--	--	653	--	
LPB2409	SL2421	--	106	--	--	--	--	--	--	--	--	--	--	608	--	
SL2421	SL2422	--	146	--	--	--	--	--	--	--	--	--	--	486	--	
CB2400 SUBTOTAL		0	2849	290	329	0	0	0	0	0	0	0	0	24508		

* ADDITIONAL QUANTITIES SHOWN ELSEWHERE

ALL ITEMS CATEGORY 1100

Addenum No. 02
ID 1130-68-77
Revised Sheet 349
May 8, 2025

LIGHTING CONDUIT AND WIRE (CONTINUED)

FROM TO		204.9090.S.01* REMOVING ELECTRICAL CONDUCTORS FROM EXISTING CONDUIT	652.0225* CONDUIT RIGID NONMETALLIC SCHEDULE 40 2-INCH	652.0235* CONDUIT RIGID NONMETALLIC SCHEDULE 40 3-INCH	652.0335* CONDUIT RIGID NONMETALLIC SCHEDULE 80 3-INCH	652.0700.S* INSTALL CONDUIT INTO EXISTING ITEM	655.0610* ELECTRICAL WIRE LIGHTING 12 AWG	655.0620* ELECTRICAL WIRE LIGHTING 8 AWG	655.0620* ELECTRICAL WIRE LIGHTING 6 AWG	REMARKS
LF	LF	LF	LF	LF	LF	ITEM	LF	LF	LF	
LPB2409	LPB2410	--	--	--	111	--	--	--	630	--
LPB2410	SL2425	--	21	--	--	--	--	--	365	--
LPB2410	LPB2411	--	--	--	78	--	--	--	465	--
LPB2411	SL2424	--	--	23	--	--	--	--	501	--
LPB2411	SL2423	--	167	--	--	--	--	--	548	--
LPB2411	LPB2412	--	92	--	--	--	--	--	535	--
LPB2412	SL2426	--	--	16	--	--	--	--	473	--
LPB2412	LPB2413	--	--	--	97	--	--	--	560	--
LPB2412	LPB2419	--	196	--	--	--	--	--	1228	INCLUDES 173 FEET OF CABLE COILED IN LPB2421 FOR SL2427
LPB2413	SL2430	--	19	--	--	--	--	--	276	--
LPB2413	SL2431	--	56	--	--	--	--	--	215	--
LPB2413	LPB2414	--	--	122	--	--	138	--	--	TRACER WIRE ONLY INCLUDE TRACER WIRE
LPB2414	SL2432	--	8	--	--	--	24	--	71	--
LPB2414	LPB2406	--	--	--	120	--	--	--	405	--
LPB2415	LPB2415	--	--	--	117	--	--	--	660	--
LPB2405	LPB2415	--	--	--	117	--	--	--	660	--
LPB2415	SL2433	--	--	--	--	--	--	--	555	--
LPB2415	LPB2416	--	146	--	--	--	--	--	805	--
LPB2415	LPB2416	--	146	--	--	--	--	--	805	--
LPB2415	SL2434	--	57	--	--	--	--	--	725	--
LPB2416	SL2435	--	24	--	--	--	--	--	395	--
LPB2416	LPB2417	--	--	--	59	--	--	--	370	--
LPB2416	LPB2417	--	--	--	59	--	--	--	370	--
LPB2417	SL2437	--	81	--	--	--	--	--	772	--
LPB2417	LPB2420	--	19	--	--	--	--	--	856	INCLUDES 683 FEET OF CABLE COILED IN LPB2422 FOR SL2438
LPB2417	LPB2418	--	80	--	--	--	--	--	285	--
LPB2417	LPB2418	--	80	--	--	--	--	--	475	--
LPB2418	SL2438	--	15	--	--	--	--	--	92	--
LPB2418	CB2400	--	--	26	--	--	--	--	--	PULL WIRE ONLY
LPB2418	CB2400	--	--	16	--	--	--	--	193	--
LPB207	SL210	--	37	--	--	1	--	--	--	--
CB2400 SUBTOTAL		0	1284	203	758	1	162	0	14290	
CB2400 TOTAL		0	4133	493	1087	1	162	0	38798	

* ADDITIONAL QUANTITIES SHOWN ELSEWHERE

ALL ITEMS CATEGORY 1100

PROJECT NO: 1130-68-77	HWY: SOUTHBRIDGE RD - INTERCHANGE	COUNTY: BROWN	MISCELLANEOUS QUANTITIES	SHEET: 349	E
------------------------	-----------------------------------	---------------	--------------------------	------------	---

W:\JOS82809-441-Connord Lighting\TECH\PRODS&E Docs\1130-68-81\Lighting_MQ_1130-68-81.dwg PLOT DATE: 5/5/2025 7:20:33 AM PLOT BY: HNTB PLOT NAME: J030241_mpl.dwg PLOT SCALE: 1:1

Addendum No. 02
ID 1130-68-77
Revised Sheet 350
May 8, 2025

LIGHTING CONDUIT AND WIRE (CONTINUED)

FROM TO		204.9090.S.01* REMOVING ELECTRICAL CONDUCTORS FROM EXISTING CONDUIT	652.0225* CONDUIT RIGID NONMETALLIC SCHEDULE 40 2-INCH	652.0235* CONDUIT RIGID NONMETALLIC SCHEDULE 40 3-INCH	652.0335* CONDUIT RIGID NONMETALLIC SCHEDULE 80 3-INCH	652.0700.S* INSTALL CONDUIT INTO EXISTING ITEM	655.0610* ELECTRICAL WIRE LIGHTING 12 AWG	655.0620* ELECTRICAL WIRE LIGHTING 8 AWG	655.0625* ELECTRICAL WIRE LIGHTING 6 AWG	REMARKS
LF	LF	LF	LF	LF	LF	ITEM EACH	LF	LF	LF	
CB100	LPB100	--	--	27	--	--	--	--	--	PULL WIRE ONLY
CB100	LPB100	--	--	27	--	--	--	248	--	--
LPB100	SL100	--	37	--	--	--	--	525	--	--
LPB100	LPB101	--	--	--	84	--	--	495	--	--
LPB101	SL101	--	141	--	--	--	--	1565	--	--
SL101	SL102	--	160	--	--	--	--	880	--	--
SL102	SL103	--	160	--	--	--	--	880	--	--
SL103	SL104	--	160	--	--	--	--	880	--	--
LPB101	LPB102	--	--	--	55	--	--	350	--	--
LPB102	SL105	--	13	--	--	--	--	285	--	--
LPB103	SL106	--	7	--	--	--	--	338	--	--
LPB103	SL107	--	131	--	--	--	--	733	--	--
LPB103	LPB104	--	--	--	86	--	--	505	--	--
LPB104	SL108	--	26	--	--	--	--	415	--	--
LPB105	LPB105	--	91	--	--	--	--	530	--	--
LPB105	SL109	--	14	--	--	--	--	384	--	--
LPB105	SL110	--	161	--	--	--	--	530	--	--
LPB105	LPB106	--	--	--	60	--	--	375	--	--
LPB106	SL112	--	53	--	--	--	--	891	--	--
LPB106	LPB107	--	--	--	53	--	--	616	--	--
LPB107	SL111	--	96	--	--	--	--	335	--	--
LPB107	LPB108	--	133	--	--	--	--	740	--	--
LPB108	SL113	--	54	--	--	--	--	765	--	--
LPB108	SL114	--	25	--	--	--	--	122	--	--
LPB108	LPB109	--	--	--	98	--	--	339	--	--
LPB108	LPB109	--	--	--	98	--	--	565	--	--
LPB109	SL115	--	98	--	--	--	--	152	--	--
LPB109	CB100	--	--	60	--	--	--	413	--	--
LPB109	CB100	--	--	60	--	--	--	--	--	PULL WIRE ONLY
LPB108	SL116	--	177	--	--	--	--	963	--	--
SL116	SL117	--	163	--	--	--	--	895	--	--
SL117	SL118	--	149	--	--	--	--	825	--	--
SL118	EXR2	--	144	--	--	1	--	798	--	--
EXR2	F6-AL06TW	27	--	--	--	--	--	128	--	--
LPB110	TMFB400	67	--	--	--	--	--	--	--	--
LPB110	F6-BUY7Z7	208	--	--	--	--	--	--	--	--
EXR2	LPB110	48	--	--	--	--	--	213	--	--
LPB110	F6-BUY7Z7	--	--	--	--	--	--	662	--	--
CB100 TOTAL		350	2286	174	534	1	0	19880	0	

* ADDITIONAL QUANTITIES SHOWN ELSEWHERE

ALL ITEMS CATEGORY 1100

LIGHTING CONDUIT AND WIRE (CONTINUED)

204.9090.S.01*		652.0225*	652.0235*	652.0335*	652.0700.S*	655.0610*		655.0620*	655.0625*	REMARKS	
FROM	TO	LF	LF	LF	ITEM	LF	LF	LF	LF		
SL2337	LPB2300	--	205	--	--	221	--	--	--	TRACER WIRE ONLY TRACER WIRE ONLY TRACER WIRE ONLY TRACER WIRE ONLY	
LPB2300	LPB2301	--	--	39	--	55	--	--	--		
LPB2300	SL2339	--	48	--	--	64	--	--	--		
SL2339	SL2341	--	275	--	--	291	--	--	--		
SL2341	SL2343	--	283	--	--	299	--	--	--		
CB2300 TOTAL		0	811	39	0	930	0	0	0		

* ADDITIONAL QUANTITIES SHOWN ELSEWHERE

204.9090.S.01*		652.0225*	652.0235*	652.0335*	652.0700.S*	655.0610*		655.0620*	655.0625*	REMARKS	
FROM	TO	LF	LF	LF	ITEM	LF	LF	LF	LF		
EXT2	LPB110	--	--	12	--	--	--	--	--	EXISTING CABLE EXISTING CABLE EXISTING CABLE EXISTING CABLE	
LPB110	EXT1	--	11	--	--	--	--	--	--		
LPB110	TMBP400	--	30	--	--	--	--	--	--		
TMBP400	TMBP400	--	--	--	--	--	--	--	--		
TMBP400 TOTAL		0	41	12	0	0	0	0	0		

* ADDITIONAL QUANTITIES SHOWN ELSEWHERE

PROJECT TOTALS		350	7271	1672	2	1092	19880	38798			
----------------	--	-----	------	------	---	------	-------	-------	--	--	--

Addenum No. 02
ID 1130-68-77
Revised Sheet 351
May 8, 2025

ALL ITEMS CATEGORY 1100

STREET LIGHTS

LIGHT NUMBER	STATION	OFFSET	R/L	654.0105* CONCRETE BASES TYPE 5	654.0107* CONCRETE BASES TYPE 7	657.0235* TRANSFORMER BASES BREAKAWAY 11 1/2-INCH BOLT OR CLE	657.0322* POLES TYPE 5 ALUMINUM	657.0709* LUMINAIRE ARMS TRUSS TYPE 4-INCH CLAMP 12-FT	657.0710* LUMINAIRE ARMS TRUSS TYPE 4 1/2-INCH CLAMP 12-FT	659.1120* LUMINAIRE UTILITY LED B	655.0610* ELECTRICAL WIRE LIGHTING 12 AWG	SPV.0060.01* ANCHOR BOLT COVER SHROUD
SL2400	113+24 'GV/EB'	64.8'	RT	1	--	1	1	--	1	1	150	--
SL2401	111+60 'GV/EB'	47.7'	RT	1	--	1	1	--	1	1	150	--
SL2402	109+94 'GV/EB'	46.5'	RT	1	--	1	1	--	1	1	150	--
SL2403	108+23 'GV/EB'	46.5'	RT	1	--	1	1	--	1	1	150	--
SL2404	109+13 'GV/EB'	73.9'	LT	1	--	1	1	--	1	1	150	--
SL2405	110+87 'GV/EB'	82.2'	LT	1	--	1	1	--	1	1	150	--
SL2406	112+57 'GV/EB'	90.4'	LT	1	--	1	1	--	1	1	150	--
SL2407	114+14 'GV/EB'	97.3'	LT	1	--	1	1	--	1	1	150	--
SL2408	114+62 'GV/EB'	32.8'	LT	1	--	1	1	--	1	1	150	--
SL2409	114+68 'GV/EB'	164.3'	LT	1	--	1	1	--	1	1	150	--
SL2410	611+69 'GV/D'	60.1'	LT	1	--	1	1	--	1	1	150	--
SL2411	613+96 'GV/D'	39.2'	LT	1	--	1	1	--	1	1	150	--
SL2412	116+83 'GV/EB'	140.7'	LT	1	--	1	1	--	1	1	150	--
SL2413	116+78 'GV/EB'	89.1'	LT	1	--	1	1	--	1	1	150	--
SL2414	118+43 'GV/EB' 42.9'	89.1'	LT	--	--	--	1	--	1	1	150	--
SL2415	119+49 'GV/EB' 43.0'	43.0'	LT	--	--	--	1	--	1	1	150	--
SL2416	120+73 'GV/EB'	78.5'	LT	1	--	1	1	--	1	1	150	--
SL2417**	121+71 'GV/EB'	124.0'	LT	--	--	--	1	--	1	1	150	--
SL2418	614+21 'GV/B'	28.0'	RT	1	--	1	1	--	1	1	150	--
SL2419	612+73 'GV/B'	28.0'	RT	1	--	1	1	--	1	1	150	--
SL2420	123+13 'GV/EB'	160.3'	LT	1	--	1	1	--	1	1	150	--
SL2421	124+49 'GV/EB'	101.3'	LT	1	--	1	1	--	1	1	150	--
SL2422	125+93 'GV/EB'	77.9'	LT	1	--	1	1	--	1	1	150	--
SL2423	124+51 'GV/EB'	46.5'	RT	1	--	1	1	--	1	1	150	--
SL2424	123+14 'GV/EB'	46.5'	RT	1	--	1	1	--	1	1	150	--
SL2425	122+87 'GV/EB'	37.3'	LT	1	--	1	1	--	2	2	300	--
SL2426	609+49 'GV/AB'	37.0'	RT	1	--	1	1	--	1	1	150	--
SL2430	608+95 'GVA'	13.0'	LT	1	--	1	1	--	1	1	150	--
SL2431	121+41 'GV/EB'	61.1'	RT	1	--	1	1	--	1	1	150	--
SL2432	120+47 'GV/EB'	49.5'	RT	1	--	1	1	--	1	1	150	--
SL2433	117+26 'GV/EB'	39.6'	RT	1	--	1	1	--	1	1	150	--
SL2434	608+90 'GVC'	98.1'	RT	1	--	1	1	--	1	1	150	--
SL2435**	609+15 'GVC'	15.9'	RT	--	--	--	1	--	--	1	150	--
SL2437	608+00 'GVC'	42.8'	LT	1	--	1	1	--	1	1	150	--
SL2438	2+00 'GV/CB'	42.9'	RT	1	--	1	1	--	1	1	150	--
SL2410	107+54 'GV/EB'	69.9'	LT	1	--	1	1	--	1	1	150	--

* ADDITIONAL QUANTITIES SHOWN ELSEWHERE
** SHARED INFRASTRUCTURE WITH RAMP GATES

CB2400 TOTAL

5550

37

35

2

34

32

0

32

ALL ITEMS CATEGORY 1100

PROJECT NO: 1130-68-77

COUNTY: BROWN

MISCELLANEOUS QUANTITIES

SHEET: 353

E

W:\JOSSEPH2009-441_Corridor Lighting\TECHPRO\PS&E_Docset\1130-68-811_Lighting_MQ_1130-68-811.dwg

PLOT DATE: 5/5/2025 7:20:33 AM

PLOT BY: HNTB

PLOT NAME: 1030241_mpl.dwg

PLOT SCALE: 1:1

Addendum No. 02
ID 1130-68-77
Revised Sheet 353
May 8, 2025

Addendum No. 02
ID 1130-68-77
Revised Sheet 354
May 8, 2025

LIGHT NUMBER	STATION	OFFSET	R/L	654.0105* CONCRETE BASES TYPE 5	654.0107* CONCRETE BASES TYPE 7	657.0255* TRANSFORMER BASES BREAKAWAY 11 1/2-INCH BOLT OR CLE	657.0322* POLES TYPE 5 ALUMINUM	657.0709* LUMINAIRE ARMS TRUSS TYPE 4 1/2-INCH CLAMP 12-FT	657.0710* LUMINAIRE ARMS TRUSS TYPE 4 1/2-INCH CLAMP 12-FT	659.1120* LUMINAIRE UTILITY LED B	655.0610* ELECTRICAL WIRE LIGHTING 12 AWG	SPV.0060.01* ANCHOR BOLT COVER SHROUD
SL100	130+95 'GV/EB'	70.2	LT	1	--	1	1	--	1	1	150	--
SL101	131+82 'GV/EB'	8.0'	LT	1	--	1	1	--	2	2	300	--
SL102	133+42 'GV/EB'	8.0'	LT	1	--	1	1	--	2	2	300	--
SL103	135+02 'GV/EB'	8.0'	LT	1	--	1	1	--	2	2	300	--
SL104	136+62 'GV/EB'	8.0'	LT	1	--	1	1	--	2	2	300	--
SL105	130+12 'GV/EB'	45.6'	RT	1	--	1	1	--	1	1	150	--
SL106	129+70 'GV/EB'	102.7'	RT	1	--	1	1	--	1	1	150	--
SL107	612+64 'NB'	25.0'	RT	1	--	1	1	--	1	1	150	--
SL108	128+74 'GV/EB'	71.0'	RT	1	--	1	1	--	1	1	150	--
SL109	127+81 'GV/EB'	49.1'	RT	1	--	1	1	--	1	1	150	--
SL110	126+27 'GV/EB'	46.5'	RT	1	--	1	1	--	1	1	150	--
SL111	127+26 'GV/EB'	68.0'	LT	1	--	1	1	--	1	1	150	--
SL112	128+43 'GV/EB'	30.3'	LT	1	--	1	1	--	1	1	150	--
SL113	128+43 'GV/EB'	106.3'	LT	1	--	1	1	--	1	1	150	--
SL114	128+52 'GV/EB'	176.9'	LT	1	--	1	1	--	1	1	150	--
SL115	130+43 'GV/EB'	133.5'	LT	1	--	1	1	--	1	1	150	--
SL116	618+31 'NB'	36.6'	LT	1	--	1	1	--	1	1	150	--
SL117	619+86 'NB'	30.0'	LT	1	--	1	1	--	1	1	150	--
SL118	621+49 'NB'	30.0'	LT	1	--	1	1	--	1	1	150	--
CB100 TOTAL				19	0	19	19	0	23	23	3450	0
* ADDITIONAL QUANTITIES SHOWN ELSEWHERE												

STREET LIGHTS (CONTINUED)

LIGHT NUMBER	STATION	OFFSET	R/L	654.0105* CONCRETE BASES TYPE 5	654.0107* CONCRETE BASES TYPE 7	657.0255* TRANSFORMER BASES BREAKAWAY 11 1/2-INCH BOLT OR CLE	657.0322* POLES TYPE 5 ALUMINUM	657.0709* LUMINAIRE ARMS TRUSS TYPE 4 1/2-INCH CLAMP 12-FT	657.0710* LUMINAIRE ARMS TRUSS TYPE 4 1/2-INCH CLAMP 12-FT	659.1120* LUMINAIRE UTILITY LED B	655.0610* ELECTRICAL WIRE LIGHTING 12 AWG	SPV.0060.01* ANCHOR BOLT COVER SHROUD
SL2337	616+56 'GV/D'	28.0'	LT	--	1	--	--	--	--	--	--	1
SL2339	619+10 'GV/D'	28.7'	LT	--	1	--	--	--	--	--	--	1
SL2341	621+90 'GV/D'	29.0'	LT	--	1	--	--	--	--	--	--	1
SL2343	624+73 'GV/D'	29.0'	LT	--	1	--	--	--	--	--	--	1
CB2300 TOTAL				0	4	0	0	0	0	0	0	4
PROJECT TOTALS				51	4	51	53	2	58	60	9000	4
* ADDITIONAL QUANTITIES SHOWN ELSEWHERE												


ALL ITEMS CATEGORY 1100

PROJECT NO: 1130-68-77	HWY: SOUTHBRIDGE RD - INTERCHANGE	COUNTY: BROWN	MISCELLANEOUS QUANTITIES	SHEET: 354	E
W:\JGSS\92309 4-1 Corridor Lighting\TECHPRO\PS&E Docs\1130-68-81\Lighting_MQ_1130-68-81.xlsx					
PLOT DATE: 5/5/2025 7:20:33 AM			PLOT BY: HNTB	PLOT NAME: 030241.mq.spr7	
			PLOT SCALE: 1:1		


Addendum No. 02
ID 1130-68-77
Added Sheet 749A
May 8, 2025


INNOVATION TEMP. WIDENING EARTHWORK SUMMARY									
STATION	REAL STATION	DISTANCE	AREA (SF)		INCREMENTAL VOL. (CY) UNADJUSTED				
			CUT	SALVAGED/UNUSABLE PAVEMENT MATERIAL	FILL	CUT	SALVAGED/UNUSABLE PAVEMENT MATERIAL	FILL	CUMULATIVE VOL. (CY)
620+44.43	62044.43	0.00	0.00	0.00	5.60	0	0	0	NOTE 1
620+50.00	62050.00	5.57	0.00	0.00	3.14	0	0	1	NOTE 8
621+00.00	62100.00	50.00	21.87	0.00	0.00	20	0	0	0
621+50.00	62150.00	50.00	36.61	0.00	0.00	54	0	0	1
622+00.00	62200.00	50.00	69.23	0.00	0.00	98	0	0	4
622+50.00	62250.00	50.00	71.52	0.00	0.00	130	0	0	172
623+00.00	62300.00	50.00	95.87	0.00	0.00	155	0	0	302

Addenum No. 02
ID 1130-68-77
Revised Sheet 757
May 8, 2025

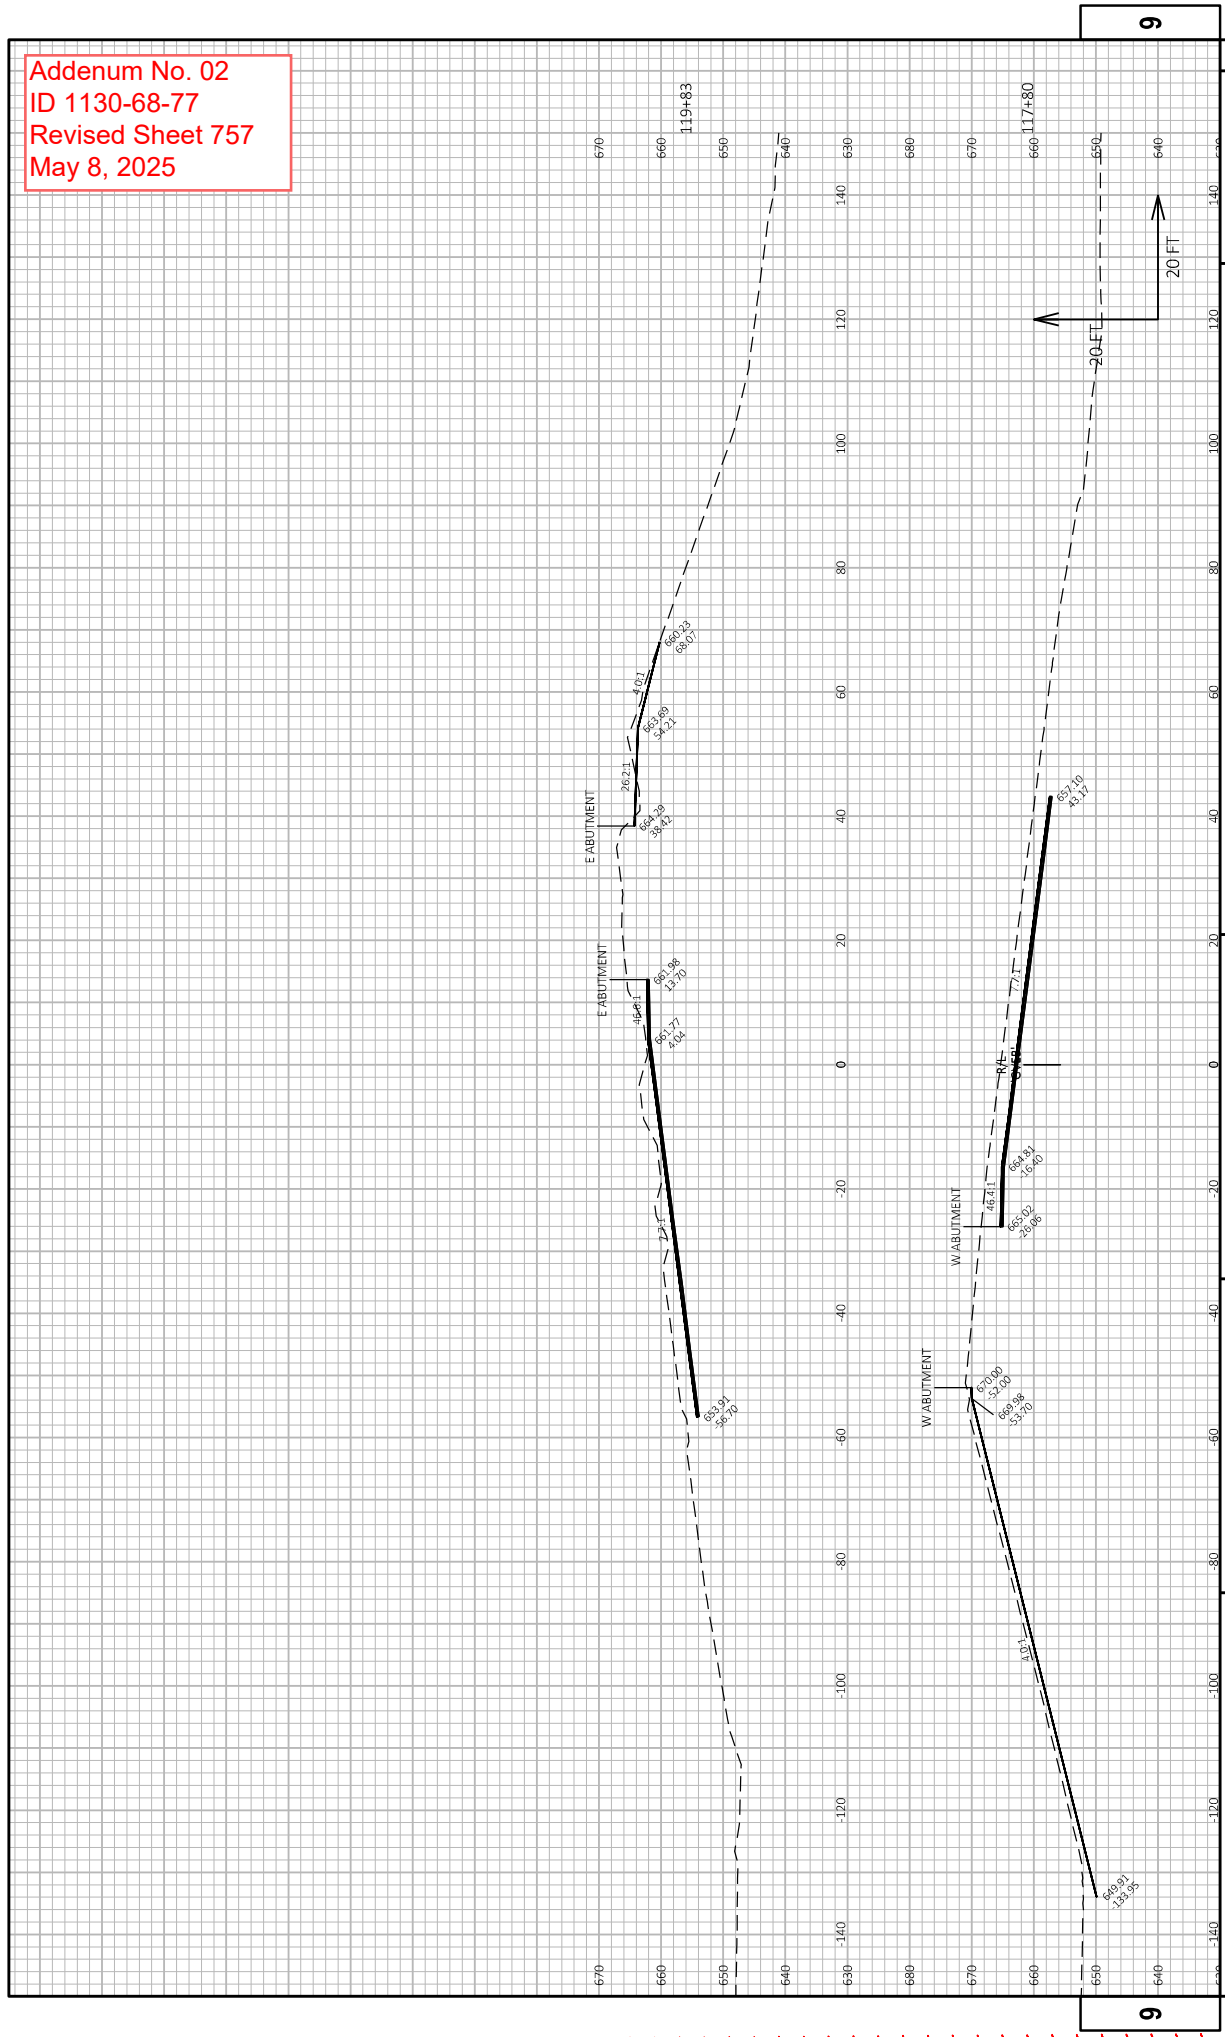


Addendum No. 02
ID 1130-68-77
Revised Sheet 775
May 8, 2025

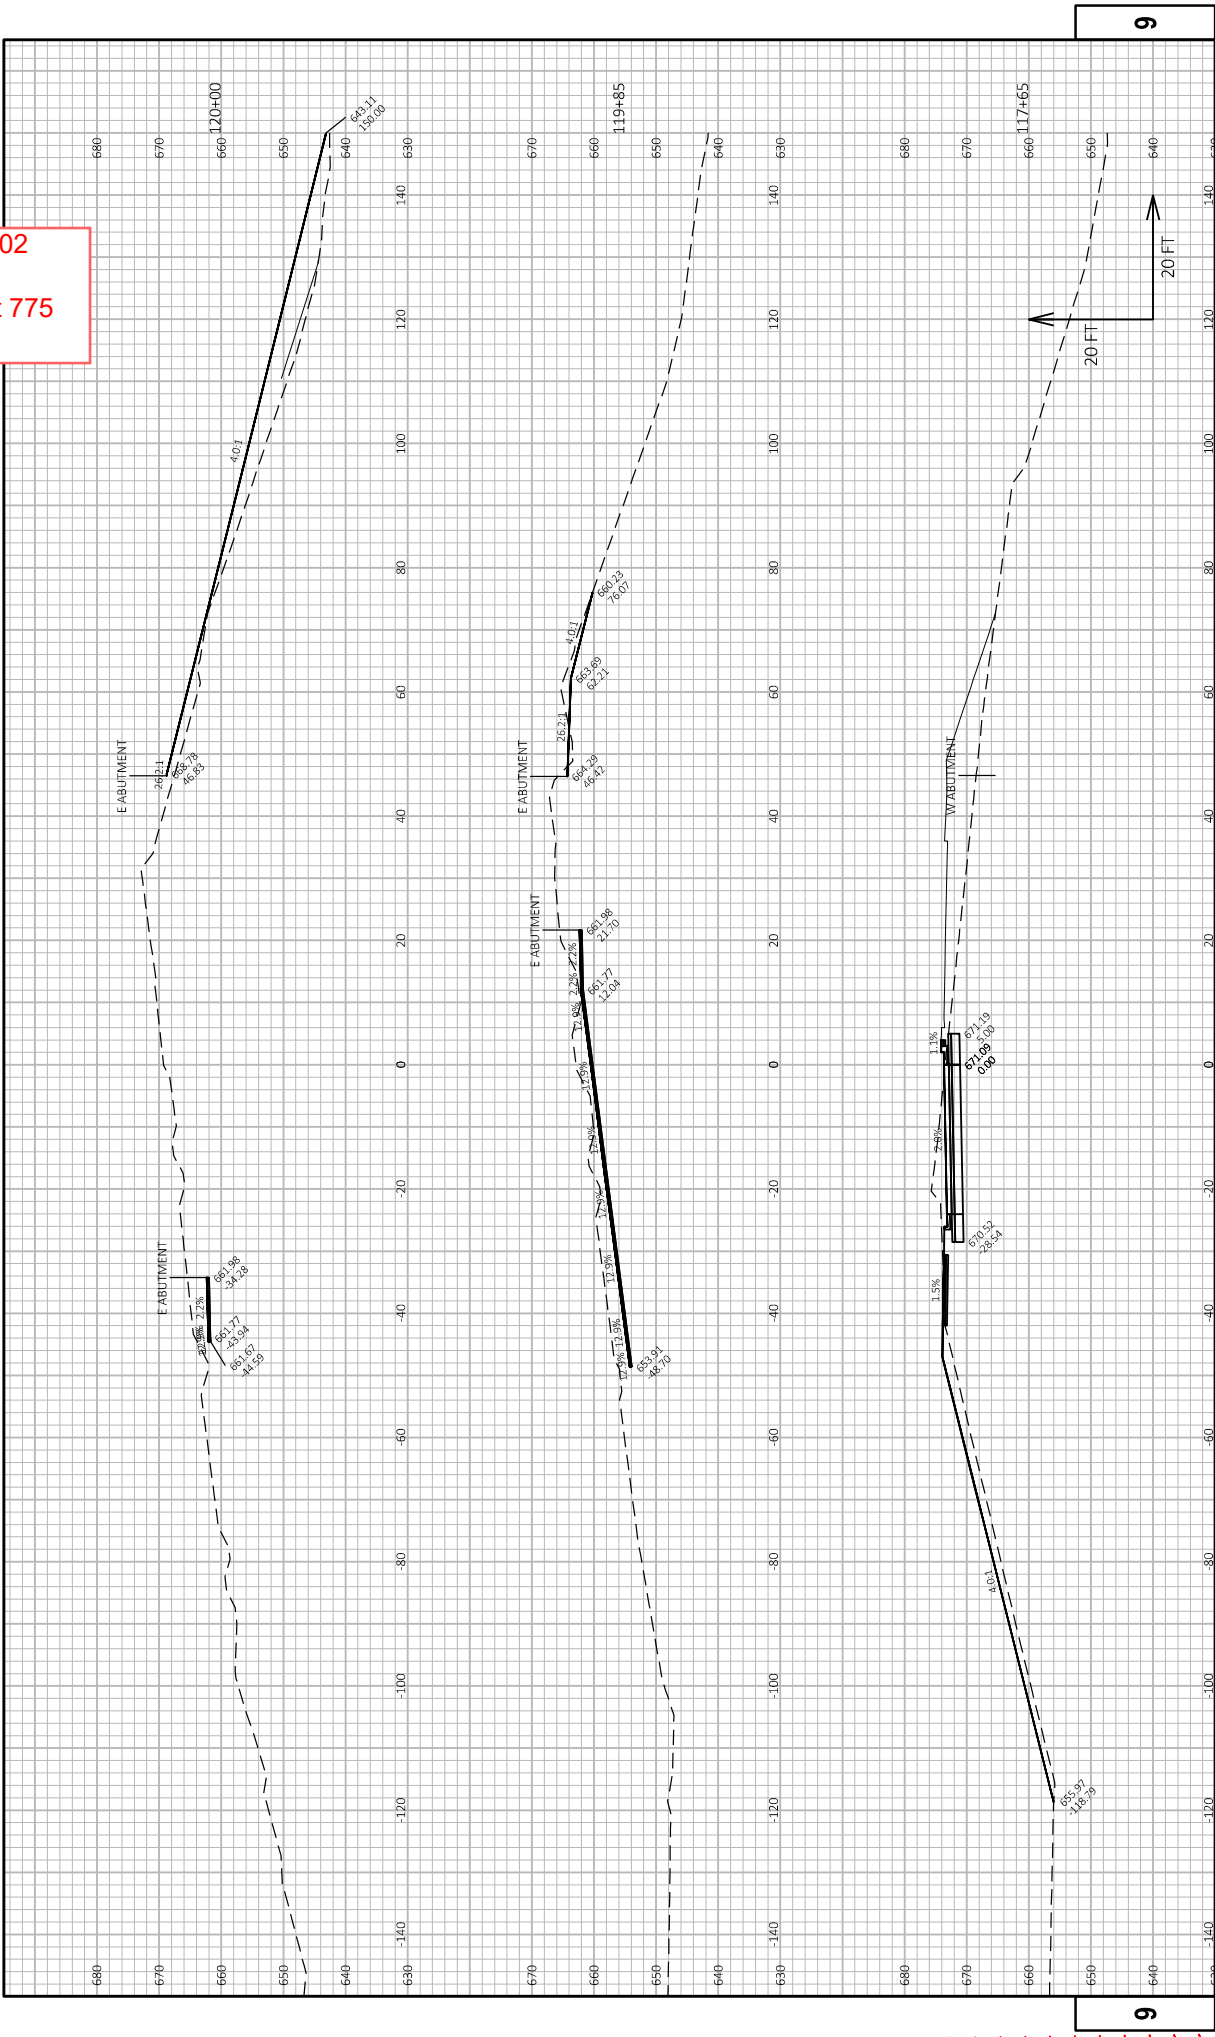

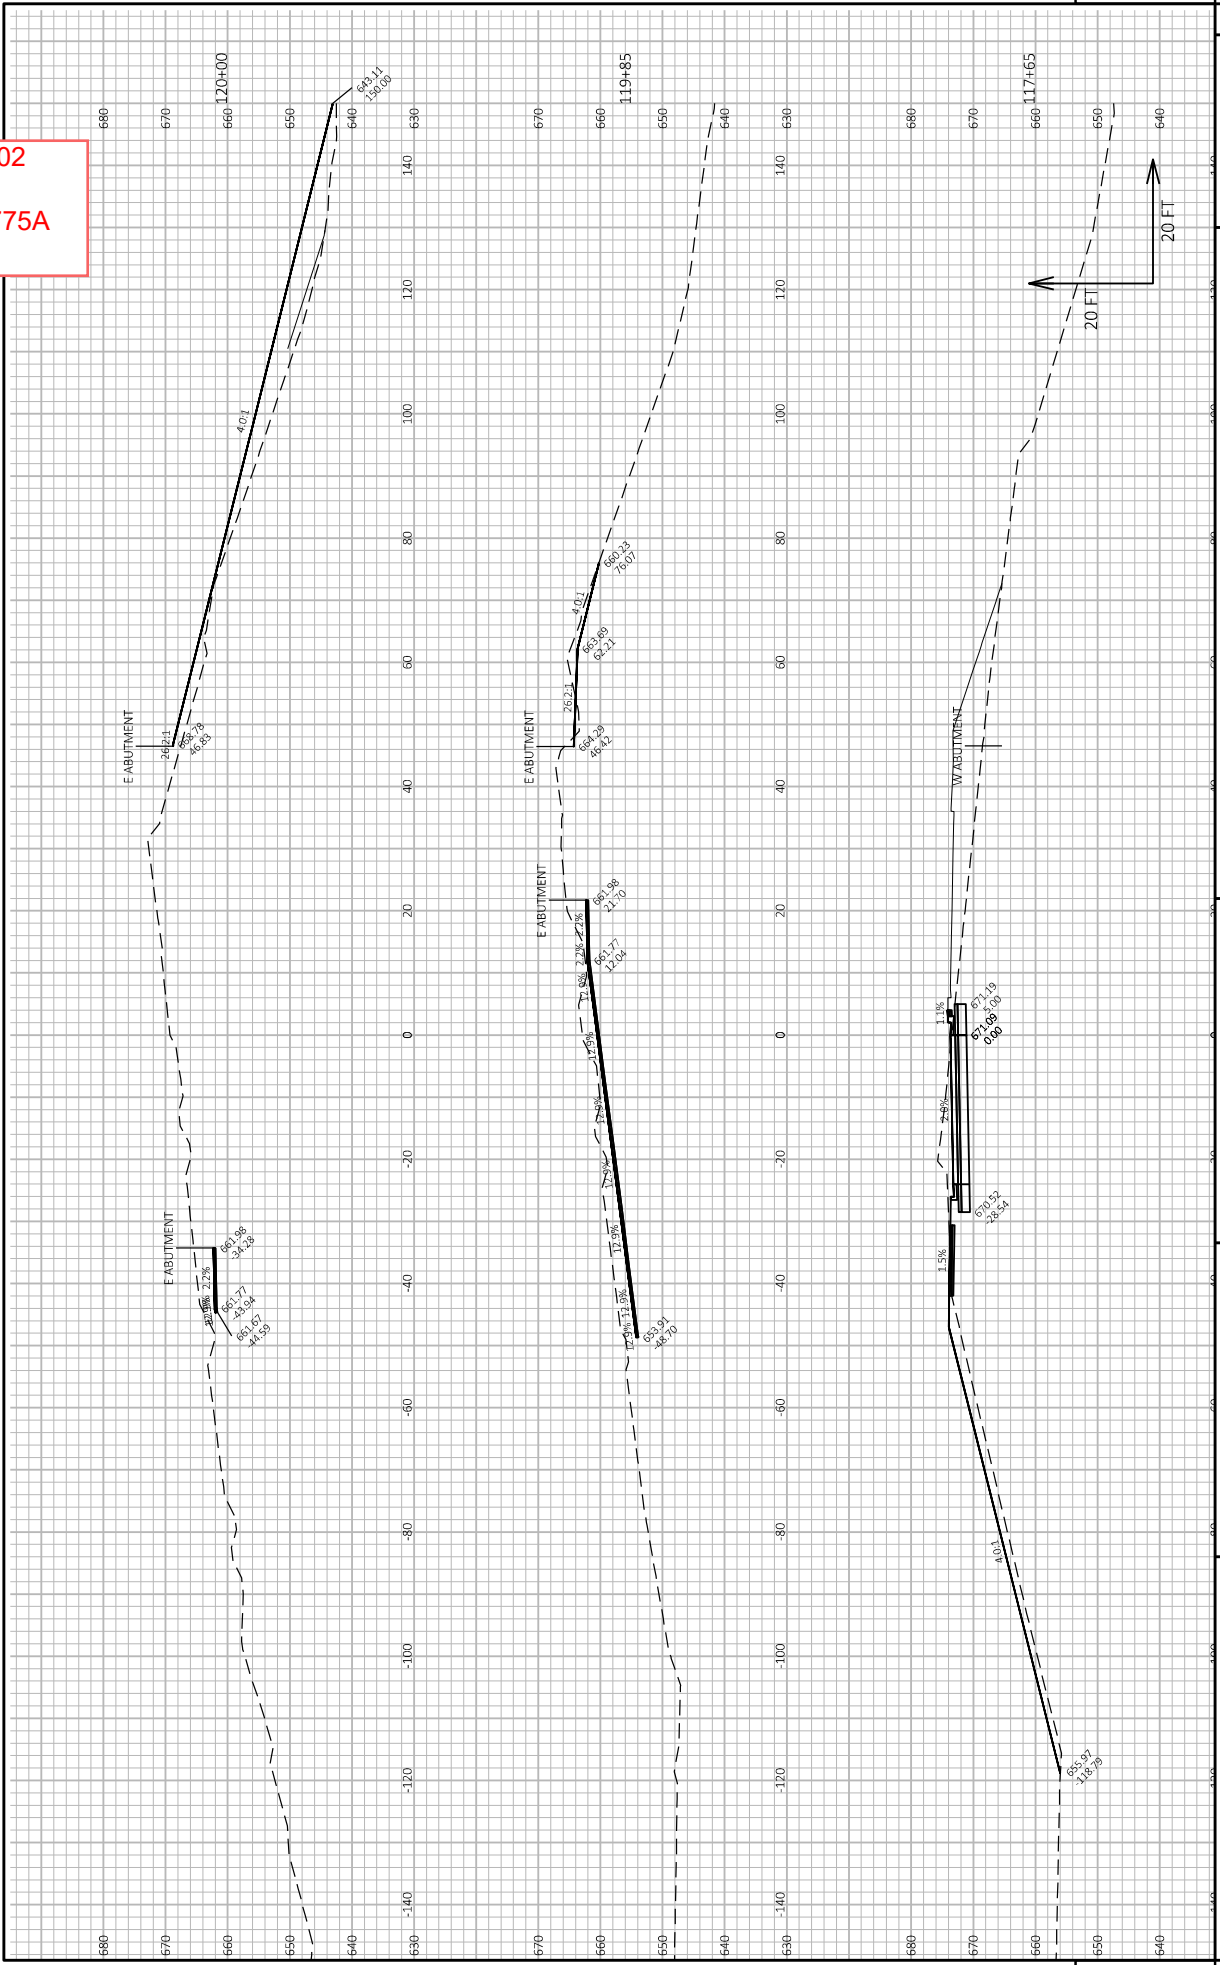[illegible]


Addendum No. 02
ID 1130-68-77
Added Sheet 874
May 8, 2025

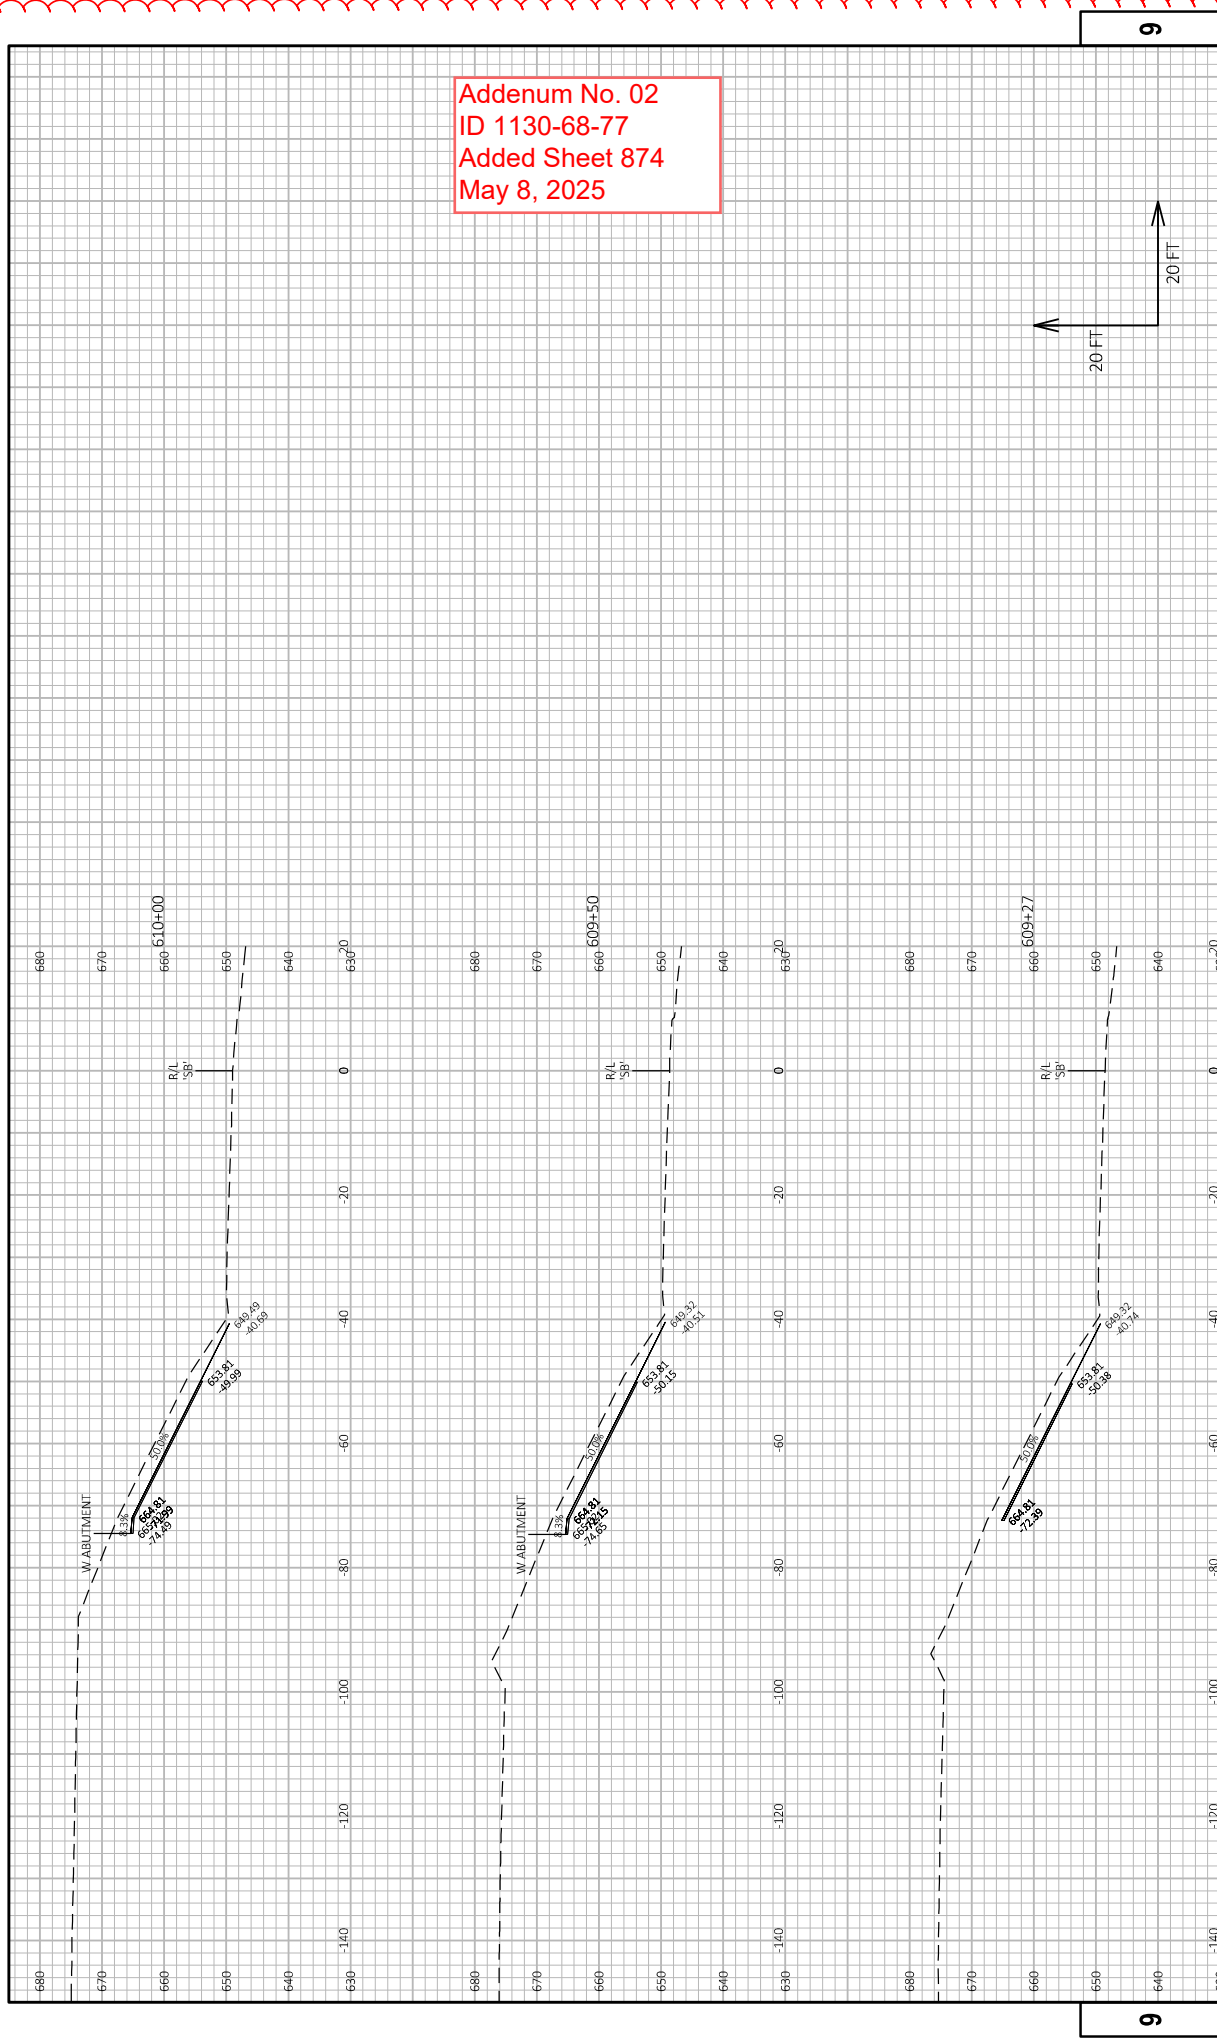


Addendum No. 02
 ID 1130-68-77
 Added Sheet 874B
 May 8, 2025

PROJECT NO:	1130-68-77	HWY: IH 41 - SOUTHBRIDGE	COUNTY: BROWN	CROSS SECTIONS: IH 41 SB - SOUTHBRIDGE SLOPE PAVING	SHEET	874B
FILE NAME: C:\Users\B074930\OneDrive\CAD\Projects\WISDOT\11306877\PROJECT FILES\DSG\11306877\SH41SHEETS\SPRIN\68-77\905 CROSS SECTIONS\905209\5 (MAINLINE BILLBOARD) DWG		PLOT DATE: 5/1/2025 12:22 PM		PLOT BY: DENVERYS, KRISTOPHER M		PLOT SCALE: 1 IN=20 FT HORIZ / 1 IN=20 FT VERT
LAYOUT NAME: - 11						

Addendum No. 02
ID 1130-68-77
Added Sheet 874C
May 8, 2025

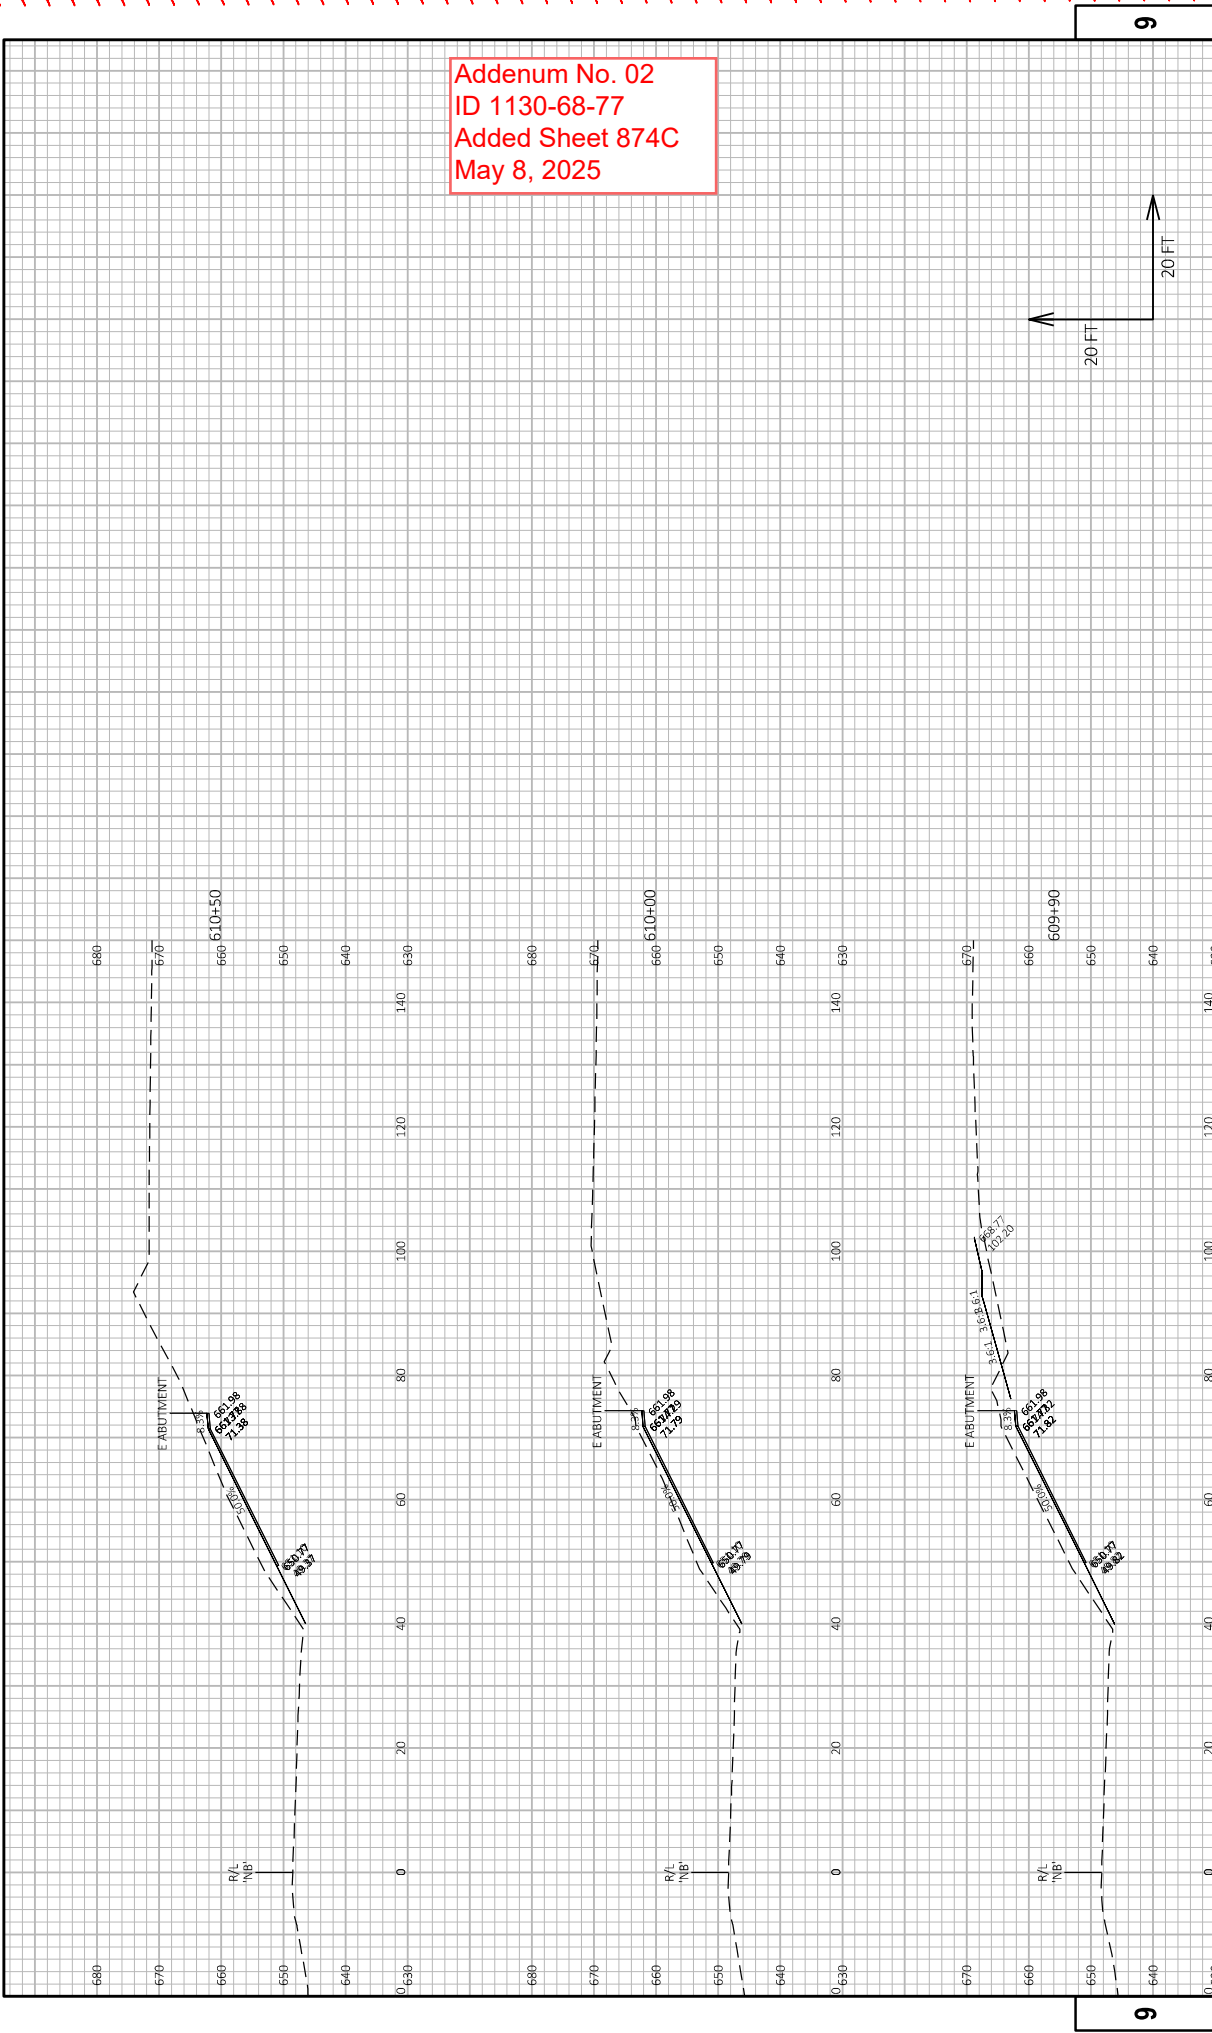

Addendum No. 02
ID 1130-68-77
Added Sheet 874D
May 8, 2025

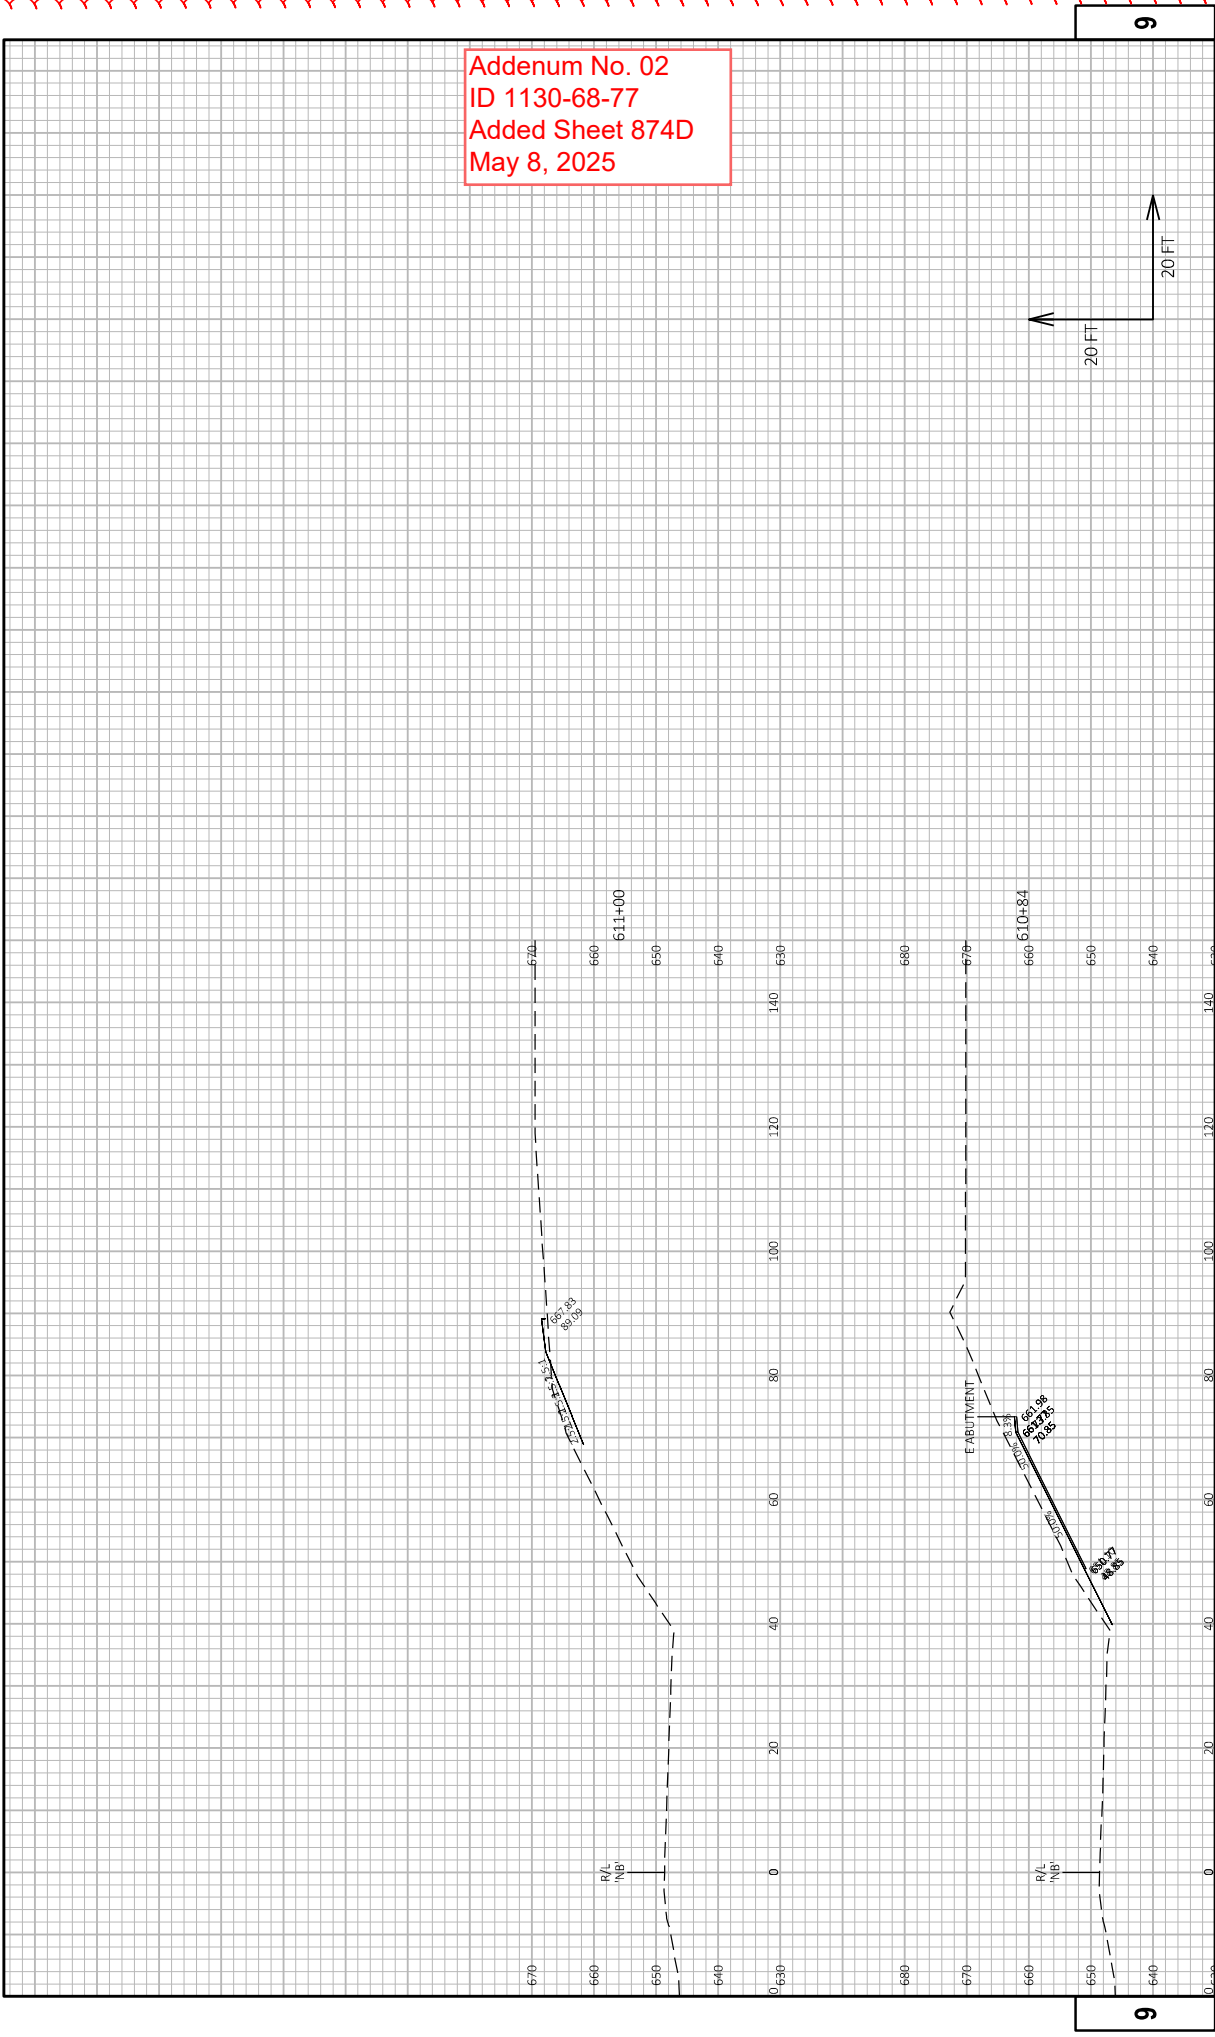



Proposal Schedule of Items

Page 1 of 21

Proposal ID: 20250513020 Project(s): 1130-68-77

Federal ID(s): WISC 2025473

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0002	203.0100 Removing Small Pipe Culverts	7.000 EACH	_____.	_____.
0004	203.0220 Removing Structure (structure) 01. C-05-0800	1.000 EACH	_____.	_____.
0006	204.0100 Removing Concrete Pavement	1,515.000 SY	_____.	_____.
0008	204.0115 Removing Asphaltic Surface Butt Joints	15.000 SY	_____.	_____.
0010	204.0150 Removing Curb & Gutter	162.000 LF	_____.	_____.
0012	204.0210 Removing Manholes	3.000 EACH	_____.	_____.
0014	204.0220 Removing Inlets	3.000 EACH	_____.	_____.
0016	204.9060.S Removing (item description) 01. Communication Vault	2.000 EACH	_____.	_____.
0018	204.9090.S Removing (item description) 01. Electrical Conductors From Existing Conduit	350.000 LF	_____.	_____.
0020	205.0100 Excavation Common	103,970.000 CY	_____.	_____.
0022	206.1001 Excavation for Structures Bridges (structure) 01. B-5-696	1.000 EACH	_____.	_____.
0024	206.2001 Excavation for Structures Culverts (structure) 01. C-05-0800	1.000 EACH	_____.	_____.
0026	210.1500 Backfill Structure Type A	1,216.000 TON	_____.	_____.
0028	210.2500 Backfill Structure Type B	256.000 TON	_____.	_____.



Proposal Schedule of Items

Page 2 of 21

Proposal ID: 20250513020 Project(s): 1130-68-77

Federal ID(s): WISC 2025473

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0030	213.0100 Finishing Roadway (project) 01. 1130-68-77	1.000 EACH	_____.	_____.
0032	214.0100 Obliterating Old Road	6.000 STA	_____.	_____.
0034	305.0110 Base Aggregate Dense 3/4-Inch	1,890.000 TON	_____.	_____.
0036	305.0120 Base Aggregate Dense 1 1/4-Inch	31,388.000 TON	_____.	_____.
0038	311.0115 Breaker Run	331.000 CY	_____.	_____.
0040	312.0110 Select Crushed Material	66,280.000 TON	_____.	_____.
0042	405.0100 Coloring Concrete WisDOT Red	888.000 CY	_____.	_____.
0044	405.0200 Coloring Concrete Custom	117.000 CY	_____.	_____.
0046	415.0090 Concrete Pavement 9-Inch	6,264.000 SY	_____.	_____.
0048	415.0095 Concrete Pavement 9 1/2-Inch	21,975.000 SY	_____.	_____.
0050	415.0410 Concrete Pavement Approach Slab	211.000 SY	_____.	_____.
0052	415.2010 Concrete Truck Apron 12-inch	1,863.000 SY	_____.	_____.
0054	415.4100 Concrete Pavement Joint Filling	34,264.000 SY	_____.	_____.
0056	416.0610 Drilled Tie Bars	1,828.000 EACH	_____.	_____.
0058	416.0620 Drilled Dowel Bars	22.000 EACH	_____.	_____.
0060	450.4000 HMA Cold Weather Paving	539.000 TON	_____.	_____.



Proposal Schedule of Items

Page 3 of 21

Proposal ID: 20250513020 Project(s): 1130-68-77

Federal ID(s): WISC 2025473

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0062	455.0605 Tack Coat	1,828.000 GAL	_____.	_____.
0064	460.2000 Incentive Density HMA Pavement	4,390.000 DOL	1.00000	4,390.00
0066	460.5223 HMA Pavement 3 LT 58-28 S	3,823.000 TON	_____.	_____.
0068	460.5224 HMA Pavement 4 LT 58-28 S	2,899.000 TON	_____.	_____.
0070	465.0105 Asphaltic Surface	734.000 TON	_____.	_____.
0072	465.0125 Asphaltic Surface Temporary	77.000 TON	_____.	_____.
0074	465.0315 Asphaltic Flumes	66.000 SY	_____.	_____.
0076	465.0510 Asphaltic Rumble Strips, Shoulder Divided Roadway	3,240.000 LF	_____.	_____.
0078	501.1000.S Ice Hot Weather Concreting	10,875.000 LB	_____.	_____.
0080	502.0100 Concrete Masonry Bridges	456.000 CY	_____.	_____.
0082	502.3200 Protective Surface Treatment	2,124.000 SY	_____.	_____.
0084	502.3210 Pigmented Surface Sealer	440.000 SY	_____.	_____.
0086	502.4205 Adhesive Anchors No. 5 Bar	47.000 EACH	_____.	_____.
0088	503.0146 Prestressed Girder Type I 45W-Inch	2,818.000 LF	_____.	_____.
0090	504.0100 Concrete Masonry Culverts	36.000 CY	_____.	_____.
0092	505.0400 Bar Steel Reinforcement HS Structures	23,120.000 LB	_____.	_____.



Proposal Schedule of Items

Page 4 of 21

Proposal ID: 20250513020 Project(s): 1130-68-77

Federal ID(s): WISC 2025473

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0094	505.0600 Bar Steel Reinforcement HS Coated Structures	238,000.000 LB	_____.	_____.
0096	505.0800.S Bar Steel Reinforcement HS Stainless Structures	2,990.000 LB	_____.	_____.
0098	505.0905 Bar Couplers No. 5	19.000 EACH	_____.	_____.
0100	506.2605 Bearing Pads Elastomeric Non-Laminated	52.000 EACH	_____.	_____.
0102	506.4000 Steel Diaphragms (structure) 01. B-5-696	48.000 EACH	_____.	_____.
0104	511.1200 Temporary Shoring (structure) 01. C-05-0800	1,682.000 SF	_____.	_____.
0106	513.4091 Railing Tubular Screening	516.000 LF	_____.	_____.
0108	516.0500 Rubberized Membrane Waterproofing	67.000 SY	_____.	_____.
0110	517.1010.S Concrete Staining (structure) 01. B-5-696	9,108.000 SF	_____.	_____.
0112	517.1015.S Concrete Staining Multi-Color (structure) 01. B-5-696	1,514.000 SF	_____.	_____.
0114	517.1050.S Architectural Surface Treatment (structure) 01. B-5-696	1,514.000 SF	_____.	_____.
0116	520.8000 Concrete Collars for Pipe	1.000 EACH	_____.	_____.
0118	522.1018 Apron Endwalls for Culvert Pipe Reinforced Concrete 18-Inch	15.000 EACH	_____.	_____.
0120	522.1021 Apron Endwalls for Culvert Pipe Reinforced Concrete 21-Inch	2.000 EACH	_____.	_____.



Proposal Schedule of Items

Page 5 of 21

Proposal ID: 20250513020 Project(s): 1130-68-77

Federal ID(s): WISC 2025473

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0122	522.1024 Apron Endwalls for Culvert Pipe Reinforced Concrete 24-Inch	3.000 EACH	_____.	_____.
0124	531.1100 Concrete Masonry Ancillary Structures Type NS	36.400 CY	_____.	_____.
0126	531.1140 Steel Reinforcement HS Ancillary Structures Type NS	3,480.000 LB	_____.	_____.
0128	531.1160 Steel Reinforcement HS Coated Ancillary Structures Type NS	2,280.000 LB	_____.	_____.
0130	531.2024 Drilling Shaft 24-Inch	20.000 LF	_____.	_____.
0132	531.2036 Drilling Shaft 36-Inch	254.000 LF	_____.	_____.
0134	531.2042 Drilling Shaft 42-Inch	151.000 LF	_____.	_____.
0136	531.4050 Foundation Camera Pole 50-FT	1.000 EACH	_____.	_____.
0138	531.5130 Foundation Single-Shaft Type MC-III (structure) 01. S-05-0438	1.000 EACH	_____.	_____.
0140	531.5130 Foundation Single-Shaft Type MC-III (structure) 02. S-05-0446	1.000 EACH	_____.	_____.
0142	531.5140 Foundation Single-Shaft Type MC-IV (structure) 01. S-05-0441	1.000 EACH	_____.	_____.
0144	531.5420 Foundation Single-Shaft Type TF-II (structure) 01. S-05-0443	2.000 EACH	_____.	_____.
0146	531.6020 Foundation Two-Shaft Type FC-II (structure) 01. S-05-0432	1.000 EACH	_____.	_____.



Proposal Schedule of Items

Page 6 of 21

Proposal ID: 20250513020 Project(s): 1130-68-77

Federal ID(s): WISC 2025473

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0148	531.6020 Foundation Two-Shaft Type FC-II (structure) 02. S-05-0442	1.000 EACH	_____.	_____.
0150	531.6110 Foundation Two-Shaft Type FF-I (structure) 01. S-05-0439	1.000 EACH	_____.	_____.
0152	531.6140 Foundation Two-Shaft Type FF-IV (structure) 01. S-05-0440	1.000 EACH	_____.	_____.
0154	531.8990 Anchor Assemblies Poles on Structures	2.000 EACH	_____.	_____.
0156	532.5130 Monotube Cantilever Type III (structure) 01. S-05-0438	1.000 EACH	_____.	_____.
0158	532.5130 Monotube Cantilever Type III (structure) 02. S-05-0446	1.000 EACH	_____.	_____.
0160	532.5140 Monotube Cantilever Type IV (structure) 01. S-05-0441	1.000 EACH	_____.	_____.
0162	532.5400 Truss Full Span 2-Chord Type NS (structure) 01. S-05-0423	1.000 EACH	_____.	_____.
0164	532.5420 Truss Full Span 2-Chord Type II (structure) 01. S-05-0443	1.000 EACH	_____.	_____.
0166	532.6000 Truss Cantilever 4-Chord Type NS (structure) 01. S-05-0431	1.000 EACH	_____.	_____.
0168	532.6000 Truss Cantilever 4-Chord Type NS (structure) 02. S-05-0433	1.000 EACH	_____.	_____.
0170	532.6020 Truss Cantilever 4-Chord Type II (structure) 01. S-05-0432	1.000 EACH	_____.	_____.
0172	532.6020 Truss Cantilever 4-Chord Type II (structure) 02. S-05-0442	1.000 EACH	_____.	_____.



Proposal Schedule of Items

Page 7 of 21

Proposal ID: 20250513020 Project(s): 1130-68-77

Federal ID(s): WISC 2025473

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0174	532.6110 Truss Full Span 4-Chord Type I (structure) 01. S-05-0439	1.000 EACH	_____.	_____.
0176	532.6140 Truss Full Span 4-Chord Type IV (structure) 01. S-05-0440	1.000 EACH	_____.	_____.
0178	550.1120 Piling Steel HP 12-Inch X 53 Lb	5,120.000 LF	_____.	_____.
0180	601.0405 Concrete Curb & Gutter 18-Inch Type A	960.000 LF	_____.	_____.
0182	601.0409 Concrete Curb & Gutter 30-Inch Type A	9,586.000 LF	_____.	_____.
0184	601.0411 Concrete Curb & Gutter 30-Inch Type D	1,300.000 LF	_____.	_____.
0186	601.0557 Concrete Curb & Gutter 6-Inch Sloped 36-Inch Type D	384.000 LF	_____.	_____.
0190	601.0600 Concrete Curb Pedestrian	369.000 LF	_____.	_____.
0192	602.0405 Concrete Sidewalk 4-Inch	34,408.000 SF	_____.	_____.
0198	602.3210 Concrete Rumble Strips, Shoulder Divided Roadway	3,310.000 LF	_____.	_____.
0200	603.8000 Concrete Barrier Temporary Precast Delivered	10,935.000 LF	_____.	_____.
0202	603.8125 Concrete Barrier Temporary Precast Installed	12,235.000 LF	_____.	_____.
0204	603.8500 Anchoring Concrete Barrier Temporary Precast	500.000 LF	_____.	_____.
0206	604.0400 Slope Paving Concrete	594.000 SY	_____.	_____.



Proposal Schedule of Items

Page 8 of 21

Proposal ID: 20250513020 Project(s): 1130-68-77

Federal ID(s): WISC 2025473

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0208	604.0600 Slope Paving Select Crushed Material	224.000 SY	_____.	_____.
0210	606.0200 Riprap Medium	106.700 CY	_____.	_____.
0212	606.0300 Riprap Heavy	14.000 CY	_____.	_____.
0214	608.0312 Storm Sewer Pipe Reinforced Concrete Class III 12-Inch	293.000 LF	_____.	_____.
0216	608.0315 Storm Sewer Pipe Reinforced Concrete Class III 15-Inch	37.000 LF	_____.	_____.
0218	608.0318 Storm Sewer Pipe Reinforced Concrete Class III 18-Inch	3,113.000 LF	_____.	_____.
0220	608.0321 Storm Sewer Pipe Reinforced Concrete Class III 21-Inch	185.000 LF	_____.	_____.
0222	608.0324 Storm Sewer Pipe Reinforced Concrete Class III 24-Inch	2,346.000 LF	_____.	_____.
0224	608.0330 Storm Sewer Pipe Reinforced Concrete Class III 30-Inch	66.000 LF	_____.	_____.
0226	608.0424 Storm Sewer Pipe Reinforced Concrete Class IV 24-Inch	508.000 LF	_____.	_____.
0228	608.3012 Storm Sewer Pipe Class III-A 12-Inch	25.000 LF	_____.	_____.
0230	611.0430 Reconstructing Inlets	2.000 EACH	_____.	_____.
0232	611.0530 Manhole Covers Type J	3.000 EACH	_____.	_____.
0234	611.0600 Inlet Covers Type A	86.000 EACH	_____.	_____.



Proposal Schedule of Items

Page 9 of 21

Proposal ID: 20250513020 Project(s): 1130-68-77

Federal ID(s): WISC 2025473

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0236	611.0610 Inlet Covers Type BW	16.000 EACH	_____.	_____.
0238	611.0612 Inlet Covers Type C	4.000 EACH	_____.	_____.
0240	611.0642 Inlet Covers Type MS	1.000 EACH	_____.	_____.
0242	611.0652 Inlet Covers Type T	6.000 EACH	_____.	_____.
0244	611.1005 Catch Basins 5-FT Diameter	20.000 EACH	_____.	_____.
0246	611.2004 Manholes 4-FT Diameter	4.000 EACH	_____.	_____.
0248	611.2005 Manholes 5-FT Diameter	2.000 EACH	_____.	_____.
0252	611.3004 Inlets 4-FT Diameter	88.000 EACH	_____.	_____.
0254	611.3901 Inlets Median 1 Grate	1.000 EACH	_____.	_____.
0256	611.8120.S Cover Plates Temporary	2.000 EACH	_____.	_____.
0258	612.0406 Pipe Underdrain Wrapped 6-Inch	472.000 LF	_____.	_____.
0260	614.0220 Steel Thrie Beam Bullnose Terminal	2.000 EACH	_____.	_____.
0262	614.0230 Steel Thrie Beam	300.000 LF	_____.	_____.
0264	614.0905 Crash Cushions Temporary	3.000 EACH	_____.	_____.
0266	614.2300 MGS Guardrail 3	1,038.000 LF	_____.	_____.
0268	614.2500 MGS Thrie Beam Transition	39.000 LF	_____.	_____.



Proposal Schedule of Items

Page 10 of 21

Proposal ID: 20250513020 Project(s): 1130-68-77

Federal ID(s): WISC 2025473

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0270	614.2610 MGS Guardrail Terminal EAT	5.000 EACH	_____.	_____.
0272	614.2620 MGS Guardrail Terminal Type 2	4.000 EACH	_____.	_____.
0274	616.0206 Fence Chain Link 6-FT	7,650.000 LF	_____.	_____.
0276	616.0700.S Fence Safety	1,000.000 LF	_____.	_____.
0278	618.0100 Maintenance and Repair of Haul Roads (project) 01. 1130-68-77	1.000 EACH	_____.	_____.
0280	619.1000 Mobilization	1.000 EACH	_____.	_____.
0284	620.0300 Concrete Median Sloped Nose	1,666.000 SF	_____.	_____.
0286	624.0100 Water	447.000 MGAL	_____.	_____.
0288	625.0500 Salvaged Topsoil	109,165.000 SY	_____.	_____.
0290	627.0200 Mulching	3,802.000 SY	_____.	_____.
0292	628.1504 Silt Fence	8,044.000 LF	_____.	_____.
0294	628.1520 Silt Fence Maintenance	8,044.000 LF	_____.	_____.
0296	628.1905 Mobilizations Erosion Control	9.000 EACH	_____.	_____.
0298	628.1910 Mobilizations Emergency Erosion Control	9.000 EACH	_____.	_____.
0300	628.2002 Erosion Mat Class I Type A	105,363.000 SY	_____.	_____.
0302	628.7005 Inlet Protection Type A	3.000 EACH	_____.	_____.



Proposal Schedule of Items

Page 11 of 21

Proposal ID: 20250513020 Project(s): 1130-68-77

Federal ID(s): WISC 2025473

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0304	628.7010 Inlet Protection Type B	16.000 EACH	_____.	_____.
0306	628.7015 Inlet Protection Type C	83.000 EACH	_____.	_____.
0308	628.7020 Inlet Protection Type D	10.000 EACH	_____.	_____.
0310	628.7504 Temporary Ditch Checks	400.000 LF	_____.	_____.
0312	628.7555 Culvert Pipe Checks	27.000 EACH	_____.	_____.
0314	628.7560 Tracking Pads	8.000 EACH	_____.	_____.
0316	628.7570 Rock Bags	90.000 EACH	_____.	_____.
0318	629.0210 Fertilizer Type B	69.500 CWT	_____.	_____.
0320	630.0120 Seeding Mixture No. 20	103.000 LB	_____.	_____.
0322	630.0130 Seeding Mixture No. 30	4,742.000 LB	_____.	_____.
0324	630.0200 Seeding Temporary	1,748.000 LB	_____.	_____.
0326	630.0500 Seed Water	2,371.000 MGAL	_____.	_____.
0328	632.0101 Trees (species, root, size) 01. Cole's Select Serviceberry, B&B, 5-FT	9.000 EACH	_____.	_____.
0330	632.0201 Shrubs (species, root, size) 01. Hydrangea Limelight, Shrubs Cont, 3-FT	27.000 EACH	_____.	_____.
0332	632.0201 Shrubs (species, root, size) 02. Weigela Florida Verweig, Cont, 1-FT	63.000 EACH	_____.	_____.



Proposal Schedule of Items

Page 12 of 21

Proposal ID: 20250513020 Project(s): 1130-68-77

Federal ID(s): WISC 2025473

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0334	632.9101 Landscape Planting Surveillance and Care Cycles	72.000 EACH	_____.	_____.
0336	633.5200 Markers Culvert End	20.000 EACH	_____.	_____.
0338	634.0614 Posts Wood 4x6-Inch X 14-FT	78.000 EACH	_____.	_____.
0340	634.0616 Posts Wood 4x6-Inch X 16-FT	2.000 EACH	_____.	_____.
0342	634.0808 Posts Tubular Steel 2x2-Inch X 8-FT	4.000 EACH	_____.	_____.
0344	634.0814 Posts Tubular Steel 2x2-Inch X 14-FT	8.000 EACH	_____.	_____.
0346	635.0200 Sign Supports Structural Steel HS	1,338.000 LB	_____.	_____.
0348	637.1220 Signs Type I Reflective SH	2,744.830 SF	_____.	_____.
0350	637.2210 Signs Type II Reflective H	1,095.640 SF	_____.	_____.
0352	637.2230 Signs Type II Reflective F	88.750 SF	_____.	_____.
0354	642.5401 Field Office Type D	1.000 EACH	_____.	_____.
0356	643.0300 Traffic Control Drums	29,907.000 DAY	_____.	_____.
0358	643.0420 Traffic Control Barricades Type III	11,300.000 DAY	_____.	_____.
0360	643.0500 Traffic Control Flexible Tubular Marker Posts	16.000 EACH	_____.	_____.
0362	643.0600 Traffic Control Flexible Tubular Marker Bases	16.000 EACH	_____.	_____.



Proposal Schedule of Items

Page 13 of 21

Proposal ID: 20250513020 Project(s): 1130-68-77

Federal ID(s): WISC 2025473

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0364	643.0705 Traffic Control Warning Lights Type A	20,950.000 DAY	_____.	_____.
0366	643.0715 Traffic Control Warning Lights Type C	6,811.000 DAY	_____.	_____.
0368	643.0800 Traffic Control Arrow Boards	84.000 DAY	_____.	_____.
0370	643.0810.S Connected Arrow Board	248.000 DAY	_____.	_____.
0372	643.0900 Traffic Control Signs	10,139.000 DAY	_____.	_____.
0374	643.0910 Traffic Control Covering Signs Type I	5.000 EACH	_____.	_____.
0376	643.0920 Traffic Control Covering Signs Type II	29.000 EACH	_____.	_____.
0378	643.1050 Traffic Control Signs PCMS	86.000 DAY	_____.	_____.
0380	643.1220.S Connected Work Zone Start and End Location Markers	324.000 DAY	_____.	_____.
0382	643.3165 Temporary Marking Line Paint 6-Inch	23,005.000 LF	_____.	_____.
0384	643.3180 Temporary Marking Line Removable Tape 6-Inch	2,408.000 LF	_____.	_____.
0386	643.5000 Traffic Control	1.000 EACH	_____.	_____.
0388	644.1810 Temporary Pedestrian Barricade	90.000 LF	_____.	_____.
0390	645.0105 Geotextile Type C	392.000 SY	_____.	_____.
0392	645.0111 Geotextile Type DF Schedule A	2,051.000 SY	_____.	_____.



Proposal Schedule of Items

Page 14 of 21

Proposal ID: 20250513020 Project(s): 1130-68-77

Federal ID(s): WISC 2025473

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0394	645.0120 Geotextile Type HR	375.200 SY	_____.	_____.
0396	646.2020 Marking Line Epoxy 6-Inch	24,592.000 LF	_____.	_____.
0398	646.4020 Marking Line Epoxy 10-Inch	6,342.000 LF	_____.	_____.
0400	646.5020 Marking Arrow Epoxy	65.000 EACH	_____.	_____.
0402	646.5120 Marking Word Epoxy	4.000 EACH	_____.	_____.
0404	646.6320 Marking Dotted Extension Epoxy 18-Inch	279.000 LF	_____.	_____.
0406	646.7120 Marking Diagonal Epoxy 12-Inch	319.000 LF	_____.	_____.
0408	646.7220 Marking Chevron Epoxy 24-Inch	182.000 LF	_____.	_____.
0410	646.7320 Marking Chevron Epoxy 12-Inch	223.000 LF	_____.	_____.
0412	646.7420 Marking Crosswalk Epoxy Transverse Line 6-Inch	910.000 LF	_____.	_____.
0414	646.8120 Marking Curb Epoxy	168.000 LF	_____.	_____.
0416	646.8220 Marking Island Nose Epoxy	8.000 EACH	_____.	_____.
0418	646.9000 Marking Removal Line 4-Inch	5,406.000 LF	_____.	_____.
0420	646.9002 Marking Removal Line 6-Inch	5,406.000 LF	_____.	_____.
0422	646.9310 Marking Removal Special Marking Water Blasting	2.000 EACH	_____.	_____.



Proposal Schedule of Items

Page 15 of 21

Proposal ID: 20250513020 Project(s): 1130-68-77

Federal ID(s): WISC 2025473

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0424	652.0125 Conduit Rigid Metallic 2-Inch	24.000 LF	_____.	_____.
0426	652.0225 Conduit Rigid Nonmetallic Schedule 40 2-Inch	8,273.000 LF	_____.	_____.
0428	652.0235 Conduit Rigid Nonmetallic Schedule 40 3-Inch	2,441.000 LF	_____.	_____.
0430	652.0335 Conduit Rigid Nonmetallic Schedule 80 3-Inch	1,672.000 LF	_____.	_____.
0432	652.0615 Conduit Special 3-Inch	221.000 LF	_____.	_____.
0434	652.0700.S Install Conduit into Existing Item	4.000 EACH	_____.	_____.
0436	653.0154 Pull Boxes Non-Conductive 24x36-Inch	4.000 EACH	_____.	_____.
0438	653.0164 Pull Boxes Non-Conductive 24x42-Inch	42.000 EACH	_____.	_____.
0440	653.0222 Junction Boxes 18x12x6-Inch	2.000 EACH	_____.	_____.
0442	653.0905 Removing Pull Boxes	1.000 EACH	_____.	_____.
0444	654.0105 Concrete Bases Type 5	57.000 EACH	_____.	_____.
0446	654.0107 Concrete Bases Type 7	4.000 EACH	_____.	_____.
0448	654.0230 Concrete Control Cabinet Bases Type L30	2.000 EACH	_____.	_____.
0450	655.0610 Electrical Wire Lighting 12 AWG	17,775.000 LF	_____.	_____.
0452	655.0620 Electrical Wire Lighting 8 AWG	19,880.000 LF	_____.	_____.



Proposal Schedule of Items

Page 16 of 21

Proposal ID: 20250513020 Project(s): 1130-68-77

Federal ID(s): WISC 2025473

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0454	655.0625 Electrical Wire Lighting 6 AWG	40,532.000 LF	_____.	_____.
0456	656.0201 Electrical Service Meter Breaker Pedestal (location) 01. CB2400	1.000 EACH	_____.	_____.
0458	656.0201 Electrical Service Meter Breaker Pedestal (location) 02. CB100	1.000 EACH	_____.	_____.
0460	656.0501 Electrical Service Breaker Disconnect Box (location) 01. CB12-1	1.000 EACH	_____.	_____.
0462	657.0255 Transformer Bases Breakaway 11 1/2- Inch Bolt Circle	57.000 EACH	_____.	_____.
0464	657.0322 Poles Type 5-Aluminum	55.000 EACH	_____.	_____.
0466	657.0709 Luminaire Arms Truss Type 4-Inch Clamp 12-FT	2.000 EACH	_____.	_____.
0468	657.0710 Luminaire Arms Truss Type 4 1/2-Inch Clamp 12-FT	58.000 EACH	_____.	_____.
0470	659.1120 Luminaires Utility LED B	60.000 EACH	_____.	_____.
0472	659.2130 Lighting Control Cabinets 120/240 30- Inch	2.000 EACH	_____.	_____.
0474	662.1026.S Ramp Closure Gates 26-FT	2.000 EACH	_____.	_____.
0476	662.1037.S Ramp Closure Gates 37-FT	1.000 EACH	_____.	_____.
0478	662.1040.S Ramp Closure Gates 40-FT	1.000 EACH	_____.	_____.
0480	670.0101 Field System Integrator	1.000 EACH	_____.	_____.



Proposal Schedule of Items

Page 17 of 21

Proposal ID: 20250513020 Project(s): 1130-68-77

Federal ID(s): WISC 2025473

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0482	670.0201 ITS Documentation	1.000 EACH	_____.	_____.
0484	671.0132 Conduit HDPE 3-Duct 2-Inch	4,829.000 LF	_____.	_____.
0486	671.0232 Conduit HDPE Directional Bore 3-Duct 2-Inch	461.000 LF	_____.	_____.
0488	671.0300 Fiber Optic Cable Marker	16.000 EACH	_____.	_____.
0490	673.0105 Communication Vault Type 1	5.000 EACH	_____.	_____.
0492	673.0200 Tracer Wire Marker Posts	10.000 EACH	_____.	_____.
0494	673.1225.S Install Pole Mounted Cabinet	3.000 EACH	_____.	_____.
0496	674.0200 Cable Microwave Detector	2,943.000 LF	_____.	_____.
0498	674.0300 Remove Cable	4,342.000 LF	_____.	_____.
0500	675.0300 Install Mounted Controller Microwave Detector Assembly	2.000 EACH	_____.	_____.
0502	677.0150 Install Camera Pole 50-FT	1.000 EACH	_____.	_____.
0504	677.0200 Install Camera Assembly	1.000 EACH	_____.	_____.
0506	678.0012 Install Fiber Optic Cable Outdoor Plant 12-CT	1,844.000 LF	_____.	_____.
0508	678.0072 Install Fiber Optic Cable Outdoor Plant 72-CT	4,716.000 LF	_____.	_____.
0510	678.0200 Fiber Optic Splice Enclosure	3.000 EACH	_____.	_____.



Proposal Schedule of Items

Page 18 of 21

Proposal ID: 20250513020 Project(s): 1130-68-77

Federal ID(s): WISC 2025473

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0512	678.0300 Fiber Optic Splice	148.000 EACH	_____.	_____.
0514	678.0400 Fiber Optic Termination	4.000 EACH	_____.	_____.
0516	678.0501 Communication System Testing	1.000 EACH	_____.	_____.
0518	678.0600 Install Ethernet Switches	1.000 EACH	_____.	_____.
0520	690.0150 Sawing Asphalt	5,073.000 LF	_____.	_____.
0522	690.0250 Sawing Concrete	5,889.000 LF	_____.	_____.
0524	715.0502 Incentive Strength Concrete Structures	6,180.000 DOL	1.00000	6,180.00
0526	715.0603 Incentive Strength Concrete Barrier	1,874.000 DOL	1.00000	1,874.00
0528	715.0715 Incentive Flexural Strength Concrete Pavement	5,410.000 DOL	1.00000	5,410.00
0530	715.0720 Incentive Compressive Strength Concrete Pavement	18,050.000 DOL	1.00000	18,050.00
0532	740.0440 Incentive IRI Ride	7,150.000 DOL	1.00000	7,150.00
0534	ASP.1T0A On-the-Job Training Apprentice at \$5.00/HR	2,100.000 HRS	5.00000	10,500.00
0536	ASP.1T0G On-the-Job Training Graduate at \$5.00/HR	5,760.000 HRS	5.00000	28,800.00
0538	SPV.0035 Special 01. HPC Masonry Structures	994.000 CY	_____.	_____.
0540	SPV.0035 Special 02. Planting Mixture	370.000 CY	_____.	_____.



Proposal Schedule of Items

Page 19 of 21

Proposal ID: 20250513020 Project(s): 1130-68-77

Federal ID(s): WISC 2025473

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0542	SPV.0060 Special 01. Anchor Bolt Cover Shroud	4.000 EACH	_____.	_____.
0544	SPV.0060 Special 02. Temporary Street Lighting System	1.000 EACH	_____.	_____.
0546	SPV.0060 Special 03. Install Ethernet Extender	4.000 EACH	_____.	_____.
0548	SPV.0060 Special 04. Baseline CPM Progress Schedule	1.000 EACH	_____.	_____.
0550	SPV.0060 Special 05. CPM Progress Schedule and Accepted Revisions	12.000 EACH	_____.	_____.
0552	SPV.0060 Special 06. Construction Staking Survey Project 1130-68-77	1.000 EACH	_____.	_____.
0554	SPV.0060 Special 07. Decorative Silhouette	2.000 EACH	_____.	_____.
0556	SPV.0060 Special 08. Adjusting Sanitary Manhole Covers	4.000 EACH	_____.	_____.
0558	SPV.0060 Special 09. Adjusting Water Valve Boxes	6.000 EACH	_____.	_____.
0560	SPV.0060 Special 10. Maintain and Remove Crash Cushions Temporary Left In Place	2.000 EACH	_____.	_____.
0562	SPV.0060 Special 11. Emergency Response to Traffic Involving Crash Cushion Temporary	12.000 EACH	_____.	_____.
0564	SPV.0060 Special 12. Emergency Response to Traffic Involving Concrete Barrier Temporary	24.000 EACH	_____.	_____.
0566	SPV.0075 Special 01. Street Sweeping	152.000 HRS	_____.	_____.



Proposal Schedule of Items

Page 20 of 21

Proposal ID: 20250513020 Project(s): 1130-68-77

Federal ID(s): WISC 2025473

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0568	SPV.0090 Special 01. Concrete Curb and Gutter 36-Inch Special	3,441.000 LF	_____.	_____.
0570	SPV.0090 Special 02. Removal and Salvage of High Tension Cableguard and Posts	2,642.000 LF	_____.	_____.
0572	SPV.0090 Special 03. Maintain and Remove Concrete Barrier Temporary Precast Left in Place	2,063.000 LF	_____.	_____.
0574	SPV.0090 Special 04. Concrete Barrier Type S42 Special	3,748.000 LF	_____.	_____.
0576	SPV.0165 Special 01. Longitudinal Grooving Bridge Deck	15,515.000 SF	_____.	_____.
0578	SPV.0180 Special 01. Double Shredded Hardwood Mulch	555.000 SY	_____.	_____.
0580	SPV.0180 Special 02. Concrete Pavement 10 1/2- Inch Special	11,506.000 SY	_____.	_____.
0582	SPV.0180 Special 03. Concrete Stamping	1,392.000 SY	_____.	_____.
0584	204.0170 Removing Fence	4,070.000 LF	_____.	_____.
0586	204.0180 Removing Delineators and Markers	19.000 EACH	_____.	_____.
0588	601.0551 Concrete Curb & Gutter 4-Inch Sloped 36-Inch Type A	525.000 LF	_____.	_____.
0590	601.0581 Concrete Curb & Gutter 4-Inch Sloped 30-Inch Type R	1,059.000 LF	_____.	_____.
0592	602.0515 Curb Ramp Detectable Warning Field Natural Patina	520.000 SF	_____.	_____.



Proposal Schedule of Items

Page 21 of 21

Proposal ID: 20250513020 Project(s): 1130-68-77

Federal ID(s): WISC 2025473

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0594	602.0615 Curb Ramp Detectable Warning Field Radial Natural Patina	101.000 SF	_____.	_____.
0596	633.0100 Delineator Posts Steel	18.000 EACH	_____.	_____.
0598	633.0500 Delineator Reflectors	18.000 EACH	_____.	_____.
0600	633.1000 Delineators Barrier Wall	12.000 EACH	_____.	_____.
0602	638.2601 Removing Signs Type I	2.000 EACH	_____.	_____.
0604	204.0245 Removing Storm Sewer (size) 01. 21-Inch	30.000 LF	_____.	_____.
0606	204.0245 Removing Storm Sewer (size) 02. 24-Inch	139.000 LF	_____.	_____.
0608	204.0245 Removing Storm Sewer (size) 03. 30-Inch	40.000 LF	_____.	_____.
0610	310.0115 Base Aggregate Open-Graded	73.700 CY	_____.	_____.
0612	611.2008 Manholes 8-FT Diameter	1.000 EACH	_____.	_____.
0614	612.0106 Pipe Underdrain 6-Inch	4,100.000 LF	_____.	_____.
Section: 0001			Total:	_____.
			Total Bid:	_____.