



Wisconsin Department of Transportation

May 7, 2025

Division of Transportation Systems Development

Bureau of Project Development
4822 Madison Yards Way, 4th Floor South
Madison, WI 53705

Telephone: (608) 266-1631
Facsimile (FAX): (608) 266-8459

NOTICE TO ALL CONTRACTORS:

Proposal #29: 1058-25-62, WISC-2025480
Shawano – Green Bay
Slope Stabilization B-58-0075
STH 29
Shawano County

Letting of May 13, 2025

This is Addendum No. 01, which provides for the following:

Schedule of Items:

Revised Bid Item Quantities					
Bid Item	Item Description	Unit	Proposal Total Prior to Addendum	Proposal Quantity Change (-)	Proposal Total After Addendum
204.0110	Removing Asphaltic Surface	SY	175	350	525
205.0100	Common Excavation	CY	5,170	445	5,615
305.0120	Base Aggregate Dense 1 ¼-Inch	TON	5,845	60	5,905
305.0110	Base Aggregate Open Graded	TON	280	40	320
465.0105	Asphaltic Surface	TON	40	80	120
624.0100	Water	MGAL	78	1	79
645.0140	Geotextile Type SAS	SY	990	175	1,165
690.0150	Sawing Asphalt	LF	2,159	18	2,177

Plan Sheets:

Revised Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of changes to sheet)
7	Construction Details: Moved "Base Restoration" construction detail to sheet 7A
11	Pavement Repair Plan: Added replacement of asphaltic shoulders adjacent to areas paid as "concrete pavement".
40,41,43,49	Miscellaneous Quantities: Revised quantities to reflect replacement of asphaltic shoulders adjacent to areas paid as "concrete pavement" and to reflect payment of common excavation in areas paid as "removing concrete pavement".

Added Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of why sheet was added)
7A	Construction Details: Added to create room for expanded "Base Restoration" construction detail which was modified to clarify anticipated excavation and restoration limits along shoulders.

Schedule of Items

Attached, dated May 7, 2025, are the revised Schedule of Items Pages 1 – 8.

Plan Sheets

The following 8½ x 11-inch sheets are attached and made part of the plans for this proposal:

Revised: 7, 11, 40, 41, 43, and 49

Added: 7A.


The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.

Sincerely,

Mike Coleman

Proposal Development Specialist
Proposal Management Section

END OF ADDENDUM

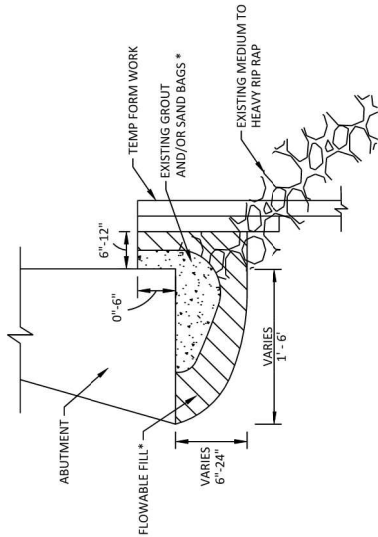


* REMOVE UNSOUND PREVIOUSLY
INSTALLED GROUT BEFORE
INSTALLING FLOWABLE FILL.

FLOWABLE FILL DETAIL
WEST ABUTMENT


NOTES

1. STABILIZE GRANULAR BACKFILL SURFACE UNDER STRUCTURE WITH SLOPE PAVING CRUSHED AGGREGATE. STABILIZE GRANULAR BACKFILL SURFACE OUTSIDE OF STRUCTURE FOOTPRINT WITH 6" OF TOPSOIL, SEED, AND EMAT.
2. PROVIDE 2" WIDE SHELF AT TOP OF GRANULAR BACKFILL UNDER THE STRUCTURE. OUTSIDE OF THE STRUCTURE FOOTPRINT BLEND TOP OF GRANULAR BACKFILL INTO EXISTING SLOPE TO PREVENT PONDING.
3. SLOPES ARE PERPENDICULAR TO ABUTMENT FACE AND STABILITY BERM REFERENCE LINE.

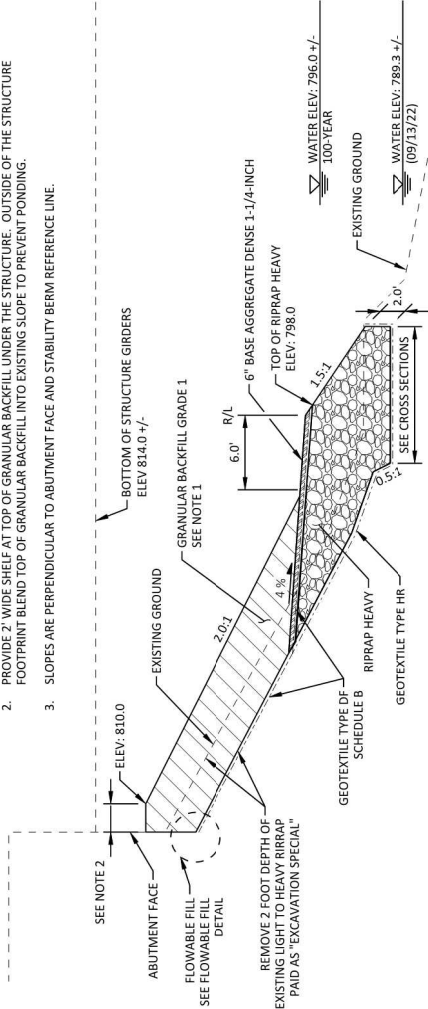

STABILITY BERM DETAIL
WEST ABUTMENT

Addendum No. 01
ID 1058-25-62
Revised Sheet 7
May 7, 2025

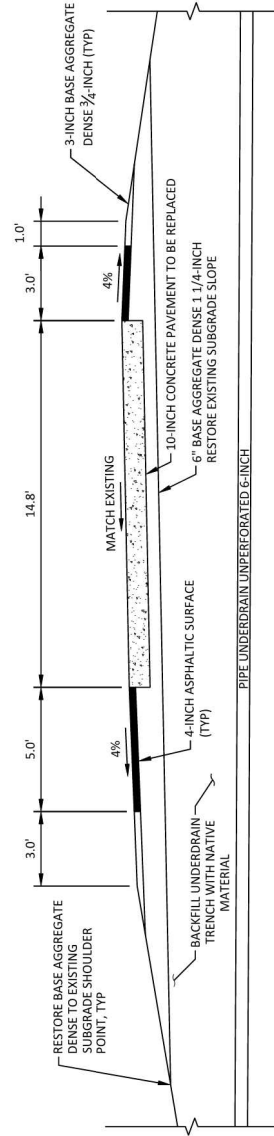

PAVEMENT REPLACEMENT AT RAMP 'PB' UNDERDRAIN CROSSING

PROJECT NO: 1058-25-62

HWY: STH 29

COUNTY: SHAWANO

CONSTRUCTION DETAILS

SHEET 7

E


FILE NAME: N:\3001548.00\CIVIL 3D\DWG\10582562-021001-CD.DWG
LAYOUT NAME: 10582562-021001.cd

PLOT DATE: 5/6/2025 8:48 AM

PLOT BY: ANDY WESTBROOK

PLOT NAME: #####

WSDOT/CADSW/ST-43

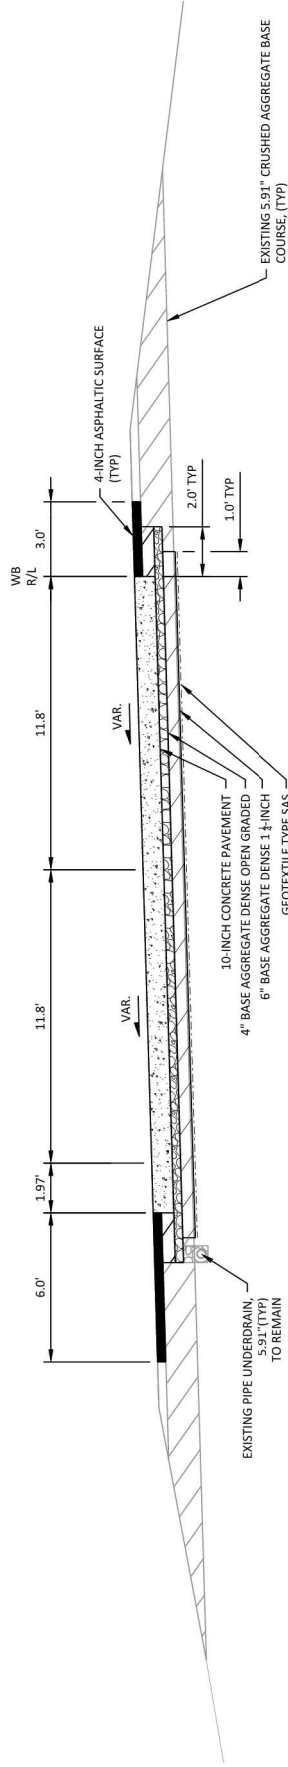

BASE RESTORATION IN CONCRETE PAVEMENT AREAS

STH 29 WB: STA 187+43 - STA 190+93

Addendum No. 01
ID 1058-25-62
Added Sheet 7A
May 7, 2025

PROJECT NO: 1058-25-62	HWY: STH 29	COUNTY: SHAWANO	CONSTRUCTION DETAILS	SHEET 7A	E
FILE NAME: N:\3001548.00\CIVIL 3D\SHEETS\10582562-021001-CD.DWG	LAYOUT NAME: 10582562-021003.d	PLOT DATE: 5/6/2025 8:48 AM	PLOT BY: ANDY WESTBROOK	PLOT NAME: #####	WISDOT/CADSW SHEET 43

LEGEND

- CONCRETE PAVEMENT REPAIR
- CONCRETE PAVEMENT REPLACEMENT
- CONCRETE PAVEMENT 7-INCH
- CONCRETE PAVEMENT APPROACH SLAB
- CONCRETE PAVEMENT 10-INCH

EXISTING RIPRAP TO REMAIN

EXISTING PIPE TO REMAIN

REMOVING RAISED PAVEMENT MARKER & FILLING VOIDS

4" ASPHALTIC SURFACE

4" ASPHALTIC SURFACE

REPAIR ON STH 29 WB

BEGIN PROJECT STA 183+95.00

PT. 186+85.32

PT. 189+78.61

PC STA = 185-98.72

R = 975.00'

L = 379.88'

T = 192.38'

D = 552.35'

DELTA = 27°19'25" LT

X = 859.506.325

Y = 262.071.898

PI STA = 197.01.10'PB'

NEWLY RELOCATED SPECTRUM FACILITY (LOCATION UNKNOWN)

PC: 185+98.72'PB'

Y: 262.159.323

X: 859.333.001

53°38'15" E

91.88'

185+00'PB'

186+00'

187+00'

188+00'

189+00'

190+00'

191+00'

192+00'

193+00'

194+00'

195+00'

196+00'

197+00'

198+00'

199+00'

200+00'

201+00'

202+00'

203+00'

204+00'

205+00'

206+00'

207+00'

208+00'

209+00'

210+00'

211+00'

212+00'

213+00'

214+00'

215+00'

216+00'

217+00'

218+00'

219+00'

220+00'

221+00'

222+00'

223+00'

224+00'

225+00'

226+00'

227+00'

228+00'

229+00'

230+00'

231+00'

232+00'

233+00'

234+00'

235+00'

236+00'

237+00'

238+00'

239+00'

240+00'

241+00'

242+00'

243+00'

244+00'

245+00'

246+00'

247+00'

248+00'

249+00'

250+00'

251+00'

252+00'

253+00'

254+00'

255+00'

256+00'

257+00'

258+00'

259+00'

260+00'

261+00'

262+00'

263+00'

264+00'

265+00'

266+00'

267+00'

268+00'

269+00'

270+00'

271+00'

272+00'

273+00'

274+00'

275+00'

276+00'

277+00'

278+00'

279+00'

280+00'

281+00'

282+00'

283+00'

284+00'

285+00'

286+00'

287+00'

288+00'

289+00'

290+00'

291+00'

292+00'

293+00'

294+00'

295+00'

296+00'

297+00'

298+00'

299+00'

300+00'

301+00'

302+00'

303+00'

304+00'

305+00'

306+00'

307+00'

308+00'

309+00'

310+00'

311+00'

312+00'

313+00'

314+00'

315+00'

316+00'

317+00'

318+00'

319+00'

320+00'

321+00'

322+00'

323+00'

324+00'

325+00'

326+00'

327+00'

328+00'

329+00'

330+00'

331+00'

332+00'

333+00'

334+00'

335+00'

336+00'

337+00'

338+00'

339+00'

340+00'

341+00'

342+00'

343+00'

344+00'

345+00'

346+00'

347+00'

348+00'

349+00'

350+00'

351+00'

352+00'

353+00'

354+00'

355+00'

356+00'

357+00'

358+00'

359+00'

360+00'

361+00'

362+00'

363+00'

364+00'

365+00'

366+00'

367+00'

368+00'

369+00'

370+00'

371+00'

372+00'

373+00'

374+00'

375+00'

376+00'

377+00'

378+00'

379+00'

380+00'

381+00'

382+00'

383+00'

384+00'

385+00'

386+00'

387+00'

388+00'

389+00'

390+00'

391+00'

392+00'

393+00'

394+00'

395+00'

396+00'


397+00'

398+00'

399+00'

400+00'

40

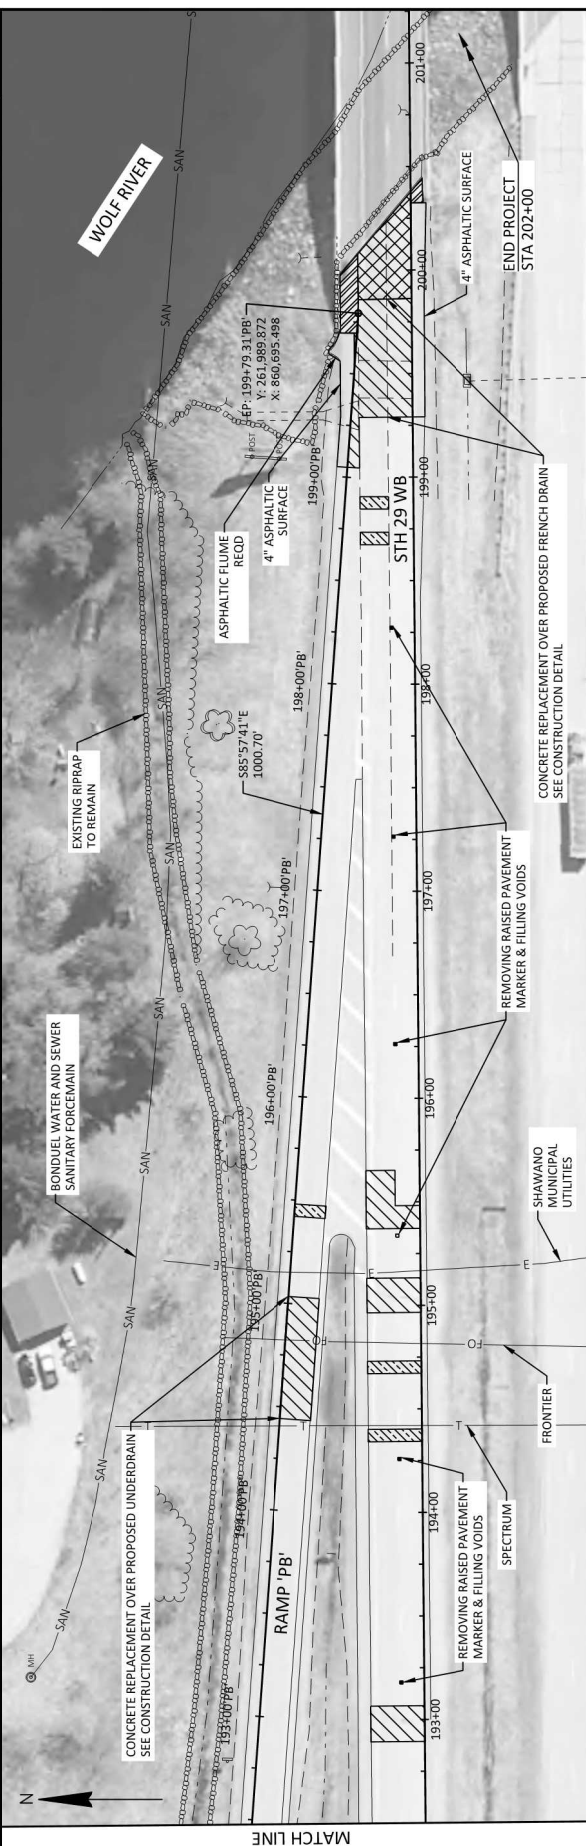

GRUBBING

201.0205					
STATION TO STATION DIR	LOCATION	STA			
PROJECT 1058-25-62					
CATEGORY 0010					
196+00 - 199+00	LT STH 29 WB	3			

PROJECT TOTAL

3

NOTE: CLEARING DONE BY OTHERS PRIOR TO PROJECT

REMOVING CONCRETE PAVEMENT

STATION TO STATION DIR	LOCATION	SY	COMMENTS
PROJECT 1058-25-62			
CATEGORY 0010			
187+42 - 190+93	LT STH 29	1,005	10" CONC. REPLACEMENT
199+70 - 200+08	LT STH 29	31	7" SHOULDER
199+86 - 200+38	LT STH 29	105	12" APPROACH SLAB
200+32 - 200+44	RT STH 29	6	7" SHOULDER
CATEGORY 0010 TOTAL		1,147	
PROJECT TOTAL		1,147	

REMOVING ASPHALTIC SURFACE

STATION TO STATION DIR	LOCATION	SY	COMMENTS
PROJECT 1058-25-62			
CATEGORY 0010			
194+44 - 195+04	RAMP PB	52	LT AND RT SHOULDERS
199+06 - 199+70	RAMP PB	47	LT SHOULDER
187+43 - 190+93	STH 29	350	LT AND RT SHOULDERS
199+39 - 200+32	STH 29	76	RT SHOULDER
CATEGORY 0010 TOTAL		525	

EARTHWORK SUMMARY

ROADWAY	FROM/TO STATION	205.0100 EXCAVATION COMMON CY	AVAILABLE MATERIAL	UNEXPANDED FILL	EXPANDED FILL		MASS ORDINATE +/-	WASTE	COMMENT
					FACTOR 1.20				
PROJECT 1058-25-62									
CATEGORY 0010									
10" PAVEMENT REPLACEMENT	187+43 - 190+93	650	650	0	0	0	650	650	REMOVE MUDJACK MATERIAL
APPROACH SLAB REPLACEMENT	199+95 - 200+38	130	130	0	0	0	130	130	REMOVE MUDJACK MATERIAL
WEST CROSSEVER	332+32 - 347+50	725	725	584	701	24	24	24	
EAST CROSSEVER	339+74 - 355+80	735	735	494	593	142	142	142	
WEST CROSSEVER REMOVAL	132+32 - 147+47	1,525	1,525	8	10	1,515	1,515	1,515	
EAST CROSSEVER REMOVAL	239+76 - 255+80	1,440	1,440	8	10	1,430	1,430	1,430	

CATEGORY 0020								
STH 29 FRENCH DRAIN	199+35 - 199+65	350	350	220	260	90	90	

CATEGORY 0020 TOTALS

350

PROJECT TOTALS

5,615

PROJECT NO: 1058-25-62

HWY: STH 29

COUNTY: SHAWANO

MISCELLANEOUS QUANTITIES

SHEET

40

E

FILE NAME: N:\3001548.D\01Civil 3D\Sheets\Plan\10582562-20201-rmqj.ppt

ORIGINATOR: OMNII ASSOCIATES

ORIG. DATE: March 5, 2023

REV. DATE: May 2, 2025

PRINT DATE: May 2, 2025

Addendum No. 01
ID 1058-25-62
Revised Sheet 40
May 7, 2025

BASE AGGREGATE

STATION	TO	STATION	DIR	ROADWAY	AREA	305.0110 BASE AGGREGATE DENSE 3/4-INCH	TON	305.0120* BASE AGGREGATE DENSE 1 1/4-INCH	TON	310.0110 BASE AGGREGATE OPEN GRADED	TON	624.0100 WATER	M GAL	645.0140 GEOTEXTILE TYPE SAS	SY	COMMENTS
PROJECT 1058-25-62																
CATEGORY 0010																
194+92																
187+00	-	194+45	R/L	RAMP PB	UNDERDRAIN	---	---	20	---	---	---	0.5	---	---	---	RESTORATION OF RAMP PAVT SECTION
187+00	-	194+45	RT	STH 29 WB	UNDERDRAIN	340	---	---	---	---	---	3.5	---	---	---	RESTORATION OF FORESLOPE BASE
187+43	-	194+07	LT	STH 29 WB	UNDERDRAIN	190	---	---	---	---	---	2.0	---	---	---	RESTORATION OF FORESLOPE BASE
187+43	-	190+93	LT	STH 29 WB	PAVT REPLACE	---	---	405	---	260	---	6.5	---	1,165	---	QTY FOR POTENTIAL LOSS OF EX BASE
199+35	-	199+65	R/L	STH 29 WB	FRENCH DRAIN	10	---	---	---	---	---	1.8	---	---	---	QTY FOR POTENTIAL LOSS OF EX BASE
199+70	-	200+38	R/L	STH 29 WB	APPR SLAB/SHLD REPLACE	---	---	95	---	60	---	1.5	---	---	---	QTY FOR REPLACEMENT OF EX BASE
332+16	-	348+06	R/L	WEST CROSSOVER	ROADWAY/SHLD	455	---	2,550	---	---	---	30.0	---	---	---	QTY FOR REPLACEMENT OF EX BASE
339+74	-	355+80	R/L	EAST CROSSOVER	ROADWAY/SHLD	455	---	2,660	---	---	---	31.0	---	---	---	QTY FOR REPLACEMENT OF EX BASE
332+16	-	348+06	R/L	WEST CROSSOVER	STH 29 SHLD RESTORATION	150	---	---	---	---	---	1.5	---	---	---	QTY FOR REPLACEMENT OF EX BASE
339+74	-	355+80	R/L	EAST CROSSOVER	STH 29 SHLD RESTORATION	150	---	---	---	---	---	1.5	---	---	---	QTY FOR REPLACEMENT OF EX BASE
207+81	-	209+25	LT	STH 29 EB	B-58-74 DEPARTURE BEAM GUARD	10	---	---	---	---	---	0.0	---	---	---	QTY FOR SHOULDER GRADING AROUND EAT

5,840* 320 79.0 1,165

5,840* 320 79.0 1,165

*ADDITIONAL QUANTITY IN STABILITY BERM TABLE

CATEGORY 0010 TOTALS 1,760

PROJECT TOTALS 1,760

Addendum No. 01
ID 1058-25-62
Revised Sheet 41
May 7, 2025

ASPHALTIC ITEMS

STATION	TO	STATION	ROADWAY	AREA	PAVEMENT SECTION	455.0605 TACK COAT GAL	465.0105 ASPHALTIC SURFACE TON	465.0125 ASPHALTIC SURFACE TEMPORARY TON	465.0315 ASPHALTIC FLUMES SY	COMMENTS
PROJECT 1058-25-62										
CATEGORY 0010										
187+43	-	190+93	STH 29	LT AND RT SHOULDER	SHOULDER RESTORATION	---	80	---	---	PAVT REPLACEMENT
199+05	-	200+32	STH 29	LT AND RT SHOULDER	SHOULDER RESTORATION	---	27	---	5	FRENCH DRAIN / APPROACH SLAB
194+44	-	195+04	RAMP PB	LT AND RT SHOULDER	SHOULDER RESTORATION	---	13	---	---	UNDERDRAIN
332+16	-	348+06	WEST CROSSEVER	LANE	ROADWAY	205	---	735	---	
339+74	-	355+80	EAST CROSSEVER	LANE	ROADWAY	205	---	735	---	
						410	120	1,470	5	
						410	120	1,470	5	

TEMPORARY STORM SEWER AND CULVERTS

PIPE RUN	ROADWAY	DIR	204.0220 REMOVING INLETS	204.0245 REMOVING STORM SEWER 18-INCH	520.2021 CULVERT PIPE TEMPORARY 21-INCH	608.0418 STORM SEWER PIPE REINF CONCRETE CLASS IV 18-INCH	611.0642 INLET COVERS TYPE MS	611.3901 INLETS MEDIAN 1 GRATE	COMMENTS
PROJECT 1058-25-62									
CATEGORY 0010									
100 -	WEST CROSSEVER	R/L	1	377	---	377	1	1	TEMPORARY STORM SEWER AND REMOVAL
STA 343+00	WEST CROSSEVER	R/L	---	---	10	---	---	---	
			CATEGORY 0010 TOTALS	1	377	377	1	1	
			PROJECT TOTALS	1	377	377	1	1	

Addendum No. 01
ID 1058-25-62
Revised Sheet 43
May 7, 2025

SAWING

STATION TO STATION	ROADWAY	690.0150 SAWING ASPHALT
PROJECT 1058-25-62		
CATEGORY 0010 LF		
187+43 - 190+93	5TH 29	18
193+35 - 199+65	SPR 29 RT SHOULDER	32
332+16 - 348+06	WEST CROSSOVER	15
339+74 - 355+80	EAST CROSSOVER	12
332+16 - 348+06	WEST CROSSOVER REMOVAL	1,010
339+74 - 355+80	EAST CROSSOVER REMOVAL	1,100
CATEGORY 0010 TOTAL		2,177

TEMPORARY ACCESS

PROJECT	SPV. 0060.01 TEMPORARY ACCESS ROAD	SPV. 0060.02 TEMPORARY CAUSEWAY
PROJECT_1058-25-62		
CATEGORY 0010		
1058-25-62	1	1
CATEGORY 0010 TOTALS		
PROJECT TOTALS	1	1

REMOVING RAISED PAVEMENT MARKERS AND FILLING VOIDS

STATION	LOCATION	SPV.0060.05
PROJECT 1058-25-62		
CATEGORY 0010		
186+18	STH 29	1
187+19	STH 29	1
191+21	STH 29	1
192+20	STH 29	1
193+18	STH 29	1
194+26	STH 29	1
195+34	STH 29	1
196+26	STH 29	1
197+26	STH 29	1
198+27	STH 29	1
CATEGORY 0010 TOTALS		10
PROJECT TOTALS		10

Addendum No. 01
ID 1058-25-62
Revised Sheet 49
May 7, 2025



Proposal Schedule of Items

Page 1 of 8

Proposal ID: 20250513029 Project(s): 1058-25-62

Federal ID(s): WISC 2025480

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0002	201.0205 Grubbing	3.000 STA	_____.	_____.
0004	204.0100 Removing Concrete Pavement	1,147.000 SY	_____.	_____.
0006	204.0110 Removing Asphaltic Surface	525.000 SY	_____.	_____.
0008	204.0220 Removing Inlets	1.000 EACH	_____.	_____.
0010	204.0245 Removing Storm Sewer (size) 01. 18-Inch	377.000 LF	_____.	_____.
0012	205.0100 Excavation Common	5,615.000 CY	_____.	_____.
0014	209.0300.S Backfill Coarse Aggregate (size) 01. No. 2	740.000 CY	_____.	_____.
0016	209.1100 Backfill Granular Grade 1	890.000 CY	_____.	_____.
0018	213.0100 Finishing Roadway (project) 01. 1058-25-62	1.000 EACH	_____.	_____.
0020	305.0110 Base Aggregate Dense 3/4-Inch	1,760.000 TON	_____.	_____.
0022	305.0120 Base Aggregate Dense 1 1/4-Inch	5,905.000 TON	_____.	_____.
0024	310.0110 Base Aggregate Open-Graded	320.000 TON	_____.	_____.
0026	415.0070 Concrete Pavement 7-Inch	37.000 SY	_____.	_____.
0028	415.0100 Concrete Pavement 10-Inch	1,005.000 SY	_____.	_____.
0030	415.0410 Concrete Pavement Approach Slab	105.000 SY	_____.	_____.



Proposal Schedule of Items

Page 2 of 8

Proposal ID: 20250513029 Project(s): 1058-25-62

Federal ID(s): WISC 2025480

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0032	416.0610 Drilled Tie Bars	30.000 EACH	_____.	_____.
0034	416.0620 Drilled Dowel Bars	803.000 EACH	_____.	_____.
0036	416.1710 Concrete Pavement Repair	260.000 SY	_____.	_____.
0038	416.1720 Concrete Pavement Replacement	2,120.000 SY	_____.	_____.
0040	420.1000 Continuous Diamond Grinding Concrete Pavement	5,580.000 SY	_____.	_____.
0042	455.0605 Tack Coat	410.000 GAL	_____.	_____.
0044	465.0105 Asphaltic Surface	120.000 TON	_____.	_____.
0046	465.0125 Asphaltic Surface Temporary	1,470.000 TON	_____.	_____.
0048	465.0315 Asphaltic Flumes	5.000 SY	_____.	_____.
0050	511.1300 Temporary Shoring (location) 01. STA 199+50 RT	660.000 SF	_____.	_____.
0052	520.2021 Culvert Pipe Temporary 21-Inch	10.000 LF	_____.	_____.
0054	604.0500 Slope Paving Crushed Aggregate	160.000 SY	_____.	_____.
0056	606.0300 Riprap Heavy	347.000 CY	_____.	_____.
0058	608.0418 Storm Sewer Pipe Reinforced Concrete Class IV 18-Inch	377.000 LF	_____.	_____.
0060	611.0642 Inlet Covers Type MS	1.000 EACH	_____.	_____.



Proposal Schedule of Items

Page 3 of 8

Proposal ID: 20250513029 Project(s): 1058-25-62

Federal ID(s): WISC 2025480

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0062	611.3901 Inlets Median 1 Grate	1.000 EACH	_____.	_____.
0064	612.0106 Pipe Underdrain 6-Inch	1,997.000 LF	_____.	_____.
0066	612.0206 Pipe Underdrain Unperforated 6-Inch	253.000 LF	_____.	_____.
0068	612.0806 Apron Endwalls for Underdrain Reinforced Concrete 6-Inch	2.000 EACH	_____.	_____.
0070	614.1000 MGS Guardrail Temporary	112.500 LF	_____.	_____.
0072	614.1100 MGS Guardrail Temporary Thrie Beam Transition	78.800 LF	_____.	_____.
0074	614.1200 MGS Guardrail Temporary Terminal EAT	2.000 EACH	_____.	_____.
0076	618.0100 Maintenance and Repair of Haul Roads (project) 01. 1058-25-62	1.000 EACH	_____.	_____.
0078	619.1000 Mobilization	1.000 EACH	_____.	_____.
0080	624.0100 Water	79.000 MGAL	_____.	_____.
0082	625.0100 Topsoil	17,300.000 SY	_____.	_____.
0084	628.1504 Silt Fence	3,500.000 LF	_____.	_____.
0086	628.1520 Silt Fence Maintenance	3,500.000 LF	_____.	_____.
0088	628.1905 Mobilizations Erosion Control	5.000 EACH	_____.	_____.
0090	628.1910 Mobilizations Emergency Erosion Control	6.000 EACH	_____.	_____.



Proposal Schedule of Items

Page 4 of 8

Proposal ID: 20250513029 Project(s): 1058-25-62

Federal ID(s): WISC 2025480

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0092	628.2002 Erosion Mat Class I Type A	17,200.000 SY	_____.	_____.
0094	628.2027 Erosion Mat Class II Type C	130.000 SY	_____.	_____.
0096	628.6005 Turbidity Barriers	280.000 SY	_____.	_____.
0098	628.7005 Inlet Protection Type A	5.000 EACH	_____.	_____.
0100	628.7010 Inlet Protection Type B	1.000 EACH	_____.	_____.
0102	628.7504 Temporary Ditch Checks	470.000 LF	_____.	_____.
0104	628.7555 Culvert Pipe Checks	5.000 EACH	_____.	_____.
0106	628.7570 Rock Bags	50.000 EACH	_____.	_____.
0108	629.0210 Fertilizer Type B	11.000 CWT	_____.	_____.
0110	630.0120 Seeding Mixture No. 20	190.000 LB	_____.	_____.
0112	630.0130 Seeding Mixture No. 30	590.000 LB	_____.	_____.
0114	630.0500 Seed Water	385.000 MGAL	_____.	_____.
0116	633.1100 Delineators Temporary	50.000 EACH	_____.	_____.
0118	642.5001 Field Office Type B	1.000 EACH	_____.	_____.
0120	643.0300 Traffic Control Drums	26,500.000 DAY	_____.	_____.
0122	643.0420 Traffic Control Barricades Type III	1,360.000 DAY	_____.	_____.



Proposal Schedule of Items

Page 5 of 8

Proposal ID: 20250513029 Project(s): 1058-25-62

Federal ID(s): WISC 2025480

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0124	643.0500 Traffic Control Flexible Tubular Marker Posts	290.000 EACH	_____.	_____.
0126	643.0600 Traffic Control Flexible Tubular Marker Bases	290.000 EACH	_____.	_____.
0128	643.0705 Traffic Control Warning Lights Type A	2,700.000 DAY	_____.	_____.
0130	643.0715 Traffic Control Warning Lights Type C	7,770.000 DAY	_____.	_____.
0132	643.0800 Traffic Control Arrow Boards	200.000 DAY	_____.	_____.
0134	643.0810.S Connected Arrow Board	90.000 DAY	_____.	_____.
0136	643.0900 Traffic Control Signs	6,010.000 DAY	_____.	_____.
0138	643.0910 Traffic Control Covering Signs Type I	2.000 EACH	_____.	_____.
0140	643.0920 Traffic Control Covering Signs Type II	1.000 EACH	_____.	_____.
0142	643.1000 Traffic Control Signs Fixed Message	192.000 SF	_____.	_____.
0144	643.1220.S Connected Work Zone Start and End Location Markers	180.000 DAY	_____.	_____.
0146	643.3165 Temporary Marking Line Paint 6-Inch	45,980.000 LF	_____.	_____.
0148	643.3180 Temporary Marking Line Removable Tape 6-Inch	1,620.000 LF	_____.	_____.
0150	643.3265 Temporary Marking Line Paint 10-Inch	400.000 LF	_____.	_____.
0152	643.3760 Temporary Marking Raised Pavement Marker Type I	275.000 EACH	_____.	_____.



Proposal Schedule of Items

Page 6 of 8

Proposal ID: 20250513029 Project(s): 1058-25-62

Federal ID(s): WISC 2025480

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0154	643.3960 Temporary Marking Removable Mask Out Tape 6-Inch	1,320.000 LF	_____.	_____.
0156	643.5000 Traffic Control	1.000 EACH	_____.	_____.
0158	645.0111 Geotextile Type DF Schedule A	2,570.000 SY	_____.	_____.
0160	645.0112 Geotextile Type DF Schedule B	380.000 SY	_____.	_____.
0162	645.0120 Geotextile Type HR	380.000 SY	_____.	_____.
0164	645.0140 Geotextile Type SAS	1,165.000 SY	_____.	_____.
0166	646.2020 Marking Line Epoxy 6-Inch	20,020.000 LF	_____.	_____.
0168	646.4020 Marking Line Epoxy 10-Inch	665.000 LF	_____.	_____.
0170	646.6120 Marking Stop Line Epoxy 18-Inch	30.000 LF	_____.	_____.
0172	646.6466 Cold Weather Marking Epoxy 6-Inch	2,095.000 LF	_____.	_____.
0174	646.9002 Marking Removal Line 6-Inch	8,190.000 LF	_____.	_____.
0176	646.9102 Marking Removal Line 10-Inch	400.000 LF	_____.	_____.
0178	650.4000 Construction Staking Storm Sewer	2.000 EACH	_____.	_____.
0180	650.4500 Construction Staking Subgrade	3,123.000 LF	_____.	_____.
0182	650.5000 Construction Staking Base	3,123.000 LF	_____.	_____.



Proposal Schedule of Items

Page 7 of 8

Proposal ID: 20250513029 Project(s): 1058-25-62

Federal ID(s): WISC 2025480

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0184	650.9911 Construction Staking Supplemental Control (project) 01. 1058-25-62	1.000 EACH	_____.	_____.
0186	650.9920 Construction Staking Slope Stakes	6,387.000 LF	_____.	_____.
0188	690.0150 Sawing Asphalt	2,177.000 LF	_____.	_____.
0190	690.0250 Sawing Concrete	1,420.000 LF	_____.	_____.
0192	715.0720 Incentive Compressive Strength Concrete Pavement	500.000 DOL	1.00000	500.00
0194	ASP.1T0A On-the-Job Training Apprentice at \$5.00/HR	2,000.000 HRS	5.00000	10,000.00
0196	ASP.1T0G On-the-Job Training Graduate at \$5.00/HR	1,260.000 HRS	5.00000	6,300.00
0198	SPV.0035 Special 02. Excavation Special	380.000 CY	_____.	_____.
0200	SPV.0035 Special 03. Flowable Fill	30.000 CY	_____.	_____.
0202	SPV.0060 Special 01. Temporary Access Road	1.000 EACH	_____.	_____.
0204	SPV.0060 Special 02. Temporary Causeway	1.000 EACH	_____.	_____.
0206	SPV.0060 Special 03. Underdrain Connection To Inlet	1.000 EACH	_____.	_____.
0208	SPV.0060 Special 04. Clean Existing Underdrain Outlet	3.000 EACH	_____.	_____.
0210	SPV.0060 Special 05. Removing Raised Pavement Markers & Filling Voids	10.000 EACH	_____.	_____.



Proposal Schedule of Items

Page 8 of 8

Proposal ID: 20250513029 Project(s): 1058-25-62

Federal ID(s): WISC 2025480

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0212	SPV.0090 Special 01. Construction Staking Pavement Replacement Reference	350.000 LF	_____.	_____.
0214	SPV.0090 Special 02. Construction Staking Stability Berm	110.000 LF	_____.	_____.
0216	SPV.0090 Special 03. Marking Diagonal Epoxy 24- Inch Special	210.000 LF	_____.	_____.
Section: 0001			Total:	_____.
			Total Bid:	_____.

