



Wisconsin Department of Transportation

July 2, 2025

Division of Transportation Systems Development
Bureau of Project Development
4822 Madison Yards Way, 4th Floor South
Madison, WI 53705

Telephone: (608) 266-1631
Facsimile (FAX): (608) 266-8459

NOTICE TO ALL CONTRACTORS:

Proposal #04: 1130-67-72, WISC 2025523
Appleton – De Pere
I-41 Mainline, CTH JJ – Miners
Way
IH 41
Outagamie/Brown Counties

1130-67-76, WISC 2025523
Appleton – De Pere
S County Line Rd (CTH U)
Intchg
IH 41
Outagamie County

1130-67-86, WISC 2025523
Appleton – De Pere
CTH U Frontage Roads
IH 41
Outagamie/Brown Counties

Letting of July 8, 2025

This is Addendum No. 02, which provides for the following:

Special Provisions:

Revised Special Provisions	
Article No.	Description
2.1	Prosecution and Progress
4.1	Traffic

Added Special Provisions	
Article No.	Description
18.16	Animal Carcass Removal

Schedule of Items:

Revised Bid Item Quantities					
Bid Item	Item Description	Unit	Proposal Total Prior to Addendum	Proposal Quantity Change (-)	Proposal Total After Addendum
205.0100	Excavation Common	CY	599,155	-1,045	598,110
305.0120	Base Aggregate Dense 1 1/4 -Inch	TON	206,779	7,159	213,938
312.0100	Select Crushed Material	TON	493,672	44,051	537,723
455.0605	Tack Coat	GAL	14,224	7	14,231
460.5223	HMA Pavement 3 LT 58-28 S	TON	13,931	12,510	6,990
460.5224	HMA Pavement 4 LT 58-28 S	TON	8,523	-947	7,576
465.0125	Asphaltic Surface Temporary	TON	7,927	-195	7,732
603.8000	Concrete Barrier Temporary Precast Delivered	LF	124,710	3,000	127,710
603.8125	Concrete Barrier Temporary Precast Installed	LF	124,710	3,000	127,710
614.0800	Crash Cushions Permanent	EACH	2	1	3
614.0905	Crash Cushions Temporary	EACH	17	6	23
623.0200	Dust Control Surface Treatment	SY	401,600	15,840	417,440
624.0100	Water	MGAL	3,469	92	3,561
628.2004	Erosion Mat Class I Type B	SY	285,885	7,544	293,429
629.2039	Erosion Mat Class II Type D	SY	7,884	-7,544	340
645.0120	Geotextile Type HR	SY	21,780	-11,731	10,049
SPV.0090	Special 001. HMA Longitudinal Joint Repair	LF	7,470	1,304	8,774

Added Bid Item Quantities					
Bid Item	Item Description	Unit	Proposal Total Prior to Addendum	Quantity Added	Proposal Total After Addendum
211.0400	Prepare Foundation for Asphaltic Shoulder	STA	0	6	6
465.0105	Asphaltic Surface	TONS	0	2576	2576
SPV.0075.02	Animal Carcass Removal	HOUR	0	240	240

Plan Sheets:

Revised Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of changes to sheet)
19,22	Typical section sheets – Revised HMA to MT
29-36,38, 39,44,46	Typical section sheets – Revised sidewalk and terrace CTH U
186,187	Plan detail sheets – Revised Concrete Barrier Type 42S Special
753,757	Traffic control sheets –temporary bridge widening at CTH JJ and WRT
762,776,781,795, 800,814,819,833, 838,852,857,871, 876,890,895,909, 928,947,952	Traffic Control sheets for bridge work at CTH JJ and WRT

998,1100,1108-10 1115-16, 1121, 1126-27, 1129, 1130, 1216-18	Miscellaneous Quantities – Sheets for matching plan sheet updates
1329,1364	Plan and Profile Sheets for Revised Concrete Barrier Type 42S Special
2482-2491, 2524-2532	Cross Sections – Revisions at CTH U to match structure excavation limits

Added Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of why sheet was added)
26A,26B	Typical section sheets - Temporary widening and frontage road crossover
48A	Typical section sheets – Temporary CTH U
1110A	Miscellaneous Quantities – Updated Select Crushed and Base Aggregate Dense Quantities
2503A	Cross Sections – CTH U NB limits
1471A	Standard Detail Drawing 14B32-11b – needed for barrier wall
1471B	Standard Detail Drawing 14B32-11d – needed for barrier wall
1471C	Standard Detail Drawing 14B32-11e – needed for barrier wall
2503A	Cross Section

Deleted Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of why sheet was deleted)
53	Construction Detail – Fixed object protection not needed

The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.

Sincerely,

Mike Coleman

Proposal Development Specialist
Proposal Management Section

ADDENDUM NO. 02

1130-67-72

July 2, 2025

Special Provisions

2.1 Prosecution and Progress

Replace entire section titled 2025 Winter Work Restrictions with the following:

2025 Winter Work Restrictions

Complete Stage 1A and shift traffic by November 15, 2025 prior to suspending roadway work until 2026. Winter Shutdown typical sections, and open to traffic by November 15, 2025. Work on B-44-0341, I-41 NB bridge over CTH JJ, B-44-0343, I-41 NB bridge over Wrightstown Rd, and B-44-0345, I-41 NB bridge over CTH U can continue through the winter, with the abutment and deck pours occurring in spring 2026

Suspend roadway work upon the completion of Stage 1A and traffic has been shifted as shown in the plans in the fall of 2025. Do not resume roadway work until March 1, 2026 unless approved by the engineer. Provide a start date in writing at least 14 days prior to the planned recommencement of roadway work in 2026. Upon approval the engineer will issue the notice to proceed roadway work 10 days of the approved start date

Replace entire section titled 2026 Winter Work Restrictions with the following:

2026 Winter Work Restrictions

Replace paragraph with the following:

Winter shutdown will commence with the completion of Stage 2C in the Fall of 2026. Do not resume work until March 1, 2027 unless approved by the engineer. Provide a start date in writing at least 14 days prior to the planned recommencement of work in 2027. Upon approval the engineer will issue the notice to proceed within 10 days of the approved start date

4.1 Traffic

Insert the following after paragraph three under section titled Local Street Work Restrictions:

Off Peak Hours:

- Wrightstown Road: 6 PM – 6 AM and 8 AM – 3 PM.
- CTH JJ: 6 PM – 6 AM and 8 AM – 3 PM
- CTH U: 6 PM – 6 AM

18.16 Animal Carcass Removal, Item SPV.0075.002

A Description

This special provision describes removal and relocation of animal carcasses encountered within the work zone.

B Materials

Provide appropriate personal protective equipment for the removal of animal carcasses from the roadway.

C Construction

Collect animal carcasses from live lanes of traffic and shoulders as directed by the engineer. Complete animal carcass removal utilizing lane closures or mobile operations per SDD 15D43, during off peak hours as shown

in the Freeway Lane Requirements. Remove animal carcasses within two (2) calendar days of notification by the engineer.

Provide adequate equipment to secure the animal carcasses to the vehicle or trailer to prevent animal carcass and animal residue from falling off.

Prepare a location map to relocate the carcasses to the nearest interchange outside the limits of any work zone with vegetated ramp shoulder slopes at least 300 feet from the mainline gore, for approval by the engineer. Place animal carcasses on the outside shoulder, outside the aggregate and within vegetation to obscure visibility from the traveling public, for pick up and disposal by others. Notify the engineer of the number and location of the carcasses to be picked up.

Notify the engineer prior to start and upon completion of the removal operations.

D Measurement

The department will measure Animal Carcass Removal by the HOUR that the contractor is actively picking up from the roadway, relocating, and dropping off the carcasses.

E Payment

The department will pay for measured quantities at the contract unit price under the following bid item:

ITEM NUMBER	DESCRIPTION	UNIT
SPV.0075.002	Animal Carcass Removal	HOURS

Payment is full compensation for mobilization; traffic control, materials, equipment, loading, unloading, and delivery of animal carcasses to an engineer approved location; and submitting hourly invoices. The cost for lane closures and mobile operations, SDD 15D43, including vehicles and traffic control shall be incidental to the Animal Carcass Removal bid item. The department shall make no payment for time to set up and removal of traffic control and is considered incidental to the Animal Carcass Removal bid item.

ner41-643 (06302025)

Schedule of Items

Attached, dated July 2, 2025, are the revised Schedule of Items Pages 1 - 35.

Plan Sheets

The following 8½ x 11-inch sheets are attached and made part of the plans for this proposal:


Revised: 19, 22, 29 – 36, 38, 39, 44, 46, 186, 187, 753, 757, 762,776,781,795, 800,814,819,833, 838,852,857,871, 876,890,895,909, 998,1100,1108-10 1115-16, 1121, 1126-27, 1129, 1130, 1216-18, 1329, 1364, 2482 – 2491, and 2524 - 2532

928,947,952 .

Added: 26A, 26B, 1110A, 2503A, and 1471A – 1471C

Deleted: 53

END OF ADDENDUM

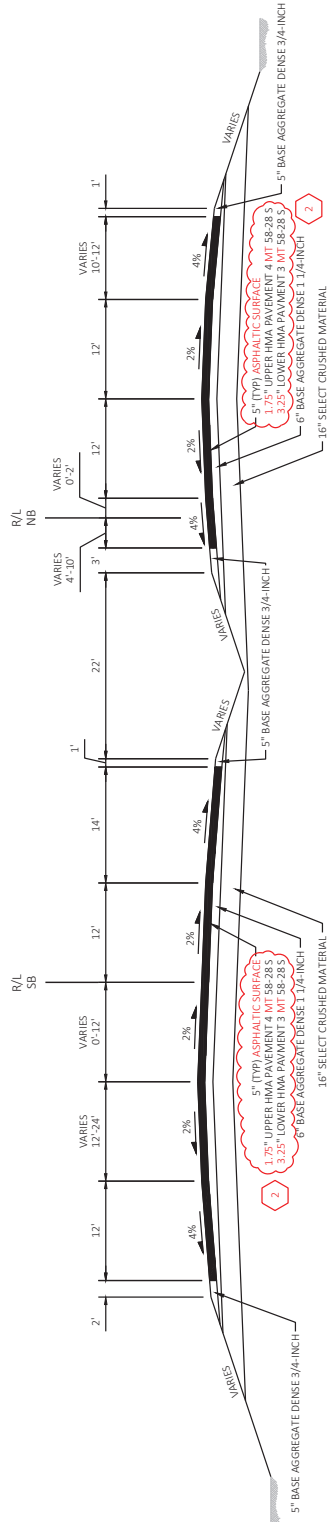


FINISHED TYPICAL SECTION IH 41 MAINLINE

STA 1243'8B+00 TO STA 1249'8B+93
STA 1471'8B+64 TO STA 1473'8B+64

FINISHED TYPICAL SECTION IH 41 MAINLINE

STA 1243'NB+00 TO STA 1247'NB+48
STA 1473'NB+50 TO STA 1475'NB+00

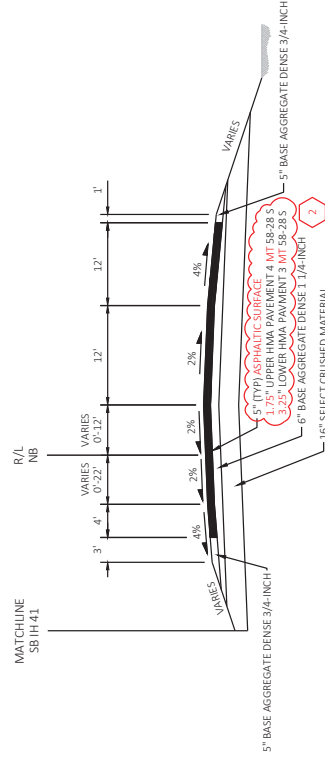


FINISHED TYPICAL SECTION IH 41 MAINLINE

STA 1247'NB+48 TO STA 1250'NB+28
STA 1472'NB+00 TO STA 1473'NB+50

Addendum No. 02
ID 1130-67-72/76/86
Revised Sheet 19
July 2, 2025

Addendum No. 02
ID 1130-67-72/76/86
Revised Sheet 22
July 2, 2025

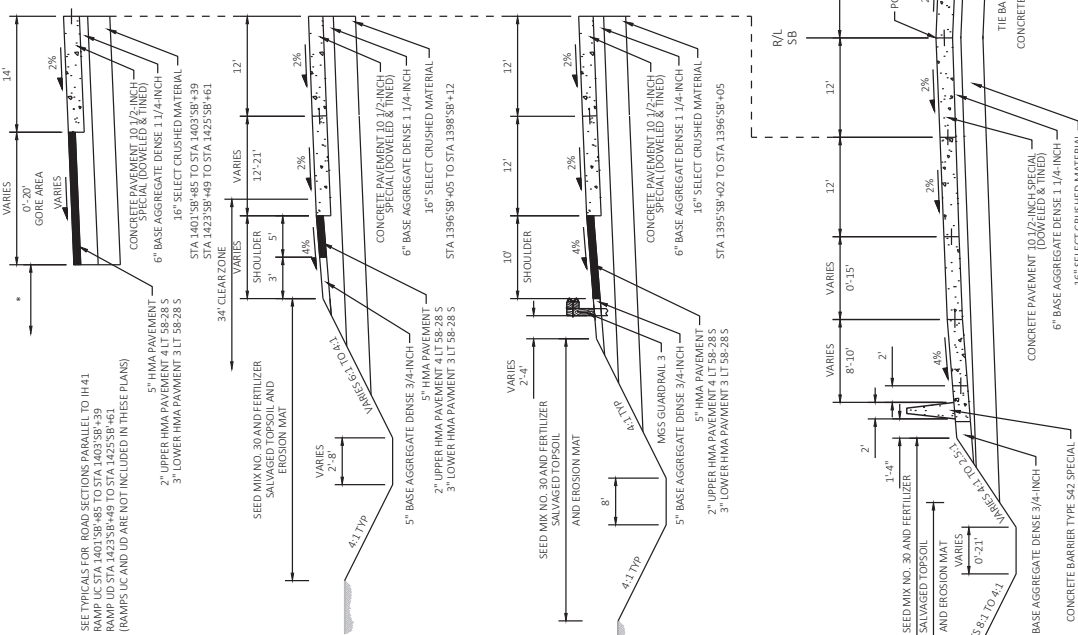


* SEE TYPICALS FOR ROAD SECTIONS PARALLEL TO IH 41 RAMP, I.C. STA 1401+58 TO STA 1403+59 RAMP, I.D. STA 1423+84 TO STA 1425+61 (RAMP U.C. AND U.D. ARE NOT INCLUDED IN THESE PLANS)

2

FINISHED TYPICAL SECTION IH 41 MAINLINE
 STA 1323+79 TO STA 1336+40


FINISHED TYPICAL SECTION IH 41 MAINLINE
 STA 1385+02 TO STA 1395+02
 STA 1425+84 TO STA 1435+24

PROJECT NO: 1130-67-72	COUNTY: OUTAGAMIE & BROWN	SHEET: 22
HWY: IH 41	TYPICAL FINISHED SECTIONS	
FILE NAME: C:\USERS\DOITG\DC\ACDCOS\WB001\113067\PROJECT FILES\DSGN\113067\00\0401-TS.DWG	FLY BY: ECK, KAITLYN GRACE	PLOT SCALE: 1/8"=1'-0"
LAYOUT NAME: _104	PLOT DATE: 6/30/2025 6:14 PM	

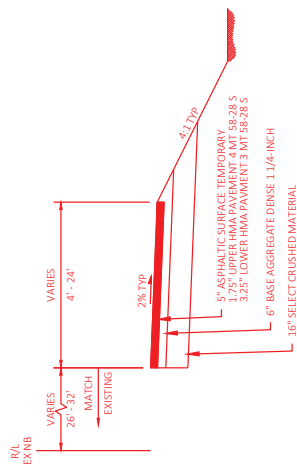


TEMPORARY TYPICAL SECTION NB OUTSIDE WIDENING

STAGE 1A
 STA 1248' ENB +06 TO STA 1250' ENB +06
 STA 1251' ENB +02 TO STA 1252' ENB +06
 STA 1319' ENB +00 TO STA 1322' ENB +06
 STA 1323' ENB +06 TO STA 1324' ENB +02
 STA 1440' ENB +05 TO STA 1441' ENB +05
 STA 1437' ENB +06 TO STA 1440' ENB +09

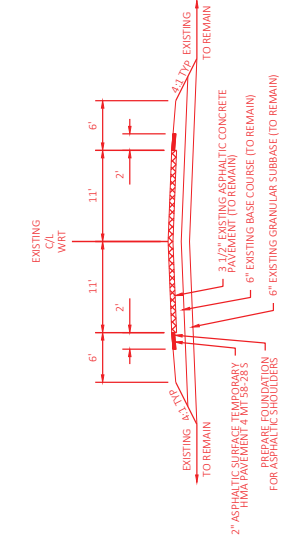

TEMPORARY TYPICAL SECTION WRIGHTSTOWN RD WIDENING


STAGE 1B
 LEFT: STA 57' WRT +53 TO STA 60' WRT +53
 RIGHT: STA 56' WRT +09 TO STA 59' WRT +28



TEMPORARY TYPICAL SECTION B-44-345 CONNECTION


STAGE 1B
 STA 1407' ENB +07 TO STA 1410' ENB +00
 STA 1412' ENB +57 TO STA 1415' ENB +00

Addendum No. 02
ID 1130-67-72/76/86
Added Sheet 26A
July 2, 2025

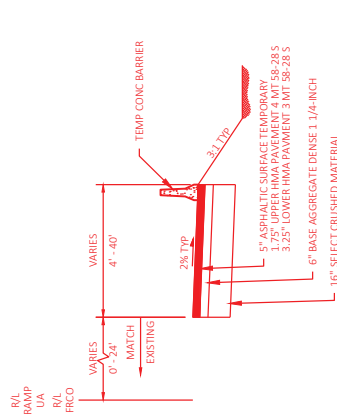


TEMPORARY TYPICAL SECTION FRONTAGE ROAD CROSSOVER

STAGE 1B
 STA 1U4TR+81 TO STA 4U4TR+50
 STA 8FRCO+37 TO STA 12FRCO+15

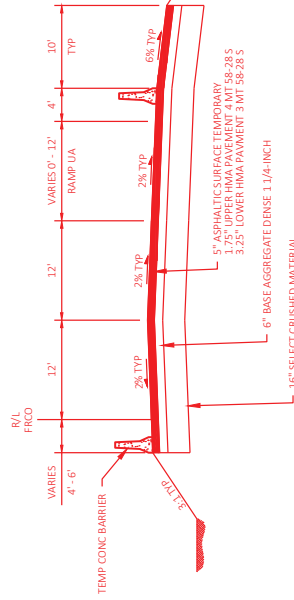

TEMPORARY TYPICAL SECTION FRONTAGE ROAD CROSSOVER


STAGE 1B
 STA 12FRCO+15 TO STA 22FRCO+50

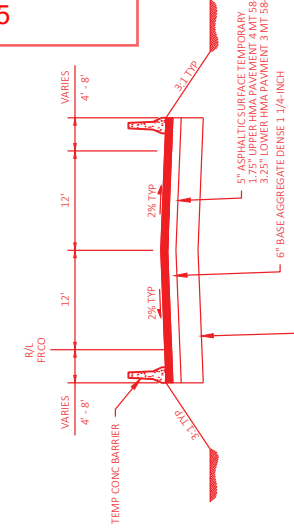

TEMPORARY TYPICAL SECTION FRONTAGE ROAD CROSSOVER


STAGE 1B
 STA 22FRCO+50 TO STA 25FRCO+14
 STA 26FRCO+57 TO STA 36FRCO+65

Addendum No. 02
ID 1130-67-72/76/86
Added Sheet 26B
July 2, 2025




TEMPORARY TYPICAL SECTION RAMPS

- STAGE 1C
 RAMP I/C: STA 1390(U)CTA+41 TO STA 1404(U)CTA+09
 RAMP U/D: STA 1423(U)DTA+94 TO STA 1433(U)DTA+30
- STAGE 2A
 RAMP I/C: STA 1374(U)CTB+98 TO STA 1389(U)CTB+84
 RAMP U/D: STA 1448(U)DTB+07 TO STA 1456(U)DTB+32
- STAGE 3C
 RAMP I/A: STA 1423(U)TA+96 TO STA 1423(U)TA+90
 RAMP U/B: STA 1392(U)BT+79 TO STA 1394(U)BT+96



TEMPORARY TYPICAL SECTION RAMPS


- STAGE 1C
 RAMP I/C: STA 1409(U)CTA+86 TO STA 1410(U)CTA+95
 RAMP U/D: STA 1416(U)DTA+54 TO STA 1419(U)DTA+19
- STAGE 2A
 RAMP I/C: STA 1390(U)CTB+26 TO STA 1393(U)CTB+07
 RAMP U/D: STA 1443(U)DTB+08 TO STA 1446(U)DTB+61
- STAGE 3C
 RAMP I/A: STA 1424(U)TA+88 TO STA 1424(U)TA+94
 RAMP U/B: STA 1383(U)BT+50 TO STA 1392(U)BT+19



TEMPORARY TYPICAL SECTION RAMPS

- STAGE 1C
 RAMP I/C: STA 1404(U)CTA+86 TO STA 1409(U)CTA+86
 RAMP U/D: STA 1419(U)DTA+19 TO STA 1423(U)DTA+94
- STAGE 2A
 RAMP I/C: STA 1389(U)CTB+20 TO STA 1390(U)CTB+20
 RAMP U/D: STA 1420(U)DTB+12 TO STA 1423(U)DTB+45
 RAMP U/D: STA 1446(U)DTB+61 TO STA 1448(U)DTB+07
- STAGE 3C
 RAMP I/A: STA 1423(U)TA+96 TO STA 1424(U)TA+83
 RAMP U/B: STA 1392(U)BT+19 TO STA 1392(U)BT+79

Addendum No. 02
ID 1130-67-72/76/86
Revised Sheet 29
July 2, 2025

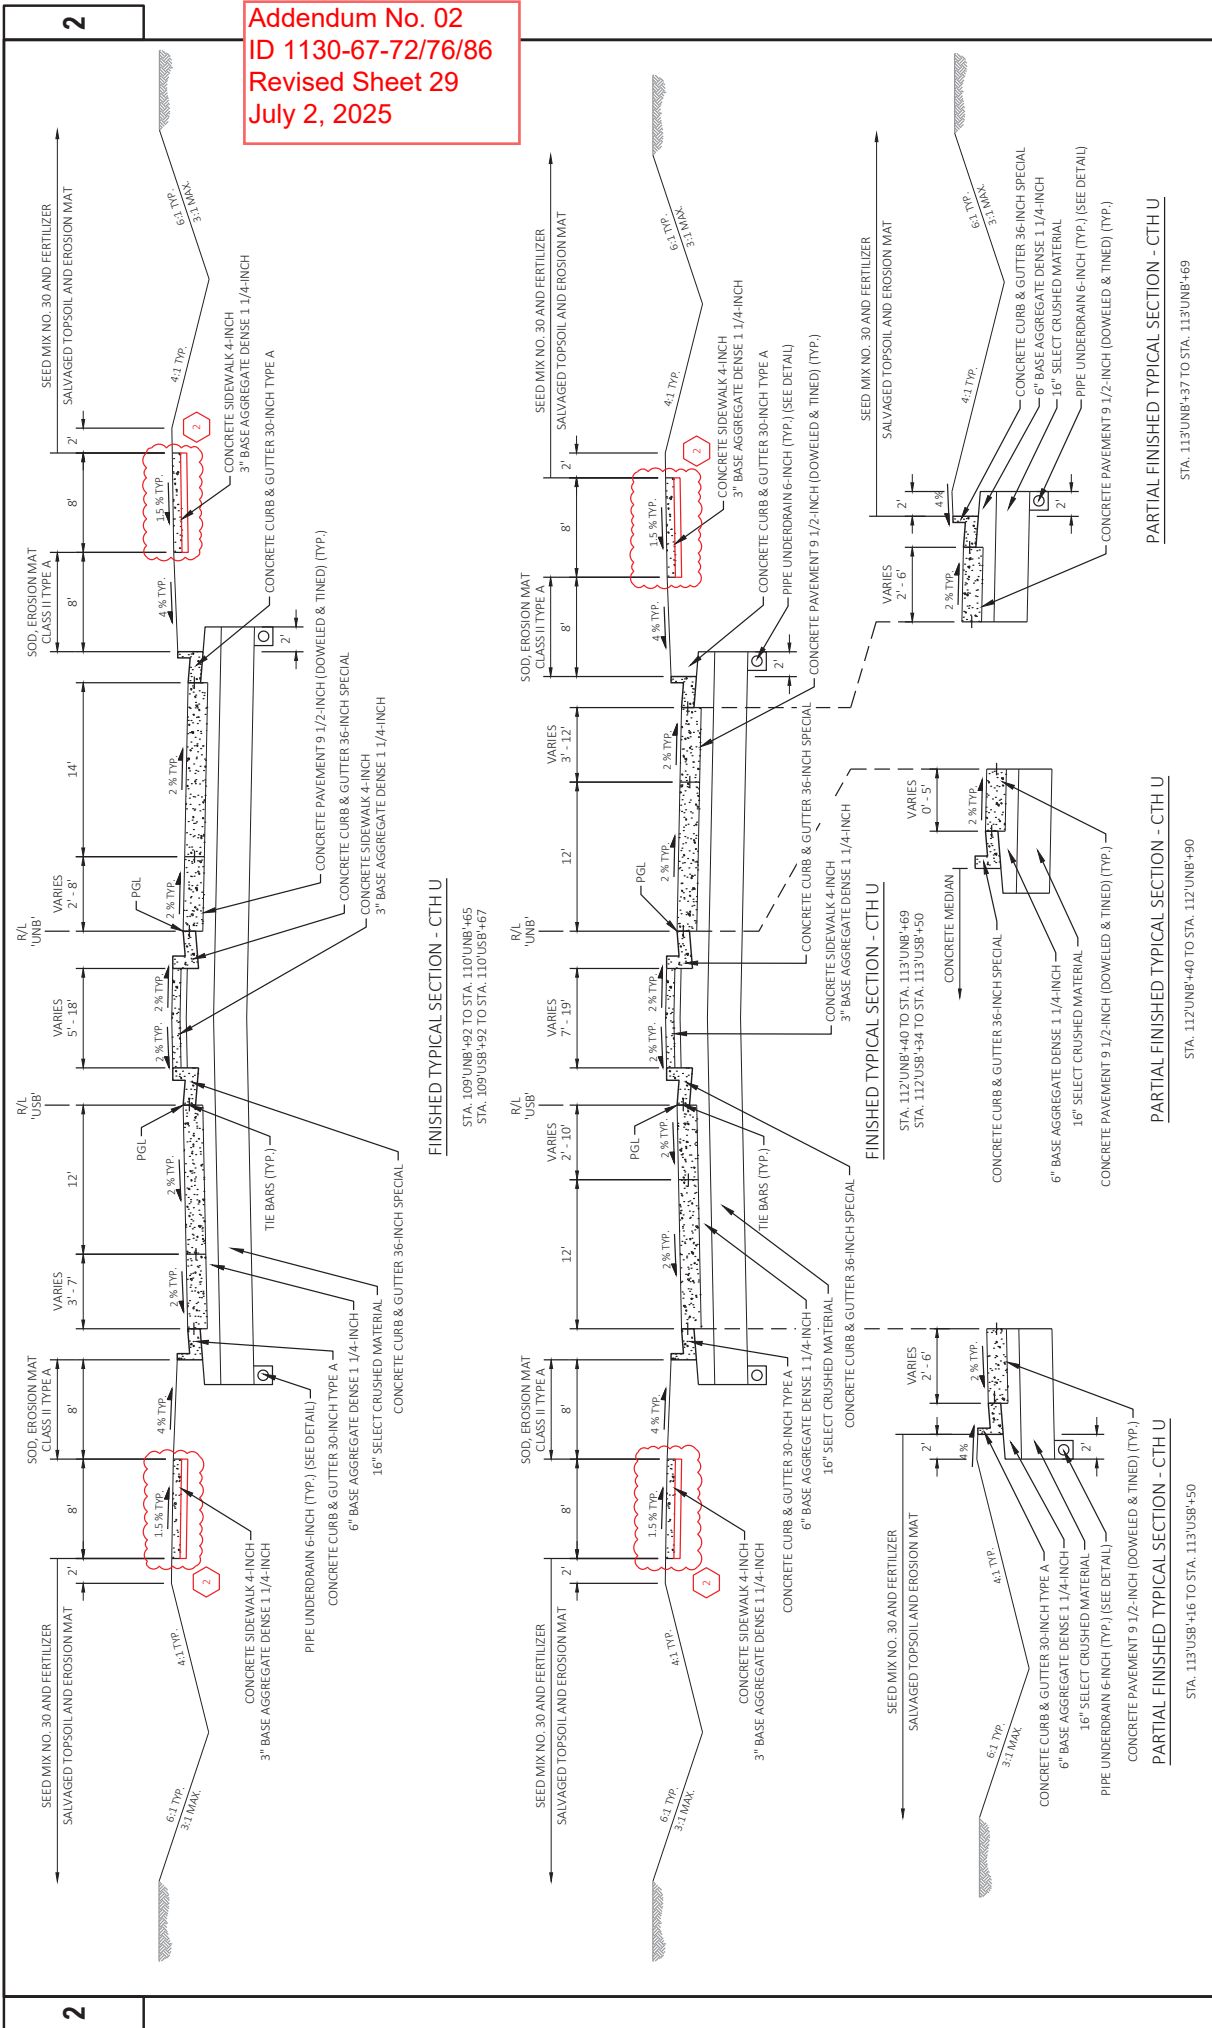


2

2

PROJECT NO: 1130-67-76	COUNTY: OUTAGAMIE & BROWN	TYPICAL FINISHED SECTIONS	SHEET 29
FILE NAME: C:\USERS\VOITKED\CAD\CDCS\W\B071130630\PROJECT FILES\DSG\11306770\1130-67-76\0402-TS.DWG	LOT BY: 6/30/2025 9:00 PM	KL ENGINEERING	1 IN=30 FT
LAYOUT NAME: _203	LOT DATE: 6/30/2025 9:00 PM	KL ENGINEERING	1 IN=30 FT
HWY: IH 41	STA. 112'UNB+40 TO STA. 112'UNB+90	PARTIAL FINISHED TYPICAL SECTION - CTH U	STA. 113'UNB+37 TO STA. 113'UNB+69


E

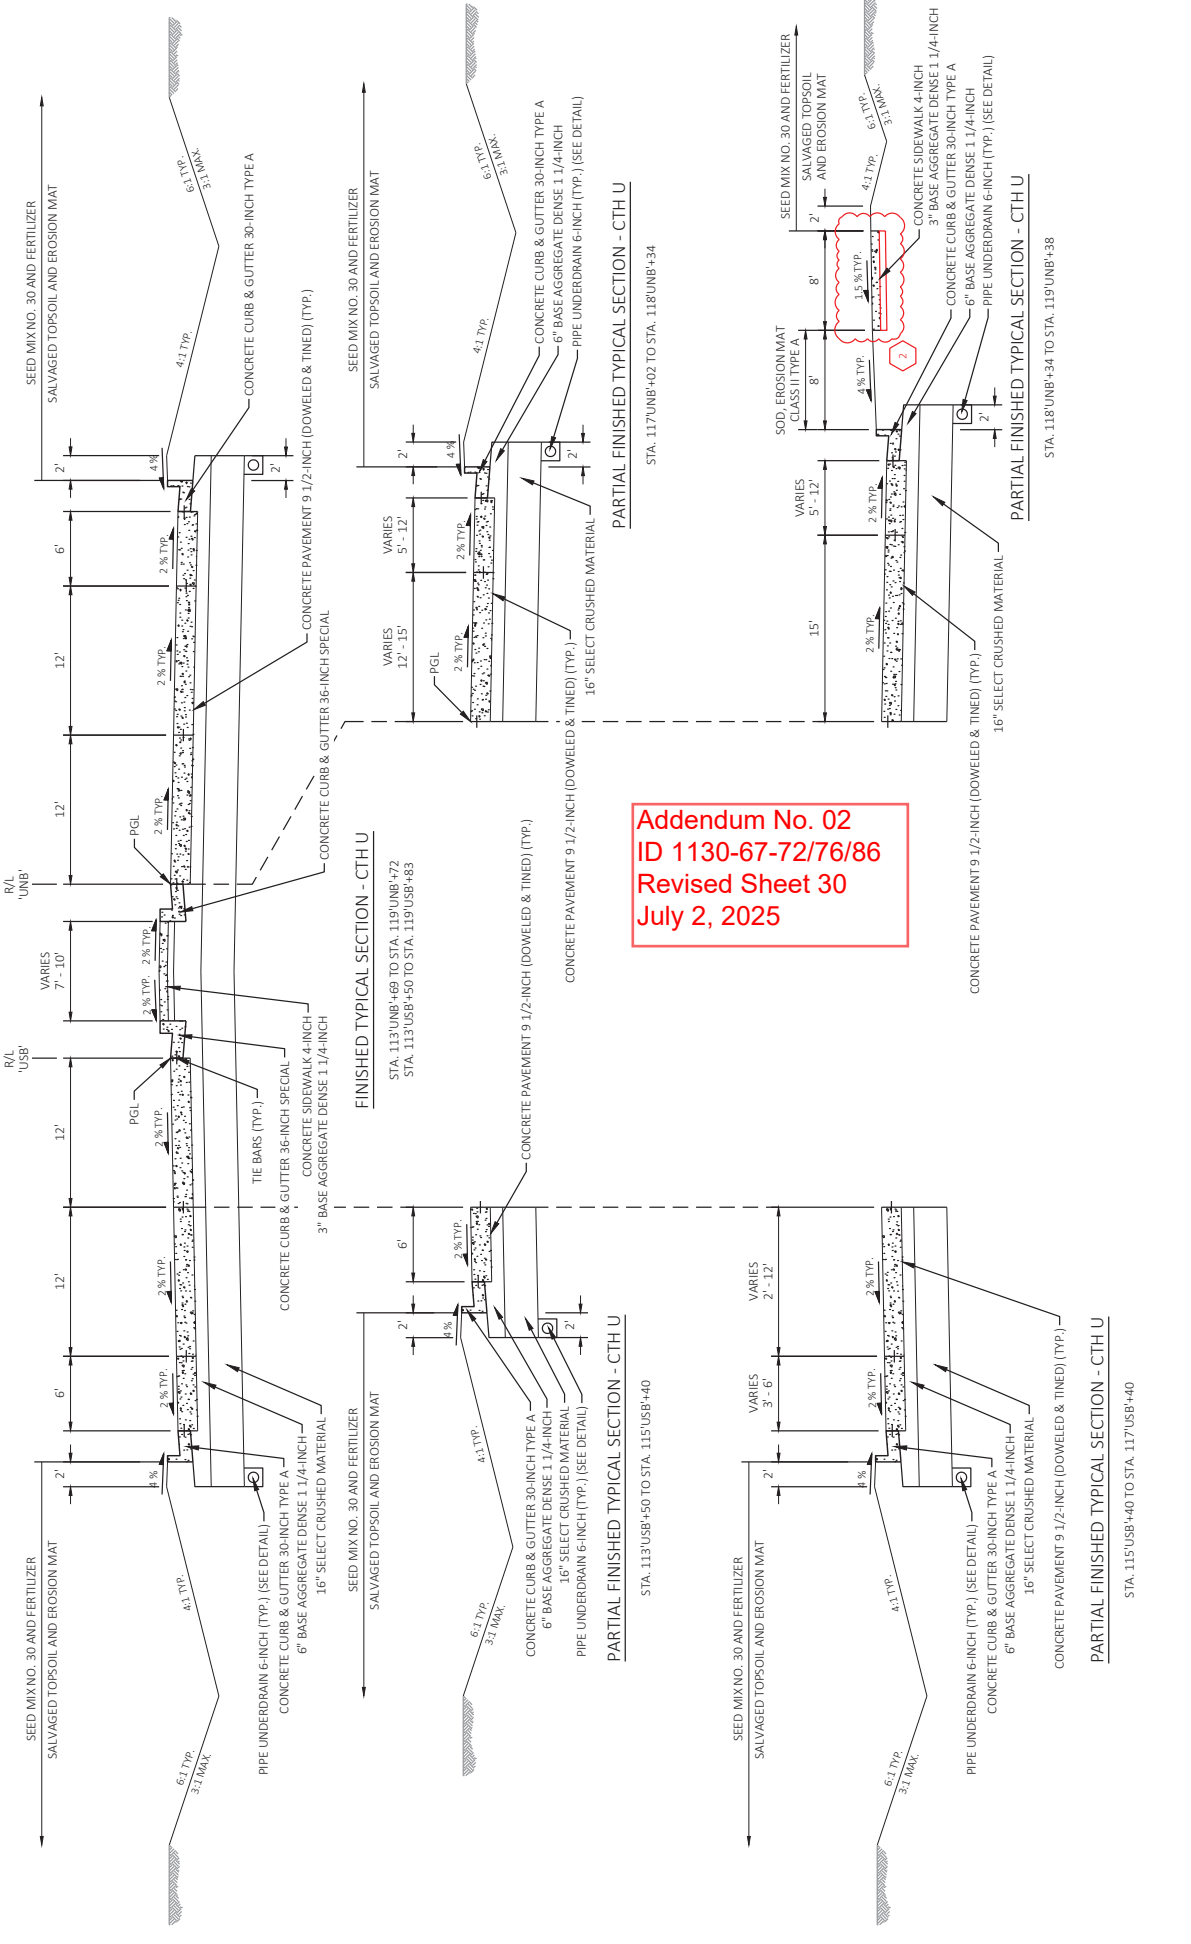

Addendum No. 02
ID 1130-67-72/76/86
Revised Sheet 30
July 2, 2025

PROJECT NO: 1130-67-76	COUNTY: OUTAGAMIE & BROWN	TYPICAL FINISHED SECTIONS	SHEET 30 E
<small>FILE NAME: C:\USERS\DOTKING\EDC\CAD\CDCS\W\B071130630\PROJECT FILES\DWG\1130-67-76\0402-TS.DWG</small>	<small>HWY:</small> IH 41	<small>PLOT DATE:</small> 7/1/2025 11:10 AM	<small>PLOT NAME:</small> 1 IN:30 FT
<small>LAYOUT NAME: -_204</small>	<small>FLOTT BY:</small> KL ENGINEERING	<small>WISDOT/CAD/CDS SHEET 42</small>	


Addendum No. 02
ID 1130-67-72/76/86
Revised Sheet 31
July 2, 2025

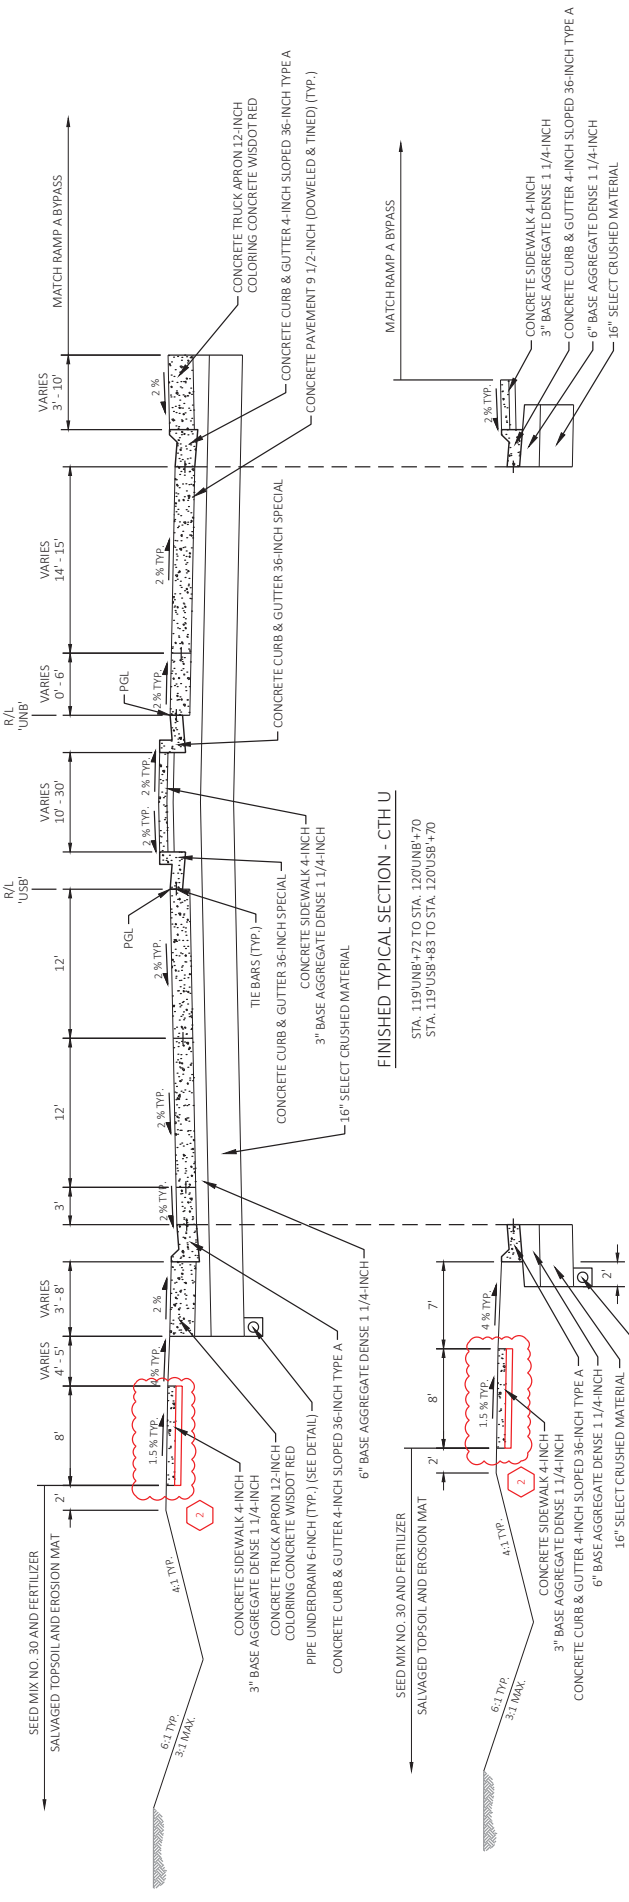


FINISHED TYPICAL SECTION - CTH U
 STA. 119'UNB+72 TO STA. 120'UNB+70
 STA. 119'USB+83 TO STA. 120'USB+70

PARTIAL FINISHED TYPICAL SECTION - CTH U
 STA. 119'UNB+72 TO STA. 120'UNB+06

FINISHED TYPICAL SECTION - CTH U
 STA. 122'UNB+35 TO STA. 123'UNB+22
 STA. 122'USB+42 TO STA. 123'USB+21

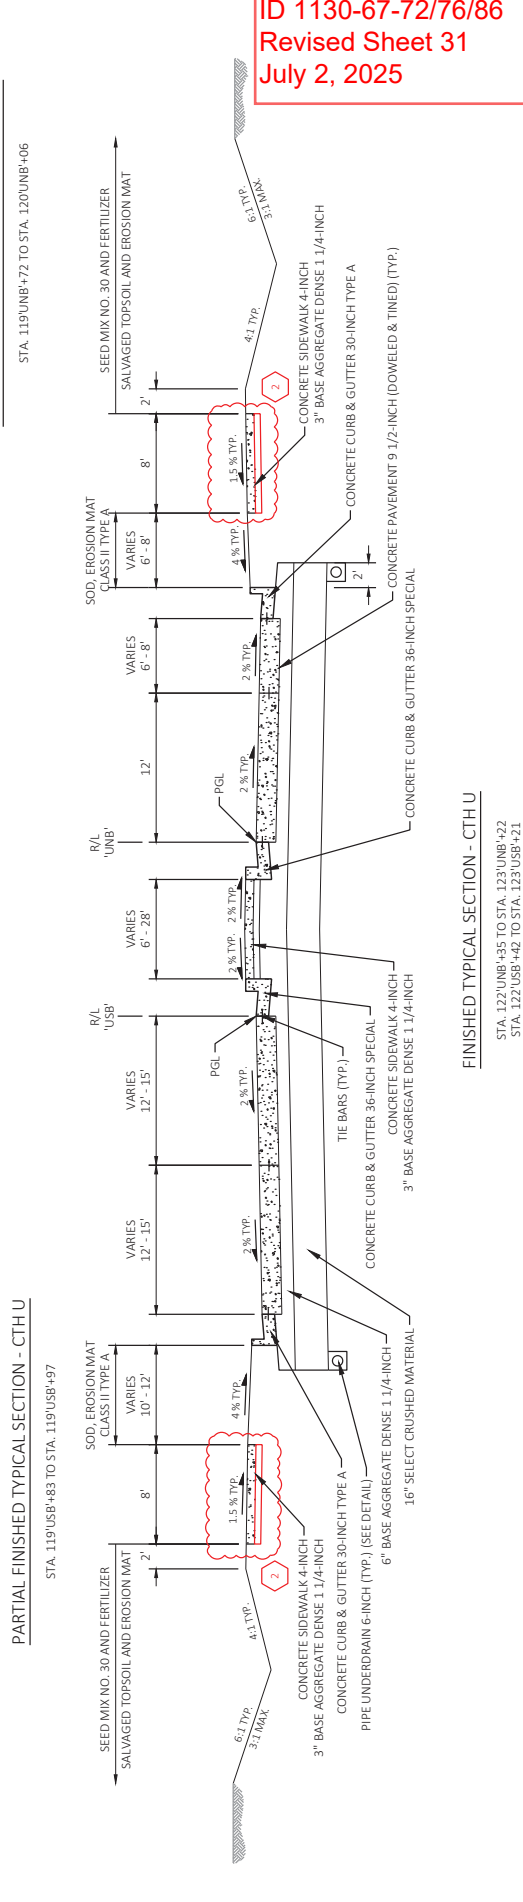


PROJECT NO: 1130-67-76	COUNTY: OUTAGAMIE & BROWN	TYPICAL FINISHED SECTIONS	SHEET 31
FILE NAME: C:\USERS\DOITKING\EDC\CAD\CD\PROJECT FILES\DSG\11306770\11306770\SHEETS\1130-67-76\060402-TS.DWG	HWY: IH41	PLOT NAME: KL ENGINEERING	PLOT SCALE: 1 IN=30 FT
LAYOUT NAME: -_205	PLOT DATE: 6/30/2025 9:17 PM	PLOT NAME: KL ENGINEERING	PLOT SCALE: 1 IN=30 FT

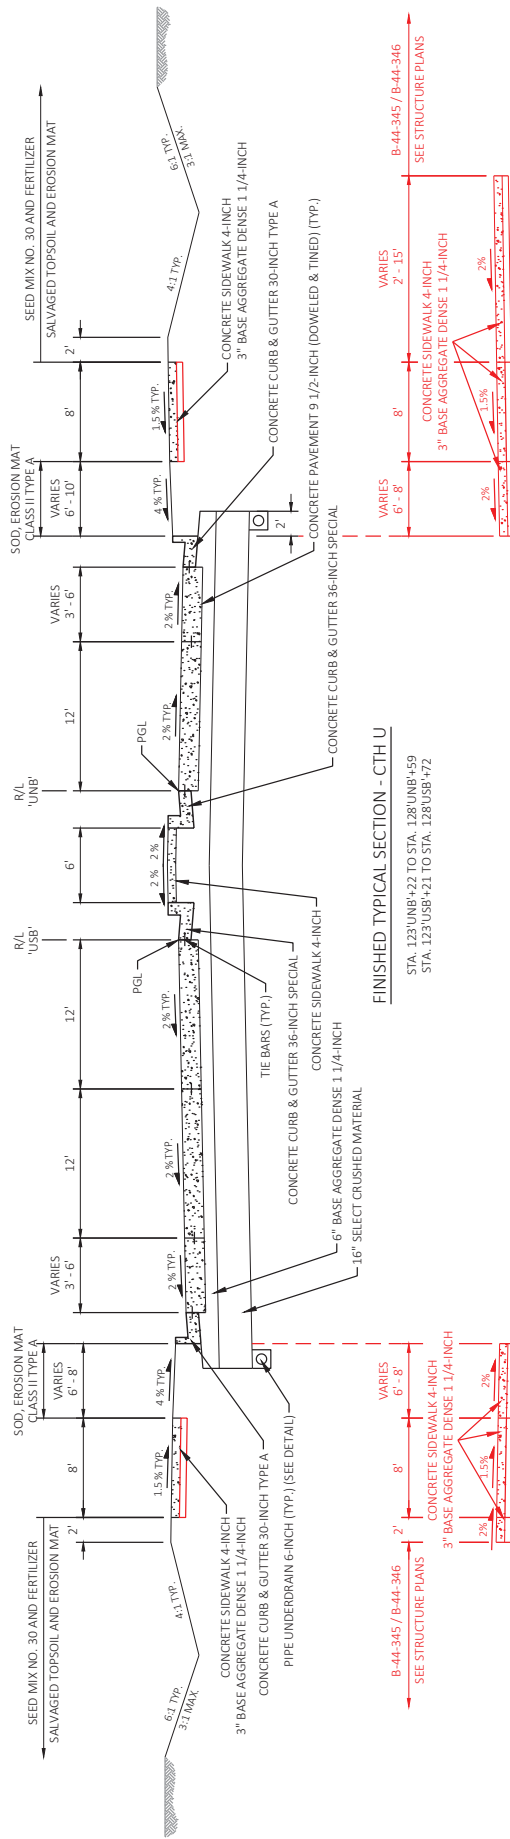

FINISHED TYPICAL SECTION - CTH U


PARTIAL FINISHED TYPICAL SECTION - CTH U

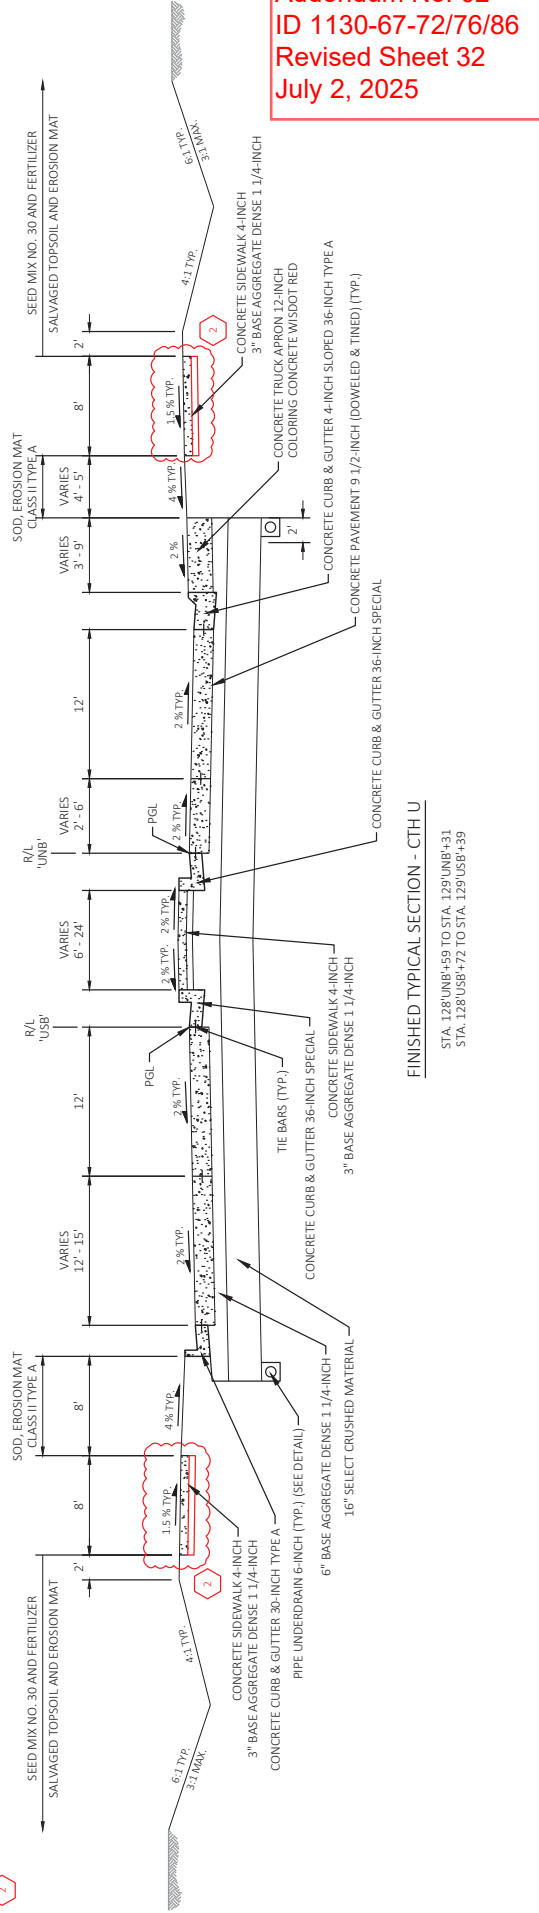

FINISHED TYPICAL SECTION - CTH U


PARTIAL FINISHED TYPICAL SECTION - CTH U

Addendum No. 02
 ID 1130-67-72/76/86
 Revised Sheet 32
 July 2, 2025

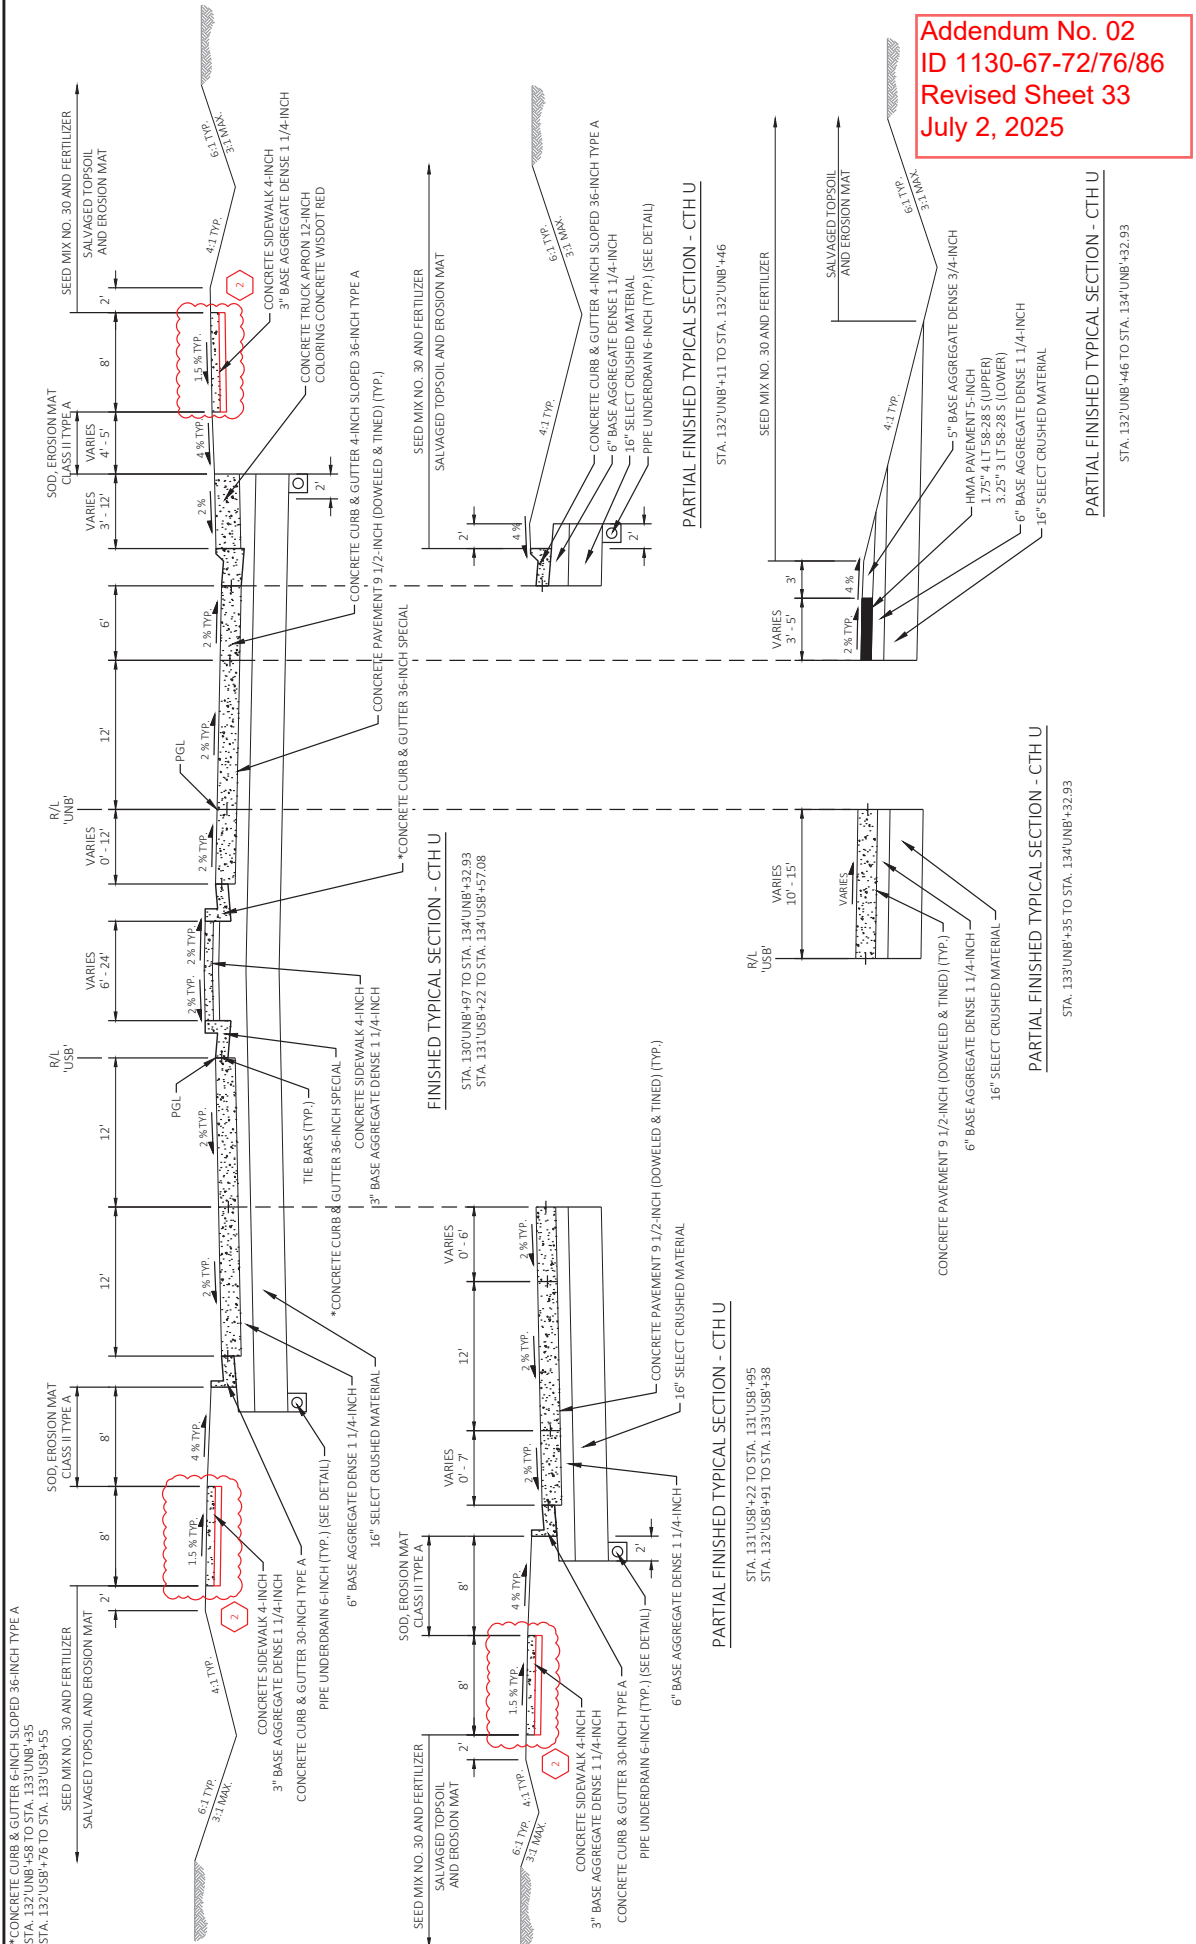

Addendum No. 02
ID 1130-67-72/76/86
Revised Sheet 33
July 2, 2025


PROJECT NO: 1130-67-76	COUNTY: OUTAGAMIE & BROWN	TYPICAL FINISHED SECTIONS	SHEET 33
<small>FILE NAME: C:\USERS\DOUG\DCAC\DCS\WB\B0711306770\PROJECT FILES\DS6\11306770\SHEETS\1130-67-76\060402-TS.DWG LAYOUT NAME: _207</small>	<small>PLOT DATE: 6/30/2025 9:00 PM</small>	<small>PLOT NAME: KL ENGINEERING</small>	<small>PLOT SCALE: 1 IN.=3 FT.</small>
HWY: IH 41	STA. 132' UNB+58 TO STA. 133' UNB+55	STA. 133' UNB+35 TO STA. 134' UNB+32.93	STA. 132' UNB+11 TO STA. 132' UNB+46

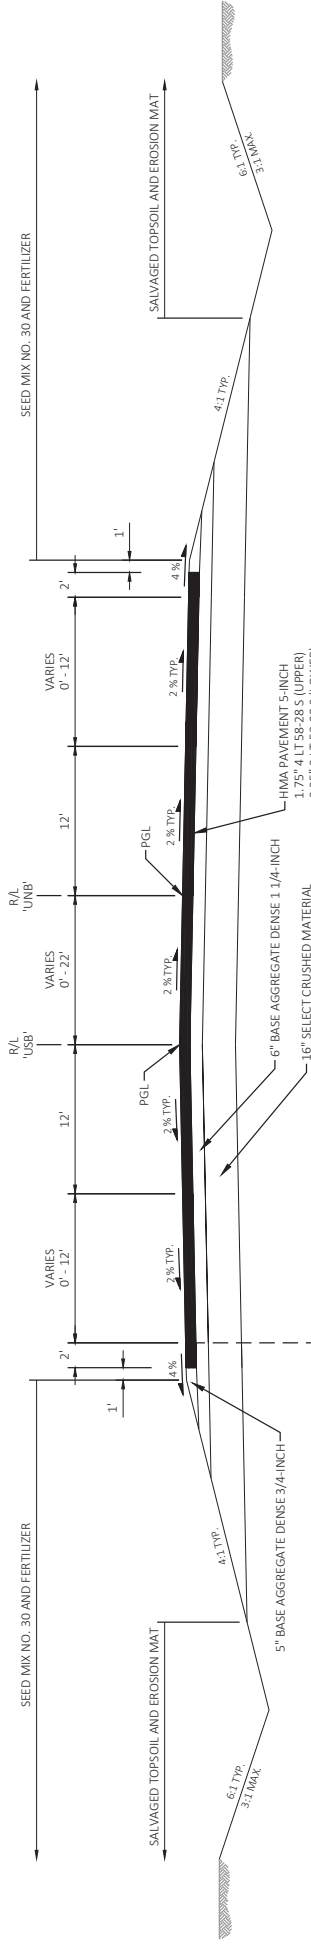


FINISHED TYPICAL SECTION - CTH U
 STA. 134'UNB+32.93 TO STA. 138'UNB+25
 STA. 134'USB+57.08 TO STA. 138'USB+53

Addendum No. 02
ID 1130-67-72/76/86
Revised Sheet 34
July 2, 2025

PARTIAL FINISHED TYPICAL SECTION - CTH U
 STA. 136'USB+78 TO STA. 138'USB+53

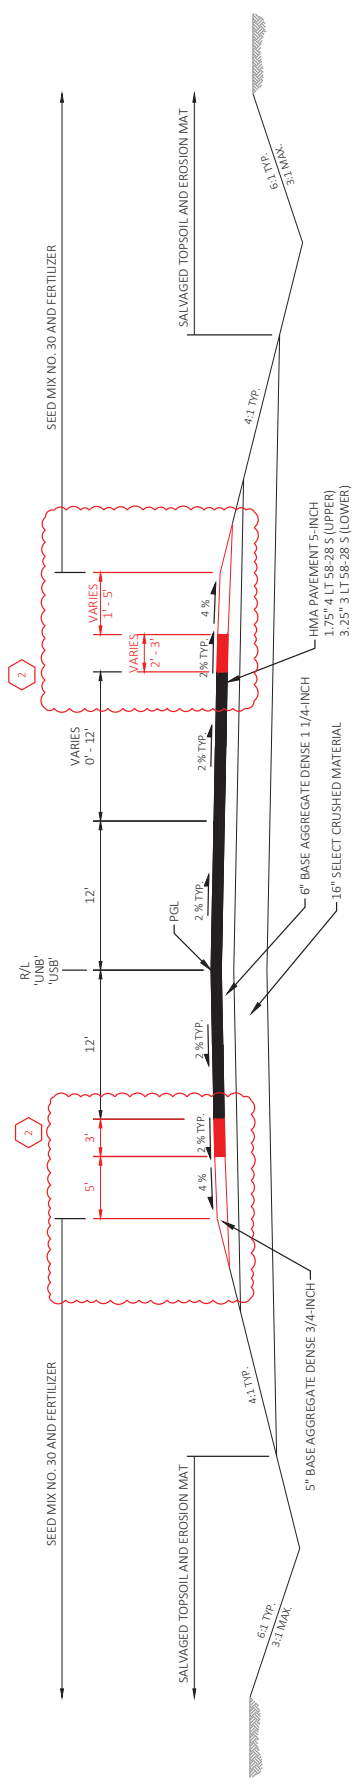


FINISHED TYPICAL SECTION - CTH U
 STA. 138'UNB+25 TO STA. 139'UNB+55.38
 STA. 138'USB+53 TO STA. 139'USB+83.65

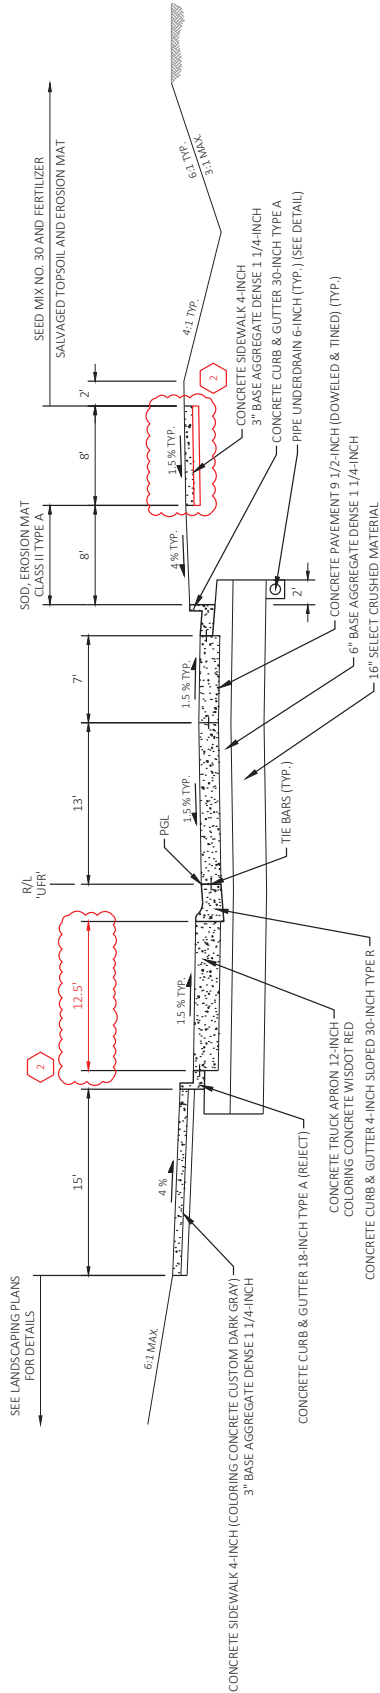

FINISHED TYPICAL SECTION - CTH U / E FRONTAGE RD ROUNDABOUT

STA. 1+UNR+00 TO STA. 4+UNR+45.57

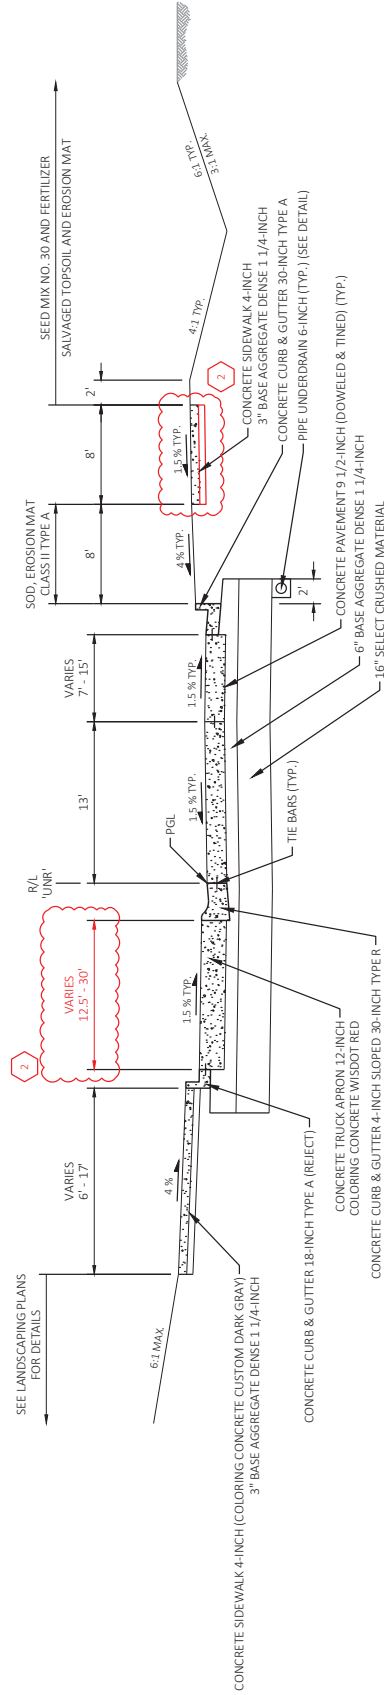


FINISHED TYPICAL SECTION - CTH U / IH 41 NB ROUNDABOUT

STA. 1+UNR+00 TO STA. 4+UNR+58.13

Addendum No. 02
ID 1130-67-72/76/86
Revised Sheet 35
July 2, 2025


Addendum No. 02
 ID 1130-67-72/76/86
 Revised Sheet 36
 July 2, 2025

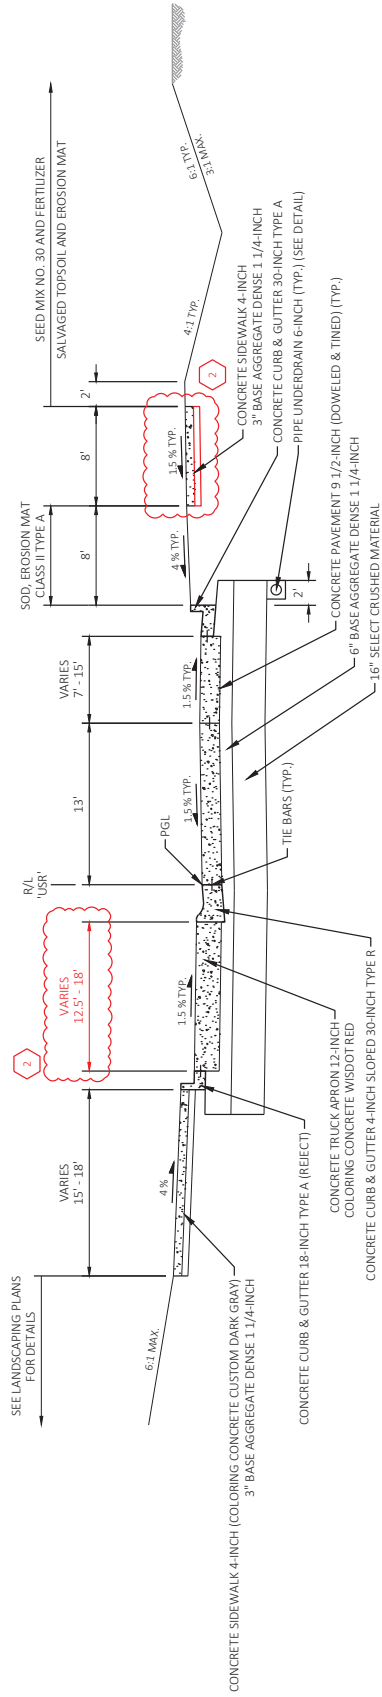

FINISHED TYPICAL SECTION - CTH U / IH 41 SB ROUNDABOUT

STA. 1' USR+00 TO STA. 4' USR+64.20


PROJECT NO: 1130-67-76	COUNTY: OUTAGAMIE & BROWN	TYPICAL FINISHED SECTIONS	SHEET 36	E
FILE NAME: C:\USERS\DOTKREID\CA\CCDC\SWIBDOT\1130630\PROJECT FILES\DS6\11306770\SHETS\1130-67-76\02\0402-TS.DWG	HWY: IH 41	7/2/2025 11:10 AM	1 IN:30 FT	WISDOT\CAD\DS SHEET 42
LAYOUT NAME: _210	KL ENGINEERING	PLOT NAME:	PLOT SCALE:	

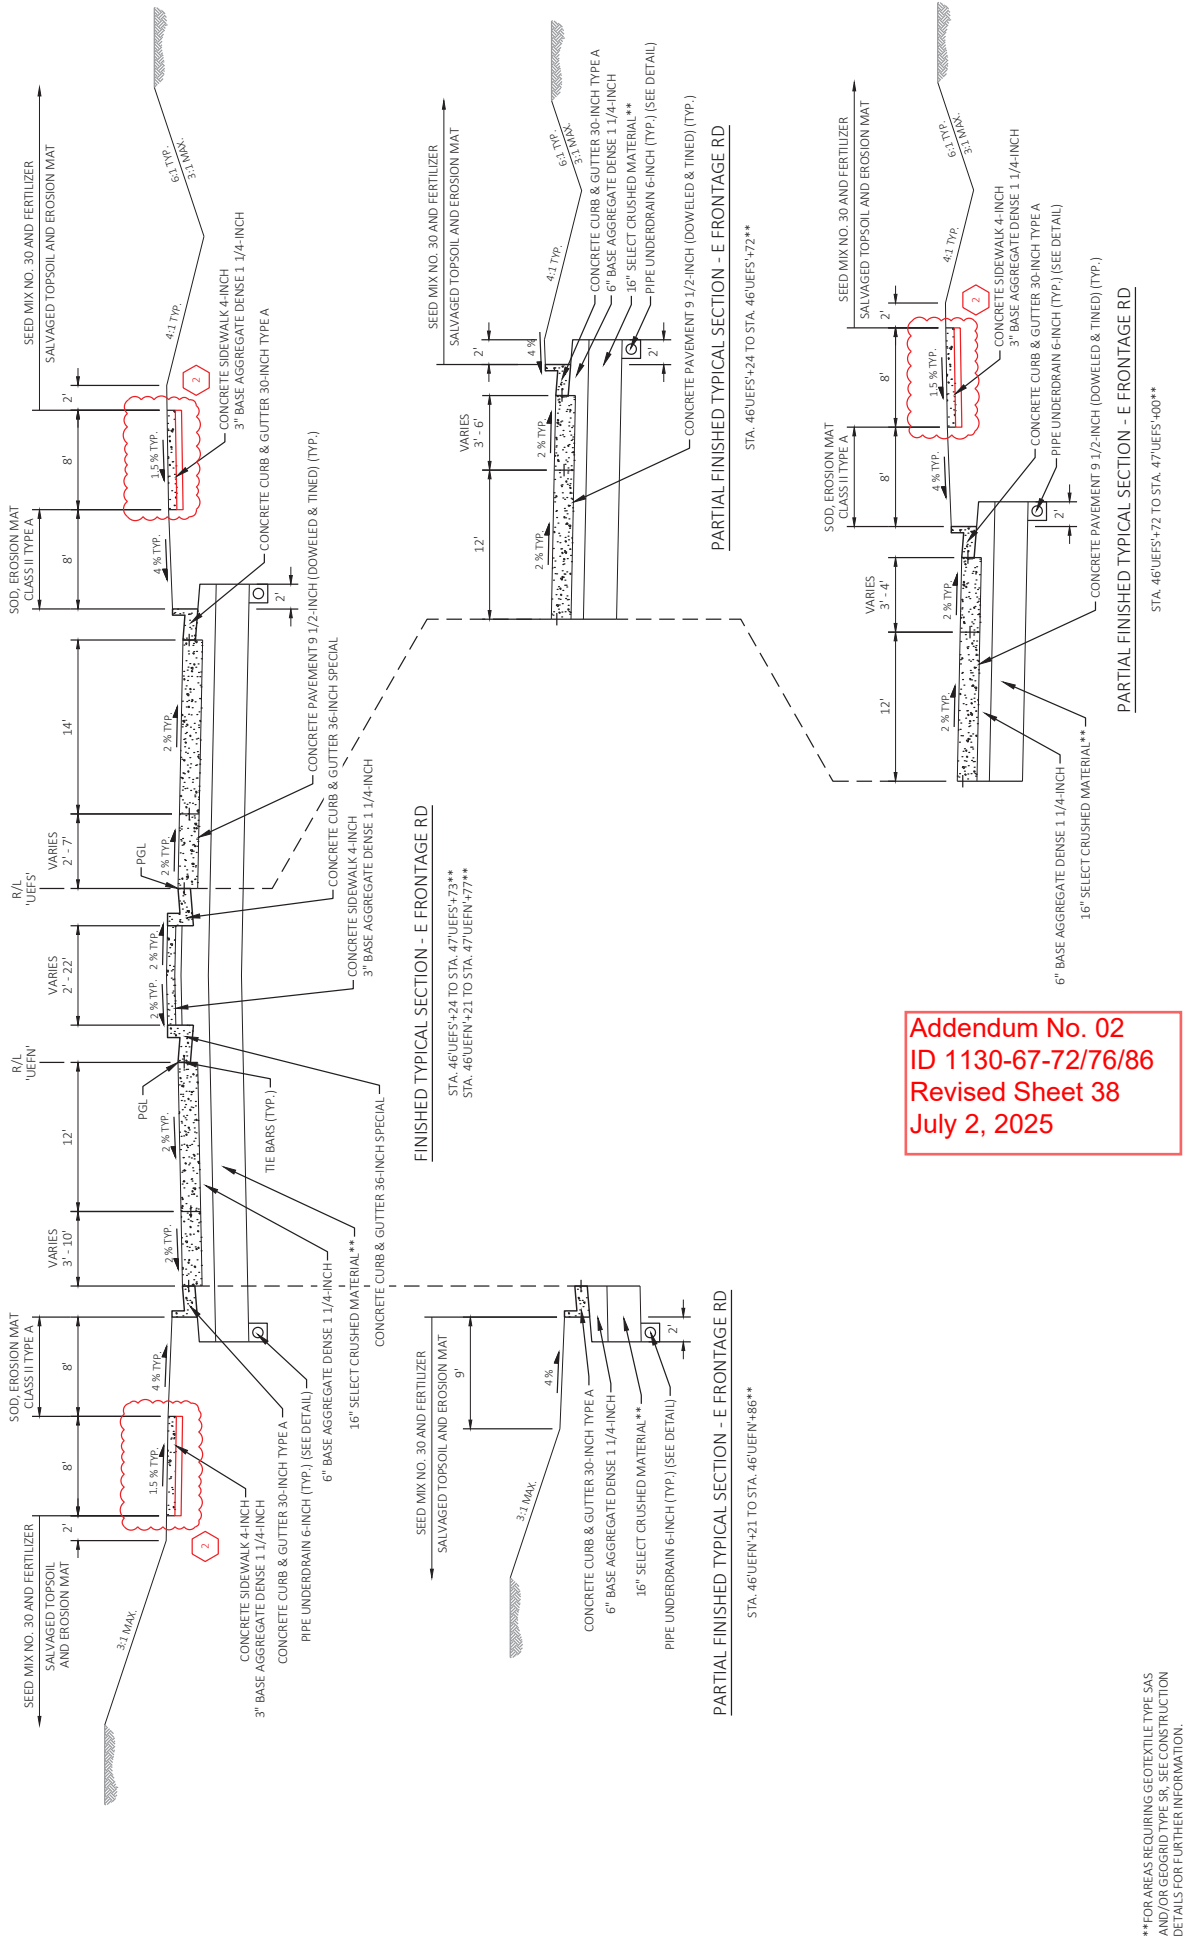


Addendum No. 02
ID 1130-67-72/76/86
Revised Sheet 38
July 2, 2025

**FOR AREAS REQUIRING GEOTEXTILE TYPE SAS AND/OR GEOGRID TYPE SR, SEE CONSTRUCTION DETAILS FOR FURTHER INFORMATION.

Addendum No. 02
 ID 1130-67-72/76/86
 Revised Sheet 39
 July 2, 2025

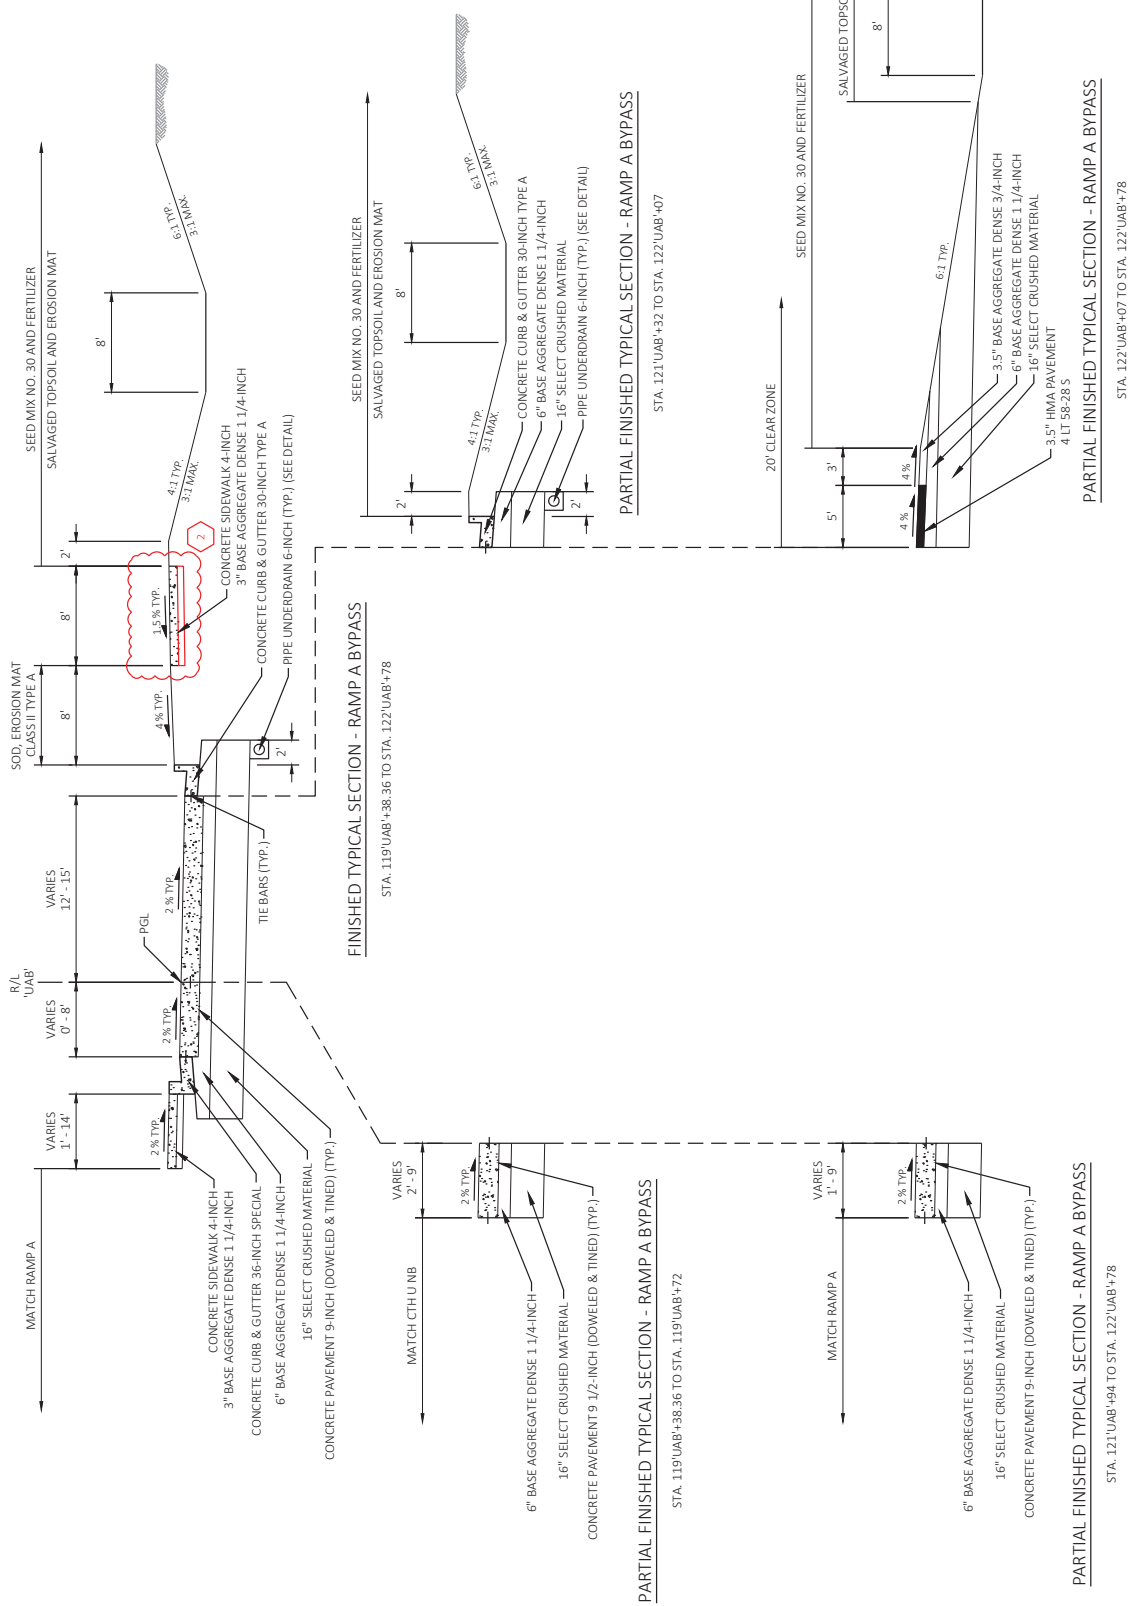

PROJECT NO: 1130-67-76	COUNTY: OUTAGAMIE & BROWN	TYPICAL FINISHED SECTIONS	SHEET 39	E
FILE NAME: C:\USERS\DOTING\EDC\ACCCDCS\WB07\1130630\PROJECT FILES\DSG\11306770\SHETS\1130-67-76\0402-TS.DWG	HWY: IH 41	FLYBY: KL ENGINEERING	PLOT SCALE: 1 IN.=30 FT	WB07\0402\SHET 42
LAYOUT NAME: -_213	PLOT DATE: 6/30/2025 9:00 PM			

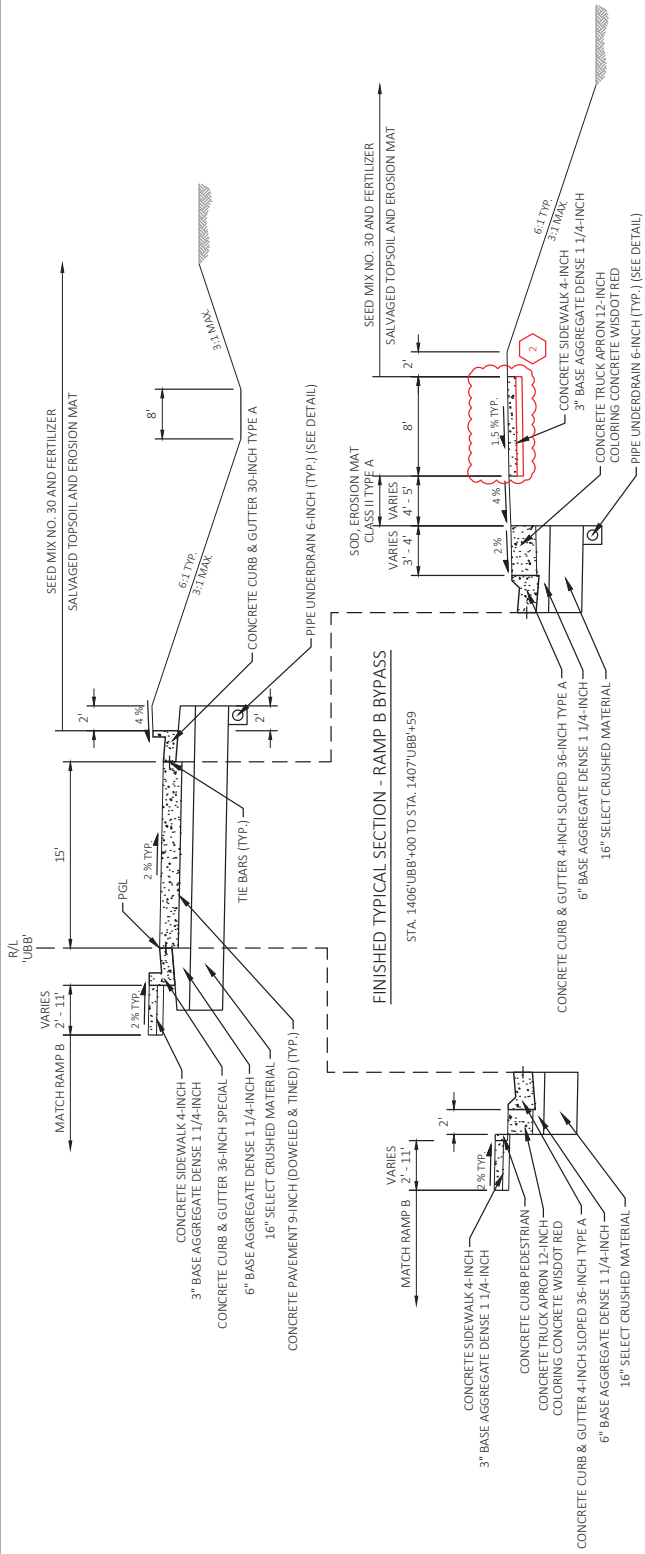


PARTIAL FINISHED TYPICAL SECTION - RAMP B BYPASS

STA. 1407+00 TO STA. 1407+59

PARTIAL FINISHED TYPICAL SECTION - RAMP B BYPASS

STA. 1407+00 TO STA. 1407+59

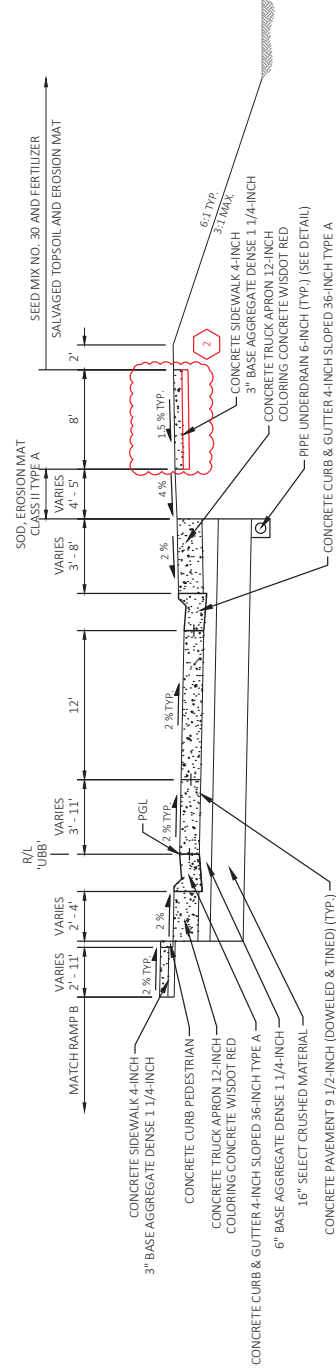


FINISHED TYPICAL SECTION - RAMP B BYPASS

STA. 1407+00 TO STA. 1408+49


Addendum No. 02
 ID 1130-67-72/76/86
 Revised Sheet 44
 July 2, 2025

Addendum No. 02
 ID 1130-67-72/76/86
 Revised Sheet 46
 July 2, 2025

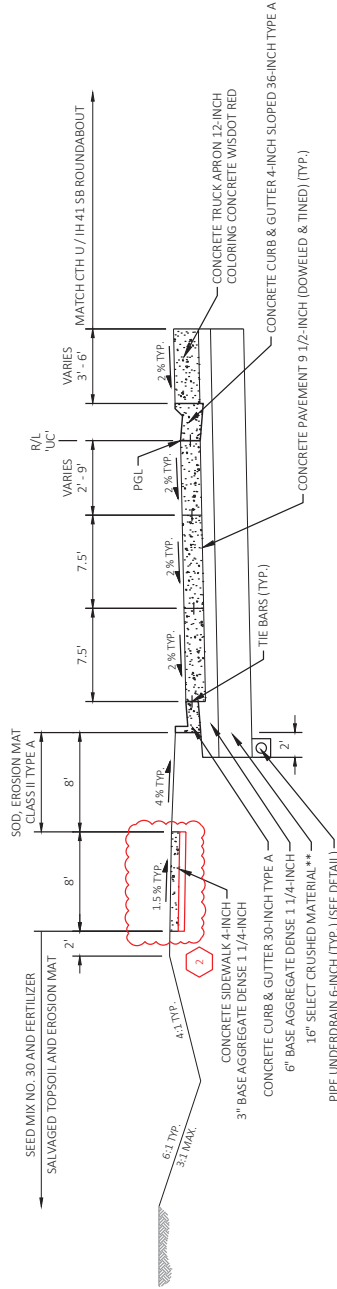

FINISHED TYPICAL SECTION - RAMP C

STA. 1414'UC+32 TO STA. 1414'UC+74.18**

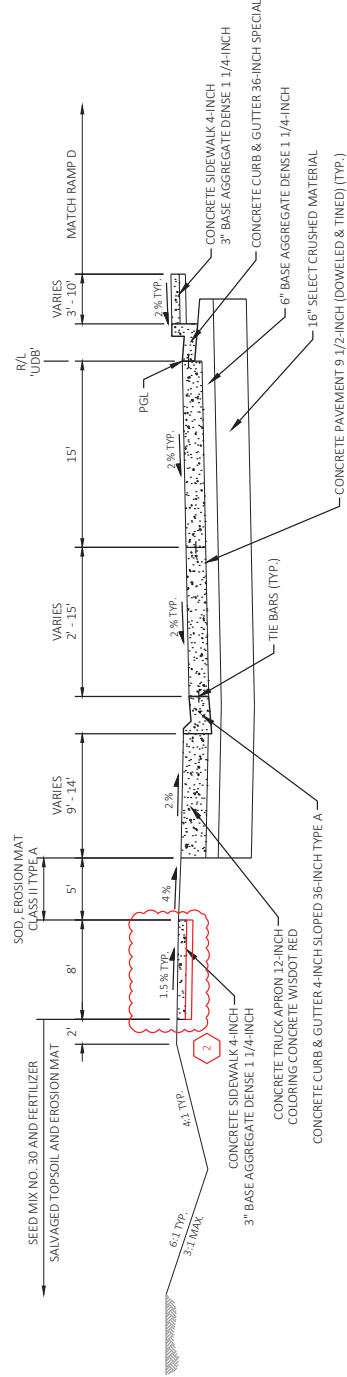


FINISHED TYPICAL SECTION - RAMP D BYPASS

STA. 1414'UD8+53.12 TO STA. 1415'UD8+06

**FOR AREAS REQUIRING GEOTEXTILE TYPE SAS AND/OR GEOGRID TYPE SR, SEE CONSTRUCTION DETAILS FOR FURTHER INFORMATION.

PROJECT NO: 1130-67-76	COUNTY: OUTAGAMIE & BROWN	TYPICAL FINISHED SECTIONS	SHEET 46	E
HWY: IH 41	FILE NAME: C:\USERS\DOTINGED\CAD\CDC03\WB07\113067\PROJECT FILES\DS6\113067\70\SH\1130-67-76\0402-TS.DWG	FLYBY: KL ENGINEERING	PLOT SCALE: 1 IN=30 FT	WB07\CAD\05 SHEET 42
LAYOUT NAME: _220	DATE: 6/30/2025 9:08 PM	DATE: 6/30/2025 9:08 PM	DATE: 6/30/2025 9:08 PM	DATE: 6/30/2025 9:08 PM

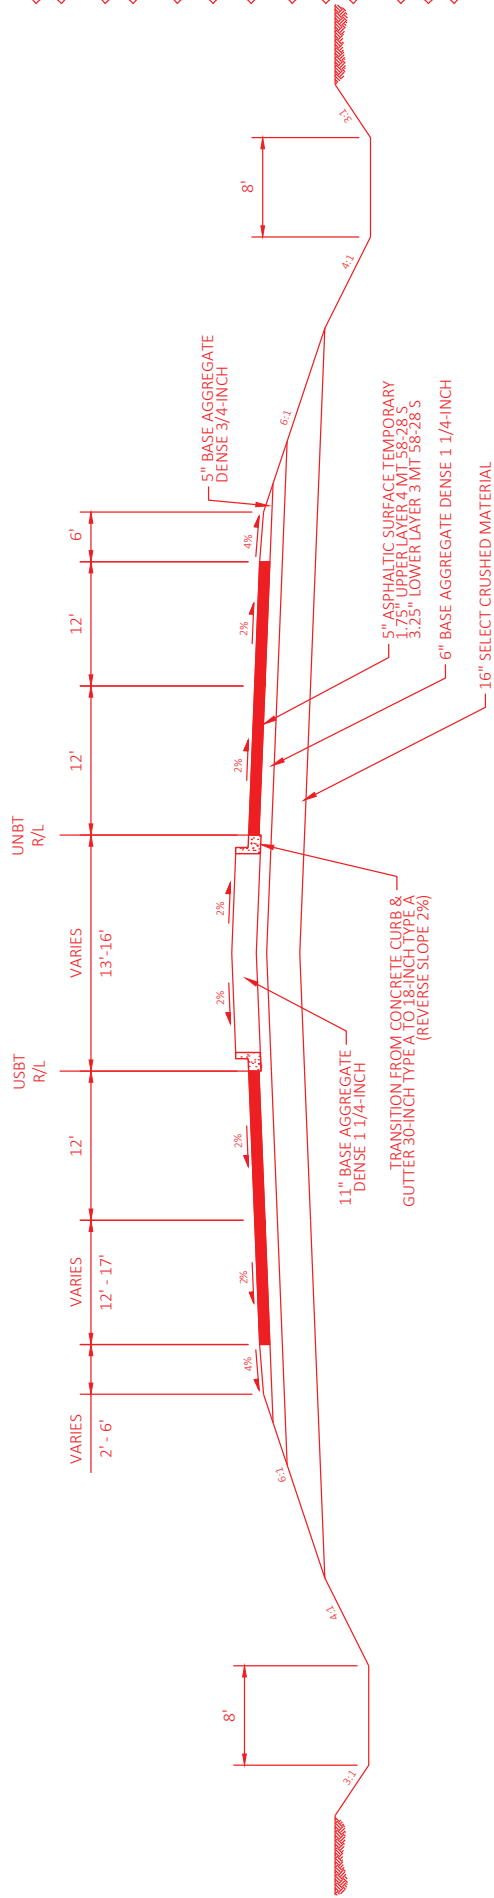


TEMPORARY TYPICAL SECTION CTH U

STAGE 2A
STA 117'UNBT'+53.38 TO STA 119'UNBT'+27.55
STA 117'USBT'+42.14 TO STA 119'USBT'+16.25




Addendum No. 02
ID 1130-67-72/76/86
Added Sheet 48A
July 2, 2025

Addendum No. 02
ID 1130-67-72/76/86
Deleted Sheet 53
July 2, 2025

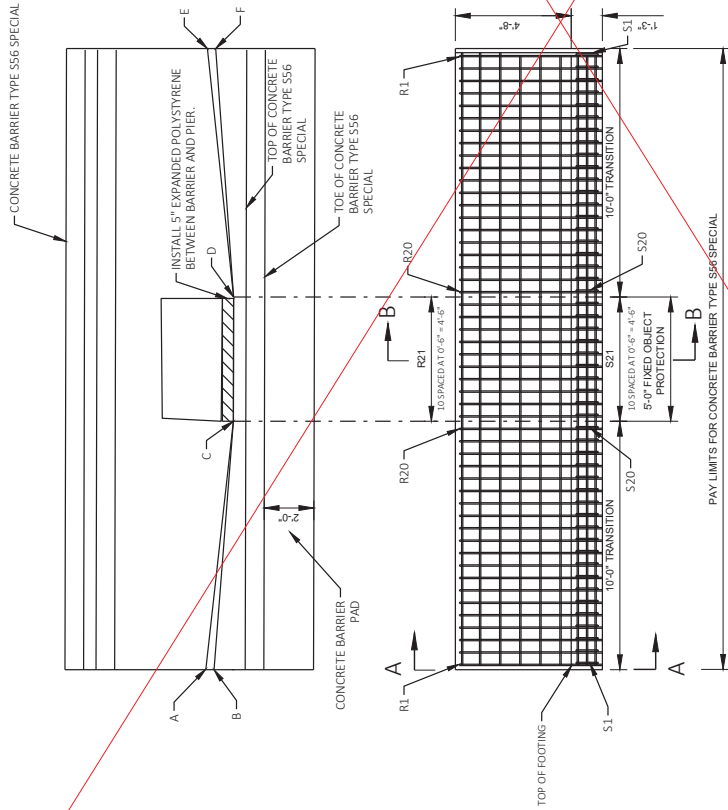

SECTION A-A

SECTION B-B

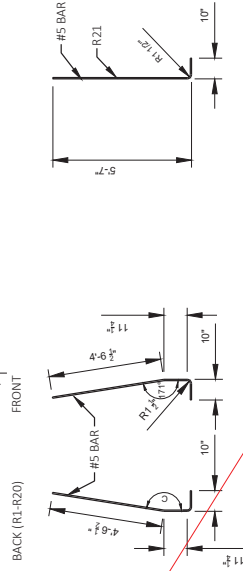

BAR POSITION	C
R12	175
R13	174
R14	174
R15	174
R16	173
R17	173
R18	172
R19	172
R20	171


BAR POSITION	C
R1	180
R2	179
R3	179
R4	178
R5	178
R6	177
R7	177
R8	176
R9	176
R10	176
R11	175

BAR POSITION	A	B
S12	2'-10 1/2"	5"
S13	2'-5 3/4"	5"
S14	2'-9"	5"
S15	2'-6 1/2"	5"
S16	2'-3 1/4"	5"
S17	2'-7"	5"
S18	2'-6 1/2"	5"
S19	2'-5 3/4"	5"
S20	2'-5"	5"

BAR POSITION	A	B
S1	3'-6"	5"
S2	3'-5 1/4"	5"
S3	3'-4 1/2"	5"
S4	3'-4"	5"
S5	3'-3 1/4"	5"
S6	3'-2 1/2"	5"
S7	3'-2 1/2"	5"
S8	3'-1 1/4"	5"
S9	3'-0 1/2"	5"
S10	3'-0"	5"
S11	2'-11 1/4"	5"

PAY LIMITS FOR CONCRETE BARRIER TYPE S56 SPECIAL

CONCRETE BARRIER FIXED OBJECT PROTECTION TYPE S56 SPECIAL


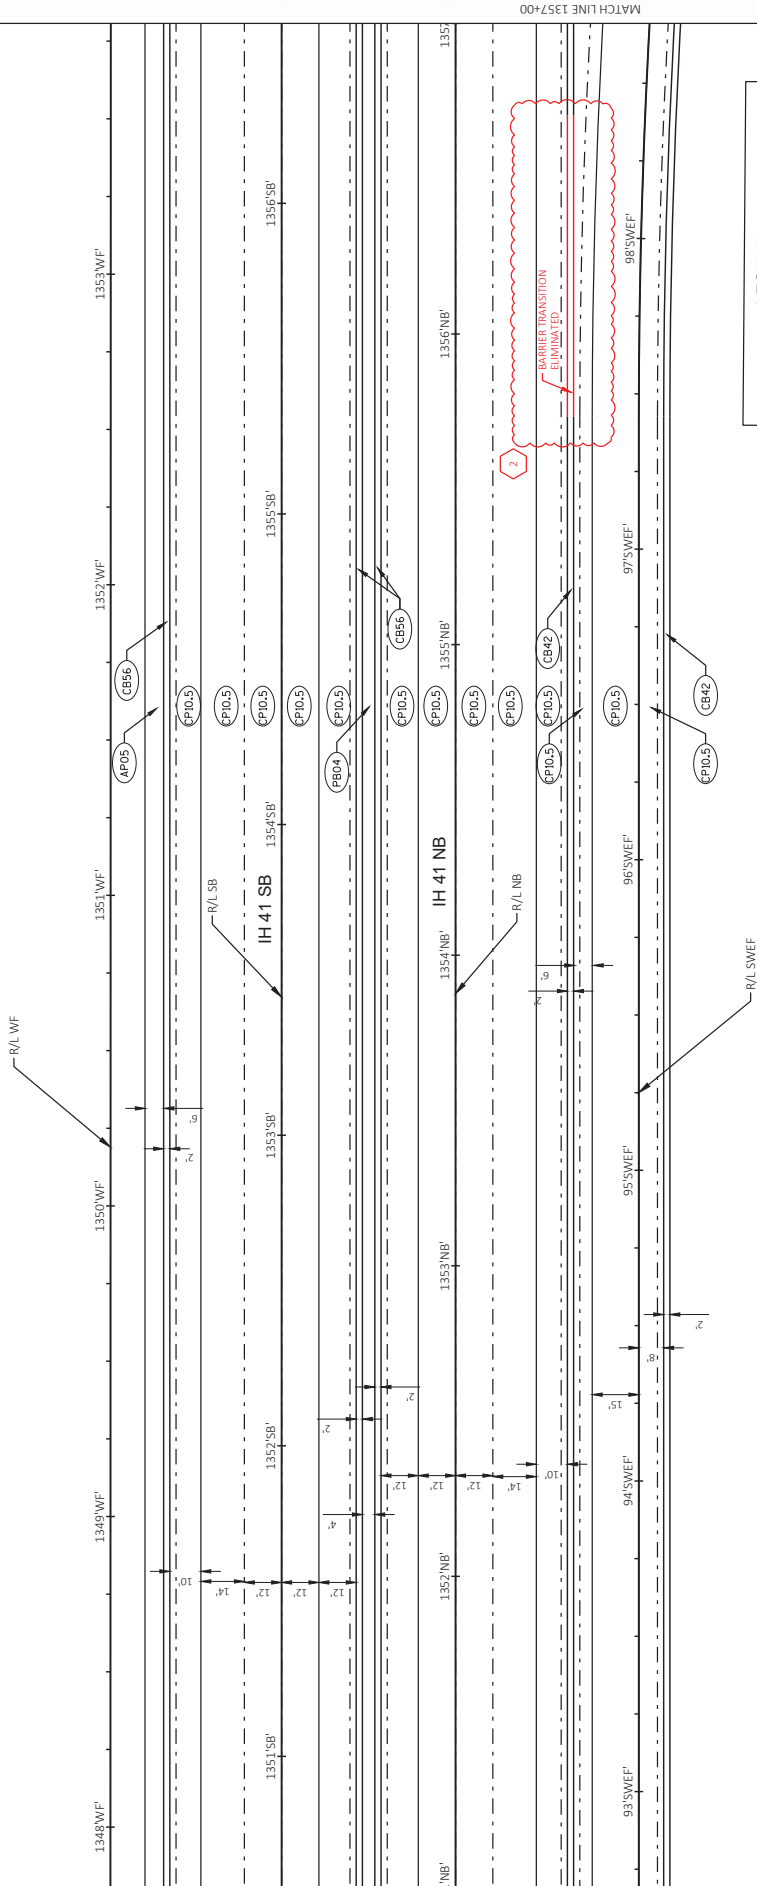


LEGEND

- (AG01) BASE AGGREGATE DENSE 3/4-INCH
- (AP05) HMA PAVEMENT 5-INCH
- (CB42) CONCRETE BARRIER TYPE 542 SPECIAL
- (CB56) CONCRETE BARRIER TYPE 556 SPECIAL
- (CP10.5) CONCRETE PAVEMENT 10 1/2-INCH SPECIAL
- (FB04) CONCRETE BASE 4-INCH

Addendum No. 02
ID 1130-67-72/76/86
Revised Sheet 186
July 2, 2025

Addendum No. 02
 ID 1130-67-72/76/86
 Revised Sheet 187
 July 2, 2025

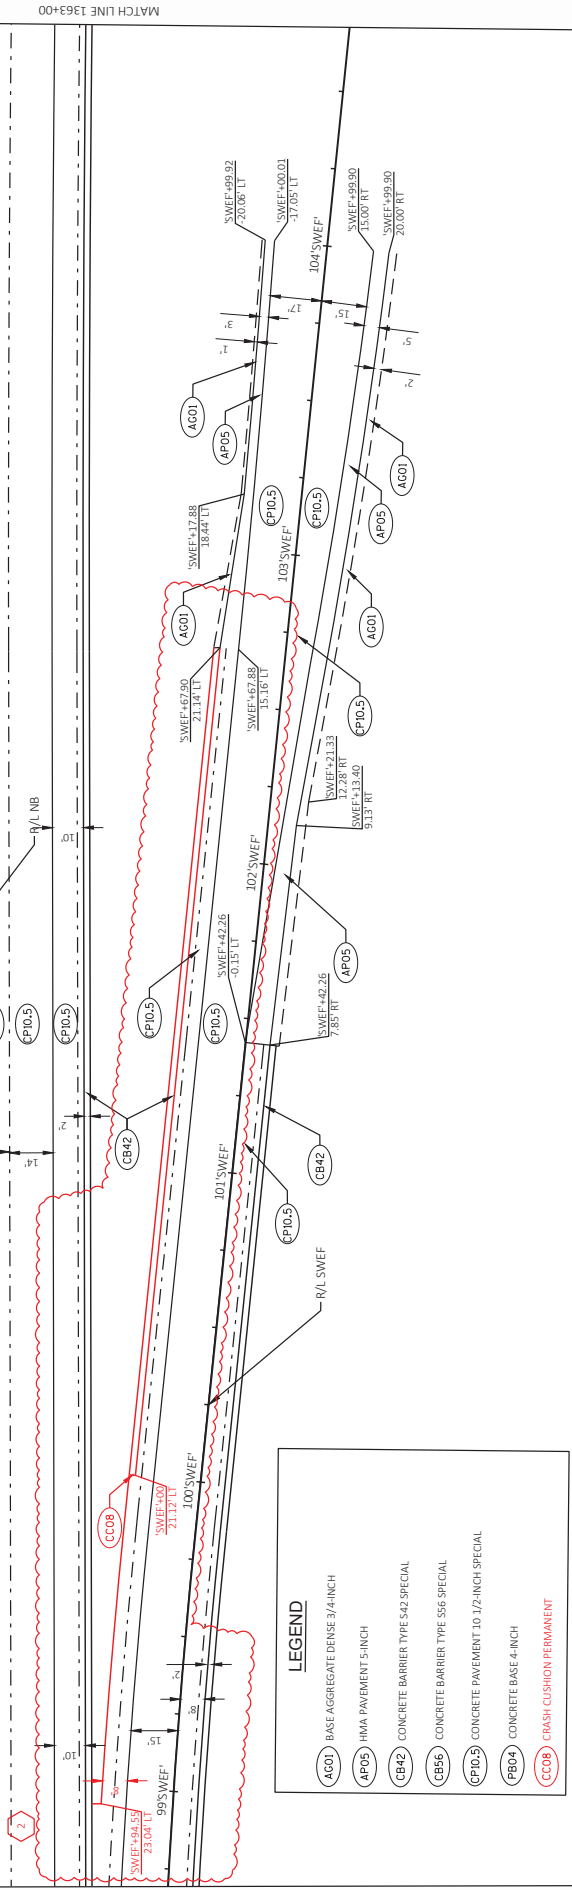

LEGEND

- (AG01) BASE AGGREGATE DENSE 3/4 INCH
- (AP05) HMA PAVEMENT 5 INCH
- (CB42) CONCRETE BARRIER TYPE S42 SPECIAL
- (CB56) CONCRETE BARRIER TYPE S56 SPECIAL
- (FP10.5) CONCRETE PAVEMENT 10 1/2 INCH SPECIAL
- (PB04) CONCRETE BASE 4 INCH
- (CC08) CRASH CUSHION PERMANENT

CONSTRUCTION STAGING 1130-67-72

STAGE 1A

- MAINTENANCE OF TRAFFIC
- IH 41 SR: NO LANES CLOSED. ALL TRAFFIC USES EXISTING TWO (2) LANES.
- IH 41 NB: NO LANES CLOSED. ALL TRAFFIC USES EXISTING TWO (2) LANES.
- IH 41 NB OVER CTH U: TRAFFIC SHIFTED TO TWO (2) 11-FT LANES ON OUTSIDE OF STRUCTURE
- IH 41 NB OVERNIGHT FULL CLOSURES) REQUIRED AS NEEDED FOR CULVERT CROSSING CONSTRUCTION
- IH 41 SR OVERNIGHT (INSIDE LANE CLOSURES) AS NEEDED FOR DEEP CROSSING CONSTRUCTION
- CTH JI & WRIGHTSTOWN RD: DEEP FULL CLOSURES) AS NEEDED FOR STRUCTURE WORK ABOVE

CONSTRUCTION TO BE COMPLETED

- TEMPORARY WIDEN NB OUTSIDE AROUND STRUCTURES
- TEMPORARY WIDEN B-44-072 & B-44-074
- BEGIN CONSTRUCTION OF MEDIAN HALF OF B-44-0345; WORK OVER WINTER AVAILABLE
- WRIGHTSTOWN RD: TEMPORARY WIDEN SHOULDERS BETWEEN FRONTAGE ROADS


WINTER SHUTDOWN

- FOLLOWING COMPLETION OF STAGE 1A
- ALL TRAFFIC REMAINS ON EXISTING TWO (2) LANES*
- *NOT OF B-44-160 (CTH U) REMAINS SAME DURING WINTER SHUTDOWN


LEGEND

- TEMPORARY PAVEMENT
- WORK ZONE
- FINISHED CONSTRUCTION
- CONCRETE BARRIER
- TEMPORARY PRECAST
- CONCRETE BARRIER
- TEMPORARY PRECAST
- (FROM A PREVIOUS STAGE)

Addendum No. 02
ID 1130-67-72/76/86
Revised Sheet 753
July 2, 2025

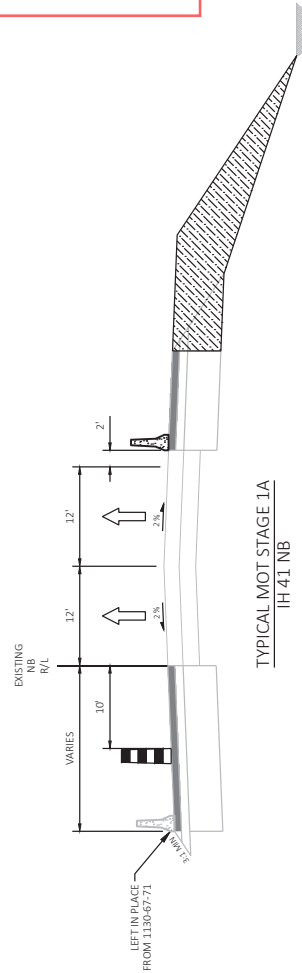


IH 41 NB OUTSIDE TEMPORARY WIDENING
 STA 1249' ENB +45 TO STA 1250' ENB +65
 STA 1250' ENB +65 TO STA 1251' ENB +85
 STA 1321' ENB +31 TO STA 1322' ENB +27
 STA 1323' ENB +42 TO STA 1324' ENB +32




TYPICAL MOT STAGE 1A
STRUCTURE B-44-072 & B-44-074

TEMPORARY STRUCTURE OUTSIDE WIDENING
 STA 1252' ENB +65 TO STA 1125' ENB +3
 STA 1322' ENB +27 TO STA 1323' ENB +42

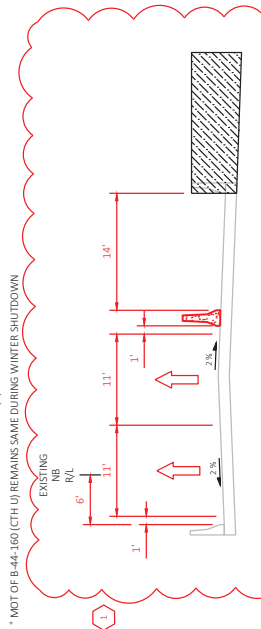

TYPICAL MOT STAGE 1A
STRUCTURES: B-44-072 & B-44-074


TEMPORARY STRUCTURE OUTSIDE WIDENING
 STA 1252' ENB +65 TO STA 1125' ENB +3
 STA 1322' ENB +27 TO STA 1323' ENB +42

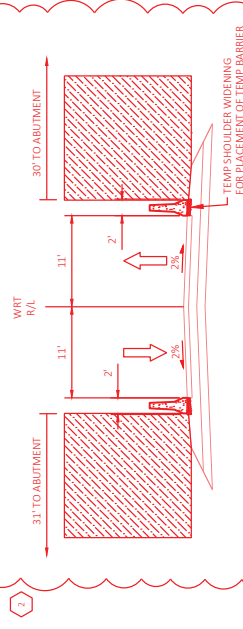

TYPICAL MOT STAGE 1A & WINTER SHUTDOWN
WRIGHTSTOWN RD


STAGE 1A: TEMPORARY WIDENING OF WRIGHTSTOWN RD SHOULDER

TEMPORARY WIDENING OF B-44-074

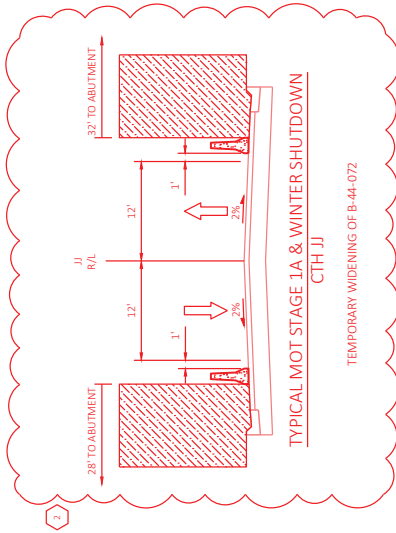

TYPICAL MOT STAGE 1A & WINTER SHUTDOWN
CTH JJ

TEMPORARY WIDENING OF B-44-072



TYPICAL MOT STAGE 1A
WINTER SHUTDOWN

STRUCTURES: B-44-072 & B-44-074

CONSTRUCTION STAGING 1130-67-72

STAGES 2A & 2B

- MAINTENANCE OF TRAFFIC (2A & 2B)
- IH 41 SB/NB TWO LANE BI-DIRECTIONAL TRAFFIC ON IH 41 NB LANES/WIDENING
- NB TRAFFIC USES FRONTAGE ROAD CROSSOVER OVER APPLE CREEK
- SB TRAFFIC ON EXISTING NB LANES OVER APPLE CREEK
- FRENCHED, CLOSED TO ALL TRAFFIC FROM CTH DDD-APPLE CREEK ROAD
- CTH JJ & WRIGHTSTOWN RD CLOSURE REACTUAL CLOSURES AS NEEDED FOR STRUCTURE WORK ABOVE

CONSTRUCTION TO BE COMPLETED (2A)


- PROPOSED SB LANES
- IH 41 SB STRUCTURES B-44-0342, B-44-0344, B-44-0346, B-05-0694

CONSTRUCTION TO BE COMPLETED (2B)


- COMPLETE PROPOSED SB IN GAPS AROUND CTH U RAMP

LEGEND

- TEMPORARY PAVEMENT
- WORK ZONE
- FINISHED CONSTRUCTION
- CONCRETE BARRIER
- CONCRETE BARRIER TEMPORARY PRECAST
- CONCRETE BARRIER TEMPORARY PRECAST (FROM A PREVIOUS STAGE)

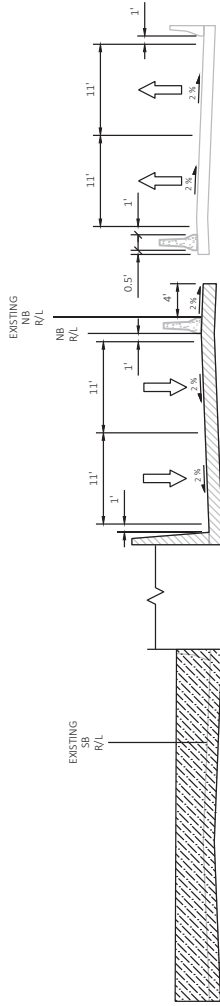


TYPICAL MOT STAGE 2A & 2B
STRUCTURE B-44-0345: IH 41 SB TRAFFIC
STRUCTURE B-44-160: IH 41 NB TRAFFIC
STAGE 2A: CONSTRUCTION OF B-44-0346

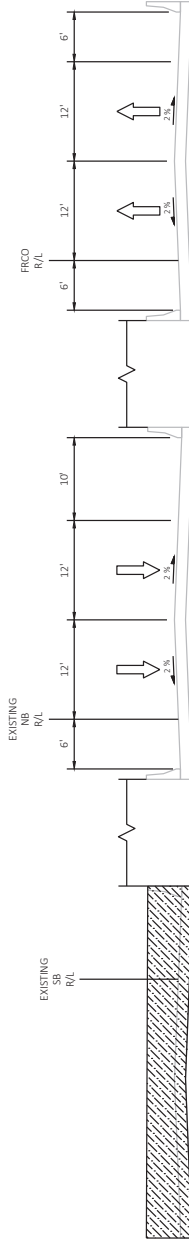


TYPICAL MOT STAGE 2A & 2B
STRUCTURE B-05-053: IH 41 SB TRAFFIC
STRUCTURE B-05-306: IH 41 NB TRAFFIC

STAGE 2A: CONSTRUCTION OF B-05-0694

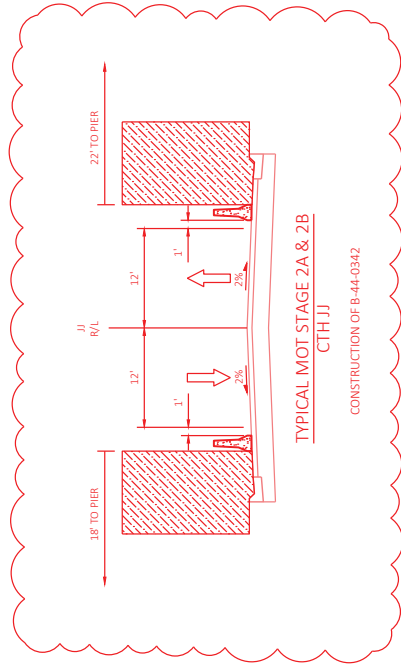

TYPICAL MOT STAGE 2A & 2B
CTH JJ
CONSTRUCTION OF B-44-0342

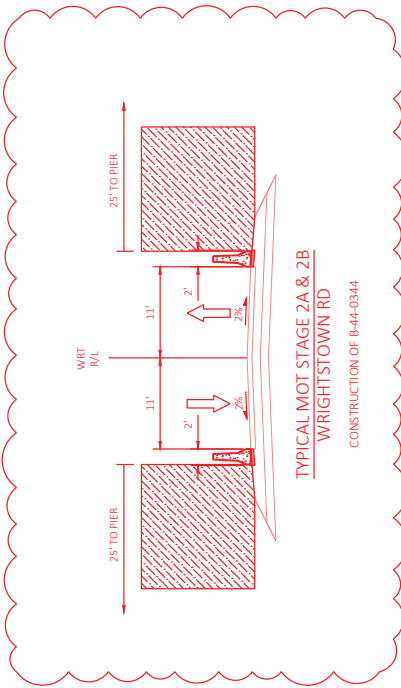

TYPICAL MOT STAGE 2A & 2B
WRIGHTSTOWN RD
CONSTRUCTION OF B-44-0344

Addendum No. 02
ID 1130-67-72/76/86
Revised Sheet 757
July 2, 2025

CONSTRUCTION STAGING 1130-67-72

STAGES 3A & 3B


- MAINTENANCE OF TRAFFIC (3A & 3B)
- IH 41 SB/NB: TWO LANE BI-DIRECTIONAL TRAFFIC ON FINISHED IH 41 SB
- CTH JJ: OFF-PEAK FULL CLOSURES AS NEEDED FOR STRUCTURE WORK ABOVE
- STAGE 3A WRIGHTSTOWN ROAD/ADJACENT FRONTAGE ROADS: FULL CLOSURES IN 2 PHASES
- STAGE 3B WRIGHTSTOWN ROAD: OFF-PEAK FULL CLOSURES AS NEEDED FOR STRUCTURE WORK ABOVE

CONSTRUCTION TO BE COMPLETED (3A)

- PROPOSED NB LANES
- TEMPORARY PAVEMENT REMOVAL
- IH 41 NB STRUCTURES: B-44-0341, B-44-0343, B-44-0345, B-05-0695
- WRIGHTSTOWN ROAD/ADJACENT FRONTAGE ROAD RECONSTRUCTION: 2 PHASES
- CONSTRUCTION TO BE COMPLETED (3B)
- COMPLETE PROPOSED NB IN GAPS AROUND CTH U RAMP
- COMPLETE CTH U RAMP AND ROUNDABOUTS

LEGEND

- TEMPORARY PAVEMENT
- WORK ZONE
- FINISHED CONSTRUCTION
- CONCRETE BARRIER
- TEMPORARY PRECAST
- CONCRETE BARRIER
- TEMPORARY PRECAST (FROM A PREVIOUS STAGE)


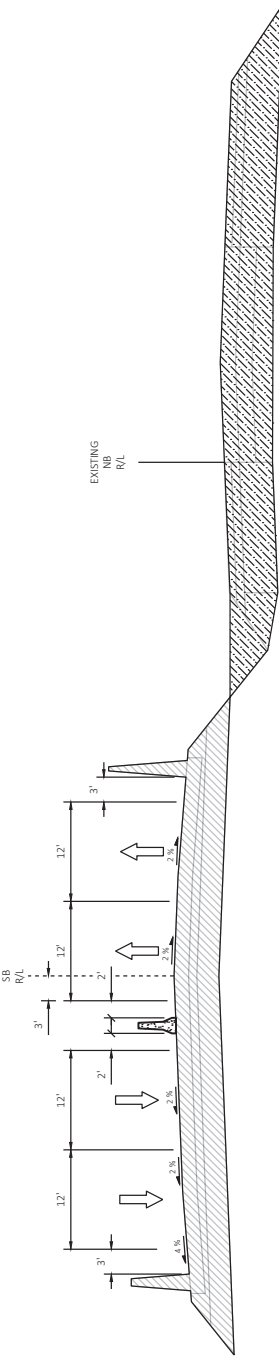


TYPICAL MOT STAGE 3A & 3B

IH 41 SB: BI-DIRECTIONAL TRAFFIC

- STAGE 3A: PROPOSED NB
 - STA 1243 NB+00 TO STA 1250 NB+00
 - STA 1257 NB+26 TO STA 1327 NB+72
 - STA 1332 NB+72 TO STA 1337 NB+72
 - STA 1428 NB+33 TO STA 1436 NB+18
 - STA 1437 NB+80 TO STA 1472 NB+00
- STAGE 3B: TEMP PAVEMENT REMOVAL
 - STA 1234 NB+69 TO STA 1243 NB+00
 - STA 1405 NB+26 TO STA 1426 NB+36
 - STA 1472 NB+00 TO STA 1489 NB+37
- STAGE 3B: PROPOSED NB (RAMP GAPS)
 - STA 1383 NB+84 TO STA 1409 NB+99
 - STA 1412 NB+10 TO STA 1434 NB+94

Addendum No. 02
ID 1130-67-72/76/86
Revised Sheet 762
July 2, 2025

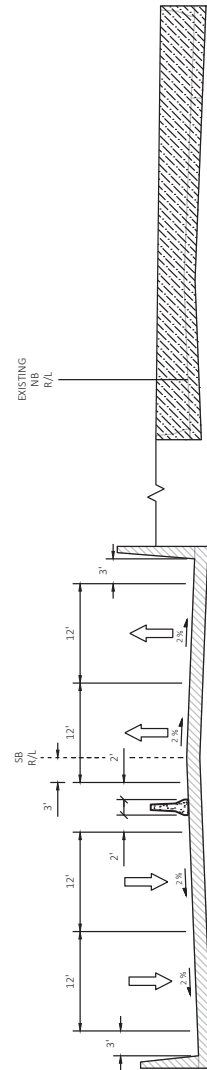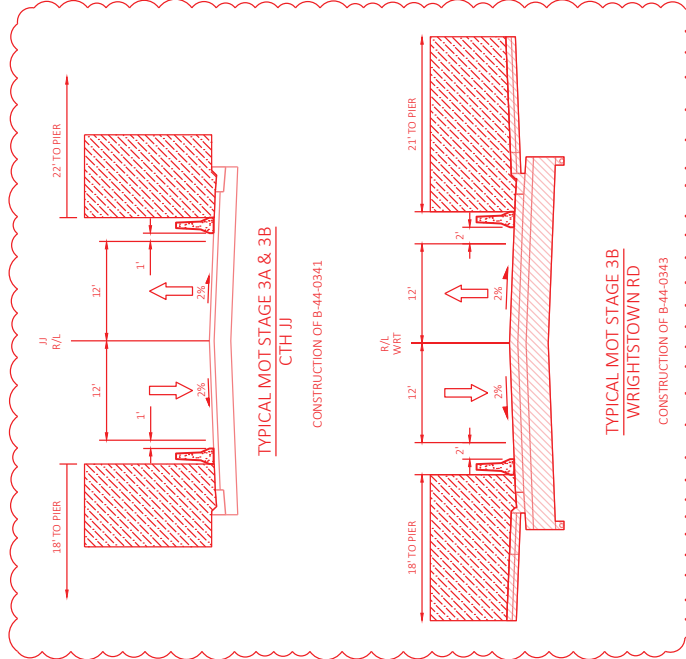

TYPICAL MOT STAGE 3A & 3B
STRUCTURES B-44-0342, B-44-0344, B-44-0346, & B-05-0694:
BI-DIRECTIONAL TRAFFIC

- STAGE 3A: CONSTRUCTION OF STRUCTURES B-44-0341, B-44-0343, B-44-0345 (STAGE 3 ONLY) & B-05-0695

PROJECT NO: 1130-67-72

HWY: IH 41

COUNTY: OUTAGAMIE & BROWN

TRAFFIC CONTROL TYPICAL SECTIONS - STAGES 3A & 3B

SHEET 762

E


FILE NAME: C:\USERS\DOTINGED\CAD\CDCS\WIB071130630\PROJECT FILES\DS6\113067\03100...STG_4_1\15.DWG LAYOUT NAME: 01

PLOT DATE: 6/30/2025 11:08 AM

PLOT BY: ECK, KAMILYN GRACE

PLOT SCALE: 1:15

WISDOT/CAD/03/SHEET 42

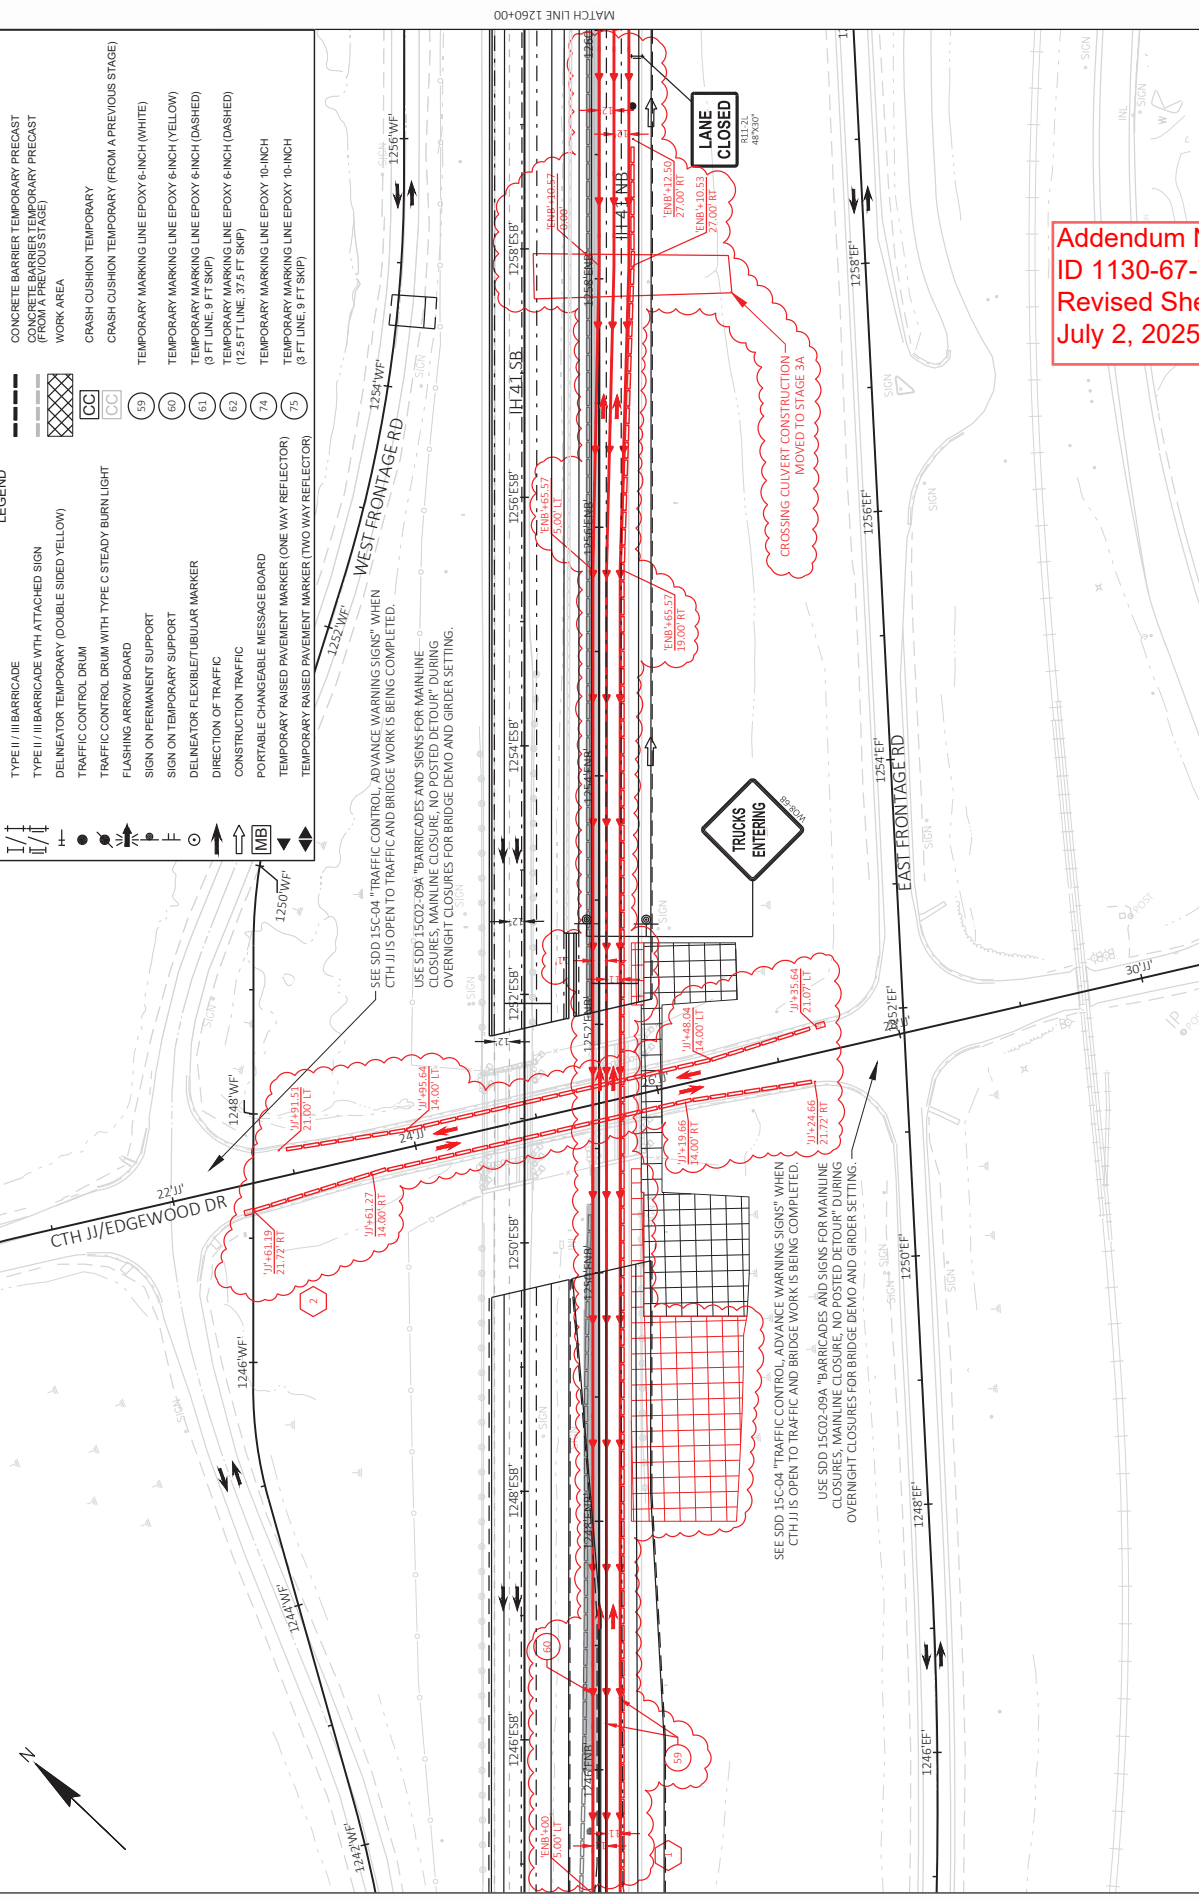

LEGEND

	TYPE II / III BARRICADE
	TYPE II / III BARRICADE WITH ATTACHED SIGN
	DELINEATOR TEMPORARY (DOUBLE SIDED YELLOW)
	TRAFFIC CONTROL DRUM
	TRAFFIC CONTROL DRUM WITH TYPE C STEADY BURN LIGHT
	FLASHING ARROW BOARD
	SIGN ON TEMPORARY SUPPORT
	DELINEATOR FLEXIBLE/TUBULAR MARKER
	DIRECTION OF TRAFFIC
	PORTABLE CHANGEABLE MESSAGE BOARD
	TEMPORARY RAISED PAVEMENT MARKER (ONE WAY REFLECTOR)
	TEMPORARY RAISED PAVEMENT MARKER (TWO WAY REFLECTOR)

- 59 (74) TEMPORARY MARKING LINE EPOXY 6-INCH (WHITE)
- 60 (74) TEMPORARY MARKING LINE EPOXY 6-INCH (YELLOW)
- 61 (74) TEMPORARY MARKING LINE EPOXY 6-INCH (DASHED) (3 FT LINE, 9 FT SKIP)
- 62 (74) TEMPORARY MARKING LINE EPOXY 6-INCH (DASHED) (12.5 FT LINE, 37.5 FT SKIP)
- 74 (75) TEMPORARY MARKING LINE EPOXY 10-INCH (3 FT LINE, 9 FT SKIP)
- 75 (75) TEMPORARY MARKING LINE EPOXY 10-INCH (3 FT LINE, 9 FT SKIP)

SEE SDD 15C04 "TRAFFIC CONTROL, ADVANCE WARNING SIGNS" WHEN CTH J11 IS OPEN TO TRAFFIC AND BRIDGE WORK IS BEING COMPLETED.


USE SDD 15C02-09A "BARRICADES AND SIGNS FOR MAINLINE CLOSURES, MAINLINE CLOSURE, NO POSTED DETOUR" DURING OVERNIGHT CLOSURES FOR BRIDGE DEMO AND GIRDER SETTING.

SEE SDD 15C04 "TRAFFIC CONTROL, ADVANCE WARNING SIGNS" WHEN CTH J11 IS OPEN TO TRAFFIC AND BRIDGE WORK IS BEING COMPLETED.

USE SDD 15C02-09A "BARRICADES AND SIGNS FOR MAINLINE CLOSURES, MAINLINE CLOSURE, NO POSTED DETOUR" DURING OVERNIGHT CLOSURES FOR BRIDGE DEMO AND GIRDER SETTING.

Addendum No. 02
ID 1130-67-72/76/86
Revised Sheet 776
July 2, 2025

Addendum No. 02
 ID 1130-67-72/76/86
 Revised Sheet 781
 July 2, 2025

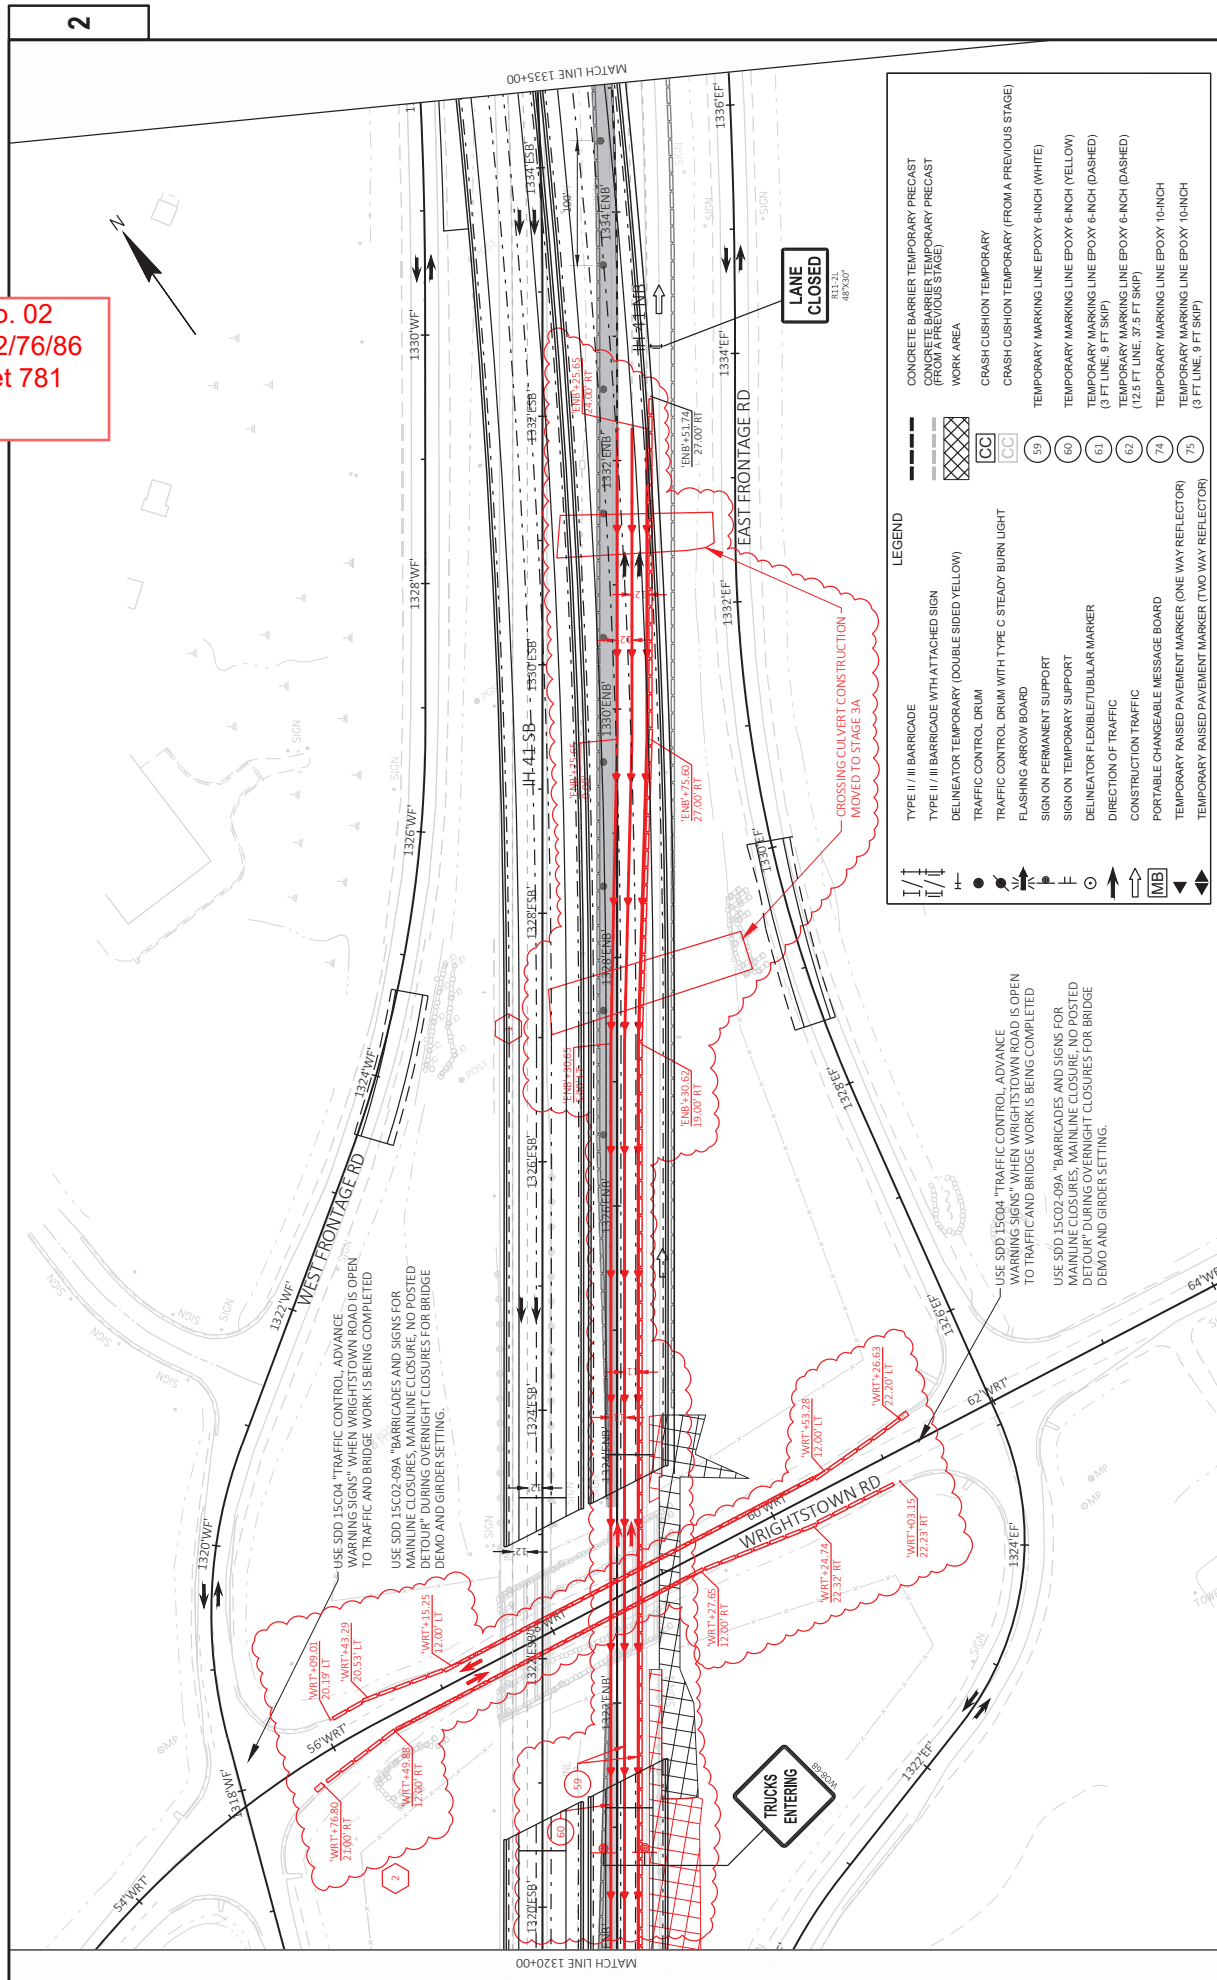

LEGEND

	TYPE II / III BARRICADE		CONCRETE BARRIER TEMPORARY PRECAST (FROM A PREVIOUS STAGE)
	TYPE II / III BARRICADE WITH ATTACHED SIGN		CRASH CUSHION TEMPORARY
	DELINEATOR TEMPORARY (DOUBLE SIDED YELLOW)		CRASH CUSHION TEMPORARY (FROM A PREVIOUS STAGE)
	TRAFFIC CONTROL DRUM		TEMPORARY MARKING LINE EPOXY 6-INCH (WHITE)
	TRAFFIC CONTROL DRUM WITH TYPE C STEADY BURN LIGHT		TEMPORARY MARKING LINE EPOXY 6-INCH (YELLOW)
	FLASHING ARROW BOARD		TEMPORARY MARKING LINE EPOXY 6-INCH (DASHED)
	SIGN ON PERMANENT SUPPORT		TEMPORARY MARKING LINE EPOXY 9 FT SKIP
	SIGN ON TEMPORARY SUPPORT		TEMPORARY MARKING LINE EPOXY 6-INCH (DASHED)
	DELINEATOR FLEXIBLE/TUBULAR MARKER		TEMPORARY MARKING LINE EPOXY 12.5 FT SKIP
	DIRECTION OF TRAFFIC		TEMPORARY MARKING LINE EPOXY 10-INCH
	CONSTRUCTION TRAFFIC		TEMPORARY MARKING LINE EPOXY 9 FT SKIP
	PORTABLE CHANGEABLE MESSAGE BOARD		
	TEMPORARY RAISED PAVEMENT MARKER (ONE WAY REFLECTOR)		
	TEMPORARY RAISED PAVEMENT MARKER (TWO WAY REFLECTOR)		

USE SDD 15C04 "TRAFFIC CONTROL, ADVANCE WARNING SIGNS" WHEN WRIGHTSTOWN ROAD IS OPEN TO TRAFFIC AND BRIDGE WORK IS BEING COMPLETED.


USE SDD 15C02-09A "BARRICADES AND SIGNS FOR MAINLINE CLOSURES, MAINLINE CLOSURE, NO POSTED DETOUR" DURING OVERNIGHT CLOSURES FOR BRIDGE DEMO AND GIRDER SETTING.

USE SDD 15C04 "TRAFFIC CONTROL, ADVANCE WARNING SIGNS" WHEN WRIGHTSTOWN ROAD IS OPEN TO TRAFFIC AND BRIDGE WORK IS BEING COMPLETED.


USE SDD 15C02-09A "BARRICADES AND SIGNS FOR MAINLINE CLOSURES, MAINLINE CLOSURE, NO POSTED DETOUR" DURING OVERNIGHT CLOSURES FOR BRIDGE DEMO AND GIRDER SETTING.

Addendum No. 02
ID 1130-67-72/76/86
Revised Sheet 795
July 2, 2025

LEGEND	
	TYPE II / III BARRICADE
	TYPE II / III BARRICADE WITH ATTACHED SIGN
	DELINATOR TEMPORARY (DOUBLE SIDED YELLOW)
	TRAFFIC CONTROL DRUM
	TRAFFIC CONTROL DRUM WITH TYPE C STEADY BURN LIGHT
	FLASHING ARROW BOARD
	SIGN ON PERMANENT SUPPORT
	SIGN ON TEMPORARY SUPPORT
	DELINATOR FLEXIBLE/TUBULAR MARKER
	DIRECTION OF TRAFFIC
	CONSTRUCTION TRAFFIC
	PORTABLE CHANGEABLE MESSAGE BOARD
	TEMPORARY RAISED PAVEMENT MARKER (ONE WAY REFLECTOR)
	TEMPORARY RAISED PAVEMENT MARKER (TWO WAY REFLECTOR)
	CONCRETE BARRIER TEMPORARY PRECAST
	CONCRETE BARRIER TEMPORARY PRECAST (FROM A PREVIOUS STAGE)
	WORK AREA
	CRASH CUSHION TEMPORARY
	CRASH CUSHION TEMPORARY (FROM A PREVIOUS STAGE)
	TEMPORARY MARKING LINE PAINT 6-INCH (WHITE)
	TEMPORARY MARKING LINE PAINT 6-INCH (YELLOW)
	TEMPORARY MARKING LINE PAINT 6-INCH (DASHED)
	TEMPORARY MARKING LINE PAINT 6-INCH (DASHED) (3 FT LINE, 9 FT SKIP)
	TEMPORARY MARKING LINE PAINT 6-INCH (DASHED) (12.5 FT LINE, 37.5 FT SKIP)
	TEMPORARY MARKING LINE PAINT 10-INCH
	TEMPORARY MARKING LINE PAINT 10-INCH (3 FT LINE, 9 FT SKIP)

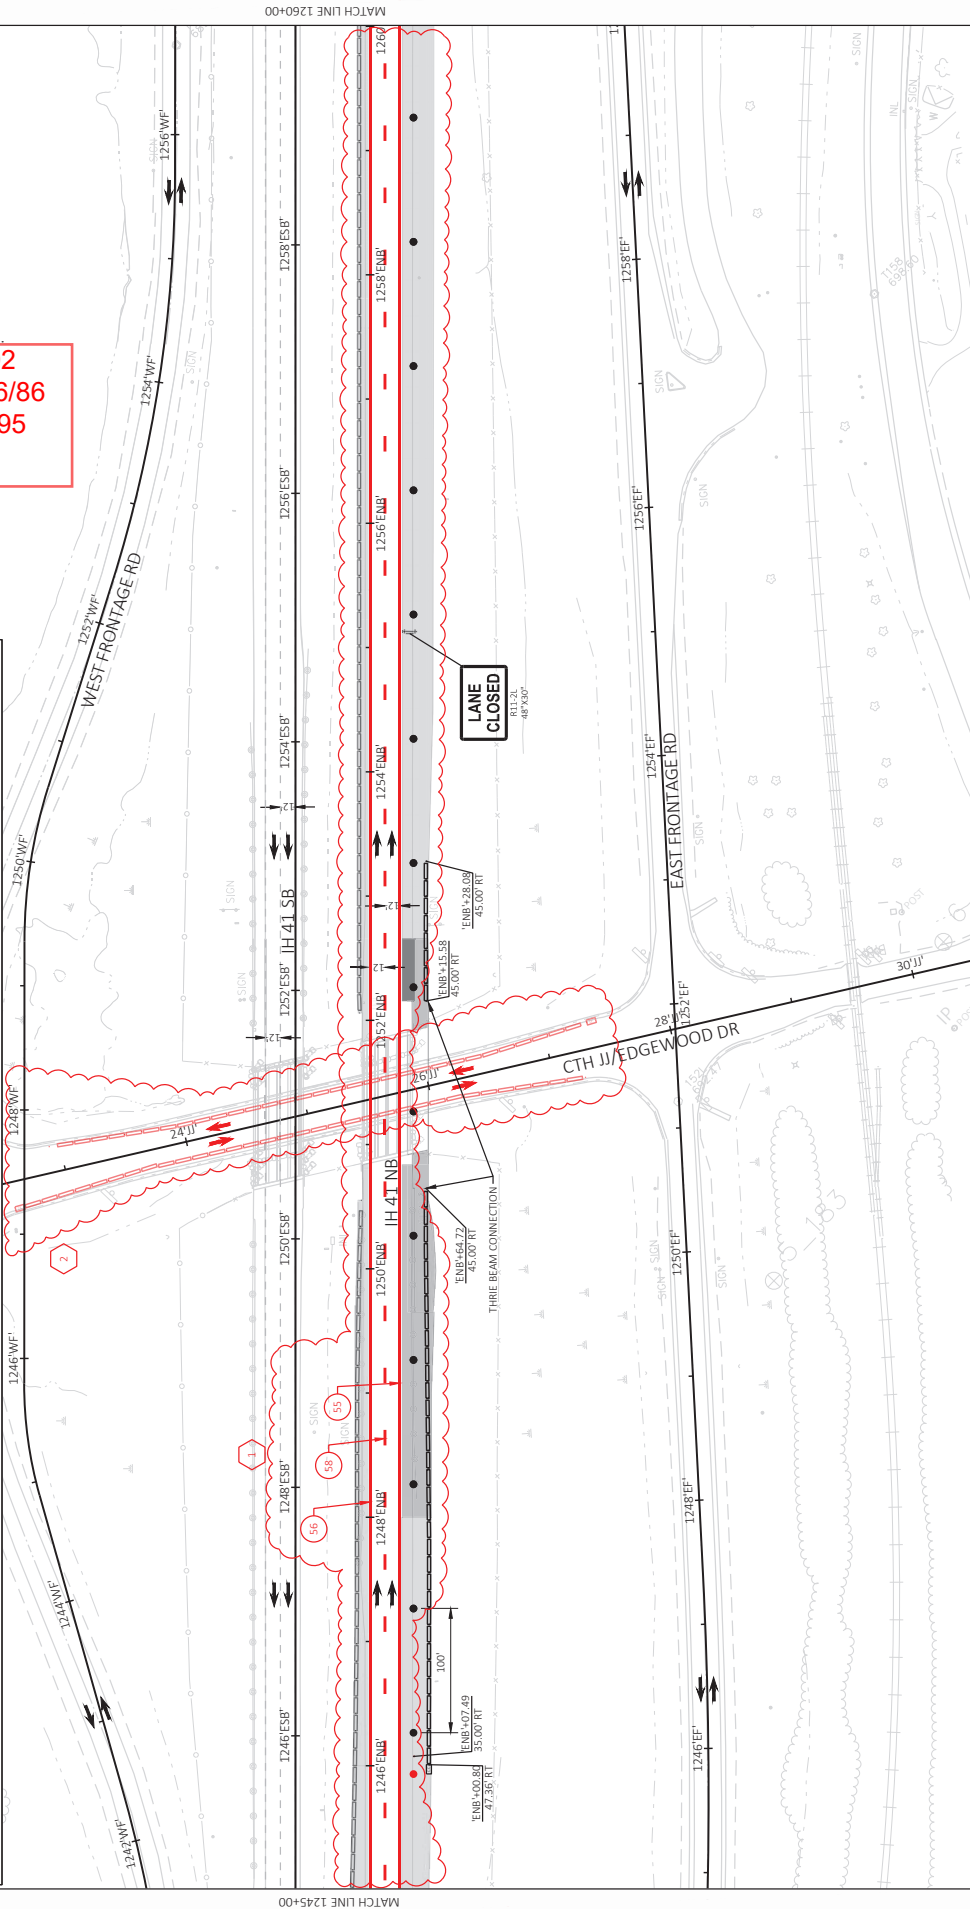


Addendum No. 02
ID 1130-67-72/76/86
Revised Sheet 800
July 2, 2025

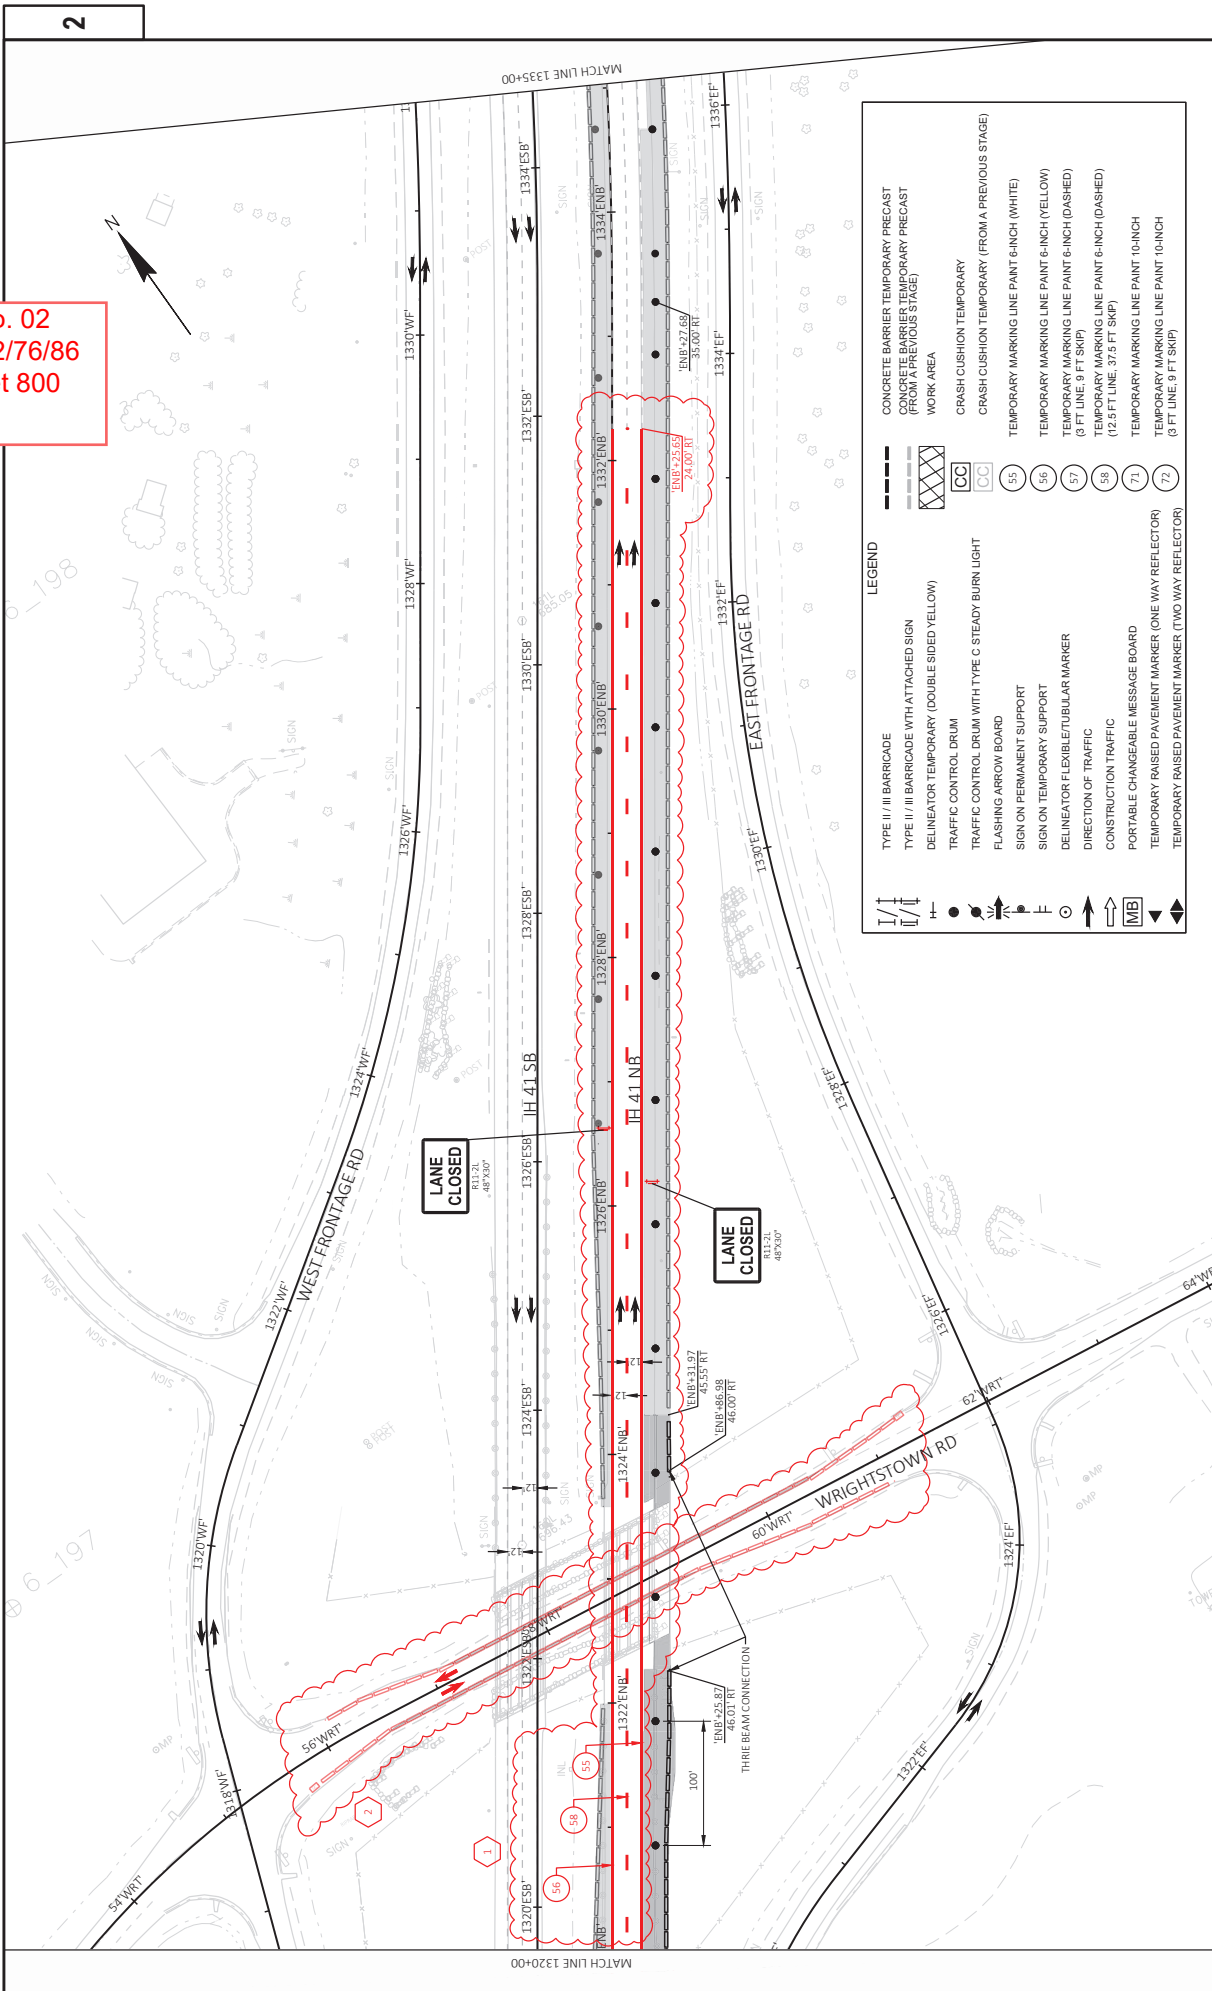

LEGEND

	TYPE II / III BARRICADE		CONCRETE BARRIER TEMPORARY PRECAST
	TYPE II / III BARRICADE WITH ATTACHED SIGN		CONCRETE BARRIER TEMPORARY PRECAST (FROM A PREVIOUS STAGE)
	DELINATOR TEMPORARY (DOUBLE SIDED YELLOW)		WORK AREA
	TRAFFIC CONTROL DRUM		CRASH CUSHION TEMPORARY
	TRAFFIC CONTROL DRUM WITH TYPE C STEADY BURN LIGHT		TEMPORARY MARKING LINE PAINT 6-INCH (WHITE)
	FLASHING ARROW BOARD		TEMPORARY MARKING LINE PAINT 6-INCH (YELLOW)
	SIGN ON PERMANENT SUPPORT		TEMPORARY MARKING LINE PAINT 6-INCH (DASHED)
	SIGN ON TEMPORARY SUPPORT		TEMPORARY MARKING LINE PAINT 6-INCH (DASHED)
	DELINATOR FLEXIBLE/TUBULAR MARKER		TEMPORARY MARKING LINE PAINT 10-INCH
	DIRECTION OF TRAFFIC		TEMPORARY MARKING LINE PAINT 10-INCH
	CONSTRUCTION TRAFFIC		TEMPORARY MARKING LINE PAINT 10-INCH
	PORTABLE CHANGEABLE MESSAGE BOARD		TEMPORARY MARKING LINE PAINT 10-INCH
	TEMPORARY RAISED PAVEMENT MARKER (ONE WAY REFLECTOR)		TEMPORARY MARKING LINE PAINT 10-INCH
	TEMPORARY RAISED PAVEMENT MARKER (TWO WAY REFLECTOR)		

Addendum No. 02
 ID 1130-67-72/76/86
 Revised Sheet 814
 July 2, 2025

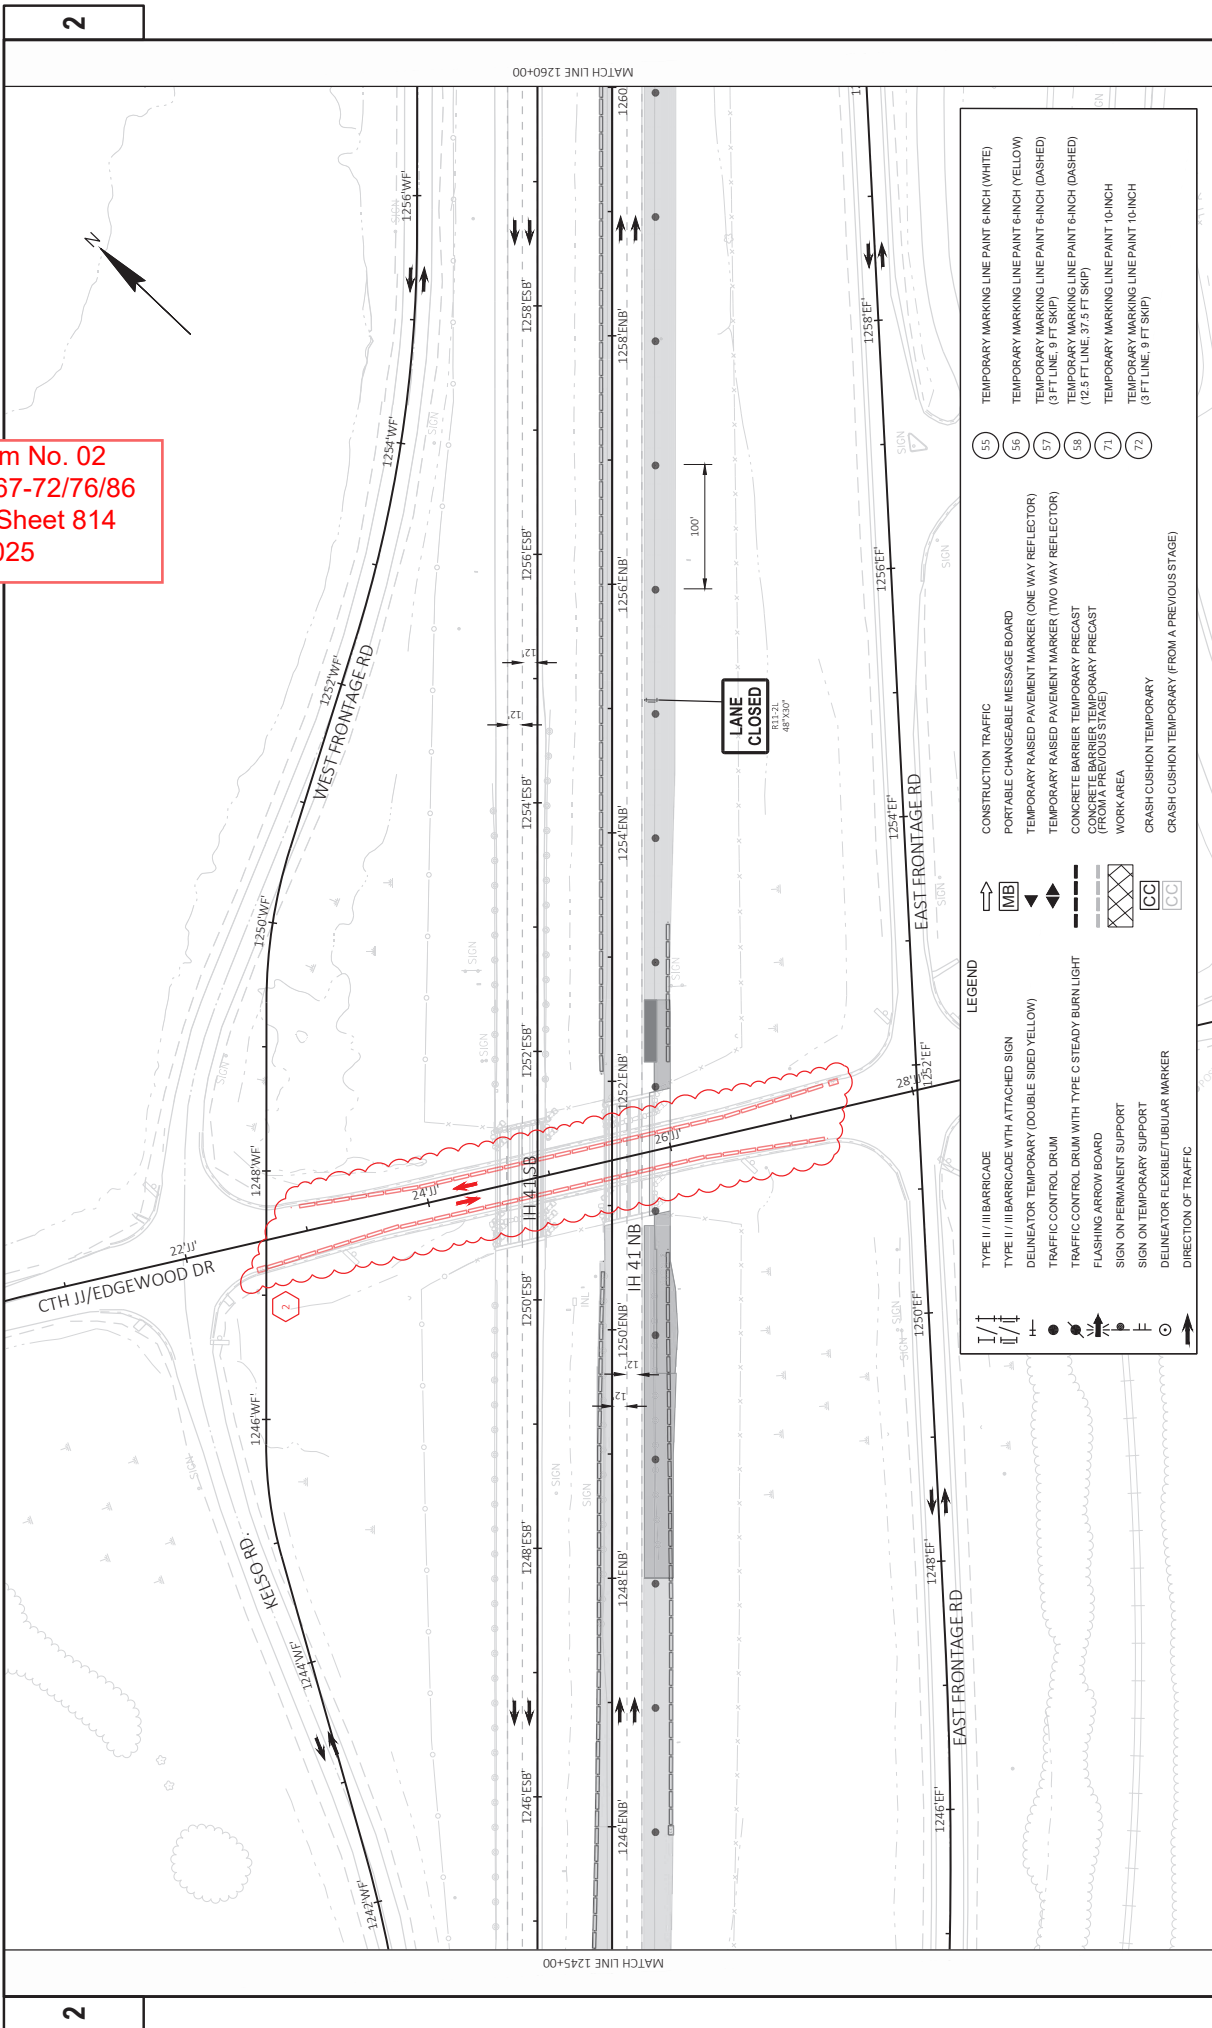


LEGEND

	TYPE II / III BARRICADE WITH ATTACHED SIGN		CONSTRUCTION TRAFFIC
	DEINEATOR TEMPORARY (DOUBLE SIDED YELLOW)		PORTABLE CHANGEABLE MESSAGE BOARD
	TRAFFIC CONTROL DRUM		TEMPORARY RAISED PAVEMENT MARKER (ONE WAY REFLECTOR)
	TRAFFIC CONTROL DRUM WITH TYPE C STEADY BURN LIGHT		TEMPORARY RAISED PAVEMENT MARKER (TWO WAY REFLECTOR)
	FLASHING ARROW BOARD		CONCRETE BARRIER TEMPORARY PRECAST (FROM A PREVIOUS STAGE)
	SIGN ON PERMANENT SUPPORT		WORK AREA
	SIGN ON TEMPORARY SUPPORT		CRASH CUSHION TEMPORARY
	DEINEATOR FLEXIBLE/TUBULAR MARKER		CRASH CUSHION TEMPORARY (FROM A PREVIOUS STAGE)
	DIRECTION OF TRAFFIC		


	TEMPORARY MARKING LINE PAINT 6 INCH (WHITE)
	TEMPORARY MARKING LINE PAINT 6 INCH (YELLOW)
	TEMPORARY MARKING LINE PAINT 6 INCH (DASHED) (3 FT LINE, 8 FT SKIP)
	TEMPORARY MARKING LINE PAINT 6 INCH (DASHED) (12.5 FT LINE, 37.5 FT SKIP)
	TEMPORARY MARKING LINE PAINT 10 INCH (3 FT LINE, 8 FT SKIP)

Addendum No. 02
 ID 1130-67-72/76/86
 Revised Sheet 819
 July 2, 2025

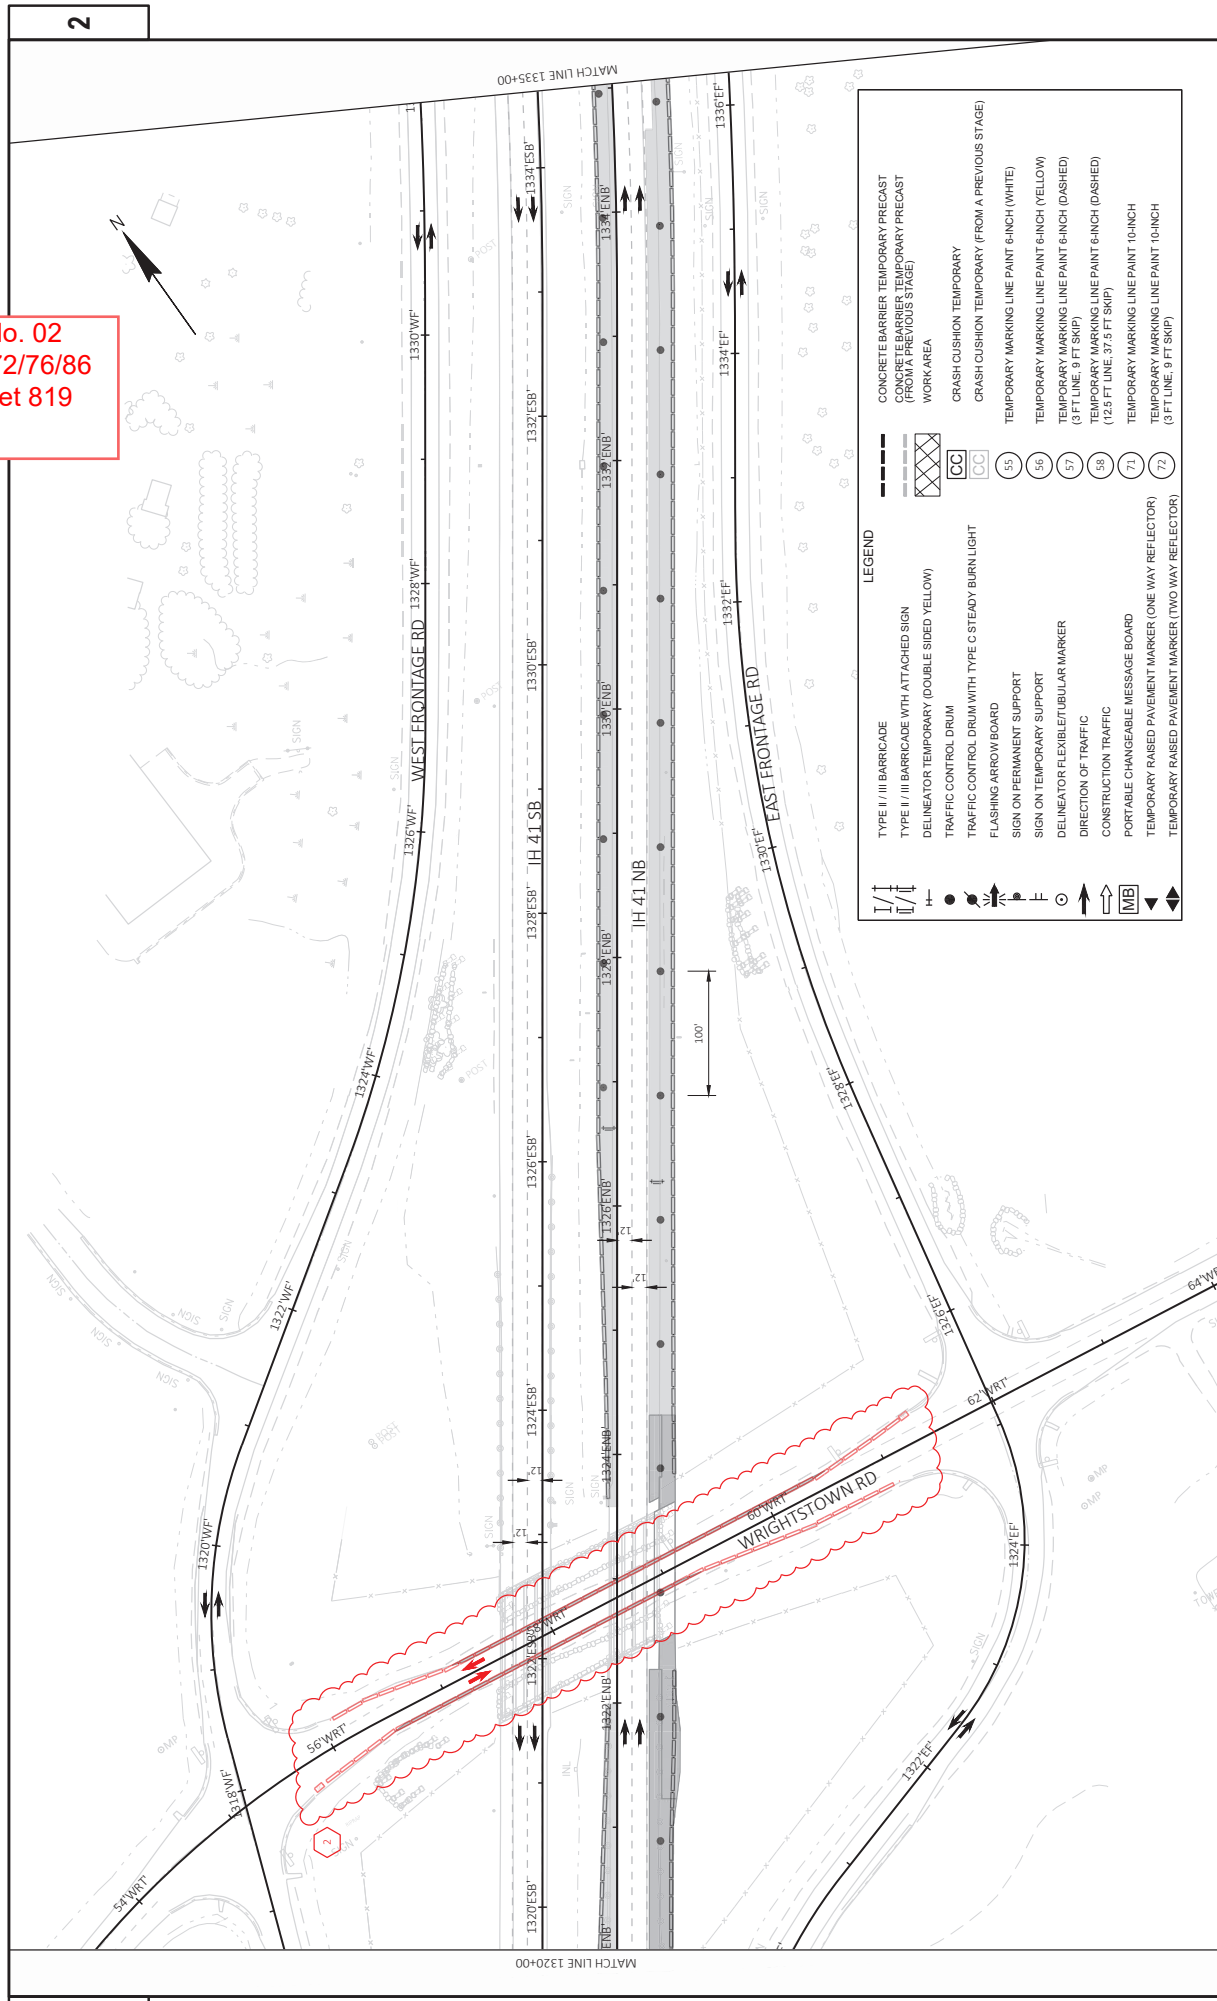

PROJECT NO: 1130-67-72
 COUNTY: OUTAGAMIE & BROWN
 HWY: IH 41

Addendum No. 02
ID 1130-67-72/76/86
Revised Sheet 833
July 2, 2025

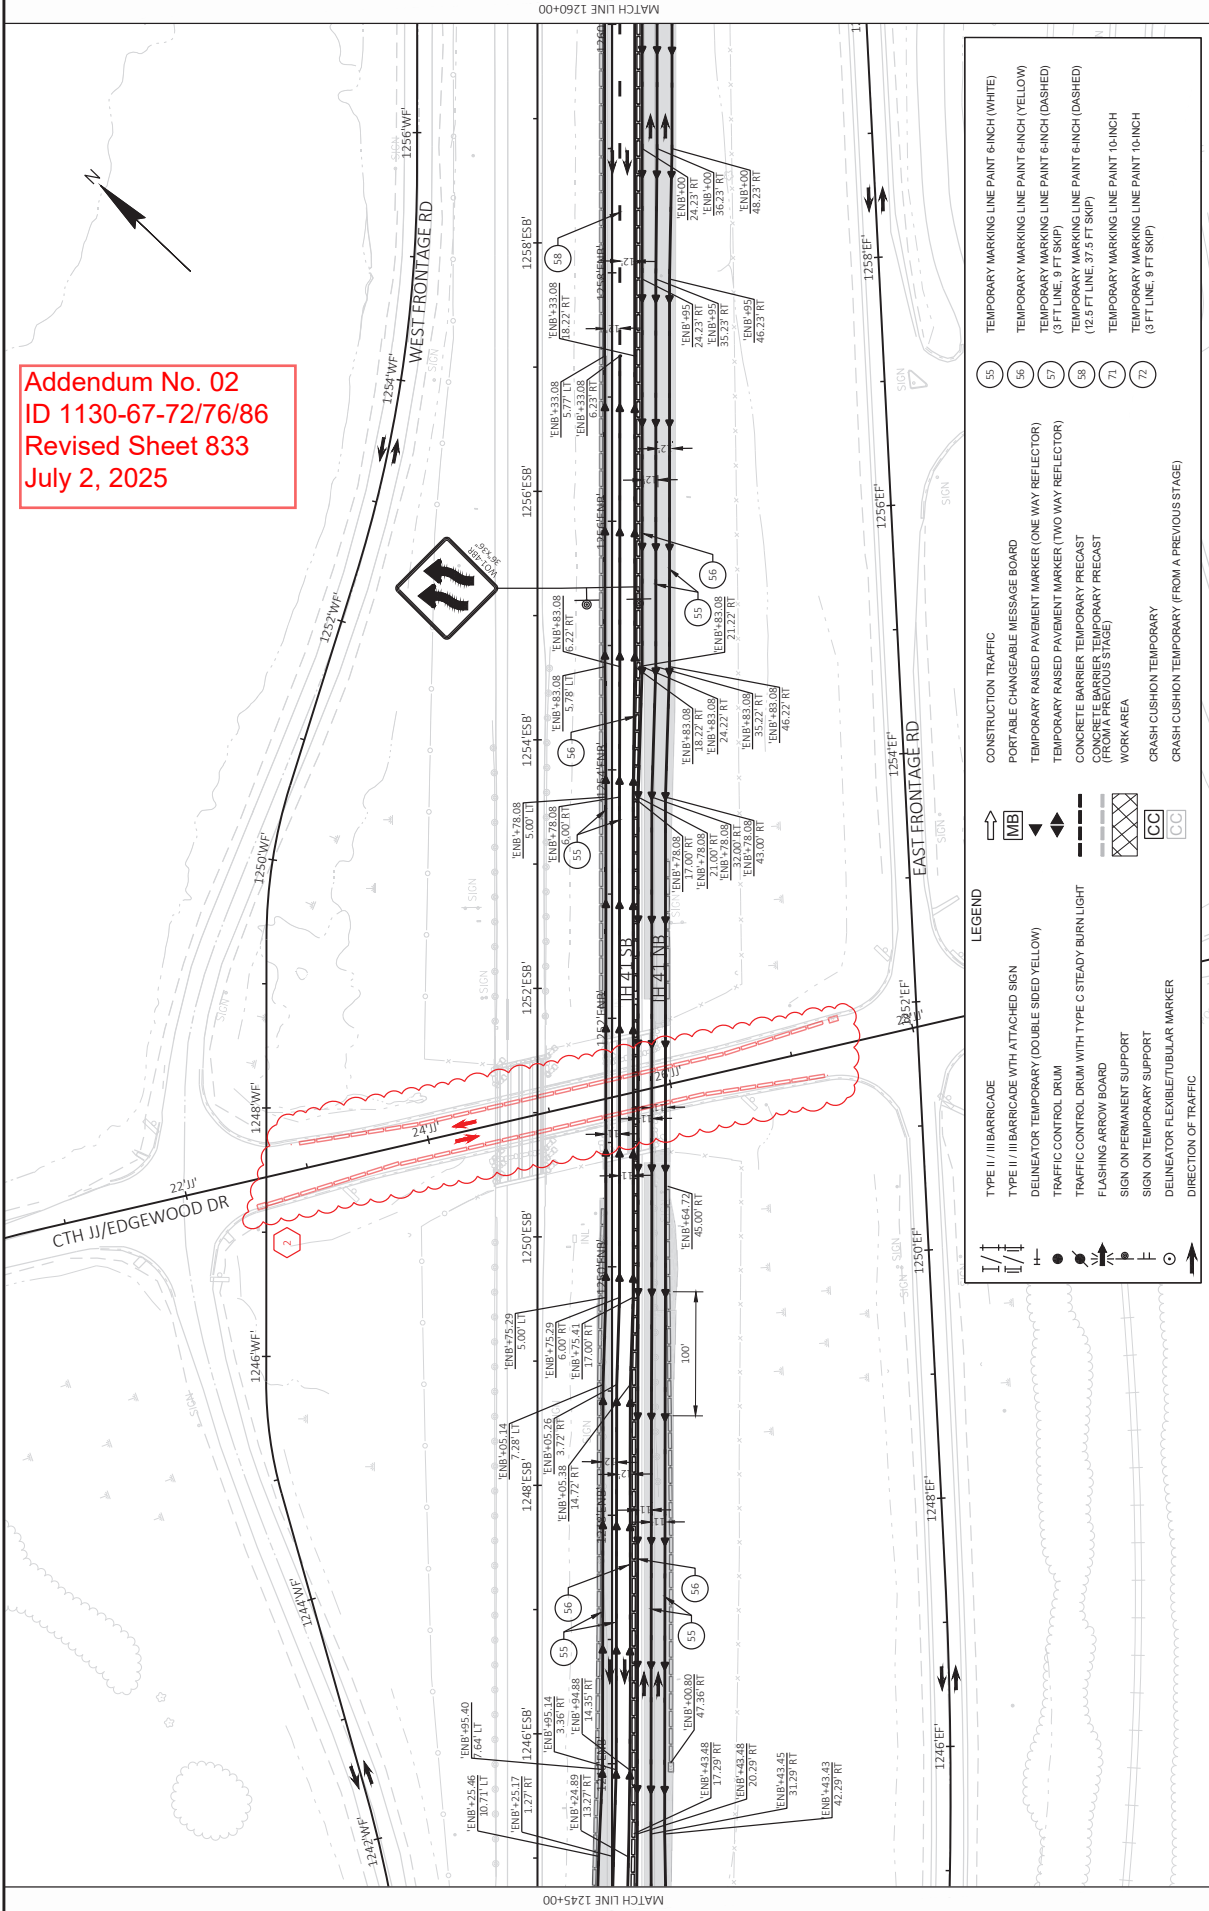

LEGEND

	TYPE II / III BARRICADE		TRAFFIC CONTROL DRUM WITH TYPE C STEADY BURN LIGHT
	TYPE II / BARRICADE WITH ATTACHED SIGN		FLASHING ARROW BOARD
	DELINEATOR TEMPORARY (DOUBLE SIDED YELLOW)		SIGN ON PERMANENT SUPPORT
	TRAFFIC CONTROL DRUM		SIGN ON TEMPORARY SUPPORT
	FLASHING ARROW BOARD		DELINEATOR FLEXIBLE/TUBULAR MARKER
	SIGN ON PERMANENT SUPPORT		DIRECTION OF TRAFFIC
	SIGN ON TEMPORARY SUPPORT		
	DELINEATOR FLEXIBLE/TUBULAR MARKER		
	DIRECTION OF TRAFFIC		
	CONSTRUCTION TRAFFIC		PORTABLE CHANGEABLE MESSAGE BOARD
	TEMPORARY RAISED PAVEMENT MARKER (ONE WAY REFLECTOR)		TEMPORARY RAISED PAVEMENT MARKER (TWO WAY REFLECTOR)
	CONCRETE BARRIER TEMPORARY PRECAST (FROM A PREVIOUS STAGE)		WORK AREA
	CRASH CUSHION TEMPORARY (FROM A PREVIOUS STAGE)		

TEMPORARY MARKING LINE PAINT 6-INCH (WHITE)


TEMPORARY MARKING LINE PAINT 6-INCH (YELLOW)

TEMPORARY MARKING LINE PAINT 6-INCH (DASHED) (8 FT LINE, 9 FT SKIP)

TEMPORARY MARKING LINE PAINT 6-INCH (DASHED) (12.5 FT LINE, 3 FT SKIP)

TEMPORARY MARKING LINE PAINT 10-INCH (8 FT LINE, 9 FT SKIP)


Addendum No. 02
 ID 1130-67-72/76/86
 Revised Sheet 838
 July 2, 2025

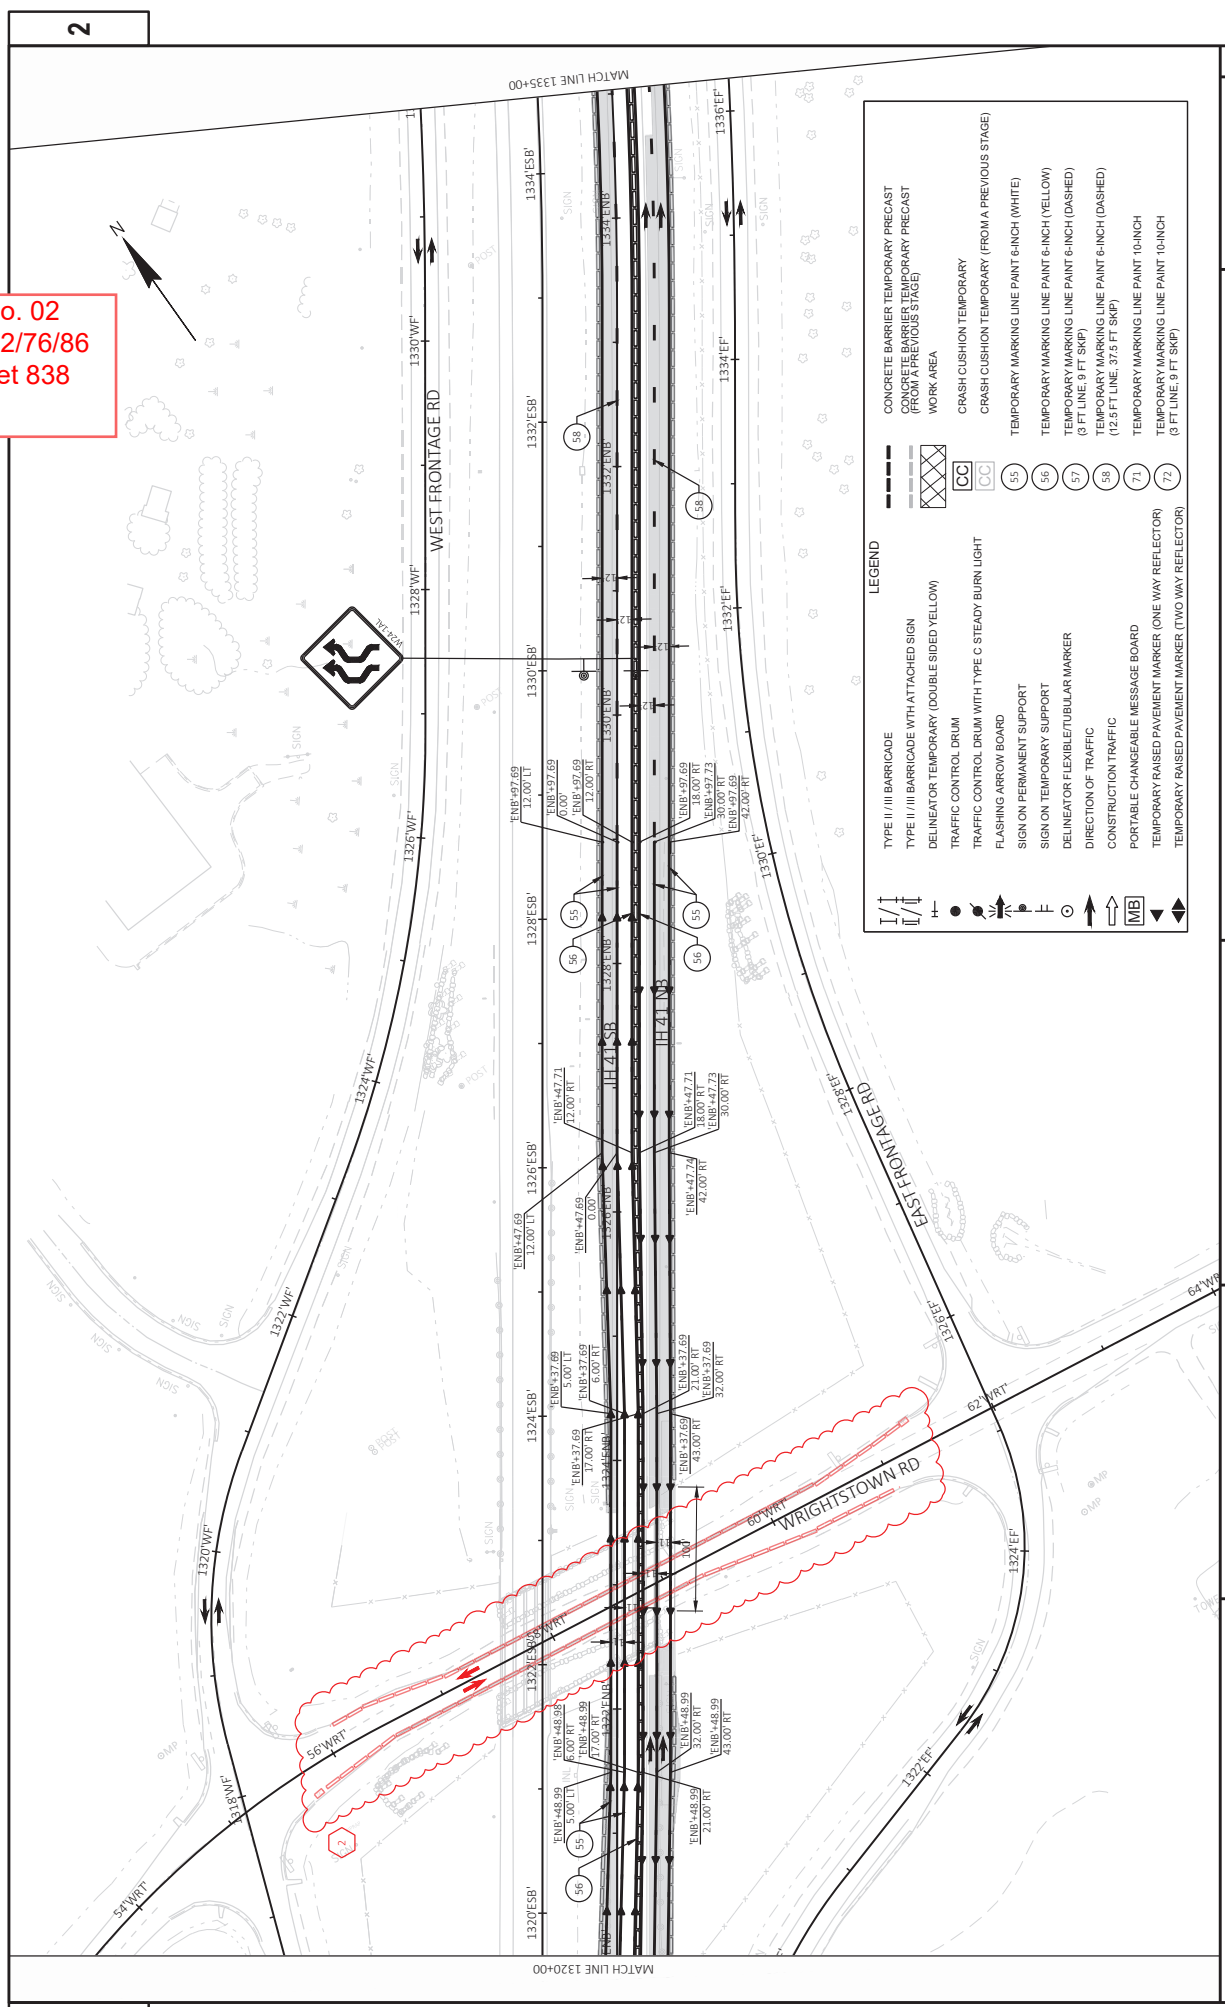

LEGEND

	TYPE II/III BARRICADE		TYPE II/III BARRICADE WITH ATTACHED SIGN		CONCRETE BARRIER TEMPORARY PRECAST (FROM A PREVIOUS STAGE)
	DELINEATOR TEMPORARY (DOUBLE SIDED YELLOW)		TRAFFIC CONTROL DRUM		WORK AREA
	FLASHING ARROW BOARD		CRASH CUSHION TEMPORARY		TEMPORARY MARKING LINE PAINT 6-INCH (WHITE)
	SIGN ON TEMPORARY SUPPORT		CRASH CUSHION TEMPORARY (FROM A PREVIOUS STAGE)		TEMPORARY MARKING LINE PAINT 6-INCH (YELLOW)
	DELINEATOR FLEXIBLE/TUBULAR MARKER		TEMPORARY MARKING LINE PAINT 8-FOOT LINE, 9-FOOT SKIP		TEMPORARY MARKING LINE PAINT 12.5-FOOT LINE, 37.5-FOOT SKIP
	CONSTRUCTION TRAFFIC		TEMPORARY MARKING LINE PAINT 6-INCH (DASHED)		TEMPORARY MARKING LINE PAINT 10-INCH
	PORTABLE CHANGEABLE MESSAGE BOARD		TEMPORARY MARKING LINE PAINT 8-FOOT LINE, 9-FOOT SKIP		TEMPORARY MARKING LINE PAINT 10-INCH
	TEMPORARY RAISED PAVEMENT MARKER (ONE WAY REFLECTOR)		TEMPORARY MARKING LINE PAINT 10-INCH		TEMPORARY MARKING LINE PAINT 8-FOOT LINE, 9-FOOT SKIP
	TEMPORARY RAISED PAVEMENT MARKER (TWO WAY REFLECTOR)				

Addendum No. 02
 ID 1130-67-72/76/86
 Revised Sheet 852
 July 2, 2025

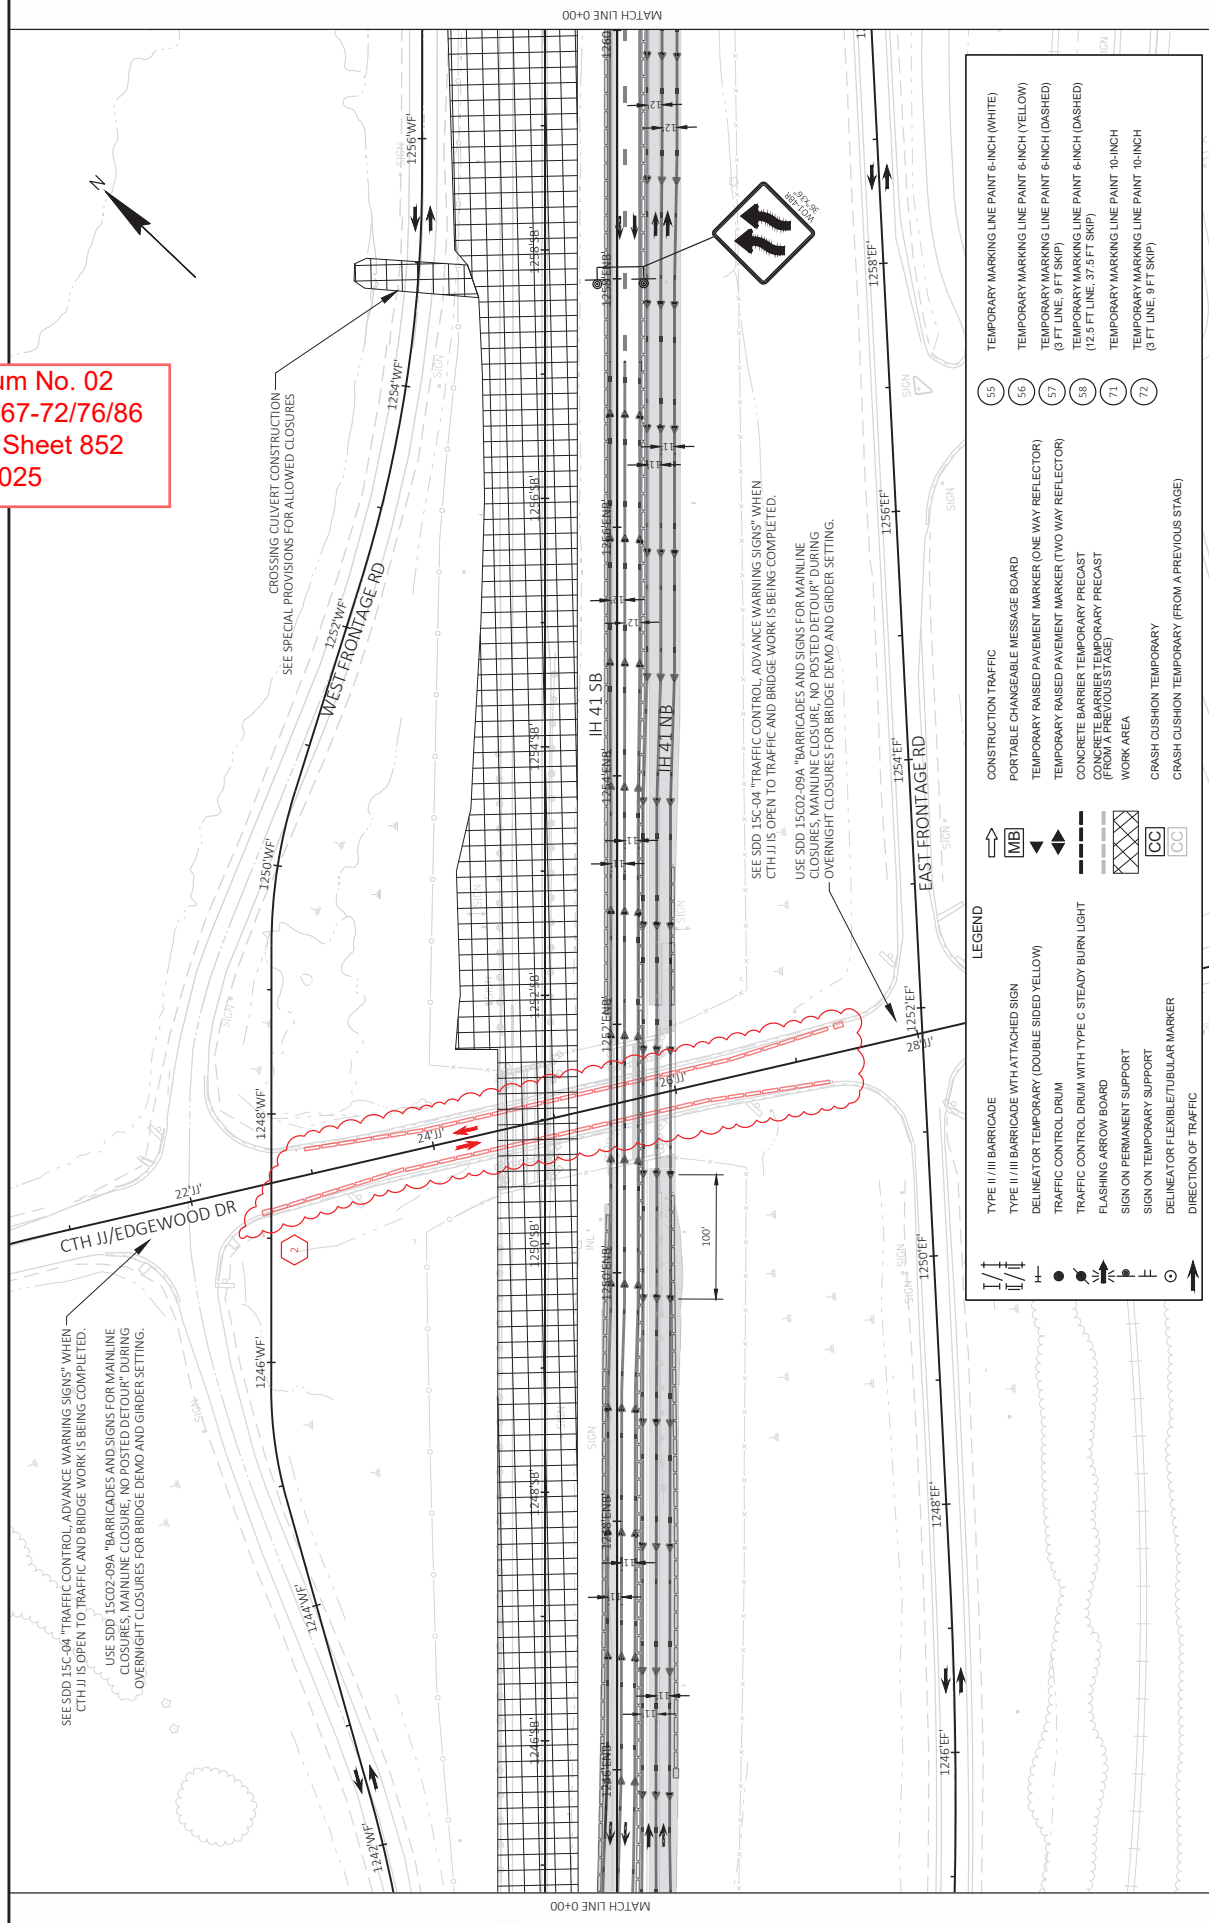


LEGEND

	TYPE II/III BARRICADE		CONSTRUCTION TRAFFIC
	TYPE II/III BARRICADE WITH ATTACHED SIGN		PORTABLE CHANGEABLE MESSAGE BOARD
	DELINEATOR TEMPORARY (DOUBLE SIDED YELLOW)		TEMPORARY RAISED PAVEMENT MARKER (ONE WAY REFLECTOR)
	TRAFFIC CONTROL DRUM		TEMPORARY RAISED PAVEMENT MARKER (TWO WAY REFLECTOR)
	TRAFFIC CONTROL DRUM WITH TYPE C STEADY BURN LIGHT		CONCRETE BARRIER TEMPORARY PRECAST
	FLASHING ARROW BOARD		CRASH CUSHION TEMPORARY PRECAST
	SIGN ON PERMANENT SUPPORT		WORK AREA
	SIGN ON TEMPORARY SUPPORT		CRASH CUSHION TEMPORARY
	DELINEATOR FLEXIBLE/TUBULAR MARKER		CRASH CUSHION TEMPORARY (FROM A PREVIOUS STAGE)
	DIRECTION OF TRAFFIC		

	TEMPORARY MARKING LINE PAINT 6-INCH (WHITE)
	TEMPORARY MARKING LINE PAINT 6-INCH (YELLOW)
	TEMPORARY MARKING LINE PAINT 6-INCH (DASHED) (3 FT LINE, 9 FT SKIP)
	TEMPORARY MARKING LINE PAINT 6-INCH (DASHED) (12.5 FT LINE, 37.5 FT SKIP)
	TEMPORARY MARKING LINE PAINT 10-INCH (3 FT LINE, 9 FT SKIP)
	TEMPORARY MARKING LINE PAINT 10-INCH (3 FT LINE, 9 FT SKIP)


Addendum No. 02
ID 1130-67-72/76/86
Revised Sheet 857
July 2, 2025

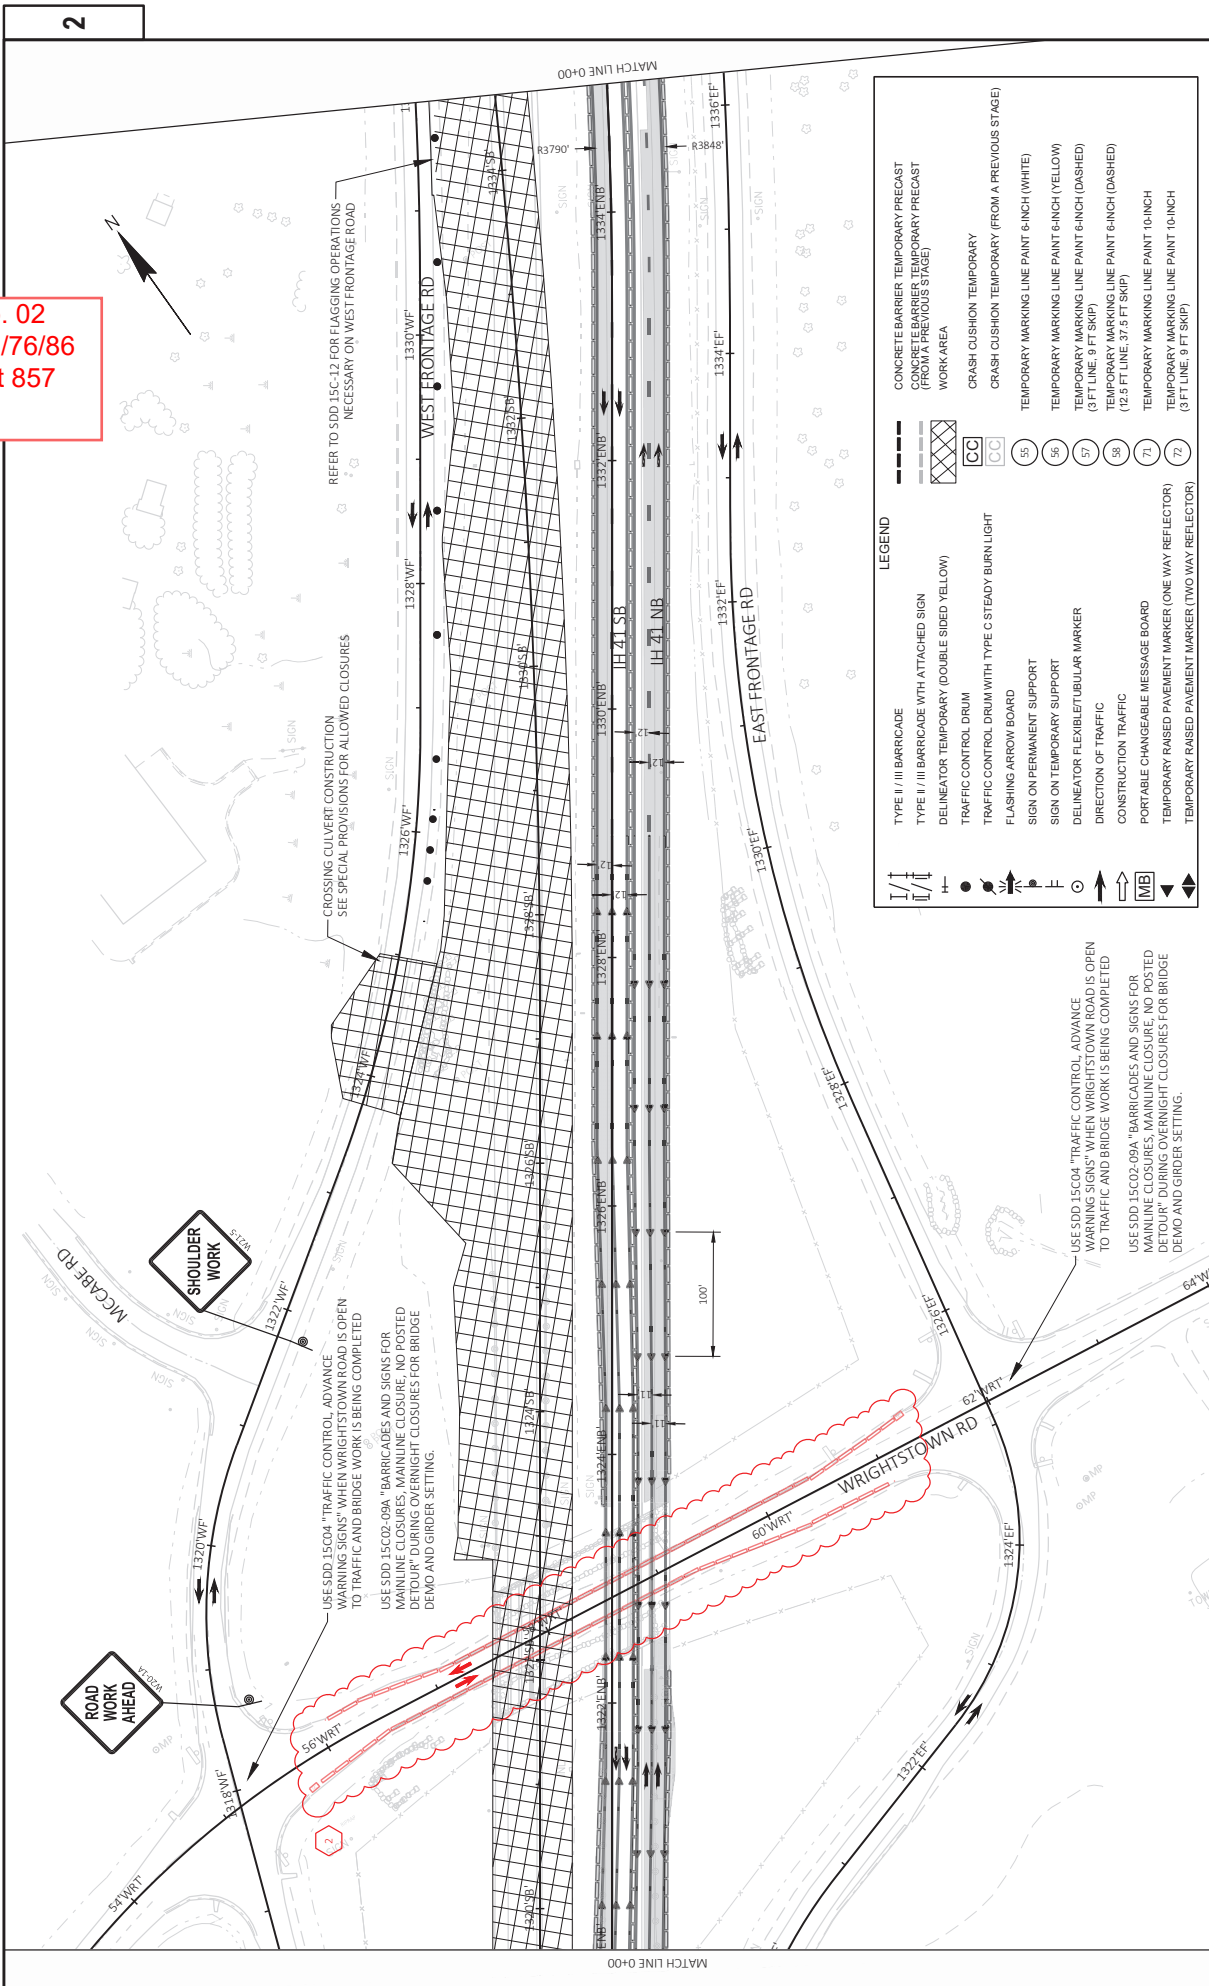


LEGEND

	TYPE II / III BARRICADE		CONCRETE BARRIER TEMPORARY PRECAST (FROM A PREVIOUS STAGE)
	TYPE II / III BARRICADE WITH ATTACHED SIGN		TEMPORARY PRECAST (FROM A PREVIOUS STAGE)
	DELINEATOR TEMPORARY (DOUBLE SIDED YELLOW)		WORK AREA
	TRAFFIC CONTROL DRUM		CRASH CUSHION TEMPORARY
	FLASHING ARROW BOARD		CRASH CUSHION TEMPORARY (FROM A PREVIOUS STAGE)
	SIGN ON TEMPORARY SUPPORT		TEMPORARY MARKING LINE PAINT 6-INCH (WHITE)
	DELINEATOR FLEXIBLE TUBULAR MARKER		TEMPORARY MARKING LINE PAINT 6-INCH (YELLOW)
	DIRECTION OF TRAFFIC		TEMPORARY MARKING LINE PAINT 6-INCH (DASHED) (3 FT LINE, 9 FT SKIP)
	CONSTRUCTION TRAFFIC		TEMPORARY MARKING LINE PAINT 6-INCH (DASHED) (2.5 FT LINE, 37.5 FT SKIP)
	PORTABLE CHANGEABLE MESSAGE BOARD		TEMPORARY MARKING LINE PAINT 10-INCH
	TEMPORARY RAISED PAVEMENT MARKER (ONE WAY REFLECTOR)		TEMPORARY MARKING LINE PAINT 10-INCH (3 FT LINE, 9 FT SKIP)
	TEMPORARY RAISED PAVEMENT MARKER (TWO WAY REFLECTOR)		

Addendum No. 02
ID 1130-67-72/76/86
Revised Sheet 871
July 2, 2025

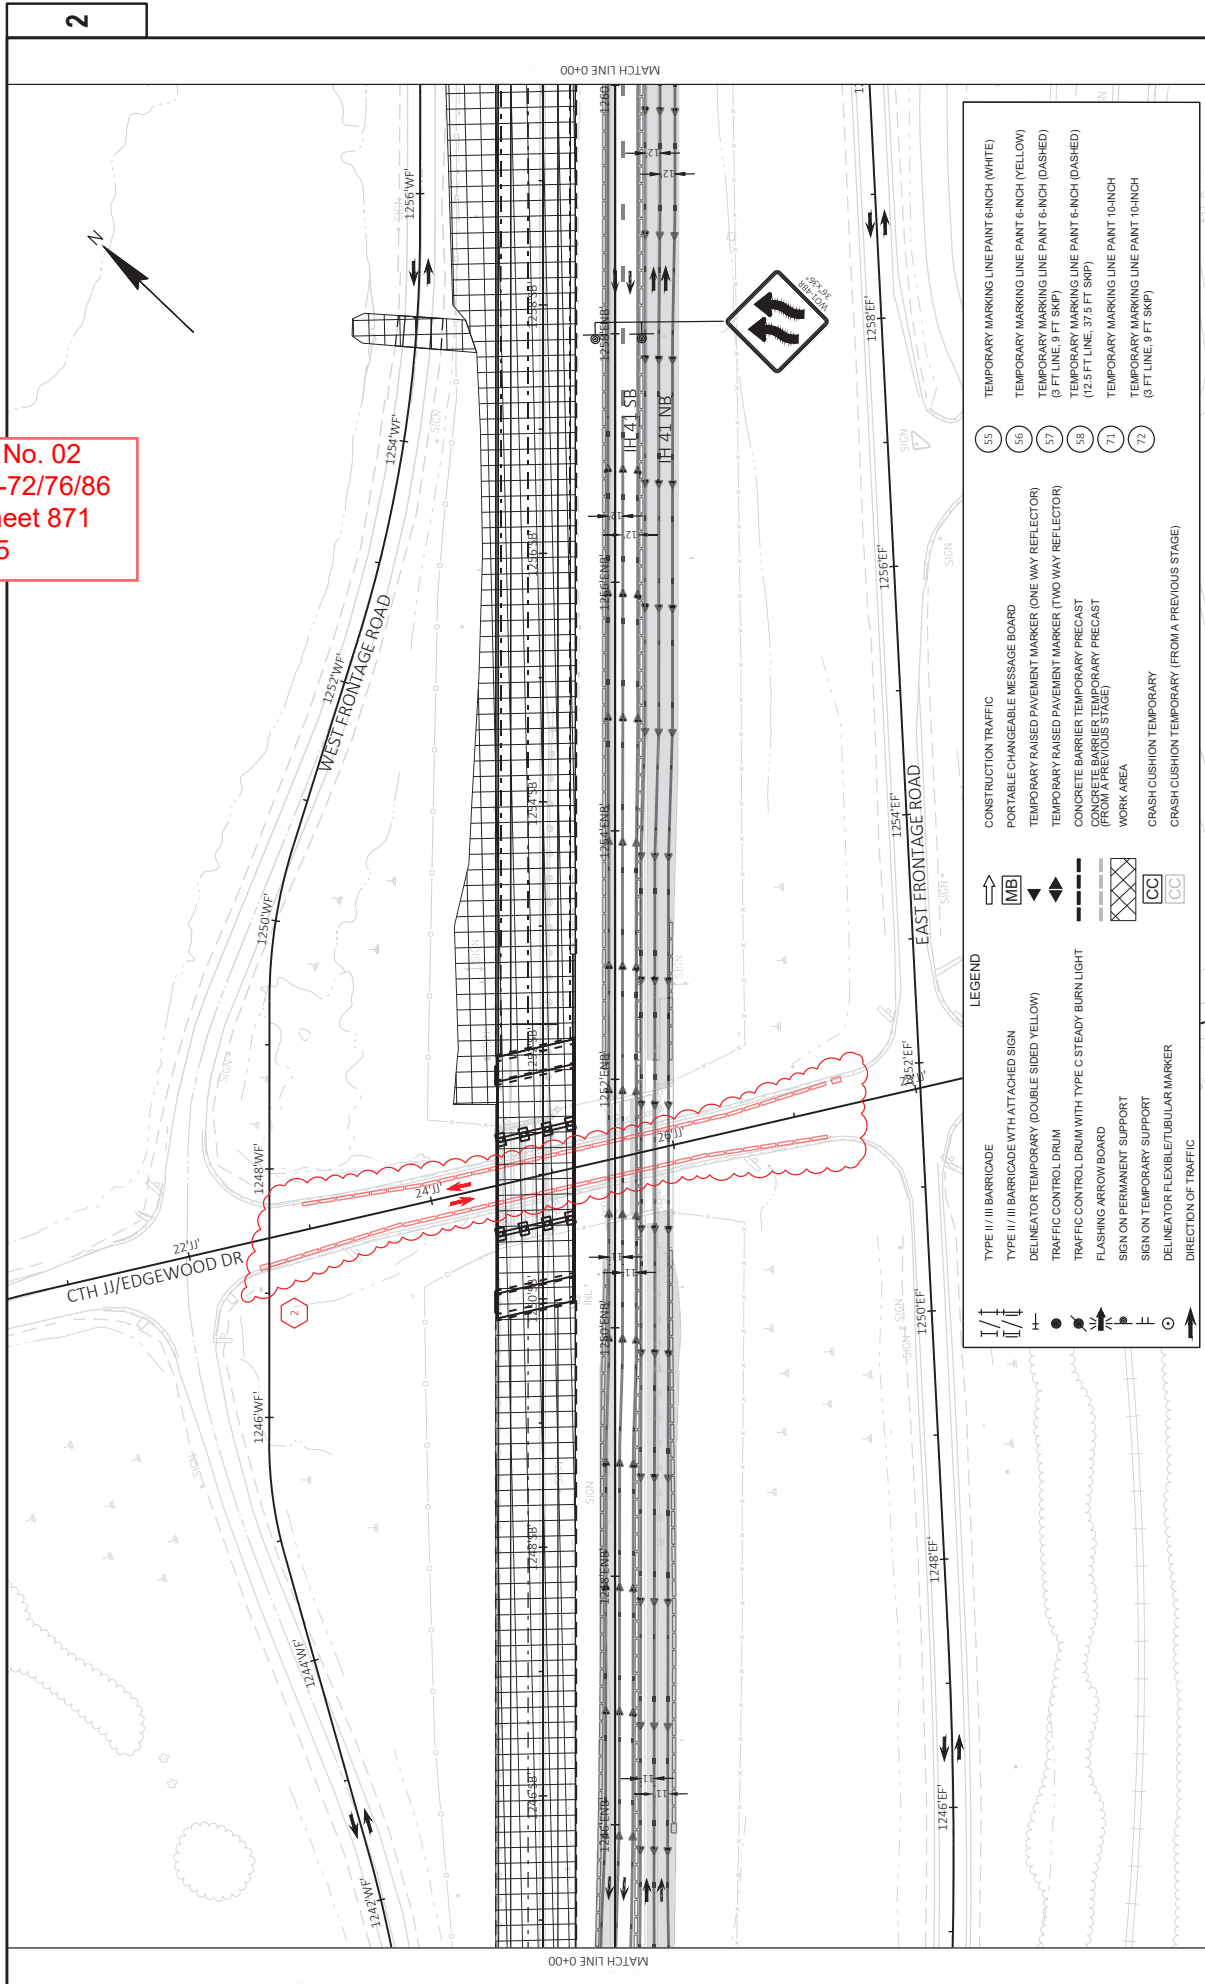


Addendum No. 02
ID 1130-67-72/76/86
Revised Sheet 876
July 2, 2025

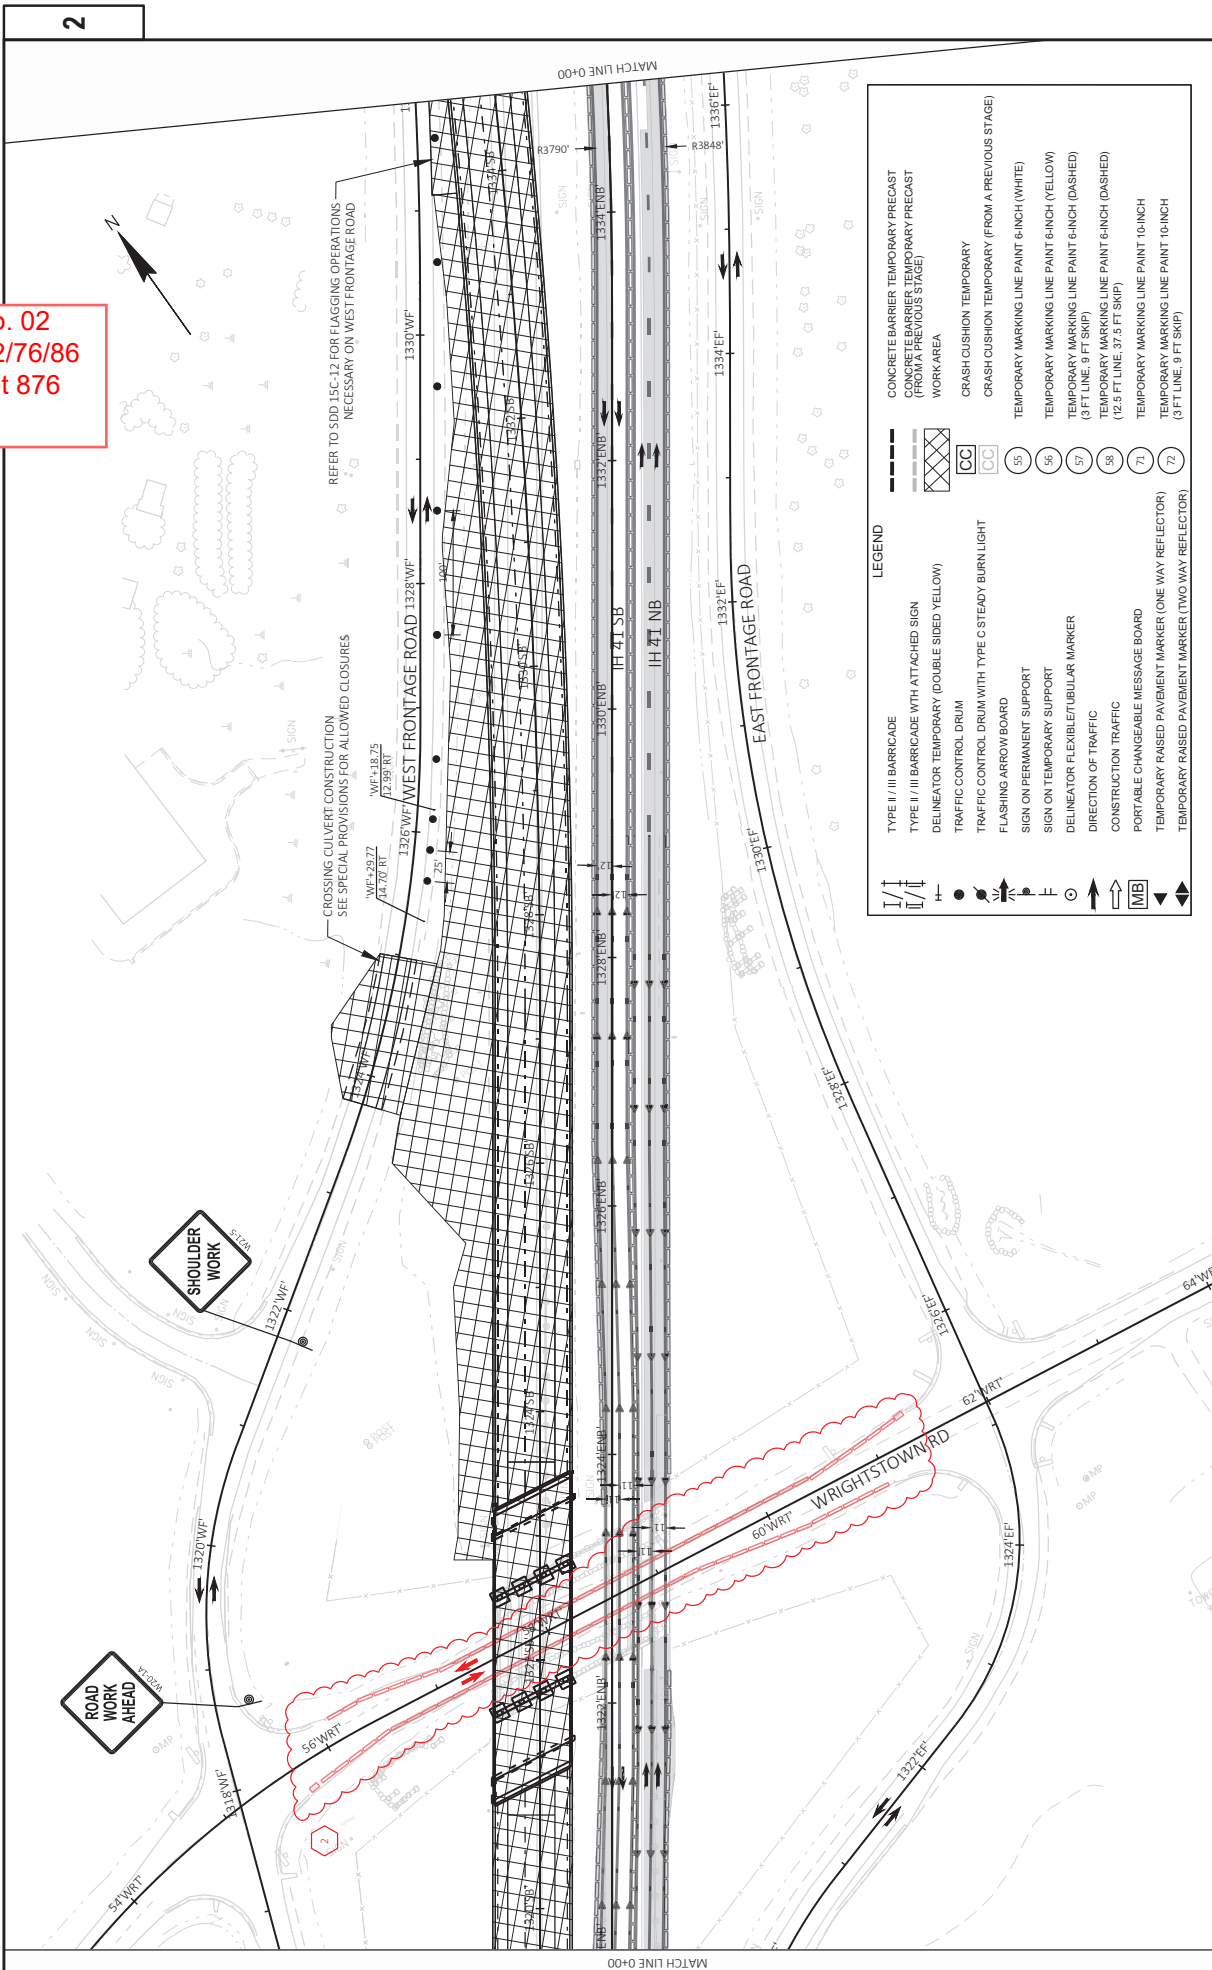

LEGEND

	TYPE II / III BARRICADE		CONCRETE BARRIER TEMPORARY PRECAST
	TYPE II / III BARRICADE WITH ATTACHED SIGN		CONCRETE BARRIER TEMPORARY PRECAST (FROM A PREVIOUS STAGE)
	DELINIMATOR TEMPORARY (DOUBLE SIDED YELLOW)		WORK AREA
	TRAFFIC CONTROL DRUM		CRASH CUSHION TEMPORARY
	TRAFFIC CONTROL DRUM WITH TYPE C STEADY BURN LIGHT		CRASH CUSHION TEMPORARY (FROM A PREVIOUS STAGE)
	FLASHING ARROW BOARD		TEMPORARY MARKING LINE PAINT 6-INCH (WHITE)
	SIGN ON TEMPORARY SUPPORT		TEMPORARY MARKING LINE PAINT 6-INCH (YELLOW)
	DELINIMATOR FLEXIBLE/TUBULAR MARKER		TEMPORARY MARKING LINE PAINT 6-INCH (DASHED) (3 FT LINE, 9 FT SKIP)
	DIRECTION OF TRAFFIC		TEMPORARY MARKING LINE PAINT 6-INCH (DASHED) (12.5 FT LINE, 37.5 FT SKIP)
	PORTABLE CHANGEABLE MESSAGE BOARD		TEMPORARY MARKING LINE PAINT 10-INCH (3 FT LINE, 8 FT SKIP)
	TEMPORARY RAISED PAVEMENT MARKER (ONE WAY REFLECTOR)		
	TEMPORARY RAISED PAVEMENT MARKER (TWO WAY REFLECTOR)		

Addendum No. 02
ID 1130-67-72/76/86
Revised Sheet 890
July 2, 2025

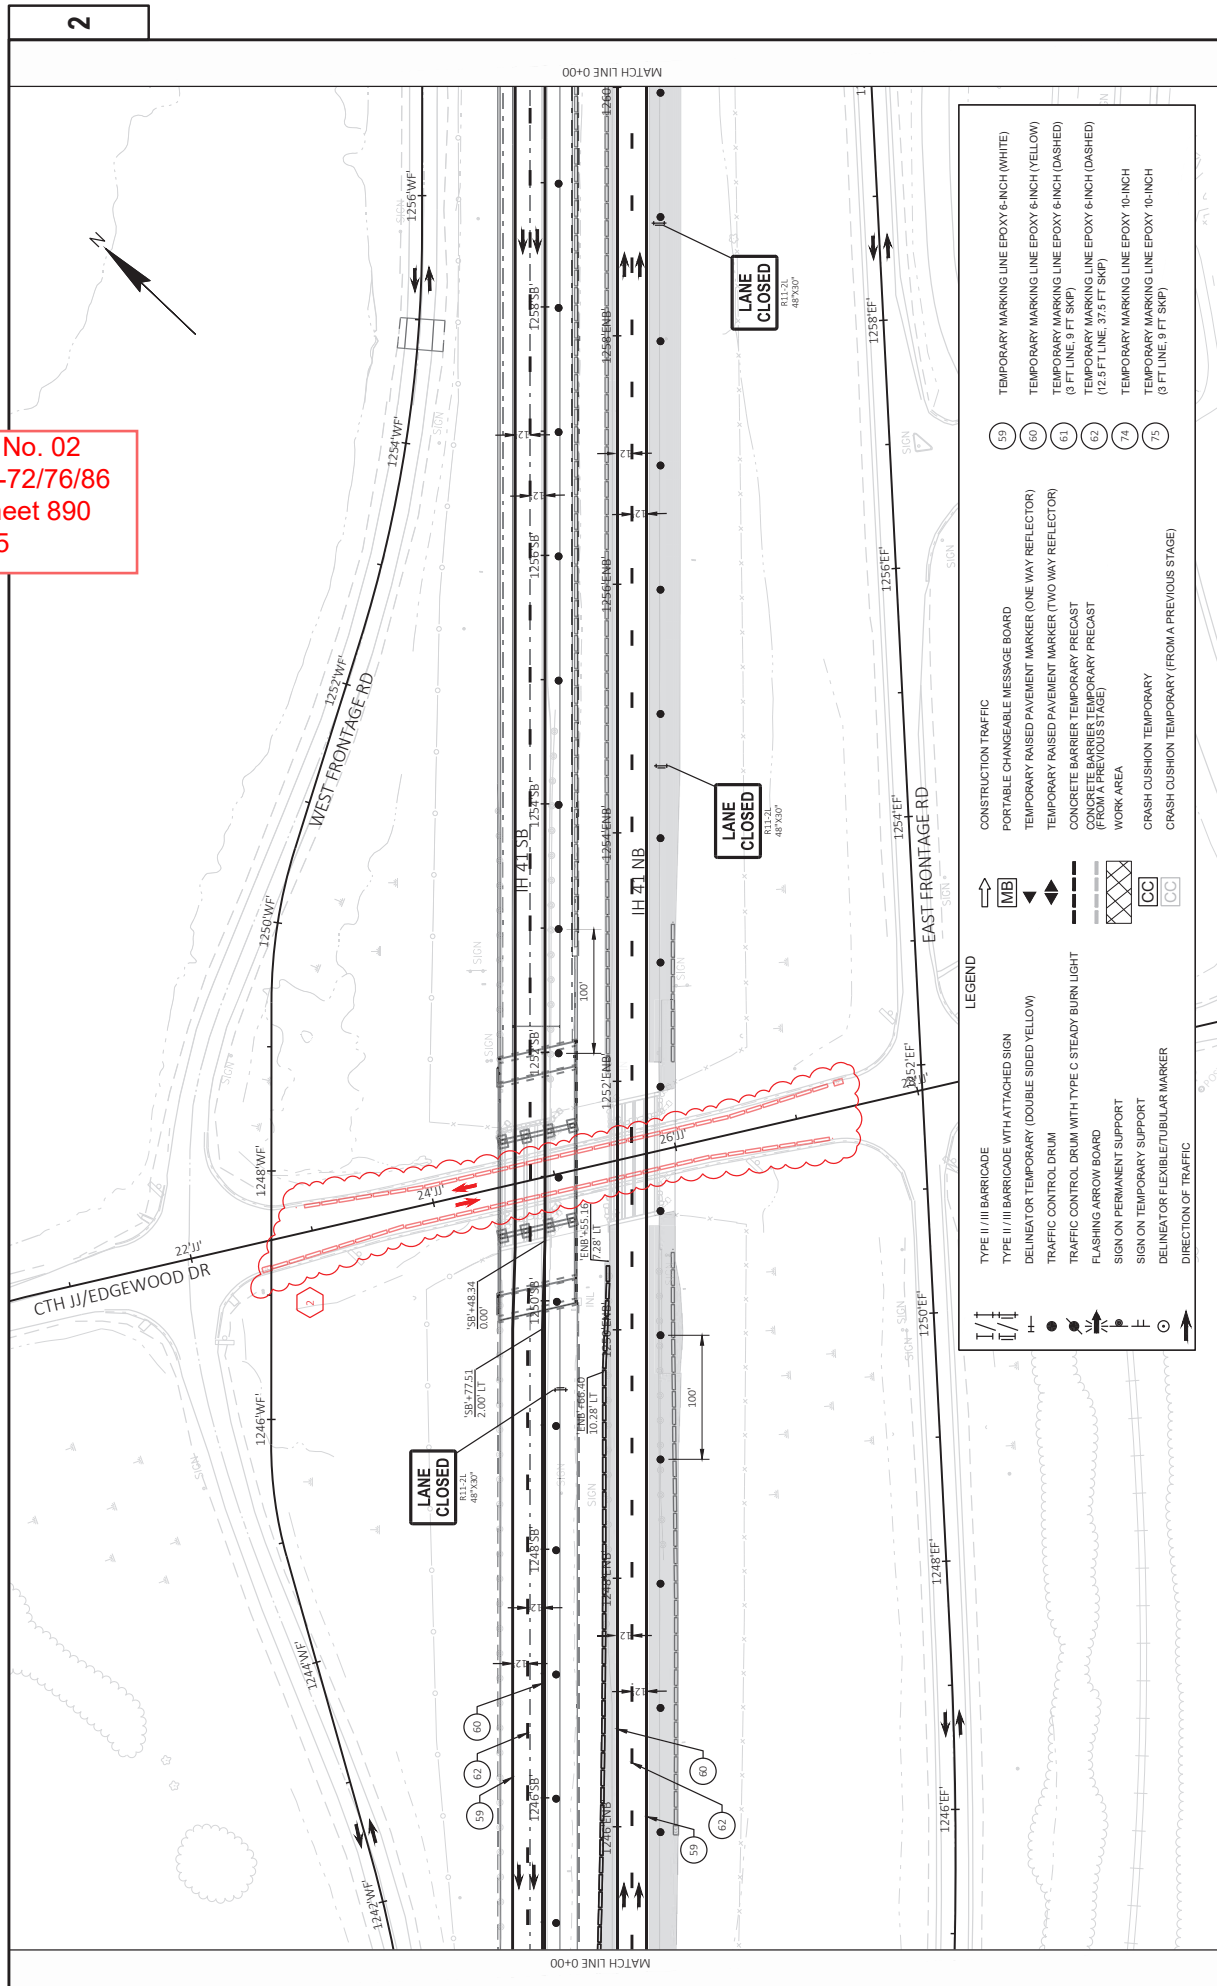


LEGEND

	TYPE II/III BARRICADE		CONSTRUCTION TRAFFIC
	TYPE II/III BARRICADE WITH ATTACHED SIGN		PORTABLE CHANGEABLE MESSAGE BOARD
	DELINIMATOR TEMPORARY (DOUBLE SIDED YELLOW)		TEMPORARY RAISED PAVEMENT MARKER (ONE WAY REFLECTOR)
	TRAFFIC CONTROL DRUM		TEMPORARY RAISED PAVEMENT MARKER (TWO WAY REFLECTOR)
	TRAFFIC CONTROL DRUM WITH TYPE C STEADY BURN LIGHT		CONCRETE BARRIER TEMPORARY PRECAST (FROM A PREVIOUS STAGE)
	FLASHING ARROW BOARD		WORK AREA
	SIGN ON PERMANENT SUPPORT		CRASH CUSHION TEMPORARY
	SIGN ON TEMPORARY SUPPORT		CRASH CUSHION TEMPORARY (FROM A PREVIOUS STAGE)
	DELINIMATOR FLEXIBLE/TUBULAR MARKER		
	DIRECTION OF TRAFFIC		

	TEMPORARY MARKING LINE EPOXY 6-INCH (WHITE)
	TEMPORARY MARKING LINE EPOXY 6-INCH (YELLOW) (3 FT LINE, 9 FT SKIP)
	TEMPORARY MARKING LINE EPOXY 6-INCH (DASHED) (12.5 FT LINE, 37.5 FT SKIP)
	TEMPORARY MARKING LINE EPOXY 10-INCH (3 FT LINE, 9 FT SKIP)

Addendum No. 02
 ID 1130-67-72/76/86
 Revised Sheet 895
 July 2, 2025

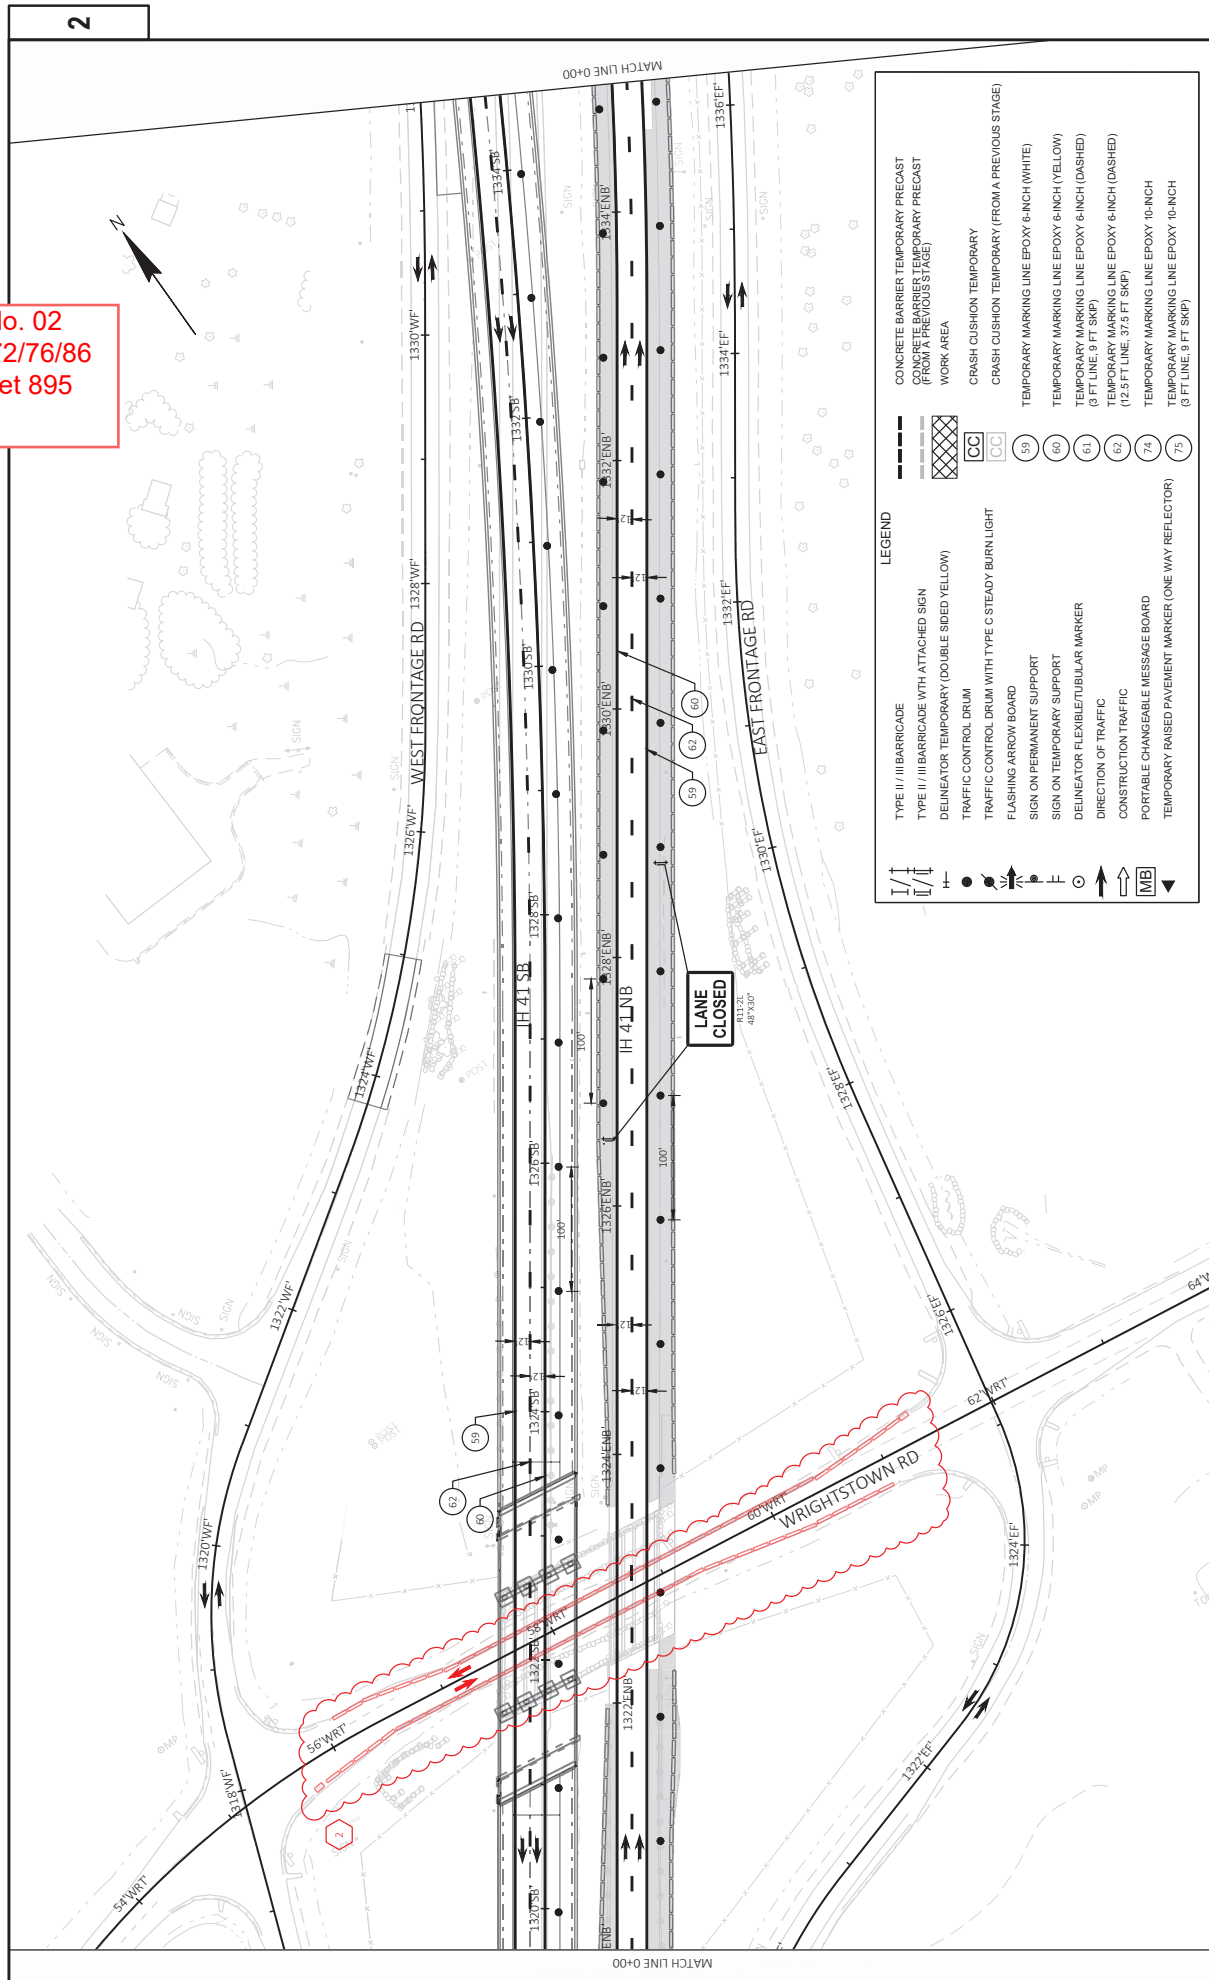

2

2

PROJECT NO: 1130-67-72
 COUNTY: OUTAGAMIE & BROWN
 HWY: IH 41

TRAFFIC CONTROL - STAGE 2C
 SHEET 895


FILE NAME: C:\USERS\VOITKING\GDC\ACCC03\WB07\113067\PROJECT FILES\DSG\113067\70\SHEET\1130-67-72\03101-TC.DWG
 LAYOUT NAME: .008

DATE: 7/1/2025 4:59 PM
 PLOT DATE: 7/1/2025 4:59 PM

PLOT SCALE: 1 IN=100 FT
 PLOT NAME: ECG_KMILYN.GRACE

WISDOT/CADDS SHEET 42

Addendum No. 02
 ID 1130-67-72/76/86
 Revised Sheet 909
 July 2, 2025

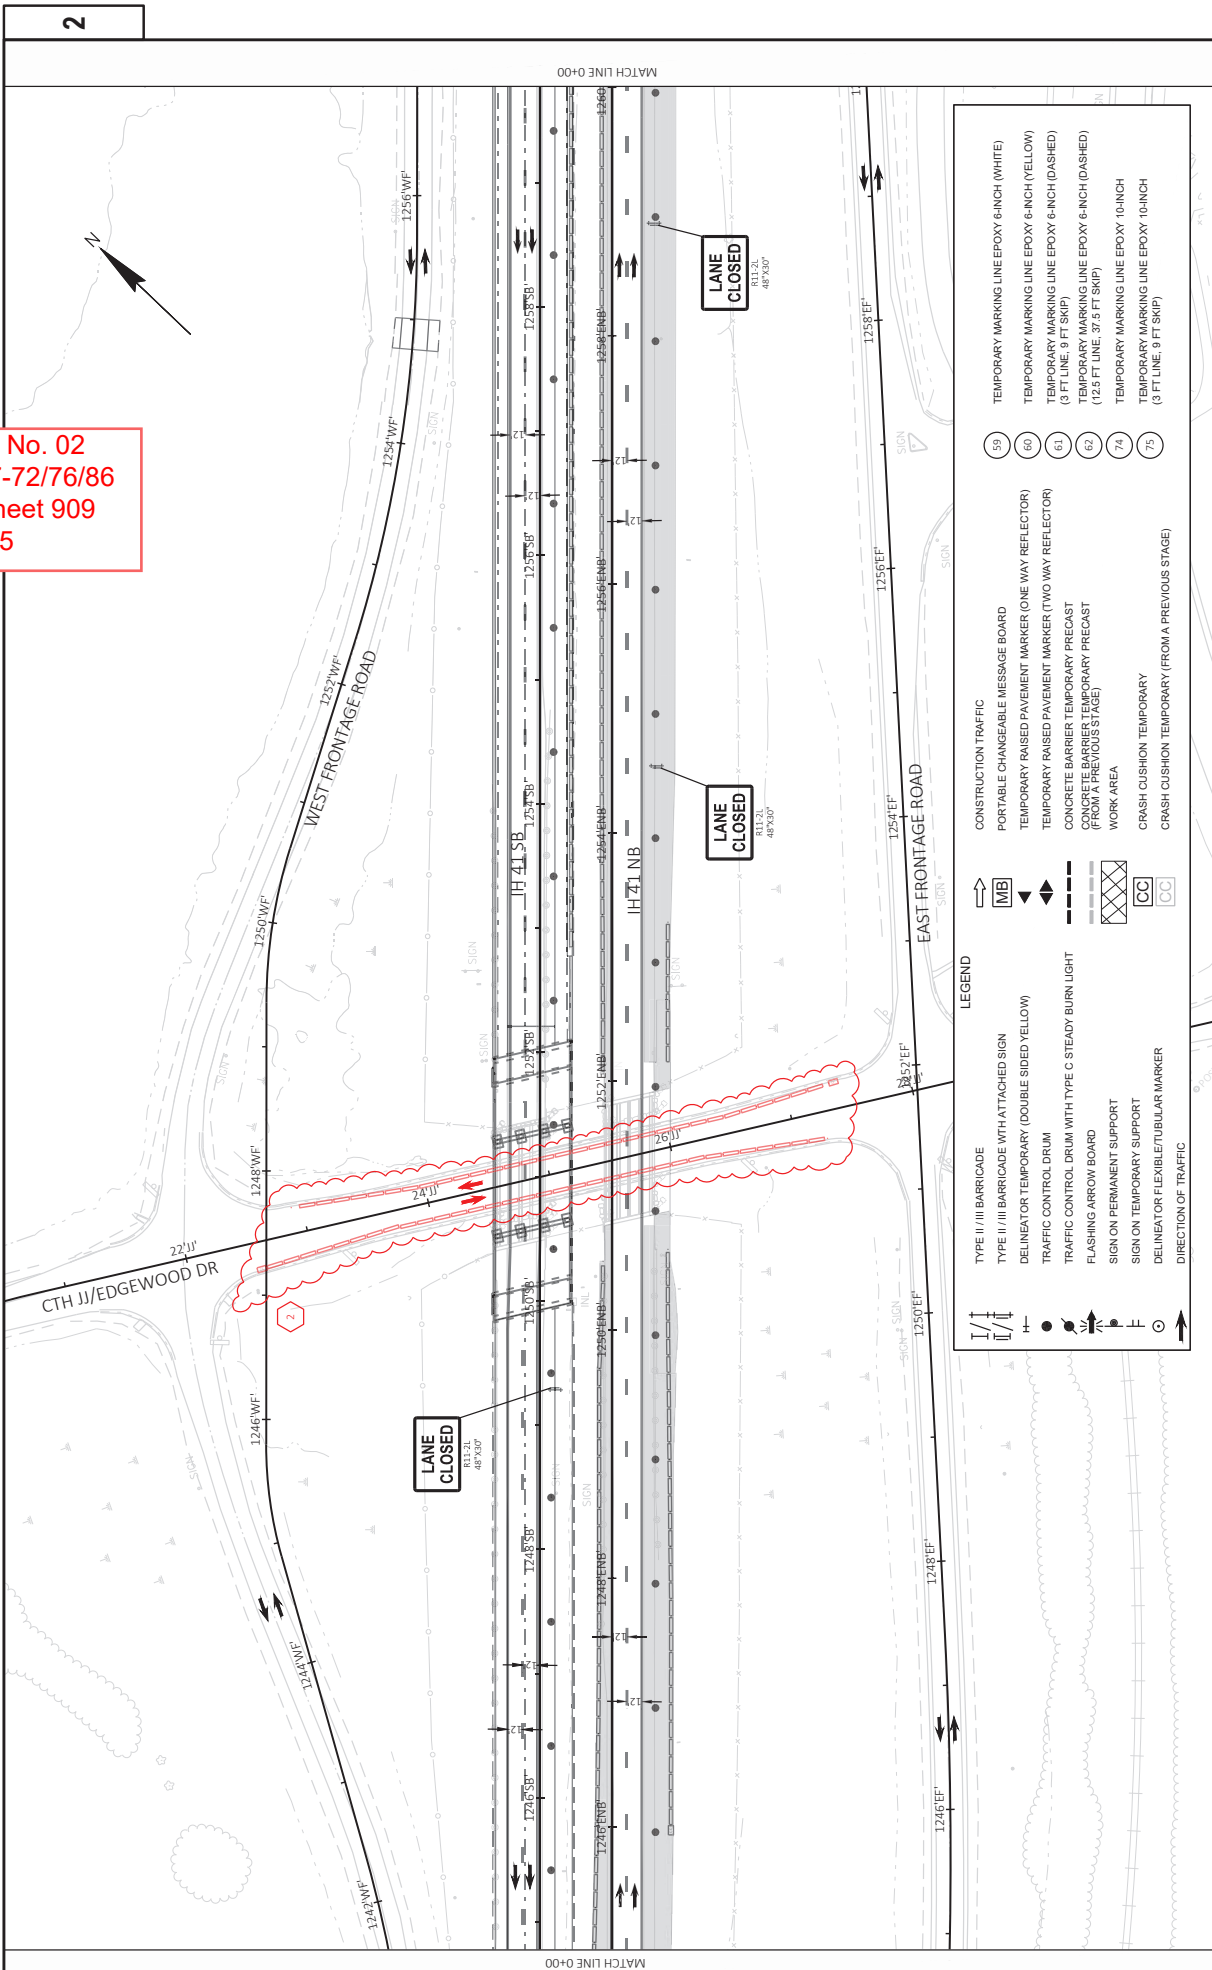


LEGEND

	TYPE II/III BARRICADE		TYPE II/III BARRICADE WITH ATTACHED SIGN
	DELIMITOR TEMPORARY (DOUBLE SIDED YELLOW)		TRAFFIC CONTROL DRUM
	TRAFFIC CONTROL DRUM WITH TYPE C STEADY BURN LIGHT		FLASHING ARROW BOARD
	SIGN ON PERMANENT SUPPORT		SIGN ON TEMPORARY SUPPORT
	DELIMITOR FLEXIBLE/TUBULAR MARKER		DIRECTION OF TRAFFIC

	CONSTRUCTION TRAFFIC		TEMPORARY MARKING LINE EPOXY 6-INCH (WHITE)
	PORTABLE CHANGEABLE MESSAGE BOARD		TEMPORARY MARKING LINE EPOXY 6-INCH (YELLOW)
	TEMPORARY RAISED PAVEMENT MARKER (ONE WAY REFLECTOR)		TEMPORARY MARKING LINE EPOXY 6-INCH (DASHED) (3 FT LINE, 9 FT SKIP)
	TEMPORARY RAISED PAVEMENT MARKER (TWO WAY REFLECTOR)		TEMPORARY MARKING LINE EPOXY 6-INCH (DASHED) (12.5 FT LINE, 37.5 FT SKIP)
	CONCRETE BARRIER TEMPORARY PRECAST (FROM A PREVIOUS STAGE)		TEMPORARY MARKING LINE EPOXY 10-INCH (3 FT LINE, 9 FT SKIP)
	WORK AREA		TEMPORARY MARKING LINE EPOXY 10-INCH (3 FT LINE, 9 FT SKIP)
	CRASH CUSHION TEMPORARY		
	CRASH CUSHION TEMPORARY (FROM A PREVIOUS STAGE)		

Addendum No. 02
 ID 1130-67-72/76/86
 Revised Sheet 928
 July 2, 2025

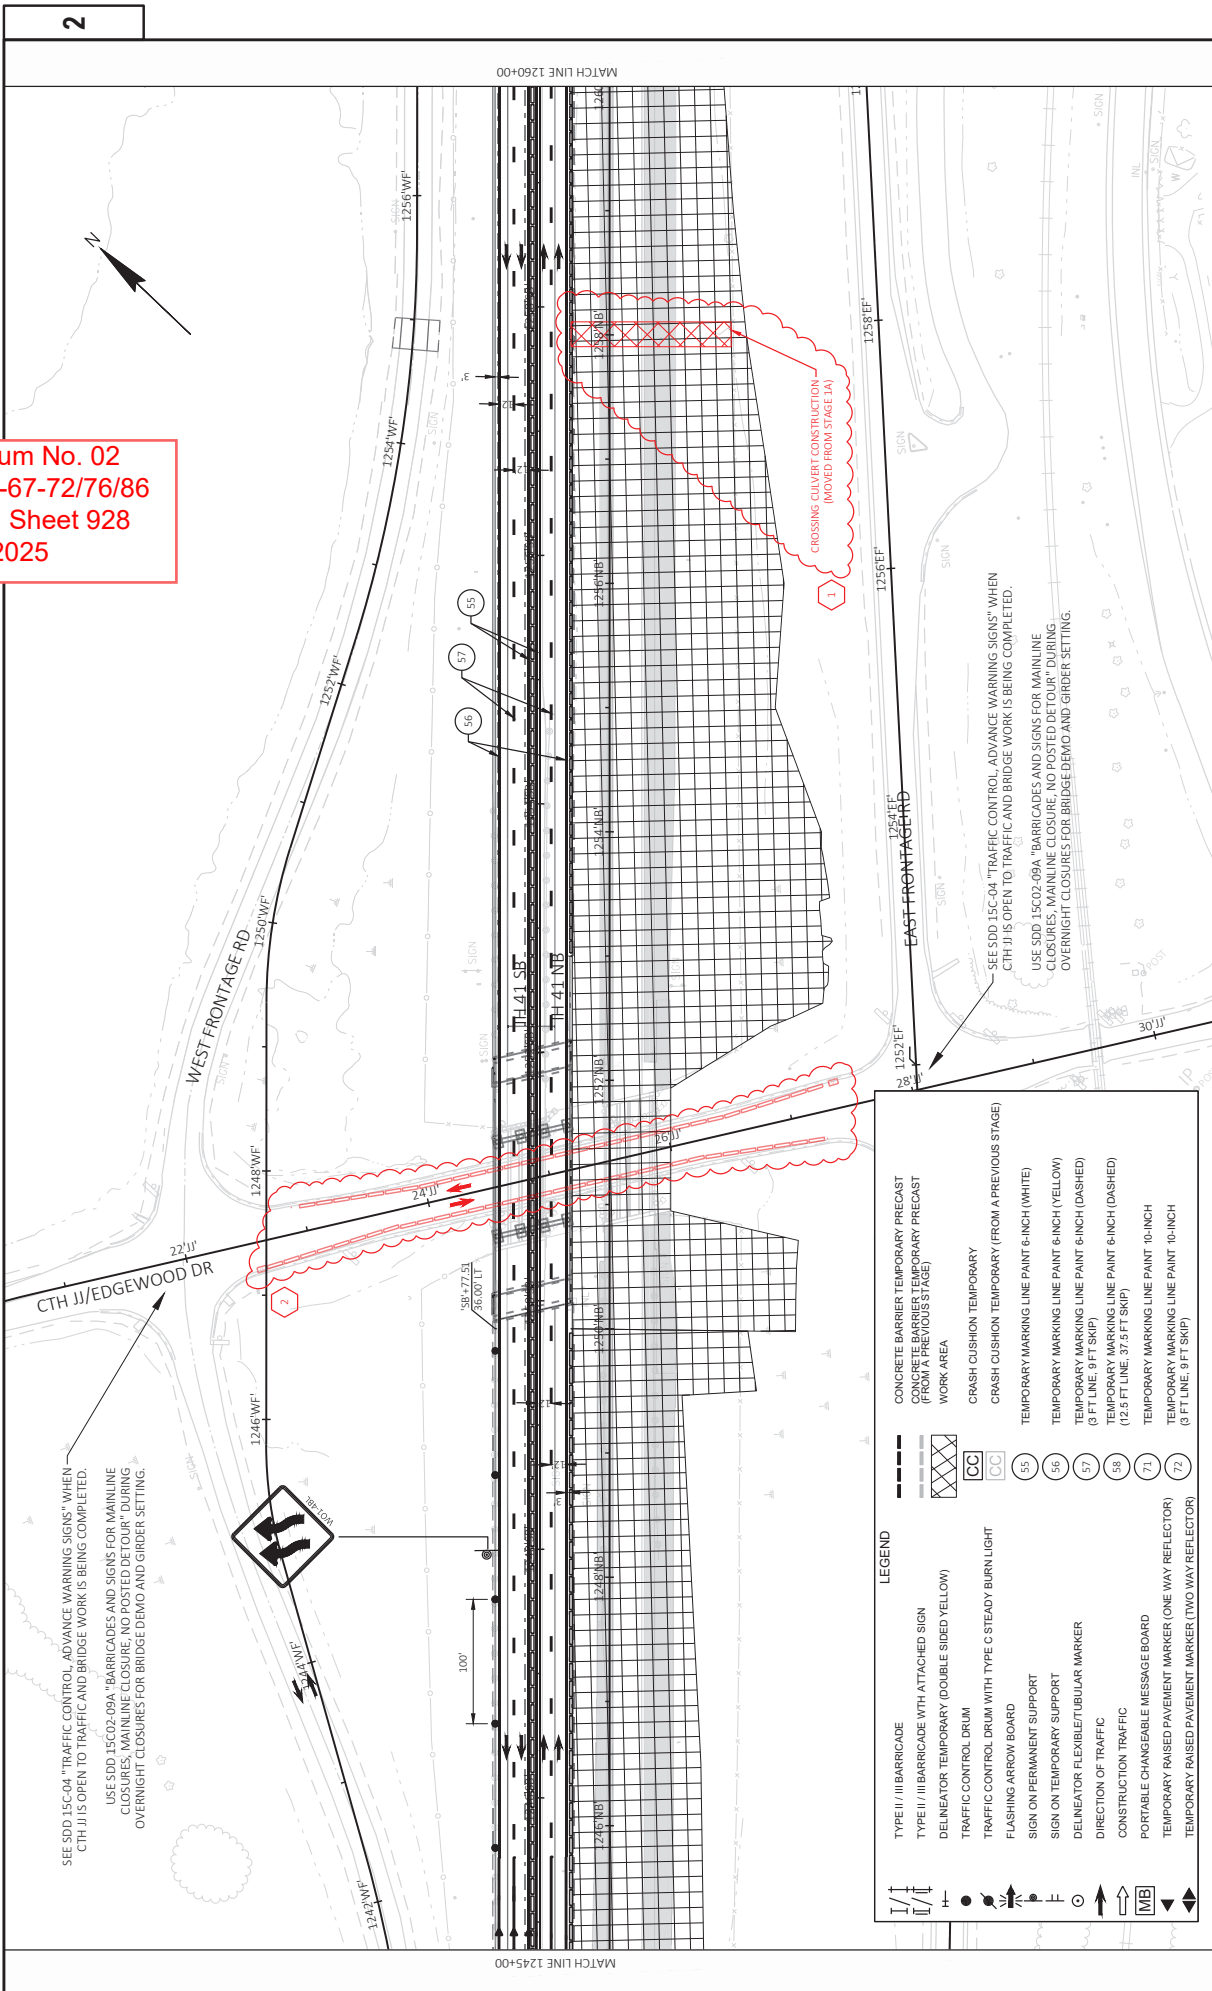

LEGEND


	TYPE II/III BARRICADE		CONCRETE BARRIER TEMPORARY PRECAST
	TYPE II/III BARRICADE WITH ATTACHED SIGN		CRASH CUSHION TEMPORARY
	DELINICATOR TEMPORARY (DOUBLE SIDED YELLOW)		CRASH CUSHION TEMPORARY (FROM A PREVIOUS STAGE)
	TRAFFIC CONTROL DRUM		TEMPORARY MARKING LINE PAINT 6-INCH (WHITE)
	FLASHING ARROW BOARD		TEMPORARY MARKING LINE PAINT 6-INCH (YELLOW)
	SIGN ON PERMANENT SUPPORT		TEMPORARY MARKING LINE PAINT 6-INCH (DASHED)
	SIGN ON TEMPORARY SUPPORT		TEMPORARY MARKING LINE PAINT 6-INCH (DASHED) (8 FT LINE, 9 FT SKIP)
	DIRECTION OF TRAFFIC		TEMPORARY MARKING LINE PAINT 6-INCH (DASHED) (12.5 FT LINE, 37.5 FT SKIP)
	CONSTRUCTION TRAFFIC		TEMPORARY MARKING LINE PAINT 10-INCH
	PORTABLE CHANGEABLE MESSAGE BOARD		TEMPORARY MARKING LINE PAINT 10-INCH (8 FT LINE, 9 FT SKIP)
	TEMPORARY RAISED PAVEMENT MARKER (ONE WAY REFLECTOR)		
	TEMPORARY RAISED PAVEMENT MARKER (TWO WAY REFLECTOR)		

SEE SDD 15C-04 "TRAFFIC CONTROL, ADVANCE WARNING SIGNS" WHEN CTH JJ IS OPEN TO TRAFFIC AND BRIDGE WORK IS BEING COMPLETED.
 USE SDD 15C02-09A "BARRICADES AND SIGNS FOR MAINLINE CLOSURES; MAINLINE CLOSURE, NO POSTED DETOUR" DURING OVERNIGHT CLOSURES FOR BRIDGE DEMO AND GIRDER SETTING.

SEE SDD 15C-04 "TRAFFIC CONTROL, ADVANCE WARNING SIGNS" WHEN CTH JJ IS OPEN TO TRAFFIC AND BRIDGE WORK IS BEING COMPLETED.
 USE SDD 15C02-09A "BARRICADES AND SIGNS FOR MAINLINE CLOSURES; MAINLINE CLOSURE, NO POSTED DETOUR" DURING OVERNIGHT CLOSURES FOR BRIDGE DEMO AND GIRDER SETTING.

CROSSING CULVERT CONSTRUCTION (MOVED FROM STAGE 1A)


Addendum No. 02
 ID 1130-67-72/76/86
 Revised Sheet 947
 July 2, 2025

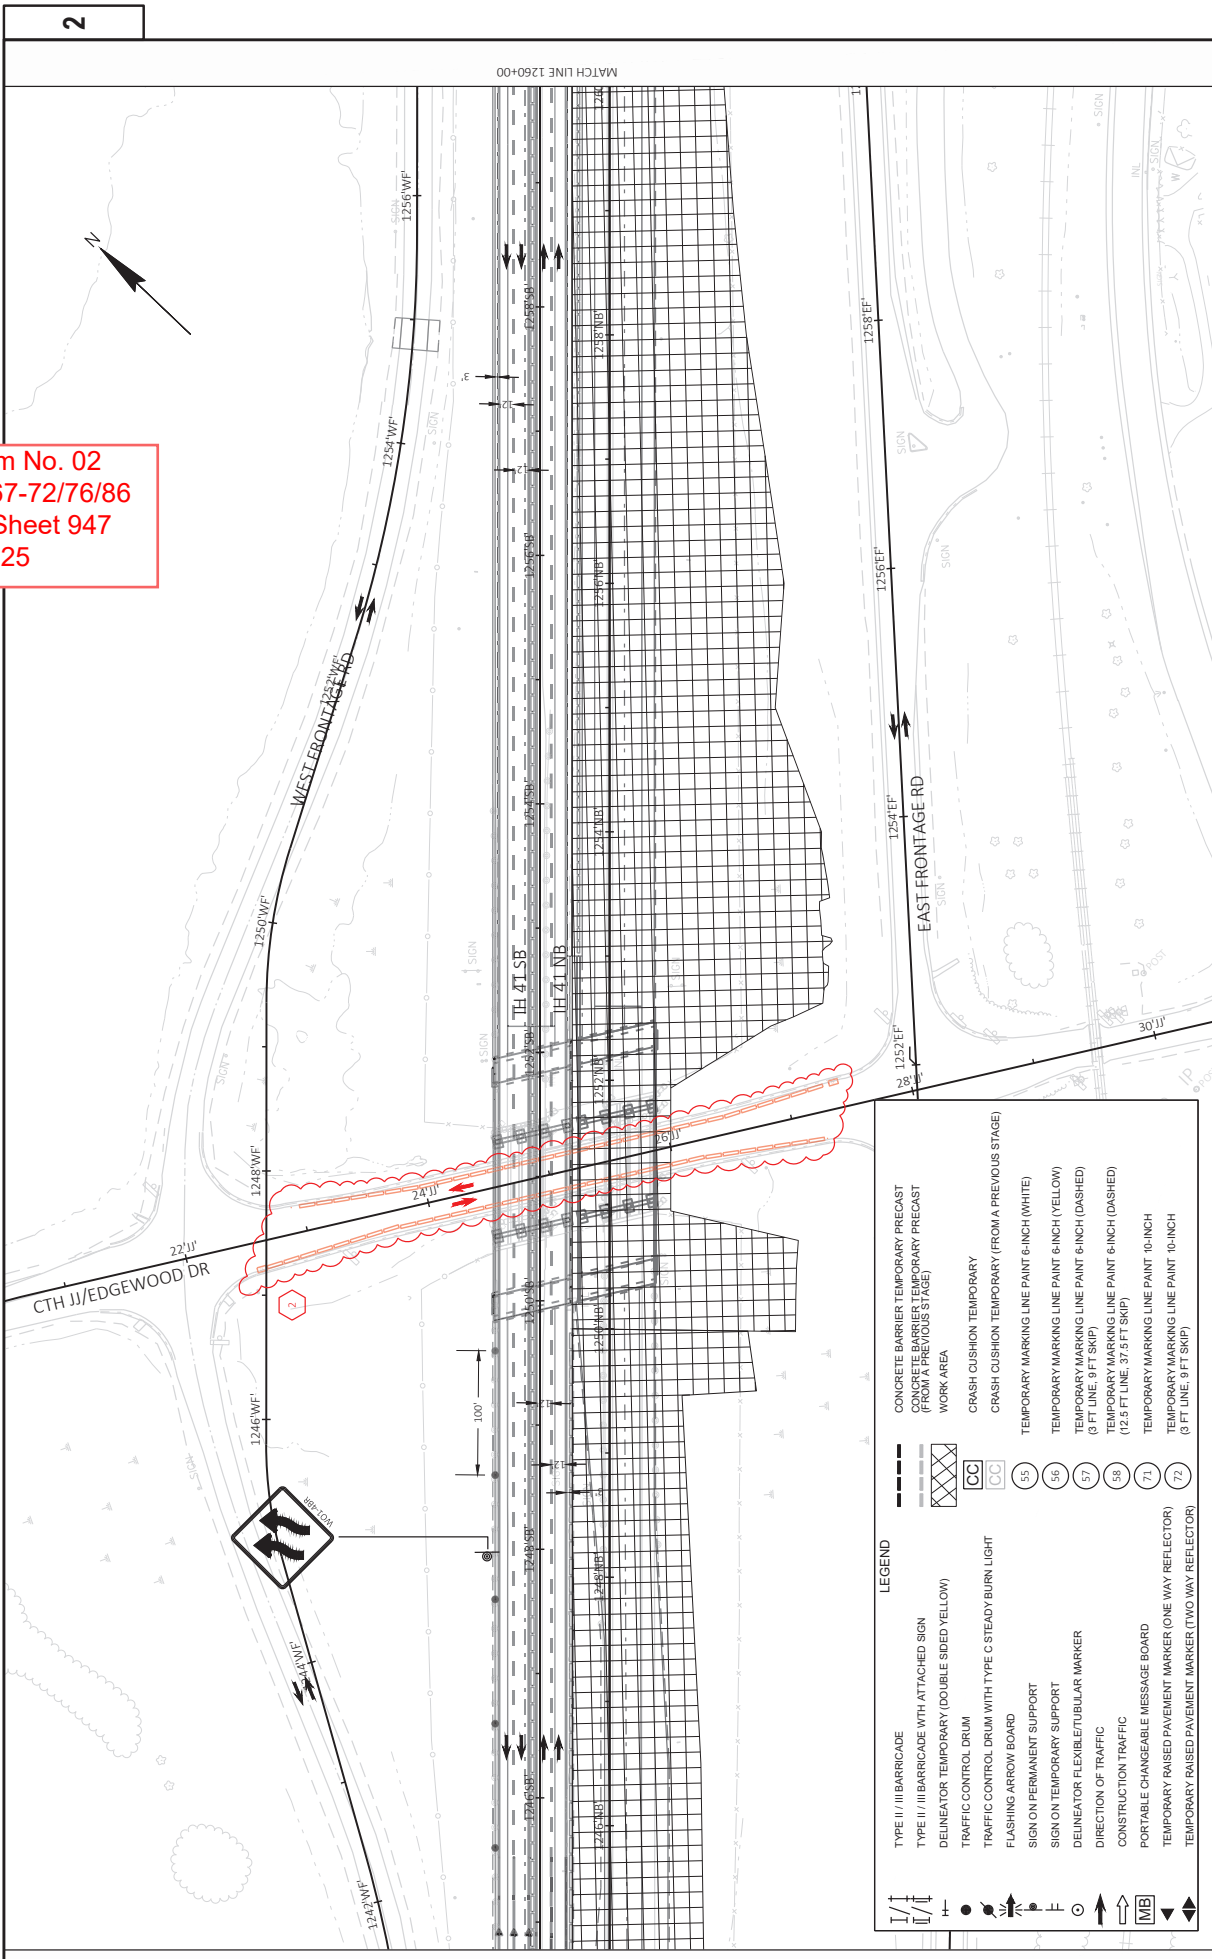

LEGEND

	TYPE II / III BARRICADE		CONCRETE BARRIER TEMPORARY PRECAST (FROM A PREVIOUS STAGE)
	TYPE II / III BARRICADE WITH ATTACHED SIGN		WORK AREA
	DELINEATOR TEMPORARY (DOUBLE SIDED YELLOW)		CRASH CUSHION TEMPORARY
	TRAFFIC CONTROL DRUM WITH TYPE C STEADY BURN LIGHT		CRASH CUSHION TEMPORARY (FROM A PREVIOUS STAGE)
	FLASHING ARROW BOARD		TEMPORARY MARKING LINE PAINT 6-INCH (WHITE)
	SIGN ON PERMANENT SUPPORT		TEMPORARY MARKING LINE PAINT 6-INCH (YELLOW)
	SIGN ON TEMPORARY SUPPORT		TEMPORARY MARKING LINE PAINT 6-INCH (DASHED) (3 FT LINE, 9 FT SKIP)
	DELINEATOR FLEXIBLE/TUBULAR MARKER		TEMPORARY MARKING LINE PAINT 6-INCH (DASHED) (12.5 FT LINE, 37.5 FT SKIP)
	DIRECTION OF TRAFFIC		TEMPORARY MARKING LINE PAINT 10-INCH
	CONSTRUCTION TRAFFIC		TEMPORARY MARKING LINE PAINT 10-INCH (9 FT LINE, 9 FT SKIP)
	PORTABLE CHANGEABLE MESSAGE BOARD		
	TEMPORARY RAISED PAVEMENT MARKER (ONE WAY REFLECTOR)		
	TEMPORARY RAISED PAVEMENT MARKER (TWO WAY REFLECTOR)		

Addendum No. 02
 ID 1130-67-72/76/186
 Revised Sheet 952
 July 2, 2025

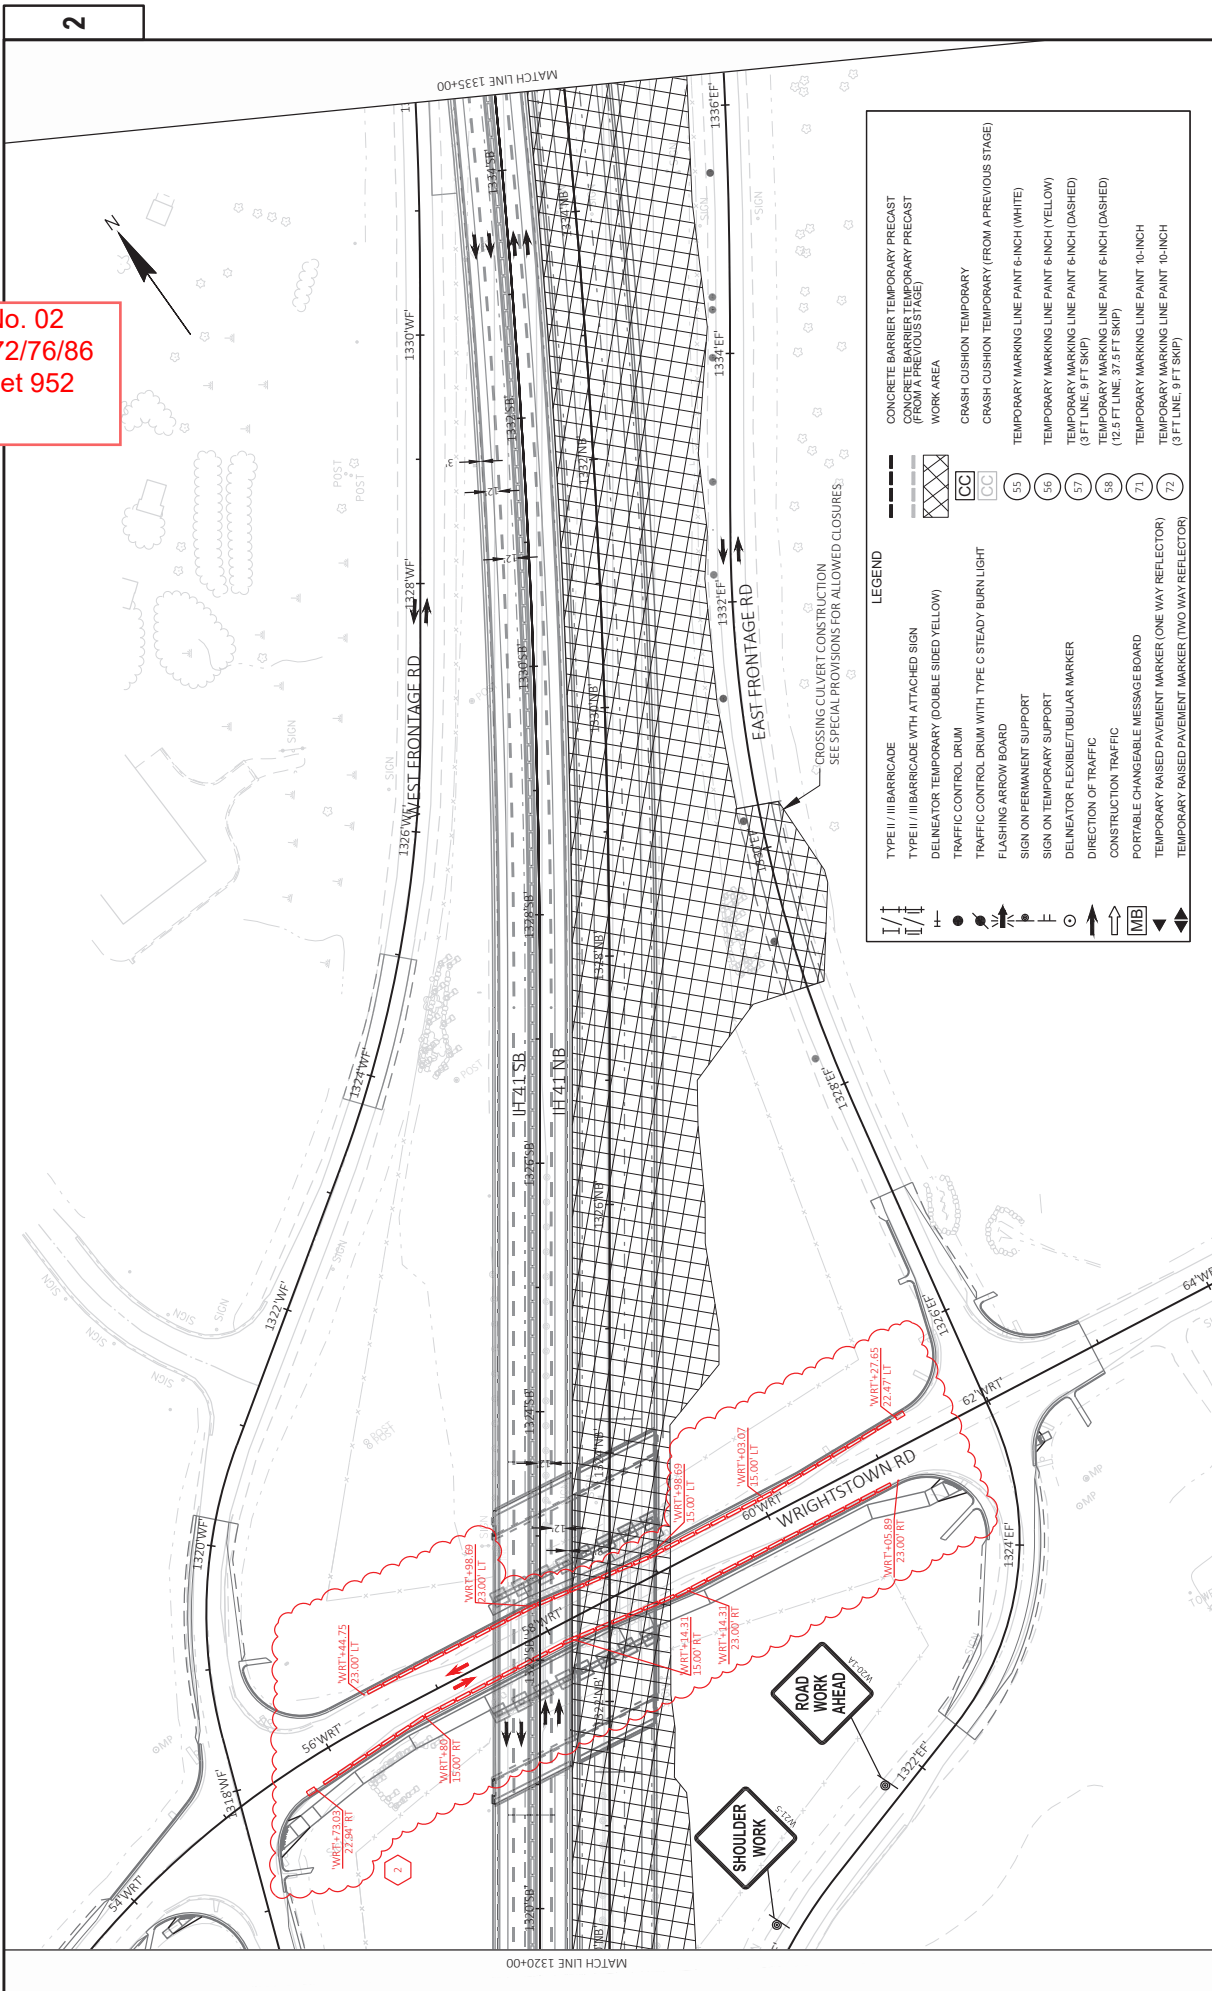

Addendum No. 02
ID 1130-67-72/76/86
Revised Sheet 998
July 2, 2025

204.0170
REMOVING FENCE
IF

CATEGORY	STAGE	ROADWAY	STATION	TO	STATION	LOCATION	REMARKS						
1000	1A	IH41 NB	1249 NB+64	-	1250 NB+93	RT	189						
			1251 NB+95	-	1253 NB+04	RT	154						
			1252 NB+06	-	1253 NB+06	RT	200						
			1253 NB+06	-	1253 NB+06	RT	200						
			1253 NB+06	-	1253 NB+06	RT	200						
			1253 NB+06	-	1253 NB+06	RT	200						
			1253 NB+06	-	1253 NB+06	RT	200						
			1253 NB+06	-	1253 NB+06	RT	200						
			1253 NB+06	-	1253 NB+06	RT	200						
			1253 NB+06	-	1253 NB+06	RT	200						
			1253 NB+06	-	1253 NB+06	RT	200						
			1253 NB+06	-	1253 NB+06	RT	200						
			1253 NB+06	-	1253 NB+06	RT	200						
			1253 NB+06	-	1253 NB+06	RT	200						
			1253 NB+06	-	1253 NB+06	RT	200						
STAGE 1A SUBTOTAL							3,133						
1000	1B	IH41 NB	1423 NB+83	-	1436 NB+27	RT	1,268						
			1437 NB+52	-	1477 NB+94	RT	1,060						
			STAGE 1B SUBTOTAL							3,329			
			1000	2A	IH41 SB	1237 SB+42	-	1250 SB+38	LT	1,334			
						1250 SB+51	-	1250 SB+61	LT	47			
						1251 SB+52	-	1251 SB+62	LT	47			
						1251 SB+39	-	1321 SB+33	LT	7,086			
						1322 SB+67	-	1402 SB+93	LT	8,192			
						1423 SB+05	-	1435 SB+84	LT	1,302			
						1437 SB+17	-	1475 SB+93	LT	4,294			
						STAGE 2A SUBTOTAL							22,302
						1000	3A	IH41 NB	1253 NB+04	-	1257 NB+05	RT	401
									1257 NB+05	-	1259 NB+05	RT	200
									1259 NB+05	-	1323 NB+02	RT	6,483
									1324 NB+75	-	1362 NB+18	RT	3,803
1382 NB+72	-	1390 NB+00							RT	738			
1447 NB+62	-	1475 NB+00							RT	2,738			
STAGE 3A SUBTOTAL									14,363				
1000	3B	IH41 NB	1390 NB+00	-	1400 NB+40				RT	1,046			
			STAGE 3B SUBTOTAL							1,046			
			1130-67-72 PROJECT TOTAL							41,170			

CATEGORY	STAGE	ROADWAY	STATION	TO	STATION	OFFSET	LOCATION	REMARKS
1000	1A	WRIGHTSTOWN ROAD	56 WRT+50	-	59 WRT+28	11.00	RT	3
			57 WRT+16	-	60 WRT+53	11.00	LT	3
			1130-67-72 PROJECT TOTAL					

Addendum No. 02
ID 1130-67-72/76/86
Revised Sheet 1100
July 2, 2025

STAGE	STATION TO	STATION	LOCATION	COMMON EXCAVATION (1)		SPV 0334.0.000 ROADWAY EMBANKMENT (4)	MASS ORDINATE +/- (5)	
				CUT (2)	FILL (3)			
1	1390.000	410.000	FRENCH RD - RAMP VIA	0	0	0	0	
	1400.000	25.000	FRENCH CROSSOVER SOUTH OF APPLE CREEK	2,600	1,214	1,386	1,386	
	1410.000	40.000	FRENCH CROSSOVER - NORTH OF APPLE CREEK	2,458	0	2,458	2,458	
	1420.000	40.000	TEMPORARY SB ON RAMP AT CTHU	6,912	0	6,912	6,912	
	1430.000	95.49	TEMPORARY SB OFF RAMP AT CTHU	5,766	0	5,766	5,766	
	1440.000	29.52	TEMPORARY SB ON RAMP AT CTHU	7,036	0	7,036	7,036	
	1450.000	13.75	TEMPORARY SB OFF RAMP AT CTHU	10,489	0	10,489	10,489	
	1460.000	13.75	POND 13.92	4,705	0	4,705	4,705	
	1470.000	13.75	POND 14.35	46,176	0	46,176	46,176	
			STAGE 1 SUBTOTAL		46,176		46,176	
	2	1374.000	1393.000	TEMPORARY SB ON RAMP AT CTHU	1,238	0	1,238	1,238
		1384.000	1400.000	TEMPORARY SB ON RAMP AT CTHU	1,553	0	1,553	1,553
		1394.000	1410.000	TEMPORARY SB OFF RAMP AT CTHU	1,914	0	1,914	1,914
1404.000		1420.000	TEMPORARY SB OFF RAMP AT CTHU	448	0	448	448	
1414.000		1430.000	TEMPORARY SB OFF RAMP AT CTHU	1,245	0	1,245	1,245	
1424.000		1440.000	TEMPORARY SB OFF RAMP AT CTHU	1,380	0	1,380	1,380	
1434.000		1450.000	TEMPORARY SB OFF RAMP AT CTHU	3,400	0	3,400	3,400	
1444.000		1460.000	TEMPORARY SB OFF RAMP AT CTHU	14,762	0	14,762	14,762	
1454.000		1470.000	TEMPORARY SB OFF RAMP AT CTHU	5,844	0	5,844	5,844	
1464.000		1480.000	TEMPORARY SB OFF RAMP AT CTHU	44,943	0	44,943	44,943	
1474.000		1490.000	TEMPORARY SB OFF RAMP AT CTHU	17,687	0	17,687	17,687	
1484.000		1500.000	TEMPORARY SB OFF RAMP AT CTHU	10,786	0	10,786	10,786	
1494.000		1510.000	TEMPORARY SB OFF RAMP AT CTHU	6,796	0	6,796	6,796	
		STAGE 2 SUBTOTAL	124,112	0	124,112	124,112		
3	1244.000	1250.000	IH 41 NORTHBOUND - BEGIN LIMIT TO CTHU	1,514	0	1,514	1,514	
	1254.000	1260.000	IH 41 NORTHBOUND - CTHU TO WRIGHTSTOWN RD	29,433	0	29,433	29,433	
	1264.000	1270.000	IH 41 NORTHBOUND - WRIGHTSTOWN RD TO CTHU	70,206	0	70,206	70,206	
	1274.000	1280.000	IH 41 NORTHBOUND - CTHU TO APPLE CREEK	19,519	0	19,519	19,519	
	1284.000	1290.000	IH 41 NORTHBOUND - APPLE CREEK TO END LIMIT	2,517	0	2,517	2,517	
	1294.000	1300.000	STAGE 3 SUBTOTAL	18,963	0	18,963	18,963	
	1304.000	1310.000	SWAGE EXCAVATION	2,593	0	2,593	2,593	
	1314.000	1320.000	WRIGHTSTOWN RD	10,304	0	10,304	10,304	
	1324.000	1330.000	EAST FRONTAGE RD AT WRIGHTSTOWN RD	2,686	0	2,686	2,686	
	1334.000	1340.000	WEST FRONTAGE RD AT WRIGHTSTOWN RD	2,624	0	2,624	2,624	
	1344.000	1350.000	POND 13.19	30,619	0	30,619	30,619	
	1354.000	1360.000	REMOVING TEMPORARY SB ON RAMP AT CTHU	1,509	0	1,509	1,509	
	1364.000	1370.000	REMOVING TEMPORARY SB OFF RAMP AT CTHU	17,726	0	17,726	17,726	
		STAGE 3 SUBTOTAL	202,896	0	202,896	202,896		
		1130-67-72 PROJECT TOTAL	3,362,910	3,763,910	93,555	188,355		
4	2111.000	3011.000	CTH U	4,248	0	4,248	4,248	
	1249.000	1253.000	EAST FRONTAGE RD AT CTHU	1,988	0	1,988	1,988	
	1258.000	1262.000	WEST FRONTAGE RD AT CTHU	3,490	0	3,490	3,490	
			STAGE 4 SUBTOTAL	9,726	0	9,726	9,726	

NOTES:
 (1) COMMON EXCAVATION IS THE SUM OF THE CUT AND FILL EXCAVATION COLUMNS. ITEM NUMBER 205.0100
 (2) SALVAGED/UNUSABLE PAVEMENT MATERIAL IS INCLUDED IN CUT.
 (3) FILL EXCAVATION TO BE BACKFILLED WITH SELECT CRUSHED MATERIAL UNLESS OTHERWISE NOTED IN THE PLANS. ALL FILL MATERIAL IS ASSUMED TO BE WASTED OFFSITE.
 (4) ROADWAY EMBANKMENT = FILL
 (5) MASS ORDINATE = EXCAVATION COMMON - ROADWAY EMBANKMENT. THE MASS ORDINATE IS FOR INFORMATION PURPOSES ONLY.

CATEGORY	STAGE	ROADWAY	STATION	TO	STATION	LOCATION	305.0110 BASE AGGREGATE 3/4-INCH		305.0120 BASE AGGREGATE 1 1/4-INCH		312.0110 SELECT DUST CONTROL MATERIAL		623.0200 DUST CONTROL SURFACE TREATMENT		644.0100 WATER	REMARKS
							TON	CU YD	TON	CU YD	TON	CU YD	TON	CU YD		
1000	1A	HH 41 NB	1248 NB+00	-	1252 NB+65	RT	-	392	-	771	910	5	WIDENING AT CTH J J BRIDGE			
			1319 NB+00	-	1324 NB+31	RT	-	412	-	793	940	6	WIDENING AT WRT BRIDGE			
			1435 NB+00	-	1440 NB+08	RT	-	394	-	201	240	2	WIDENING AT APPLE CREEK BRIDGE			
	1B	HH 41 NB	1405 NB+58	-	1409 NB+99	RT	-	998	-	1,765	2,060	13	WIDENING AT CTH U BRIDGE			
			1412 NB+57	-	1415 NB+00	RT	-	292	-	613	720	4	WIDENING AT CTH U BRIDGE			
			1416 NB+73	-	1436 NB+12	RT	-	3,225	-	7,048	8,320	48	FRENCH ROAD CROSSOVER			
			1437 NB+56	-	1447 NB+62	RT	-	1,498	-	3,830	4,224	22	FRENCH ROAD CROSSOVER			
			STAGE 1A SUBTOTAL							0	3,988	0	3,765	2,060	13	
			1C	HH 41 NB	1390 NB+75	-	1409 NB+13	LT	-	1,622	-	3,220	3,270	24	TEMPORARY SB ON-RAMP UCTA	
					1405 NB+43	-	1410 NB+54	LT	-	539	-	1,071	1,090	8	TEMPORARY SB ON-RAMP UCTA	
1416 NB+67	-	1423 NB+93			LT	-	1,244	-	2,512	2,590	19	TEMPORARY SB OFF-RAMP UDTA				
1420 NB+35	-	1433 NB+30			LT	-	4,046	-	8,075	8,240	60	TEMPORARY SB OFF-RAMP UDTA				
STAGE 1C SUBTOTAL							0	5,359	11,815	13,750	79					
2A	HH 41 SB	1227 SB+02			-	1242 SB+60	LT	-	51	316	-	740	6			
		1242 SB+60			-	1248 SB+69	L/RT	-	106	1,885	-	3,704	31			
		1252 SB+03	-	1257 SB+78	L/RT	-	14	223	-	540	4					
		1252 SB+78	-	1257 SB+78	L/RT	-	226	1,555	-	3,410	27					
		1257 SB+78	-	1272 SB+78	L/RT	-	325	4,172	-	10,614	67					
		1272 SB+78	-	1285 SB+18	L/RT	-	177	3,638	-	9,050	57					
		1285 SB+18	-	1300 SB+44	L/RT	-	240	4,509	-	11,130	71					
		1300 SB+44	-	1321 SB+03	L/RT	-	385	6,173	-	15,020	98					
		1321 SB+03	-	1325 SB+36	L/RT	-	37	596	-	1,440	10					
		1325 SB+36	-	1325 SB+36	L/RT	-	134	2,467	-	6,184	35					
		1325 SB+36	-	1340 SB+68	L/RT	-	134	2,467	-	6,184	35					
		1340 SB+68	-	1383 SB+50	L/RT	-	13,581	30,885	-	35,520	203					
		1374 SB+98	-	1392 SB+64	RT	-	1,767	4,510	-	4,510	27	TEMPORARY SB ON-RAMP UCTB				
		1383 SB+50	-	1384 SB+88	L/RT	-	360	1,562	-	1,030	6					
		1384 SB+88	-	1386 SB+13	L/RT	-	18	265	-	710	5					
		1386 SB+13	-	1389 SB+13	L/RT	-	43	678	-	1,840	11					
		1389 SB+13	-	1394 SB+75	L/RT	-	80	1,358	-	3,700	22					
		1394 SB+75	-	1395 SB+02	LT	-	4	33	-	140	1					
		1395 SB+02	-	1395 SB+02	LT	-	33	140	-	140	1					
1395 SB+02	-	1398 SB+12	LT	-	27	678	-	810	5							
1398 SB+12	-	1398 SB+12	LT	-	27	1,195	-	810	19							
1398 SB+12	-	1401 SB+85	LT	-	49	2,220	-	1,680	35							
1401 SB+85	-	1402 SB+54	LT	-	89	576	-	250	2							
1402 SB+54	-	1403 SB+39	LT	-	93	914	-	260	2							
1403 SB+39	-	1406 SB+58	LT	-	48	310	-	810	6	TEMPORARY SB ON-RAMP UCTB						
1406 SB+58	-	1407 SB+13	RT	-	18	78	-	50	1							
1407 SB+13	-	1407 SB+80	L/RT	-	63	180	-	180	1							
1407 SB+80	-	1409 SB+88	L/RT	-	15	326	-	890	9							
1409 SB+88	-	1412 SB+80	L/RT	-	186	1,327	-	1,425	10							
1412 SB+80	-	1417 SB+88	L/RT	-	132	810	-	180	2							
1417 SB+88	-	1418 SB+21	RT	-	34	79	-	100	1							
1418 SB+21	-	1423 SB+49	LT	-	543	5,520	-	1,180	9	TEMPORARY SB OFF-RAMP UDTB						
1423 SB+49	-	1425 SB+61	LT	-	103	290	-	290	2							
1425 SB+61	-	1424 SB+54	LT	-	38	110	-	170	1							
1424 SB+54	-	1425 SB+14	LT	-	61	177	-	170	1							
1425 SB+14	-	1425 SB+61	L/RT	-	69	669	-	200	2							
1425 SB+61	-	1426 SB+74	L/RT	-	18	145	-	390	2							
1426 SB+74	-	1426 SB+74	L/RT	-	18	145	-	390	2							
1426 SB+74	-	1434 SB+58	L/RT	-	26	1,260	-	3,900	24							
1434 SB+58	-	1434 SB+58	L/RT	-	26	1,260	-	3,900	24							
1434 SB+58	-	1435 SB+63	L/RT	-	15	308	-	770	5							
1435 SB+63	-	1442 SB+52	L/RT	-	72	1,490	-	3,710	24							
1442 SB+52	-	1442 SB+52	L/RT	-	72	1,490	-	3,710	24							
1442 SB+52	-	1457 SB+82	LT	-	218	2,507	-	6,690	41							
1457 SB+82	-	1456 SB+32	RT	-	478	1,278	-	3,220	27							
1456 SB+32	-	1471 SB+64	L/RT	-	197	2,910	-	7,880	46							
1471 SB+64	-	1473 SB+64	L/RT	-	71	1,230	-	1,440	9							
1473 SB+64	-	1479 SB+93	LT	-	132	362	-	840	8							
STAGE 2A SUBTOTAL							0	11,815	11,815	13,750	79					

Addendum No. 02
ID 1130-67-72/76/86
Revised Sheet 1108
July 2, 2025

CATEGORY	STAGE	ROADWAY	STATION	TO	STATION	LOCATION	305.0110 BASE AGGREGATE DUST CONTROL SURFACE 1 1/4-INCH		305.0120 BASE AGGREGATE DUST CONTROL SURFACE 1 1/4-INCH	312.0110 SELECT CONTROL SURFACE MATERIAL	623.0200 DUST CONTROL SURFACE TREATMENT	644.0100 WATER	REMARKS
							TON	SY					
1000	2A	WEST FRONTAGE ROAD	1254 WF+76	-	1255 WF+01	L/RT	13	41	100	98	100	1	
			1257 WF+78	-	1258 WF+11	L/RT	15	51	130	124	130	1	
			1263 WF+14	-	1263 WF+58	L/RT	12	36	90	86	90	1	
			1275 WF+26	-	1275 WF+70	L/RT	15	45	110	105	110	1	
			1278 WF+29	-	1278 WF+44	L/RT	16	48	116	110	116	5	
			1305 WF+65	-	1305 WF+29	L/RT	31	102	250	246	250	2	
			1323 WF+76	-	1324 WF+98	L/RT	42	172	420	417	420	4	
			1344 WF+47	-	1344 WF+91	L/RT	9	52	140	127	140	1	
			1361 WF+01	-	1361 WF+21	L/RT	4	23	60	57	60	1	
			1362 WF+43	-	1362 WF+63	L/RT	3	22	60	52	60	1	
			1384 WF+30	-	1384 WF+90	L/RT	23	87	212	212	210	2	
			1385 WF+28	-	1387 WF+48	L/RT	51	187	460	451	460	4	
			1387 WF+27	-	1387 WF+47	L/RT	26	86	210	205	210	1	
			1389 WF+17	-	1389 WF+94	L/RT	26	108	280	262	280	3	
			56 UAWN+68	-	58 UAWN+10	L/RT	-	122	296	296	350	2	
MID VALLEY DR							3.821	65.670	157.504	159.340	1.056		
STAGE 2A SUBTOTAL													
2B	IH 41 SB	1394 SB+75	-	1402 SB+64	RT	-	368	1,050	-	1,050	5		
		1402 SB+64	-	1403 SB+54	L/RT	23	86	210	205	210	1		
		1405 SB+74	-	1407 SB+13	L/RT	3	80	130	130	130	12		
		1406 SB+74	-	1407 SB+13	L/RT	3	80	130	130	130	12		
		1407 SB+13	-	1407 SB+80	L/RT	5	107	110	100	110	2		
		1416 SB+80	-	1417 SB+48	L/RT	5	108	110	110	110	2		
		1417 SB+48	-	1418 SB+21	L/RT	5	150	210	210	210	3		
		1418 SB+21	-	1423 SB+49	L/RT	38	1,132	2,230	2,230	2,230	19		
		1423 SB+49	-	1423 SB+84	L/RT	52	1,500	3,000	3,000	3,000	1		
		1423 SB+84	-	1424 SB+54	L/RT	65	1,900	3,800	3,800	3,800	1		
		1424 SB+54	-	1425 SB+14	L/RT	28	80	80	80	80	1		
		1389 NB+84	-	1395 NB+30	LT	80	3,184	5,820	5,820	5,820	50		
		1421 NB+46	-	1434 NB+94	LT	-	1,102	2,480	2,480	2,480	16		
		1383 SB+50	-	1393 SB+31	RT	-	1,296	2,920	2,920	2,920	19		
		1409 SB+80	-	1409 SB+80	RT	-	382	1,090	1,090	1,090	6		
1411 SB+46	-	1423 SB+62	RT	-	1,343	3,000	3,000	3,000	20				
1421 SB+46	-	1423 SB+62	RT	-	316	840	840	840	0				
1423 SB+62	-	1434 SB+58	RT	-	426	1,220	1,220	1,220	7				
1442 SB+52	-	1449 SB+64	RT	-	580	1,110	1,110	1,110	8				
1449 SB+64	-	1471 SB+64	RT	-	856	2,440	2,440	2,440	12				
STAGE 2B SUBTOTAL													
2C	IH 41 NB	1425 FRN+15	-	1440 FRN+80	L/RT	0	6,788	15,480	4,886	15,480	100		
		1440 FRN+80	-	1440 FRN+80	L/RT	314	2,320	5,620	5,381	5,620	40		
		1441 FRN+53	-	1451 FRN+51	L/RT	223	1,580	3,980	3,812	3,980	30		
STAGE 2C SUBTOTAL													
2C-WS	FRENCH RD	1425 FRN+15	-	1440 FRN+80	L/RT	0	6,788	15,480	4,886	15,480	100		
		1440 FRN+80	-	1440 FRN+80	L/RT	314	2,320	5,620	5,381	5,620	40		
STAGE 2C-WINTER SHUTDOWN SUBTOTAL													
TOTAL							537	3,810	9,193	9,193	9,600	70	

2

TEMPORARY NE/OFF-RAMP/UBT

TEMPORARY NB/LN-RAMP/LIAT

2

Addendum No. 02
ID 1130-67-72/76/86
Revised Sheet 1109
July 2, 2025

Addendum No. 02
ID 1130-67-72/76/86
Revised Sheet 1110
July 2, 2025

CATEGORY	STAGE	ROADWAY	STATION	TO	STATION	LOCATION	BASE AGGREGATE ITEMS		BASE AGGREGATE		DUST CONTROL SURFACE TREATMENT		REMARKS
							3/4-INCH	TON	1 1/4-INCH	TON	SY	MGAL	
1000	3A	IH 41 NB	1243 NB+00	-	1250 NB+36	L/RT	155	1,698	3,438	4,200	28		
			1252 NB+39	-	1253 NB+00	L/RT	4	392	1,565	350	3		
			1253 NB+00	-	1273 NB+00	L/RT	146	7,250	1,958	10,970	1,100		
			1273 NB+00	-	1275 NB+00	L/RT	14	300	1,479	1,479	0		
			1275 NB+00	-	1276 NB+98	L/RT	34	700	1,479	1,200	0		
			1276 NB+98	-	1285 NB+40	L/RT	130	2,242	5,556	6,440	36		
			1285 NB+40	-	1300 NB+77	L/RT	265	4,161	11,066	11,210	66		
			1300 NB+77	-	1321 NB+64	L/RT	297	5,558	14,359	15,230	87		
			1321 NB+64	-	1336 NB+40	L/RT	448	3,474	9,896	9,460	58		
			1336 NB+40	-	1337 NB+11	L/RT	102	788	2,497	2,130	14		
			1337 NB+11	-	1341 NB+65	L/RT	44	778	2,106	2,110	13		
			1341 NB+65	-	1345 NB+93	L/RT	28	1,613	4,660	4,660	16		
			1345 NB+93	-	1363 NB+21	L/RT	93	1,708	4,372	4,680	28		
			1363 NB+21	-	1371 NB+07	L/RT	112	2,215	5,883	6,080	35		
			1000	3A	RAMP SWEF	1371 NB+07	-	1376 NB+35	L/RT	-	1,181	4,562	3,370
1376 NB+35	-	1383 NB+84				L/RT	-	1,874	7,211	5,350	29		
1383 NB+84	-	1392 NB+69				L/RT	-	1,308	9,772	3,740	20		
1392 NB+69	-	1454 NB+94				L/RT	94	1,289	4,606	3,480	21		
1454 NB+94	-	1455 NB+99				L/RT	15	312	860	860	5		
1455 NB+99	-	1457 NB+00				L/RT	64	6,914	15,216	14,990	31		
1457 NB+00	-	1472 NB+00				L/RT	63	924	1,832	1,820	15		
1472 NB+00	-	87 SWEF+33				L/RT	68	503	1,294	1,280	9		
87 SWEF+33	-	87 SWEF+62				L/RT	3	32	107	80	1		
87 SWEF+62	-	98 SWEF+84				L/RT	150	152	3,008	4,000	26		
98 SWEF+84	-	101 SWEF+42				L/RT	66	488	1,245	1,200	9		
101 SWEF+42	-	102 SWEF+68				L/RT	31	235	589	530	4		
102 SWEF+68	-	119 SWEF+07				L/RT	14	283	460	460	5		
119 SWEF+07	-	120 SWEF+29				L/RT	12	474	450	450	4		
120 SWEF+29	-	124 SWEF+30				L/RT	26	703	1,802	1,280	11		
124 SWEF+30	-	125 SWEF+44	L/RT	18	18	220	220	3					
125 SWEF+44	-	126 SWEF+72	L/RT	18	135	350	350	3					
1000	3A	RAMP CD	2371 CD+07	-	2376 CD+34	L/RT	75	589	1,520	10			
			2376 CD+34	-	2379 CD+17	L/RT	40	354	930	6			
			2379 CD+17	-	2382 CD+48	L/RT	17	171	1,460	3			
			2382 CD+48	-	2385 CD+12	L/RT	108	1,296	3,470	22			
			2385 CD+12	-	2395 CD+47	L/RT	35	462	1,240	8			
			2395 CD+47	-	49 WRT+78	L/RT	75	803	1,937	2,050	14		
			49 WRT+78	-	57 WRT+38	L/RT	-	735	1,478	1,750	12		
			57 WRT+38	-	59 WRT+12	L/RT	-	404	735	870	7		
			59 WRT+12	-	62 WRT+94	L/RT	-	802	1,613	1,910	13		
			62 WRT+94	-	1316 WF+96	L/RT	71	476	1,149	1,280	9		
			1316 WF+96	-	1320 WF+21	L/RT	39	257	621	660	5		
			1320 WF+21	-	1260 EF+69	L/RT	51	213	513	540	4		
			1260 EF+69	-	1278 EF+21	L/RT	59	192	465	480	4		
			1278 EF+21	-	1305 EF+51	L/RT	23	99	240	250	2		
			1305 EF+51	-	1314 EF+43	L/RT	47	151	364	380	3		
1314 EF+43	-	1324 EF+68	L/RT	59	403	743	1,320	4					
1324 EF+68	-	1328 EF+86	L/RT	67	235	589	580	5					
1328 EF+86	-	1340 EF+42	L/RT	45	171	413	420	4					
1340 EF+42	-	55 FRN+36	L/RT	26	91	220	230	2					
55 FRN+36	-	70 FRN+55	L/RT	150	150	370	370	3					
70 FRN+55	-	73 FRN+64	L/RT	38	367	404	410	4					
73 FRN+64	-			3,845	65,484	162,559	160,540	1,060					

Addendum No. 02
ID 1130-67-72/76/86
Added Sheet 1110A
July 2, 2025

CATEGORY	STAGE	ROADWAY	STATION TO	STATION	LOCATION	BASE AGGREGATE ITEMS		305.0120 BASE AGGREGATE DIMS 1 1/4-INCH TON	312.0110 SELECT CONTROL SURFACE MATERIAL TON	623.0200 DUST CONTROL SURFACE TREATMENT SY	644.0100		REMARKS			
						306.0110 BASE AGGREGATE DIMS 3/4-INCH TON	WATER				MISCAL					
1000	3B	IH 41 NB	-	1382 NB*84	-	L/RT	-	1,145	-	2,590	18					
				1392 NB*69	-	L/RT	-	3,347	17,414	9,560	51					
				1412 NB*56	-	L/RT	-	1,674	3,711	3,330	42					
				1428 NB*20	-	L/RT	-	968	2,752	2,450	6					
				1438 NB*33	-	L/RT	-	885	2,752	2,450	15					
				1428 NB*33	-	L/RT	-	885	2,752	2,450	15					
				2397 CD*67	-	L/RT	-	149	994	2,370	17					
				2397 CD*84	-	L/RT	-	332	820	620	6					
				2397 CD*52	-	L/RT	-	216	620	620	4					
				2399 CD*74	-	L/RT	-	764	1,890	1,890	14					
				2403 CD*61	-	L/RT	-	131	764	2,880	19					
				2408 CD*25	-	L/RT	-	198	1,080	580	5					
				2408 CD*25	-	L/RT	-	42	237	360	5					
				STAGE 3B SUBTOTAL						708	14,108	33,650	289,306	230		
				4A	IH 41 SB	-	-	1382 SB*50	-	RT	-	137	-	390	3	
1423 SB*62	-	RT	-					170	-	490	3					
2217*10	-	L/RT	-					215	518	560	4					
2217*10	-	L/RT	-					210	360	360	30					
2217*10	-	L/RT	-					7	102	360	2					
2910*48	-	L/RT	-					15	237	550	4					
2910*48	-	L/RT	-					15	237	550	4					
1249 EF*81	-	L/RT	-					31	206	550	4					
1252 EF*55	-	L/RT	-					31	204	550	4					
1252 EF*55	-	L/RT	-					198	1,319	3,550	22					
1248 WF*48	-	L/RT	-					108	720	1,930	12					
1248 WF*48	-	L/RT	-					108	720	1,930	12					
STAGE 4A SUBTOTAL								416	5,410	8,810	2,200	88				
CATEGORY 1000 SUBTOTAL								9,407	174,857	417,440	401,823	2,816				
1010	3A	WRIGHTSTOWN RD	-					49 WRT*78	-	L/RT	-	128	-	-	-	
				53 WRT*88	-	L/RT	-	259	-	-	-					
				57 WRT*38	-	L/RT	-	363	-	-	-					
				59 WRT*12	-	L/RT	-	253	-	-	-					
				59 WRT*112	-	L/RT	-	802	-	-	-					
				STAGE 3A SUBTOTAL						0	802	0	0	0		
CATEGORY 1010 SUBTOTAL						0	802	0	0	0						
1130-67-72 PROJECT TOTAL						9,407	175,659	417,440	401,823	2,816						

2

Addendum No. 02
 ID 1130-67-72/76/86
 Revised Sheet 1115
 July 2, 2025

CATEGORY	STAGE	ROADWAY	STATION	TO	STATION	OFFSET	LOCATION	TACK COAT GAL	HMA PAVEMENT 3 LT 58-28 S TON	HMA PAVEMENT 4 LT 58-28 S TON	ASPHALTIC SURFACE TON	465.0135 ASPHALTIC SURFACE TEMPORARY TON	SPV.000.001 LONGITUDINAL JOINT REPAIR IF	REMARKS
1000	1A	IH 41 NB	1340NB+00 1341NB+00 1342NB+00 1343NB+00	-	1345NB+65 1346NB+30 1347NB+00 1446NB+68	37.00 38.00 31.00	RT RT RT	110 114 30	-	-	-	465	465	WIDENING AT CITY U BRIDGE WIDENING AT MT BRIDGE WIDENING AT APPLE CREEK BRIDGE
							STAGE 1A SUBTOTAL	224	0	0	0	382	1,204	
	1B	IH 41 NB	1406NB+98 1412NB+57 1416NB+73 1437NB+56	-	1409NB+99 1415NB+00 1438NB+12 1447NB+62	0.00 0.00 9.00 79.00	L7/RT L7/RT RT RT	104 88 1,002 460	-	-	-	178 151 1,739 798	275 130 645	WIDENING AT CITY U BRIDGE WIDENING AT MT BRIDGE FRENCH ROAD CROSSOVER
							STAGE 1B SUBTOTAL	1,654	0	0	0	2,866	1,050	
	1C	IH 41 NB	1330NB+78 1416NB+68	-	1410NB+59 1433NB+29	3.00 0.00	LT L7/RT	440 422	-	-	-	762 732	1,480 1,205	TEMPORARY SB ON RAMP UCTB TEMPORARY SB OFF RAMP UDTA
							STAGE 1C SUBTOTAL	862	0	0	0	1,494	2,885	
	2A	IH 41 SB	1237SB+42 1243SB+00 1252SB+78 1333SB+85 1374SB+98 1395SB+02 1401SB+84 1403SB+54 1405SB+58 1407SB+80 1410SB+48 1412SB+48 1420SB+17 1425SB+49 1443SB+09 1471SB+64 1473SB+64	-	1245SB+00 1248SB+03 1272SB+78 1384SB+88 1392SB+64 1401SB+84 1403SB+54 1405SB+58 1407SB+80 1410SB+48 1412SB+48 1420SB+17 1425SB+49 1443SB+09 1471SB+64 1473SB+64	34.00 0.00 24.00 48.00 30.00 48.00 30.00 100.00 36.00 28.00 65.00 30.00 20.00 0.00 31.00	LT L7/RT RT LT LT LT LT LT LT LT LT LT LT LT LT LT	76 572 572 544 312 53 26 86 32 45 130 36 236 166 84	130 999	566 378 37 18 22 22 25	540 850	850	TEMPORARY SB ON RAMP UCTB TEMPORARY SB ON RAMP UCTB TEMPORARY SB OFF RAMP UDTB TEMPORARY SB OFF RAMP UDTB	
							STAGE 2A SUBTOTAL	1,115	703	1,115	1,557	1,474	2,865	
	2B	IH 41 NB	1403SB+54 1416SB+80	-	1407SB+80 1425SB+49	36.00 36.00	LT LT	60 93	40 62	-	-	-	-	
							STAGE 2B SUBTOTAL	153	102	102	0	0	0	
	2C	IH 41 NB	1383NB+84 1421NB+46 1449SB+64	-	1395NB+30 1434NB+94 1471SB+64	20.00 14.00 25.00	LT LT RT	234 262 118	-	-	-	404 453 204	220 250	TEMPORARY NB OFF RAMP UBT TEMPORARY NB ON RAMP UBT
							STAGE 2C SUBTOTAL	614	0	0	1,061	470	470	
	2C - WS	FRENCH RD	1428FRN+15 1442FRN+35	-	1440FRN+80 1451FRN+31	0.00 0.00	L7/RT L7/RT	649 399	350 243	-	-	-	-	
							STAGE 2C - WINTER SHUTDOWNS SUBTOTAL	974	1,100	593	0	0	0	

CATEGORY	STAGE	ROADWAY	STATION	TO	STATION	OFFSET	LOCATION	TACK COAT GAL	460.5223 HMA PAVEMENT 3 LT 58-28.5 TON	460.5224 HMA PAVEMENT 4 LT 58-28.5 TON	465.0135 ASPHALTIC SURFACE TEMPORARY TON	SPV.000.001 LONGITUDINAL JOINT REPAIR LF	REMARKS			
1000	3A	IH41 NB	134.0NB+50	-	135.0NB+38	0.00	LT/RT	307	444	326	683	-				
			135.0NB+38	-	137.0NB+40	30.00	RT	329	397	376	-					
			137.0NB+40	-	140.0NB+40	30.00	LT	214	223	149	-					
			140.0NB+40	-	142.0NB+40	20.00	LT	26.00	235	163	-					
			142.0NB+40	-	147.5NB+00	0.00	LT/RT	130	444	330	-					
			101.5WEP+42	-	104.5WEP+00	9.00	RT	19	19	13	-					
			102.5WEP+68	-	104.5WEP+00	17.00	LT	7	7	5	-					
			119.5WEP+00	-	123.5WEP+44	21.00	RT	44	45	30	-					
			119.5WEP+00	-	120.5WEP+79	21.00	LT	8	8	5	-					
			126.0EF+69	-	126.1EF+83	0.00	LT/RT	45	51	28	-					
			127.8EF+21	-	127.9EF+40	0.00	LT/RT	37	42	23	-					
			130.5EF+51	-	130.6EF+30	0.00	LT/RT	22	25	14	-					
			132.0EF+49	-	132.1EF+43	0.00	LT/RT	32	36	21	-					
			132.2EF+44	-	132.3EF+46	0.00	LT/RT	94	106	57	-					
			132.4EF+34	-	132.5EF+48	33.00	LT	-	-	-	-					
132.5EF+92	-	132.6EF+01	24.00	RT	-	-	-	-								
132.5EF+92	-	132.7EF+08	0.00	LT/RT	49	55	30	-								
132.6EF+32	-	132.6EF+44	14.50	LT	-	-	-	-								
132.8EF+86	-	133.0EF+38	0.00	LT/RT	45	51	28	-								
134.8EF+24	-	134.9EF+42	0.00	LT/RT	35	39	21	-								
5.0FRN+36	-	5.0FRN+04	0.00	LT/RT	18	20	11	-								
6.0FRN+62	-	20.0FRN+55	0.00	LT/RT	28	32	17	-								
7.0FRN+44	-	7.0FRN+64	0.00	LT/RT	32	41	17	-								
134.0WF+09	-	134.0WF+96	0.00	LT/RT	129	146	79	-								
134.0WF+09	-	134.0WF+31	26.00	RT	-	-	-	-								
131.8WF+66	-	132.1WF+52	0.00	LT/RT	71	80	43	-								
131.8WF+95	-	131.9WF+04	24.00	RT	-	-	-	-								
49.0WRT+78	-	62.0WRT+94	0.00	LT/RT	957	1,080	582	-								
53.0WRT+48	-	53.0WRT+97	34.00	RT	-	-	-	-								
62.0WRT+55	-	62.0WRT+67	22.00	RT	-	-	-	-								
STAGE 3A SUBTOTAL																
3.037	2.093	1.562	0	1,562	3,037	1,019	0	0								
3B	IH41 NB	RAMP CD	141.2NB+07	-	142.4NB+29	53.00	RT	179	187	125	-	-				
			239.7CD+52	-	239.9CD+74	28.00	RT	39	41	27	-					
			239.9CD+74	-	240.9CD+37	28.00	RT	130	135	90	-					
			STAGE 3B SUBTOTAL													
			348	363	242	0	348	363	242	0	0					
			4A	CTH JJ	EAST FRONTAGE RD	21.0J+20	-	29.0J+47	0.00	LT/RT	658	743	400	-	-	
						21.0J+72	-	21.0J+79	24.00	RT	-	-	-	-		
						22.0J+10	-	22.0J+19	24.00	LT	-	-	-	-		
						29.0J+56	-	30.0J+79	0.00	LT/RT	-	-	34	-		
						124.0EF+81	-	125.1EF+05	0.00	LT/RT	60	67	36	-		
						124.0EF+81	-	124.0EF+29	18.00	LT/RT	60	68	37	-		
						125.2EF+55	-	125.3EF+28	0.00	LT/RT	60	68	37	-		
						125.2EF+60	-	125.2EF+69	25.00	RT	-	-	-	-		
						123.8WTF+48	-	124.6WTF+43	0.00	LT/RT	358	404	218	-		
						124.6WTF+51	-	124.6WTF+59	24.00	LT	-	-	-	-		
124.6WTF+59	-	124.6WTF+71				17.00	RT	-	-	-	-					
124.7WTF+97	-	124.8WTF+05				19.00	LT	-	-	-	-					
124.8WTF+39	-	125.2WTF+53				0.00	LT/RT	196	221	119	-					
124.8WTF+29	-	124.8WTF+37				24.00	RT	-	-	-	-					
STAGE 4 SUBTOTAL																
1,332	1,566	844	0	1,332	1,566	844	0	0								
113067-72 PROJECT TOTAL																
11,991	6,990	4,046	0	11,991	6,990	4,046	0	0								
2,576	7,282	8,774	2	2,576	7,282	8,774	2									

Addendum No. 02
 ID 1130-67-72/76/86
 Revised Sheet 1116
 July 2, 2025

Addendum No. 02
 ID 1130-67-72/76/86
 Revised Sheet 1121
 July 2, 2025

CRASH CUSHIONS

CATEGORY	STAGE	ROADWAY	STATION	OFFSET	LOCATION	CRASH CUSHIONS PERMANENT EACH	BACK WIDTH FT	OBJECT MARKING PATTERN	CRASH TEST LEVEL	DIRECTION OF TRAVEL	TRAVEL LOCATION	REMARKS
1000	3A	IH 41 NB	1346'NB+15 1376'NB+34	37' 37'	RT RT	1 1	2 2	OM-3C OM-3C	TL-3 TL-3	NB NB	BOTH BOTH	
		SWEEF	100'SWEEF+00	21'	LT	1	2	OM-3C	TL-3	NB	LEFT	
					STAGE 3A SUBTOTAL	3						
					1130-67-72 PROJECT TOTAL	3						
						2						

3

3

MAINTENANCE AND REPAIR OF HAUL ROADS

CATEGORY	LOCATION	REMARKS
1800	PROJECT 1130-67-72	
	1130-67-72 PROJECT TOTAL	

MOBILIZATION

CATEGORY	LOCATION	REMARKS
1000	PROJECT 1130-67-72	
	1130-67-72 PROJECT TOTAL	

Addendum No. 02
 ID 1130-67-72/76/86
 Revised Sheet 1126
 July 2, 2025

IRIPRAP AND GEOTEXTILE FABRIC ITEMS

CATEGORY	STAGE	ROADWAY	STATION	OFFSET	LOCATION	606.0200 IRIPRAP MEDIUM CY	606.0300 IRIPRAP HEAVY CY	645.0120 GEOTEXTILE TYPE HR SY	REMARKS
1000	1A	IH 41 NB	1327NB+99	99.00	RT	21	-	41	
			1331NB+37	76.00	RT	21	-	41	
			1434NB+00	151.00	RT	-	21	32	
			1436NB+07	197.00	RT	-	15	23	
			1438 POND SPILLWAY	-	-	-	19	29	
			1438 POND	-	-	-	-	44	
STAGE 1A SUBTOTAL						42	55	166	2
	2A	IH 41 SB	1252SB+30	57.00	LT	31	-	62	
			1253SB+75	52.00	LT	26	-	52	
			1255SB+75	58.00	LT	21	-	41	
			1257SB+77	139.00	LT	21	-	41	
			1258SB+77	56.00	LT	14	-	27	
			1260SB+78	142.00	LT	17	-	34	
			1261SB+79	58.00	LT	14	-	27	
			1264SB+28	56.00	LT	14	-	27	
			1267SB+27	56.00	LT	14	-	27	
			1270SB+27	54.00	LT	14	-	27	
			1273SB+27	52.00	LT	14	-	27	
			1275SB+77	53.00	LT	14	-	27	
			1279SB+47	54.00	LT	17	-	34	
			1280SB+30	55.00	LT	17	-	34	
			1280SB+83	123.00	LT	17	-	34	
			1282SB+28	52.00	LT	14	-	27	
			1284SB+77	52.00	LT	14	-	27	
			1287SB+27	52.00	LT	14	-	27	
			1289SB+26	52.00	LT	14	-	27	
			1291SB+24	51.00	LT	14	-	27	
			1293SB+21	55.00	LT	14	-	27	
			1297SB+18	52.00	LT	14	-	27	
			1299SB+17	52.00	LT	14	-	27	
			1301SB+67	52.00	LT	14	-	27	
			1304SB+17	52.00	LT	14	-	27	
			1307SB+37	50.00	LT	14	-	27	
			1310SB+17	68.00	LT	21	-	41	
			1313SB+57	54.00	LT	14	-	27	
			1315SB+97	57.00	LT	22	-	44	
			1320SB+67	62.00	LT	14	-	27	
			1323SB+68	66.00	LT	22	-	44	
			1326SB+71	52.00	LT	14	-	27	
			1326SB+95	85.00	LT	21	-	41	
			1329SB+11	109.00	LT	14	-	27	
			1348SB+00	160.00	LT	24	-	48	
			1390SB+25	132.00	LT	24	-	48	
			1390SB+83	138.00	LT	24	-	48	
			1365SB+31	147.00	LT	17	-	32	
			1363SB+77	232.00	LT	-	-	44	
			1365 POND SPILLWAY	-	-	-	-	56	
			1365 POND	-	-	-	-	44	
			1392SB+00	193.00	LT	-	-	30	
			1390SB+68	233.00	LT	-	-	12	
			1391 POND SPILLWAY	-	-	-	-	3	
			1391 POND	-	-	-	-	44	
STAGE 2A SUBTOTAL						633	116	1,415	2

RIPRAP AND GEOTEXTILE FABRIC ITEMS

CATEGORY	STAGE	ROADWAY	STATION	OFFSET	LOCATION	606.0200 RIPRAP MEDIUM CY	606.0300 RIPRAP HEAVY CY	645.0120 GEOTEXTILE TYPE HR SY	REMARKS
1000	3A	IH 41 NB	1261NB+29	82.00	RT	40	-	79	
			1278NB+91	59.00	RT	17	-	34	
			1279NB+30	49.00	RT	14	-	27	
			1282NB+50	50.00	RT	14	-	27	
			1285NB+00	51.00	RT	14	-	27	
			1289NB+50	54.00	RT	14	-	27	
			1299NB+50	53.00	RT	14	-	27	
			1302NB+00	52.00	RT	14	-	27	
			1304NB+50	52.00	RT	14	-	27	
			1305NB+71	53.00	RT	14	-	27	
			1307NB+70	51.00	RT	14	-	27	
			1313NB+90	52.00	RT	14	-	27	
			1313NB+92	62.00	RT	14	-	27	
			1316NB+30	53.00	RT	14	-	27	
			1320NB+36	50.00	RT	18	-	35	
			1324NB+36	69.00	RT	20	-	39	
			1327NB+08	77.00	RT	23	-	45	
			1327NB+99	95.00	RT	21	-	41	
			1328NB+55	164.00	RT	24	-	48	
			1329NB+13	74.00	RT	13	-	25	
			1331NB+37	74.00	RT	21	-	41	
			1334NB+29	74.00	RT	13	-	25	
			1336NB+29	73.00	RT	13	-	25	
			1338NB+32	75.00	RT	14	-	27	
			1343NB+46	55.00	RT	13	-	25	
			1346NB+45	91.00	RT	13	-	25	
			1347NB+50	84.00	RT	14	-	27	
			1360NB+04	112.00	RT	15	-	29	
			1379NB+10	159.00	RT	14	-	27	
			1384NB+10	80.00	RT	14	-	27	
			1386NB+91	89.00	RT	14	-	27	
			1393NB+39	96.00	RT	14	-	27	
			1430NB+00	61.00	RT	14	-	27	
			1238NB+03	58.00	RT	14	-	27	
			1440NB+00	53.00	RT	14	-	27	
			1443NB+00	52.00	RT	14	-	27	
			1446NB+00	52.00	RT	14	-	27	
			1448NB+50	51.00	RT	14	-	27	
			1451NB+00	51.00	RT	14	-	27	
			1453NB+50	50.00	RT	14	-	27	
			1456NB+00	50.00	RT	14	-	27	
			1458NB+50	51.00	RT	14	-	27	
			1461NB+00	51.00	RT	14	-	27	
			1463NB+73	55.00	RT	14	-	27	
			1464NB+01	50.00	RT	14	-	27	
			1469NB+33	50.00	RT	14	-	27	
		WRIGHTSTOWN RD	50WRT+56	33.00	LT	-	18	27	
			53WRT+26	157.00	RT	-	13	20	
			53WRT+52	112.00	RT	-	15	23	
			WRT+51	41.00	LT	-	22	33	
		1320 POND SPILLWAY	-	-	-	-	14	21	
			-	-	-	-	-	5899	2
			-	-	-	-	-	1,504	
			STAGE 3A SUBTOTAL			712	82		
			1425NB+50	68.00	RT	14	-	27	
			1428NB+00	61.00	RT	14	-	27	
			STAGE 3B SUBTOTAL			28	0	54	
			UNDISTRIBUTED			142	26	314	2
			1130-67-72 PROJECT TOTAL			1,557	279	3,263	

Addendum No. 02
 ID 1130-67-72/76/86
 Revised Sheet 1127
 July 2, 2025

Addendum No. 02
ID 1130-67-72/76/86
Revised Sheet 1129
July 2, 2025

CATEGORY	STAGE	ROADWAY	STATION	TO	STATION	OFFSET	LOCATION	EROSION MAT ITEMS		REMARKS			
								CLASS I TYPE B SY	CLASS III TYPE D SY				
1000	1A	IH 41 SB	1365'SB+05	-	1365'SB+68	60.00	LT	5,511	-				
			1390'SB+78	-	1393'SB+05	200.00	LT	4,434	-				
			1249'NB+64	-	1250'NB+63	53.00	RT	756	-				
			1252'NB+15	-	1252'NB+65	48.00	RT	339	-				
			1321'NB+22	-	1322'NB+42	36.00	RT	269	-				
			1323'NB+81	-	1324'NB+31	36.00	RT	316	-				
			1433'NB+44	-	1436'NB+07	137.00	RT	4,187	-				
			1435 POND SPILLWAY								58		
			1435 POND								1,371	2	
			1435 POND								17,183	58	
STAGE 1A SUBTOTAL													
1B	IH 41 NB	1406'NB+98	-	1409'NB+99	21.00	LT	528	-					
		1412'NB+80	-	1415'NB+00	25.00	LT	303	-					
		1416'NB+74	-	1425'NB+50	97.00	RT	1,082	-					
		1424'NB+81	-	1436'NB+12	120.00	RT	1,468	-					
		1424'NB+96	-	1436'NB+12	49.00	RT	1,785	-					
		1437'NB+56	-	1446'NB+02	116.00	RT	1,412	-					
		1437'NB+57	-	1447'NB+62	77.00	RT	1,643	-					
		1435 POND SPILLWAY								0			
		1435 POND								8,221	0		
		STAGE 1B SUBTOTAL											
1C	IH 41 SB	1390'SB+40	-	1408'SB+40	0.00	LT/RT	2,991	-					
		1404'SB+08	-	1416'SB+26	0.00	LT/RT	3,133	-					
		1416'SB+33	-	1423'SB+66	0.00	LT/RT	3,378	-					
		1420'SB+11	-	1432'SB+94	0.00	LT/RT	2,105	-					
		1391 POND SPILLWAY								1,607	0		
		1391 POND								0			
		STAGE 1C SUBTOTAL											
		2A	IH 41 SB	1237'SB+42	-	1250'SB+54	38.00	LT	5,606	-			
				1251'SB+53	-	1321'SB+01	38.00	LT	29,836	-			
				1322'SB+51	-	1333'SB+85	38.00	LT	4,542	-			
1337'SB+38	-			1338'SB+98	38.00	LT	106	-					
1347'SB+24	-			1347'SB+68	44.00	LT	268	-					
1363'SB+76	-			1363'SB+96	74.00	LT	45	-					
1384'SB+88	-			1401'SB+84	38.00	LT	7,535	-					
1407'SB+80	-			1410'SB+92	38.00	LT	1,578	-					
1412'SB+89	-			1419'SB+76	38.00	LT	2,922	-					
1425'SB+64	-			1435'SB+88	38.00	LT	2,138	-					
1437'SB+14								13,657					
1365 POND SPILLWAY								116					
1365 POND								1,613	2				
1391 POND SPILLWAY								70	2				
1391 POND								1,479	2				
STAGE 2A SUBTOTAL													
2B	IH 41 SB	1405'SB+29	-	1408'SB+87	37.00	LT	1,306	-					
		1416'SB+92	-	1421'SB+00	37.00	LT	1,501	-					
		1435 POND SPILLWAY							0				
STAGE 2B SUBTOTAL													
2C - WS	FRENCH RD	29'UFRN+83	-	42'UFRN+48	17.00	LT	4,973	-					
		29'UFRN+83	-	42'UFRN+48	17.00	RT	1,995	-					
		43'UFRN+91	-	52'UFRN+99	22.00	RT	1,682	-					
		43'UFRN+93	-	53'UFRN+98	22.00	LT	4,264	-					
		1435 POND SPILLWAY								0			
STAGE 2C - WS SUBTOTAL													

EROSION MAT ITEMS

628.2039
EROSION MAT
CLASS III
TYPE D
SY

628.2004
EROSION MAT
CLASS I
TYPE B
SY

REMARKS

SY

LOCATION

OFFSET

STATION

TO

STATION

ROADWAY

STAGE

CATEGORY

SY	LOCATION	OFFSET	STATION	TO	STATION	ROADWAY	STAGE	CATEGORY
9,341	RT	37.00	1251'NB+08	-	1244'NB+50	IH 41 NB	3A	1000
35,955	RT	40.00	1322'NB+58	-	1251'NB+77			
20,305	RT	38.00	1362'NB+27	-	1323'NB+41			
8,332	RT	43.00	1379'NB+19	-	1356'NB+70			
6,042	RT	78.00	1395'NB+15	-	1377'NB+42			
2,757	RT	46.00	1436'NB+21	-	1428'NB+33			
13,823	RT	46.00	1475'NB+00	-	1437'NB+56	1320 POND SPILLWAY		
2,395	RT	46.00	1320 POND					
8,945	RT	11.00	54'WRT+31	-	49'WRT+78	WRIGHTSTOWN		
2,231	LT	17.00	54'WRT+99	-	49'WRT+78			
1,263	LT	38.00	57'WRT+67	-	55'WRT+83			
1,738	RT	39.00	61'WRT+49	-	58'WRT+90			
717	LT	32.00	61'WRT+76	-	59'WRT+90			
454	LT	24.00	62'WRT+94	-	62'WRT+36			
839	RT	22.00	62'WRT+94	-	62'WRT+16			
115137	STAGE 3A SUBTOTAL							
65								
1,295	RT	78.00	1397'NB+52	-	1395'NB+15	IH 41 NB	3B	
6,349	RT	78.00	1410'NB+00	-	1399'NB+76			
3,401	RT	54.00	1419'NB+59	-	1411'NB+91			
956	RT	55.00	1428'NB+33	-	1424'NB+30			
12001	STAGE 3B SUBTOTAL							
0								
2,910	LT	18.00	1246'WF+73	-	1238'WF+48	WEST FRONTAGE RD	4A	
2,766	RT	18.00	1246'WF+86	-	1238'WF+48			
1,652	LT	23.00	1252'WF+55	-	1247'WF+88			
3,735	RT	38.00	1252'WF+53	-	1248'WF+07			
1,109	LT	22.00	1251'EF+21	-	1249'EF+81	EAST FRONTAGE RD		
787	RT	23.00	1251'EF+66	-	1249'EF+81			
1,445	LT	23.00	1253'EF+78	-	1252'EF+14			
780	RT	23.00	1253'EF+78	-	1252'EF+32			
273	RT	19.00	3011+79	-	2911+54	CTH JJ		
121	LT	19.00	3011+53	-	2911+97			
15558	STAGE 4A SUBTOTAL							
0								
26676	UNDISTRIBUTED							
293,429	1130-67-72 PROJECT TOTAL							

Addendum No. 02
ID 1130-67-72/76/86
Revised Sheet 1130
July 2, 2025

Addendum No. 02
ID 1130-67-72/76/86
Revised Sheet 1216
July 2, 2025

CATEGORY	STAGE	ROADWAY	STATION	TO	STATION	OFFSET	LOCATION	603.8000		603.8125		603.8500		603.8505		SPV.0090.006		SPV.0090.007		SPV.0090.008		REMARKS				
								CONCRETE BARRIER DELIVERED	CONCRETE BARRIER TEMPORARY PRECAST	CONCRETE BARRIER INSTALLED	CONCRETE BARRIER TEMPORARY PRECAST	ANCHORING CONCRETE BARRIER ON BRIDGE DECK	CONCRETE BARRIER TEMPORARY PRECAST LEFT IN PLACE	ANCHORING CONCRETE BARRIER ON BRIDGE DECK	CONCRETE BARRIER TEMPORARY PRECAST LEFT IN PLACE	SPV.0090.007 MAINTAIN AND REMOVE CONCRETE BARRIER TEMPORARY PRECAST LEFT IN PLACE	GLARE SCREENS TEMPORARY									
1000	1A	IH 41 NB	1243'ENB+50	-	1250'ENB+50	10.00	LT	-	-	-	-	-	-	-	-	-	-	-	-	-	-	LEFT IN PLACE FROM -71 PROJECT				
			1252'ENB+00	-	1322'ENB+00	10.00	LT	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	LEFT IN PLACE FROM -71 PROJECT			
			1323'ENB+50	-	1407'ENB+00	VARIES	RT	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	LEFT IN PLACE FROM -71 PROJECT		
			1324'ENB+30	-	1342'ENB+00	45.00	RT	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	LEFT IN PLACE FROM -71 PROJECT		
			1360'ENB+00	-	1381'ENB+80	45.00	RT	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	LEFT IN PLACE FROM -71 PROJECT		
			1403'ENB+00	-	1409'ENB+50	45.00	RT	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	LEFT IN PLACE FROM -71 PROJECT		
			1412'ENB+20	-	1417'ENB+60	45.00	RT	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	LEFT IN PLACE FROM -71 PROJECT		
			1415'ENB+00	-	1475'ENB+00	VARIES	LT	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	LEFT IN PLACE FROM -71 PROJECT		
			1431'ENB+80	-	1436'ENB+05	35.00	RT	430	430	-	-	-	-	-	-	-	-	-	-	-	-	-	-	LEFT IN PLACE FROM -71 PROJECT		
			1437'ENB+76	-	1440'ENB+51	35.00	RT	280	280	-	-	-	-	-	-	-	-	-	-	-	-	-	-	LEFT IN PLACE FROM -71 PROJECT		
			1243'ENB+64	-	1259'ENB+13	27.00	RT	1550	1550	-	-	-	-	-	-	-	-	-	-	-	-	-	-	LEFT IN PLACE FROM -71 PROJECT		
			1313'ENB+05	-	1332'ENB+52	27.00	RT	1950	1950	-	-	-	-	-	-	-	-	-	-	-	-	-	-	LEFT IN PLACE FROM -71 PROJECT		
			1405'ENB+40	-	1415'ENB+20	11.00	RT	980	980	-	-	-	-	-	-	-	-	-	-	-	-	-	-	LEFT IN PLACE FROM -71 PROJECT		
			CTH/JJ	221J+61	-	271J+25	-	RT	470	470	-	-	-	-	-	-	-	-	-	-	-	-	-	LEFT IN PLACE FROM -71 PROJECT		
WRT	55'WRT+77	-	61'WRT+03	-	RT	450	450	-	-	-	-	-	-	-	-	-	-	-	-	-	LEFT IN PLACE FROM -71 PROJECT					
56'WRT+09	-	61'WRT+27	20.00	LT	520	520	-	-	-	-	-	-	-	-	-	-	-	-	-	-	LEFT IN PLACE FROM -71 PROJECT					
STAGE 1A SUBTOTAL							7,160	7,160	2	845	0	0	135	0	0	27,190	1	27,190	0	0	2,070					
1C	IH 41 NB	1232'ENB+50	-	1405'ENB+00	VARIES	L7/R7	17,250	17,250	-	-	-	-	-	-	-	-	-	-	-	-	-	TEMPORARY SB ON-RAMP				
		1405'ENB+00	-	1409'ENB+01	VARIES	RT	410	410	-	-	-	-	-	-	-	-	-	-	-	-	-	TEMPORARY SB ON-RAMP				
		1405'ENB+00	-	1424'ENB+41	VARIES	RT	1,950	1,950	-	-	-	-	-	-	-	-	-	-	-	-	-	-	TEMPORARY SB ON-RAMP			
		1412'ENB+77	-	1415'ENB+00	27.00	LT	230	230	-	-	-	-	-	-	-	-	-	-	-	-	-	-	TEMPORARY SB OFF-RAMP			
		1380'ENB+50	-	1381'ENB+63	36.00	LT	120	120	-	-	-	-	-	-	-	-	-	-	-	-	-	-	TEMPORARY SB OFF-RAMP			
		1440'ENB+51	-	1481'ENB+40	27.00	RT	4,090	4,090	-	-	-	-	-	-	-	-	-	-	-	-	-	-	TEMPORARY SB OFF-RAMP			
		1475'ENB+01	-	1481'ENB+00	VARIES	LT	600	600	-	-	-	-	-	-	-	-	-	-	-	-	-	-	TEMPORARY SB OFF-RAMP			
		FRENCH RD CROSSOVER	2'FRCO+20	-	25'FRCO+14	3.00	LT	2,300	2,300	-	-	-	-	-	-	-	-	-	-	-	-	-	TEMPORARY SB ON-RAMP			
26'FRCO+68	-	40'FRCO+03	3.00	LT	2,040	2,040	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	TEMPORARY SB ON-RAMP				
26'FRCO+68	-	41'FRCO+83	27.00	RT	1,340	1,340	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	TEMPORARY SB OFF-RAMP				
STAGE 1C SUBTOTAL							31,850	31,850	0	0	0	0	0	0	0	0	0	0	0	0	0	2,070				
2A	IH 41 SB	1339'ENB+88	-	1341'ENB+00	27.00	LT	120	120	-	-	-	-	-	-	-	-	-	-	-	-	-	TEMPORARY SB ON-RAMP				
		1390'ENB+77	-	1410'ENB+00	VARIES	LT	1,930	1,930	-	-	-	-	-	-	-	-	-	-	-	-	-	-	TEMPORARY SB ON-RAMP			
		1405'ENB+00	-	1411'ENB+00	VARIES	LT	600	600	-	-	-	-	-	-	-	-	-	-	-	-	-	-	TEMPORARY SB ON-RAMP			
		1416'ENB+44	-	1423'ENB+50	VARIES	L7/R7	710	710	-	-	-	-	-	-	-	-	-	-	-	-	-	-	TEMPORARY SB OFF-RAMP			
		1418'ENB+56	-	1433'ENB+00	VARIES	L7/R7	1,450	1,450	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	TEMPORARY SB OFF-RAMP		
		1375'ENB+37	-	1394'ENB+40	VARIES	LT	1,910	1,910	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	TEMPORARY SB ON-RAMP		
		1390'ENB+00	-	1404'ENB+20	VARIES	LT	1,440	1,440	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	TEMPORARY SB ON-RAMP		
2B	IH 41 NB	1390'ENB+00	-	1404'ENB+20	VARIES	LT	1,440	1,440	-	-	-	-	-	-	-	-	-	-	-	-	-	TEMPORARY SB ON-RAMP				
		1416'ENB+00	-	1429'ENB+50	VARIES	LT	1,370	1,370	-	-	-	-	-	-	-	-	-	-	-	-	-	-	TEMPORARY SB OFF-RAMP			
		1424'ENB+50	-	1432'ENB+25	3.00	LT	780	780	-	-	-	-	-	-	-	-	-	-	-	-	-	-	TEMPORARY SB OFF-RAMP			
		1442'ENB+25	-	1448'ENB+50	VARIES	LT	620	620	-	-	-	-	-	-	-	-	-	-	-	-	-	-	TEMPORARY SB OFF-RAMP			
		1442'ENB+25	-	1458'ENB+15	VARIES	LT	1,590	1,590	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	TEMPORARY SB OFF-RAMP		
		1448'ENB+60	-	1449'ENB+00	10.00	LT	40	40	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	TEMPORARY SB OFF-RAMP		
		STAGE 2A SUBTOTAL							4,810	4,810	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
		STAGE 2B SUBTOTAL							9,200	9,200	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

CATEGORY	STAGE	ROADWAY	STATION	TO	STATION	OFFSET	LOCATION	CONCRETE BARRIER/TEMPORARY PRECAST ITEMS										REMARKS		
								603.8000 CONCRETE BARRIER TEMPORARY PRECAST DELIVERED	603.8125 CONCRETE BARRIER TEMPORARY PRECAST INSTALLED	603.8500 ANCHORING CONCRETE BARRIER TEMPORARY PRECAST	603.8505 CONCRETE BARRIER TEMPORARY PRECAST ON BRIDGE DECK	SPV.0090.0016 CONCRETE BARRIER TEMPORARY PRECAST LEFT IN PLACE	SPV.0090.0017 MAIN CONC. BARRIER TEMPORARY PRECAST LEFT IN PLACE	SPV.0090.0018 GLARE SCREENS TEMPORARY						
1000	2C	IH 41 NB	1241'ENB+83	-	1250'ENB+55	10.00	LT	880	-	-	-	-	-	-	-	-	-	-		
			1339'ENB+87	-	1340'ENB+87	27.00	LT	100	-	-	-	-	-	-	-	-	-	-	-	
			1373'ENB+30	-	1396'ENB+12	VARIES	LT/RT	2,250	-	-	-	-	-	-	-	-	-	-	-	
	IH 41 SB	1380'SB+00	-	1483'SB+96	6.00	LT	10,400	-	-	-	-	-	-	-	-	-	-	-	-	
		STAGE 2C SUBTOTAL																		
								13,670	0	0	0	0	0	0	0	0	0	0	0	
	2000	2C WINTER	IH 41 NB	1400'ENB+61	-	1409'ENB+01	VARIES	RT	840	-	-	-	-	-	-	-	-	-	-	
				1414'ENB+20	-	1433'ENB+20	VARIES	RT	1,900	-	-	-	-	-	-	-	-	-	-	-
				1418'ENB+54	-	1426'ENB+20	VARIES	RT	770	-	-	-	-	-	-	-	-	-	-	-
		IH 41 SB	1382'SB+50	-	1393'SB+10	11	RT	1,060	-	-	-	-	-	-	-	-	-	-	-	-
1420'SB+20			-	1435'SB+10	11	RT	1,490	-	-	-	-	-	-	-	-	-	-	-	-	
1449'SB+65			-	1471'SB+65	25	RT	2,200	-	-	-	-	-	-	-	-	-	-	-	-	
STAGE 2C WINTER SUBTOTAL																				
							8,260	0	0	0	0	0	0	0	0	0	0	0	0	
3000		3A	IH 41 NB	1236'SB+00	-	1484'SB+00	1.00	RT	24,800	-	-	-	-	-	-	-	-	-	-	
				1234'SB+80	-	1248'SB+80	VARIES	RT	1,400	-	-	-	-	-	-	-	-	-	-	-
	1252'SB+80			-	1272'SB+80	25.00	RT	2,000	-	-	-	-	-	-	-	-	-	-	-	
	IH 41 SB	1338'SB+60	-	1397'SB+00	VARIES	RT	5,840	-	-	-	-	-	-	-	-	-	-	-	-	
		1392'SB+45	-	1393'SB+30	25.00	RT	-	-	-	-	-	-	-	-	-	-	-	-	-	
		1392'SB+05	-	1394'SB+70	VARIES	RT	80	-	-	-	-	-	-	-	-	-	-	-	-	
	IH 41 NB	1416'SB+00	-	1424'SB+60	VARIES	RT	860	-	-	-	-	-	-	-	-	-	-	-	-	
		1423'SB+60	-	1424'SB+50	25.00	RT	-	-	-	-	-	-	-	-	-	-	-	-	-	
		1418'SB+75	-	1424'SB+30	VARIES	RT	370	-	-	-	-	-	-	-	-	-	-	-	-	
	IH 41 SB	1449'SB+50	-	1483'SB+00	VARIES	RT	3,350	-	-	-	-	-	-	-	-	-	-	-	-	
STAGE 3A SUBTOTAL																				
							38,700	0	0	0	0	0	0	0	0	0	0	0		
4000	3B	IH 41 NB	1383'SB+60	-	1386'SB+80	25.00	RT	320	-	-	-	-	-	-	-	-	-	-		
			1400'SB+90	-	1410'SB+30	35.00	LT	940	-	-	-	-	-	-	-	-	-	-	-	
			1415'SB+50	-	1428'SB+50	35.00	LT	1,300	-	-	-	-	-	-	-	-	-	-	-	
	IH 41 SB	551'WRT+73	-	61'WRT+06	23.00	RT	540	-	-	-	-	-	-	-	-	-	-	-		
		561'WRT+45	-	61'WRT+28	23.00	LT	490	-	-	-	-	-	-	-	-	-	-	-	-	
		STAGE 3B SUBTOTAL																		
							3,590	0	0	0	0	0	0	0	0	0	0	0		
	4A	IH 41 SB	1262'SB+80	-	1272'SB+75	25.00	RT	2,000	-	-	-	-	-	-	-	-	-	-	-	
			1381'SB+00	-	1443'SB+70	3.00	RT	6,270	-	-	-	-	-	-	-	-	-	-	-	
			1449'SB+60	-	1471'SB+60	25.00	RT	2,200	-	-	-	-	-	-	-	-	-	-	-	
STAGE 4A SUBTOTAL																				
						10,470	0	0	0	4,200	0	0	0	0	0	0	0			
							1130-67-72 PROJECT TOTAL	1,405	135	4,200	2,070	27,190	1	2,070						

Addendum No. 02
 ID 1130-67-72/76/86
 Revised Sheet 1217
 July 2, 2025



Addendum No. 02
 ID 1130-67-72/76/86
 Revised Sheet 1218
 July 2, 2025

CRASH CUSHIONS TEMPORARY ITEMS

614-0905 SPV.0060.029 SPV.0060.033
 REMOVE MAINTAIN AND
 CRASH CUSHIONS CRASH CUSHIONS
 TEMPORARY TEMPORARY
 LEFT IN PLACE LEFT IN PLACE

CATEGORY	STAGE	ROADWAY	STATION	OFFSET	LOCATION	CRASH CUSHIONS TEMPORARY EACH	CRASH CUSHIONS TEMPORARY LEFT IN PLACE EACH	CRASH CUSHIONS TEMPORARY LEFT IN PLACE	BACK WIDTH FT.	OBJECT MARKING PATTERN	CRASH TEST LEVEL	DIRECTION OF TRAVEL	TRAVEL LOCATION	REMARKS	
1000	1A	IH 41 NB	1242'ENB+50		LT	-	-	1	2	OM-3C	TL-3	NB	LEFT		
			1313'ENB+08	31	RT	1	-	-	2	OM-3C	TL-3	NB	RIGHT		
			1360'ENB+60		RT	-	-	1	-	2	OM-3C	TL-3	NB	RIGHT	
			1405'ENB+00		RT	-	-	-	1	2	OM-3C	TL-3	NB	RIGHT	
			1431'ENB+80	32	RT	1	-	-	1	2	OM-3C	TL-3	NB	RIGHT	
			25'JT+61	22	RT	1	-	-	-	2	OM-3C	TL-3	EB	RIGHT	
			27'JT+36	21	LT	1	-	-	-	2	OM-3C	TL-3	WB	RIGHT	
			55'WRT+77	24	RT	1	-	-	-	2	OM-3C	TL-3	EB	RIGHT	
			61'WRT+37	22	LT	1	-	-	-	2	OM-3C	TL-3	WB	RIGHT	
			STAGE 1A SUBTOTAL						6	0	3	2			
1C	IH 41 NB	1246'ENB+00	48	RT	1	-	-	-	2	OM-3C	TL-3	NB	RIGHT		
		1415'ENB+80		RT	1	-	-	-	2	OM-3C	TL-3	NB	RIGHT		
		1480'ESB+60		LT	1	-	-	-	2	OM-3C	TL-3	SB	RIGHT		
STAGE 1C SUBTOTAL						3	0	0	2						
2A	IH 41 SB	1409'ESB+30		LT	1	-	-	-	2	OM-3C	TL-3	SB	RIGHT		
		1424'ENB+20	15	LT	1	-	-	-	2	OM-3C	TL-3	SB	LEFT		
		1424'ENB+80	3	LT	1	-	-	-	2	OM-3C	TL-3	SB	RIGHT		
		STAGE 2A SUBTOTAL						3	0	0	2				
2B	IH 41 SB	1394'SB+00	37	LT	1	-	-	-	2	OM-3C	TL-3	SB	RIGHT		
		1404'SB+00	54	LT	1	-	-	-	2	OM-3C	TL-3	SB	LEFT		
		1448'ENB+20	20	LT	1	-	-	-	2	OM-3C	TL-3	SB	RIGHT		
		1449'ENB+00	12	LT	1	-	-	-	2	OM-3C	TL-3	SB	LEFT		
		STAGE 2B SUBTOTAL						4	0	0	2				
2C WINTER	IH 41 NB	1400'ENB+60	46	RT	1	-	-	-	2	OM-3C	TL-3	NB	RIGHT		
STAGE 2C WINTER SUBTOTAL						1	0	0	2						
3A	IH 41 NB	1234'NB+80	8	RT	1	-	-	-	2	OM-3C	TL-3	NB	RIGHT		
		1392'SB+07	25	RT	1	-	-	-	2	OM-3C	TL-3	NB	RIGHT		
		1392'SB+44	25	RT	1	-	-	-	2	OM-3C	TL-3	NB	RIGHT		
		STAGE 3A SUBTOTAL						3	0	0	2				
		3B	IH 41 SB	1428'SB+50	45	LT	1	-	-	-	2	OM-3C	TL-3	SB	RIGHT
55'WRT+73	23			RT	1	-	-	-	2	OM-3C	TL-3	EB	RIGHT		
61'WRT+28	22			LT	1	-	-	-	2	OM-3C	TL-3	WB	RIGHT		
STAGE 3B SUBTOTAL						3	0	0	2						
UNDISTRIBUTED						-	4	-	2						
4A	IH 41 SB	STAGE 3B SUBTOTAL						0	4	-	2				
		UNDISTRIBUTED						-	4	-	2				
STAGE 3B SUBTOTAL						0	4	0							
1130-67-72 PROJECT TOTAL						23	4	3							
TOTAL						2	1	1							


Addendum No. 02
ID 1130-67-72/76/86
Revised Sheet 1329
July 2, 2025

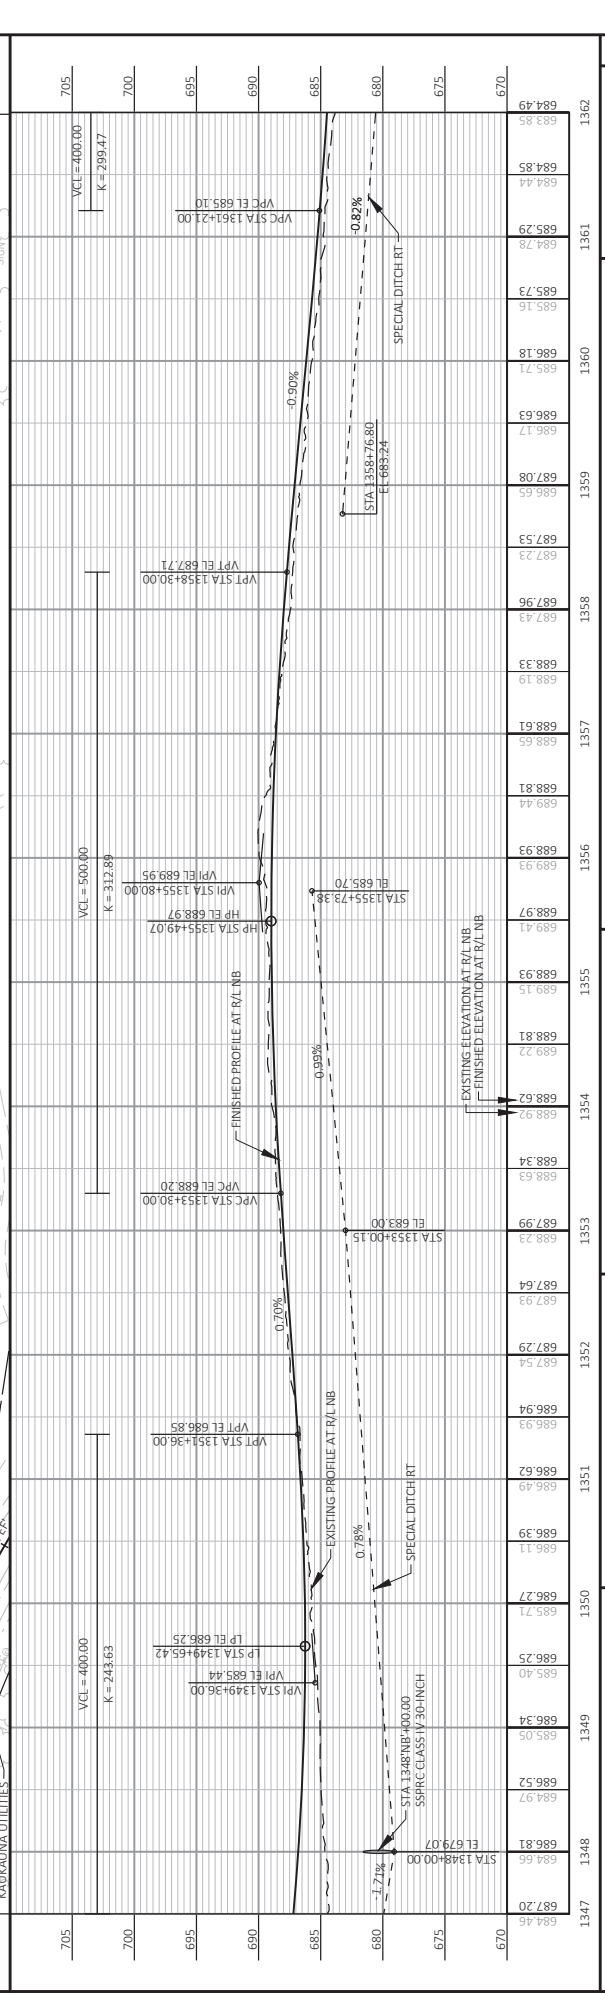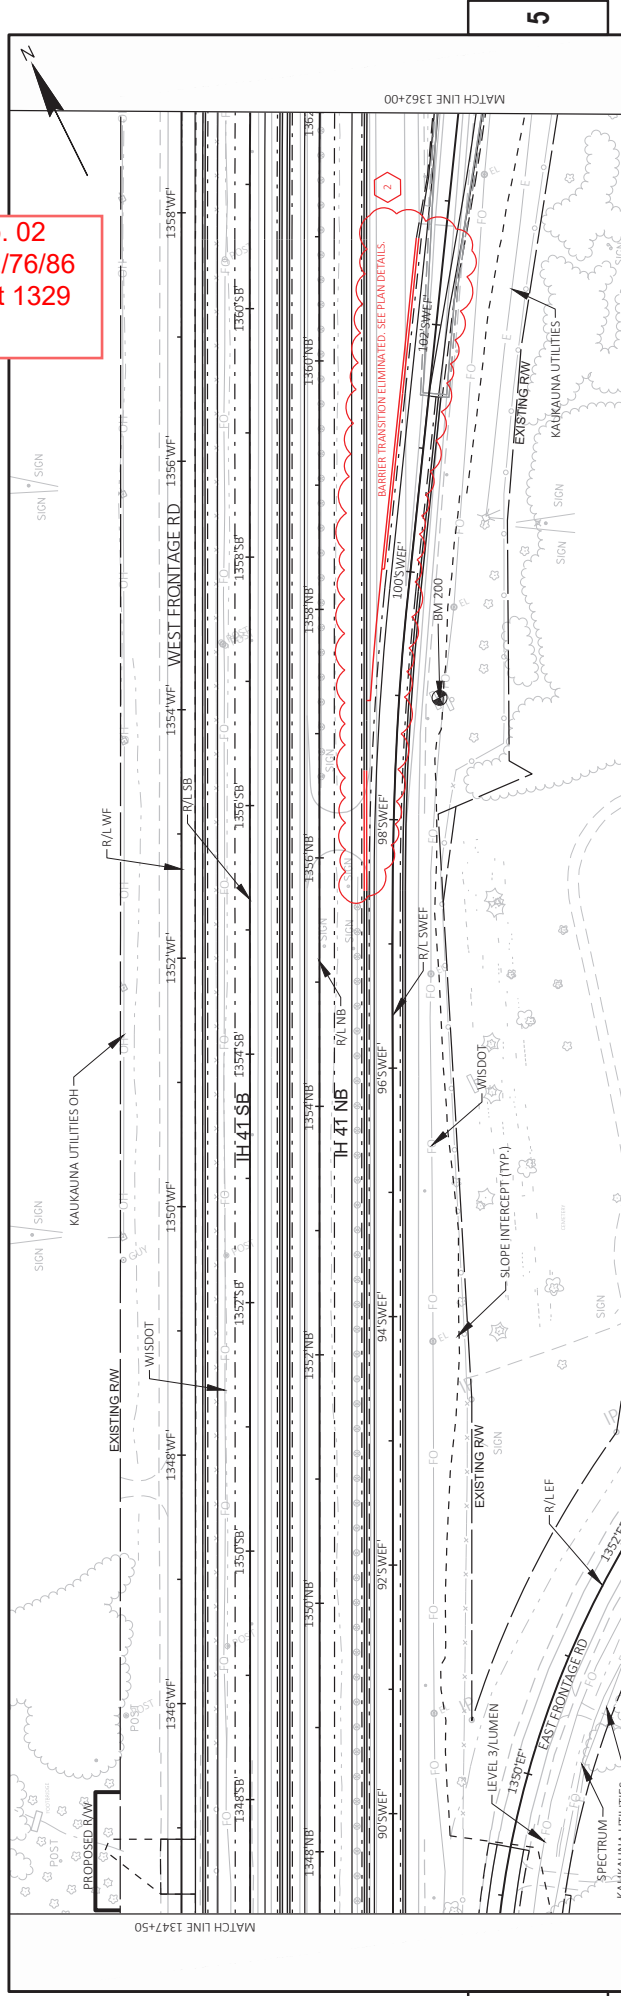

PROJECT NO:	1130-67-72	COUNTY:	OUTAGAMIE & BROWN	PLAN AND PROFILE:	IH 41 NB	SHEET:	1329	E	
FILE NAME:	C:\USERS\DOTING\EDC\ACDC03\WB011130630\PROJECT FILES\DSGN\11306770\SHETA\1130-67-72\06102-PP-NB.DWG							1 IN=100 FT	E
LAYOUT NAME:	08							1 IN=100 FT	E
FLOT BY:	7/1/2025 6:29 PM							1 IN=100 FT	E
FLOT DATE:	7/1/2025 6:29 PM							1 IN=100 FT	E



**Addendum No. 02
 ID 1130-67-72/76/86
 Revised Sheet 1364
 July 2, 2025**

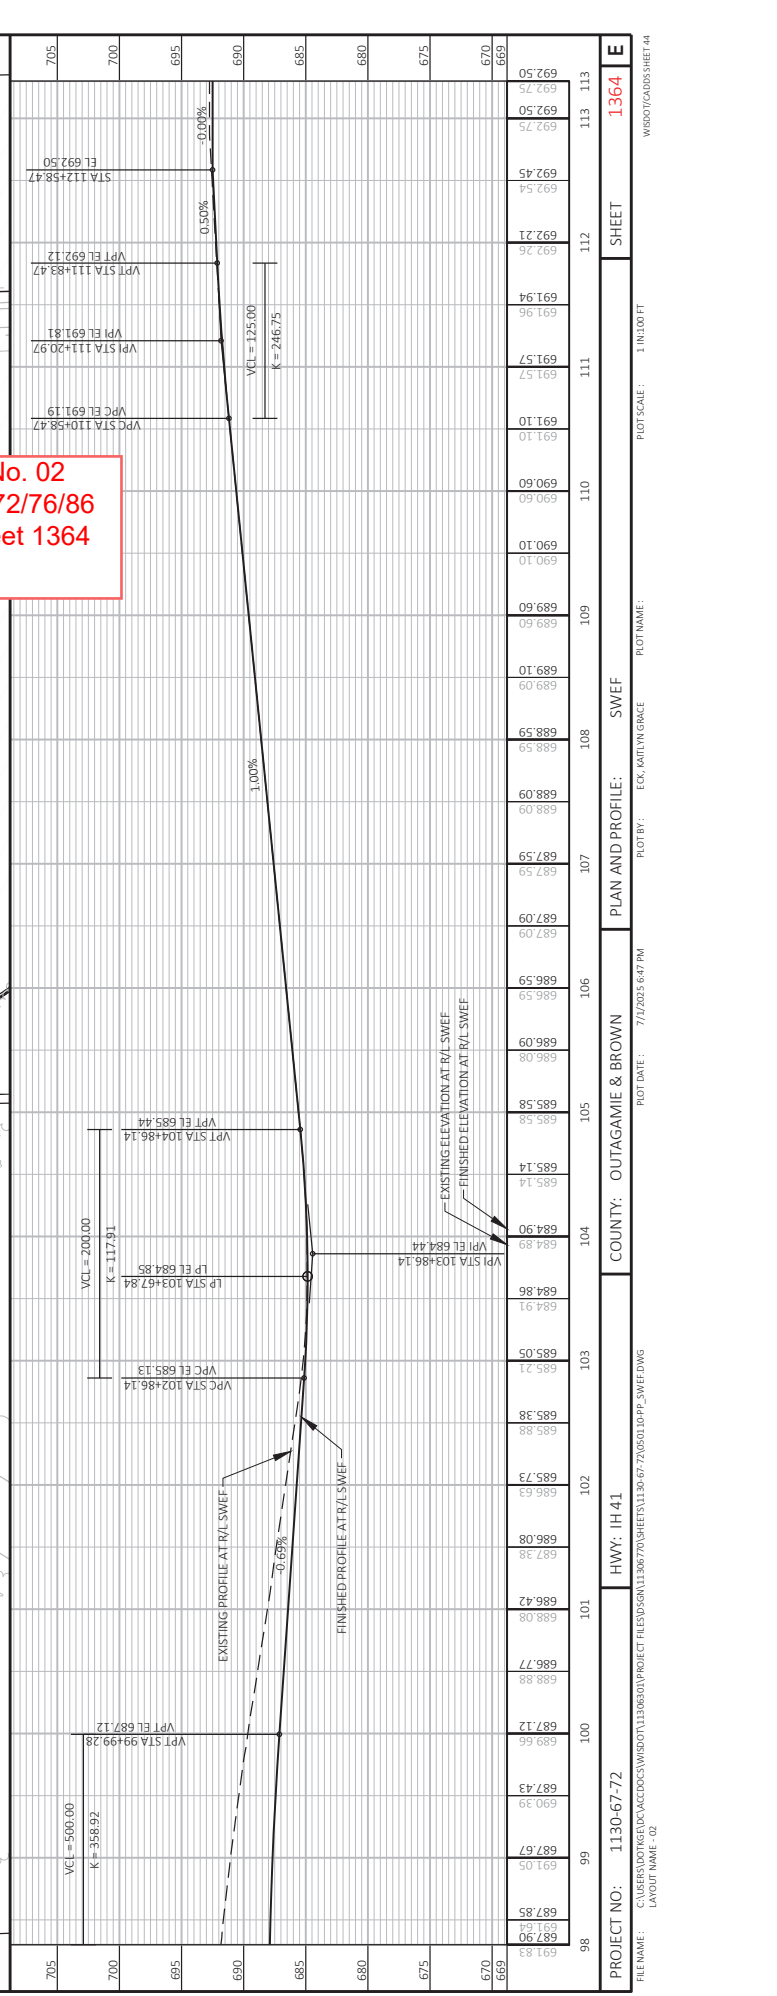


PROJECT NO:	1130-67-72	HWY:	IH 41	COUNTY:	OUTAGAMIE & BROWN	PLAN AND PROFILE:	SWEF	SHEET:	1364	E
FILE NAME:	C:\USERS\DOTINGED\CAD\CDC\SWIB071130670\PROJECT FILES\DSG\1130670\SHET\1130-67-72\0610.PP-3W.FE.DWG	LAYOUT NAME:	02	PLOT BY:	ECK, KAMILYN GRACE	PLOT NAME:	IH 41-001.PP	PLOT SCALE:	1 IN=100 FT	WISDOT/CAD/DS SHEET 14


Addendum No. 02
 ID 1130-67-72/76/86
 Added Sheet 1471A
 July 2, 2025

CONCRETE BARRIER
 SINGLE SLOPE (CBSS)


STATE OF WISCONSIN
 DEPARTMENT OF TRANSPORTATION

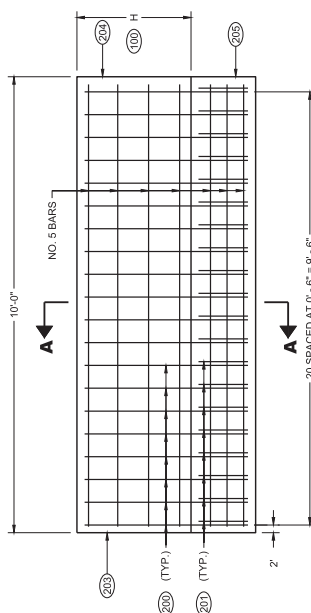


END ANCHOR SINGLE
 SLOPE CONCRETE BARRIER




56" CBSS




42" CBSS




32" AND 36" CBSS



STIRRUP BAR
 BENDING DETAIL

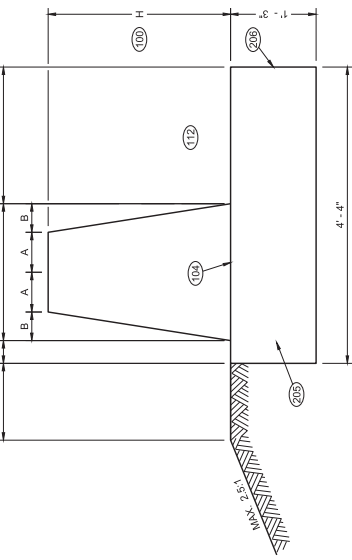

SECTION A - A

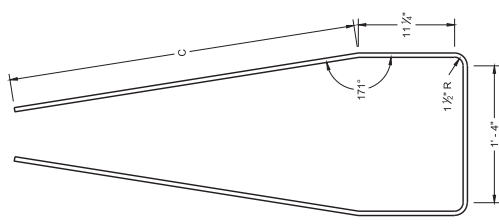

V1 BAR
 BENDING DETAIL

TABLE "B"


BARRIER HEIGHT INCHES	C INCHES
32	2'-6"
36	2'-11"
42	3'-4"
56	4'-6 1/2"

- GENERAL NOTES**
- (200) V1 BARS ARE NO. 5 BARS. (SEE BAR BENDING DETAIL)
 - (201) STIRRUPS ARE NO. 6 BARS. (SEE BAR BENDING DETAIL)
 - (202) TWELVE (12) NO. 5 BARS EVENLY SPACED
 - (203) END OF INSTALLATION OR EXPANSION JOINT.
 - (204) SEE COLD JOINT DETAIL TO CONNECT END ANCHOR SINGLE SLOPE CONCRETE BARRIER TO SINGLE SLOPE CONCRETE BARRIER.
 - (205) FOOTING
 - (206) DO NOT TIE TO FOOTING TO ADJACENT PAVEMENT.


Addendum No. 02
ID 1130-67-72/76/86
Added Sheet 1471B
July 2, 2025

GENERAL NOTES

- 400 END ANCHOR SINGLE SLOPE CONCRETE BARRIER.
- 401 PARAPET, SIGN BRIDGE BASE, LIGHT POLE BASE OR OTHER OBJECT SINGLE SLOPE CONCRETE BARRIER CANNOT TIE INTO.
- 402 JOINT SEAL CONFORMING TO STANDARD SPECIFICATION 415.2.6
- 403 EXPANSION JOINT MATERIAL.
- 404 INLET (SEE PLAN)
- 405 INLET COVER BW (SEE PLAN)
- 406 WARP PAN TO MATCH INLET COVER.
- 407 EXTEND BARRIER SLOPE TO INLET. SEE PLAN FOR THE LENGTH OF EXTENSION.
- 408 CONTRACTION JOINT.
- 409 WHEN ADJACENT TO CONCRETE PAVEMENT OR SHOULDER, JOINT SHOULD MATCH CONCRETE JOINTS, OTHERWISE, 3" (TYP.). SEE SDD 13C18 FOR MORE INFORMATION.

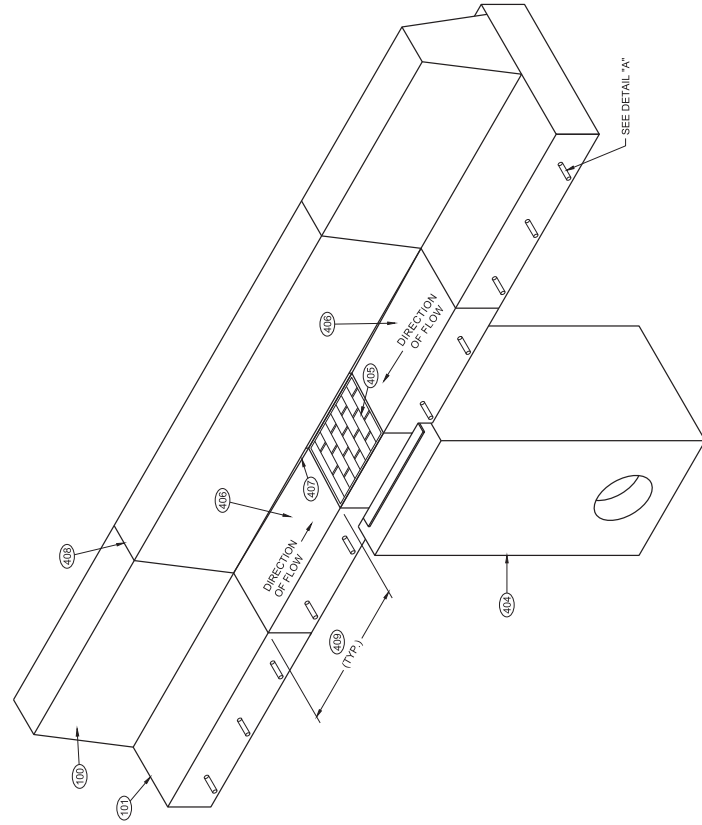

DRAINAGE DETAIL

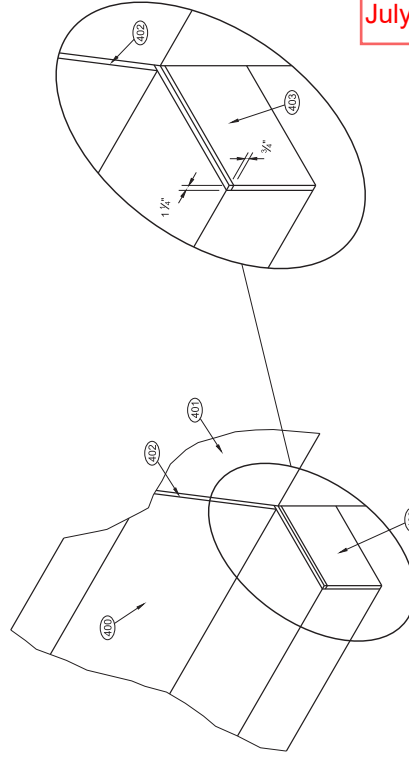

EXPANSION JOINT DETAIL

**CONCRETE BARRIER
SINGLE SLOPE (CBSS)**

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

GENERAL NOTES

USE COLD JOINT TO CONNECT MULTIPLE HEIGHT TRANSITIONS.

500 SEE TABLE "A" FOR DIMENSIONS

501 SEE TABLE "D"

502 MULTIPLE HEIGHT TRANSITION MAY BE USED IN SEQUENCE TO GET APPROPRIATE HEIGHT.

503 COLD JOINT

504 BARRIER REBAR (SEE OTHER DETAILS FOR BAR SIZE, QUANTITY AND LOCATION)

SINGLE SLOPE BARRIER SHOWN, SIMILAR DETAIL CAN BE USED FOR COLD JOINT IN


505 END ANCHORS AND TRANSITIONS.

NO. 5 REBAR FOR SPLICE, 3' OF SPLICE REBAR IS LAPPED AND TIED TO BARRIER REBAR.


506 EXTEND 3' OF SPLICE REBAR BEYOND END OF POUR. ALL BARS ARE FIRMLY TIED OR CONNECTED. EVERY REBAR IN THE BARRIER SECTION REQUIRES A SPLICE BAR.

507 END OF POUR.

508 LAP AND TIE 3' OF NEXT POUR'S REBAR TO SPLICE REBAR.

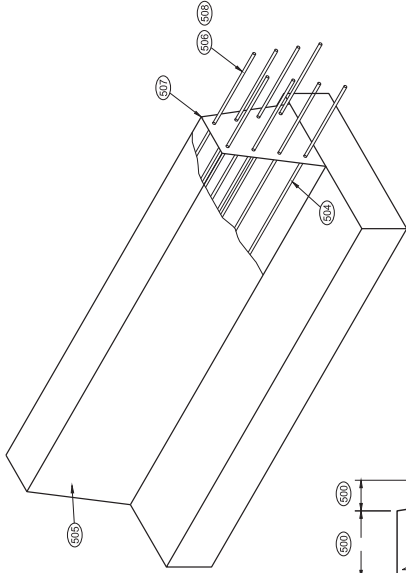


COLD JOINT DETAIL

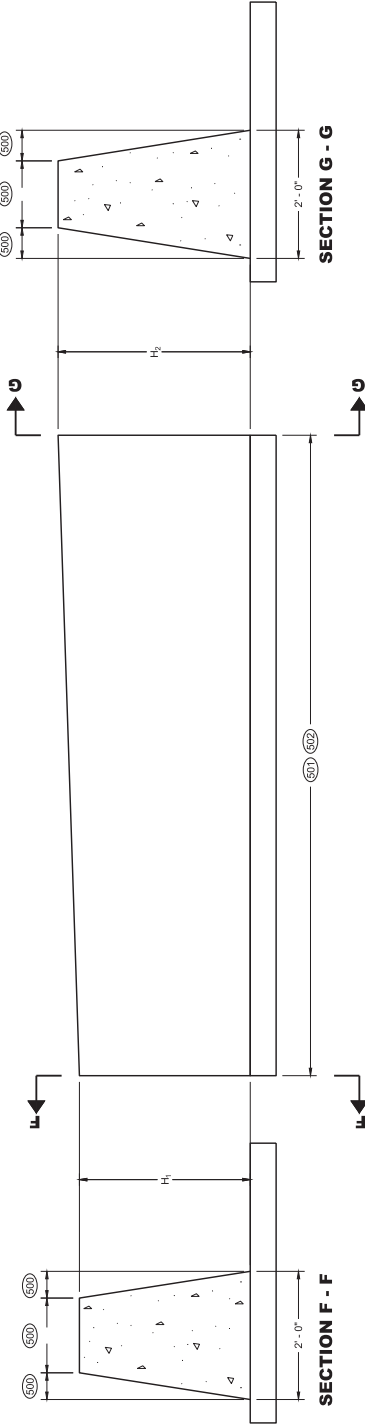

SECTION F - F

SECTION G - G

DOUBLE COLD JOINT HEIGHT TRANSITION

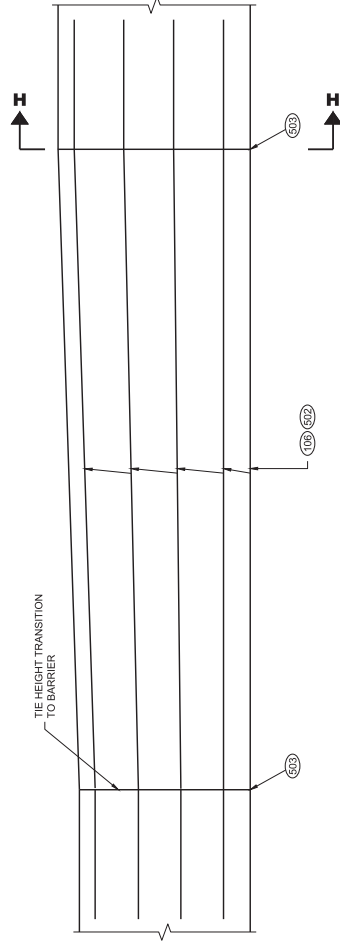


STEEL REINFORCEMENT DETAIL

*** LENGTH OF DOUBLE COLD JOINT INCLUDED IN THE TOTAL LENGTH OF CBSS.**

TABLE "D"

H ₁	H ₂	L *	NUMBER OF NO. 5 BARS
32"	36"	10' - 0"	8
36"	42"	10' - 6"	10
42"	56"	24' - 6"	11




SECTION H - H


Addendum No. 02
ID 1130-67-72/76/86
Added Sheet 1471C
July 2, 2025

**CONCRETE BARRIER
SINGLE SLOPE (CBSS)**
STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION


Addendum No. 02
 ID 1130-67-72/76/86
 Revised Sheet 2482
 July 2, 2025

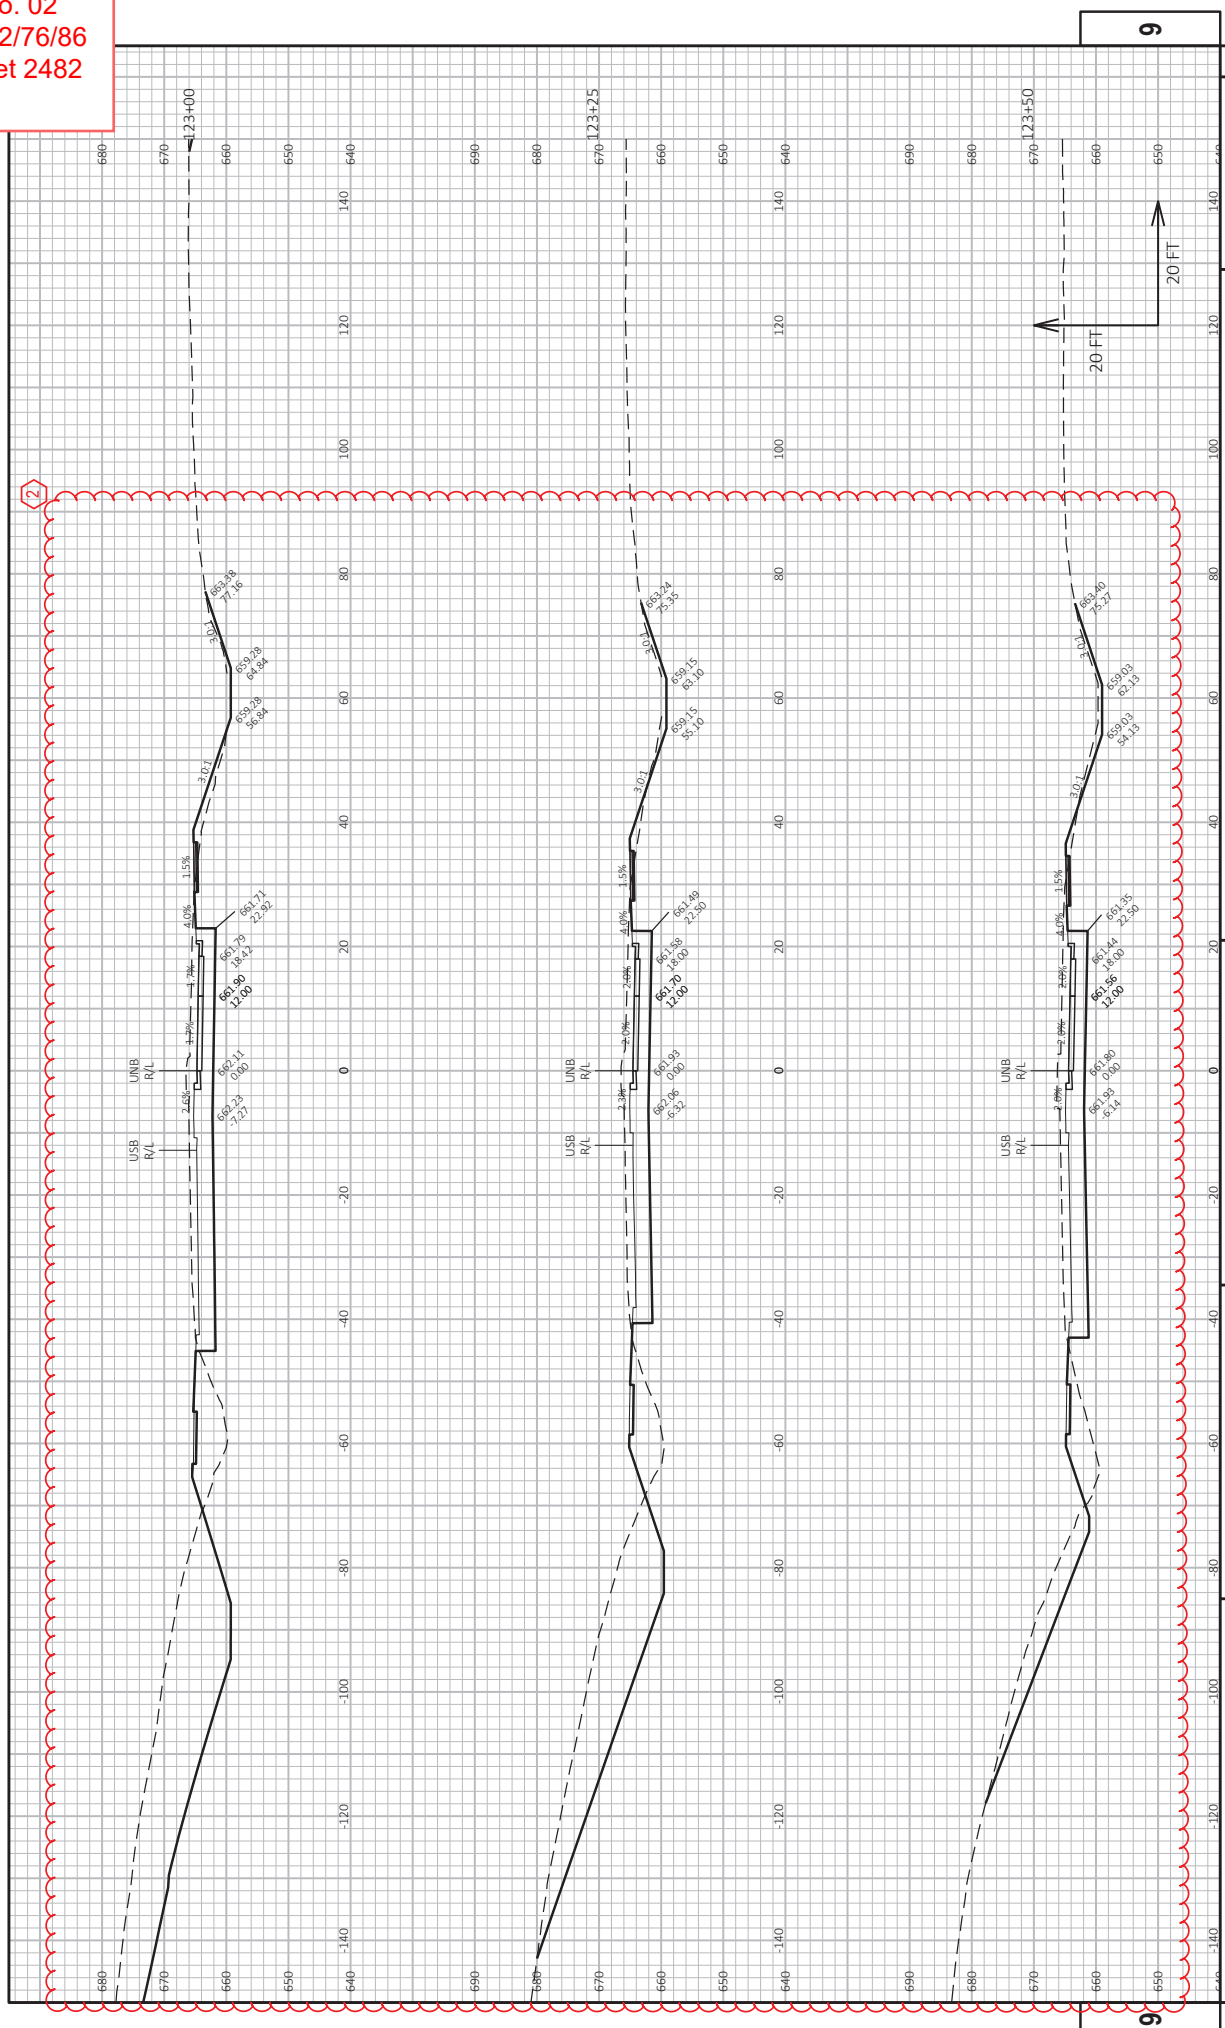

PROJECT NO: 1130-67-76 HWY: IH 41 COUNTY: OUTAGAMIE & BROWN CROSS SECTIONS: CTH U NB SHEET 2482
 FILE NAME: C:\USERS\JTB\DWG\ACDDCS\WISDOT\11306703\PROJECT FILES\DWG\11306703\1130-67-76\9007-AS_UNB.DWG PLOT DATE: 7/1/2025 3:27 PM PLOT BY: BARTZ, JEREMY PLOT NAME: CTH U NB SHEET 2482
 LAYOUT NAME: _200 PLOT SCALE: 1 IN=20 FT HORZ. / 1 IN=20 FT VERT. WISDOT/CADD/SHEET 49

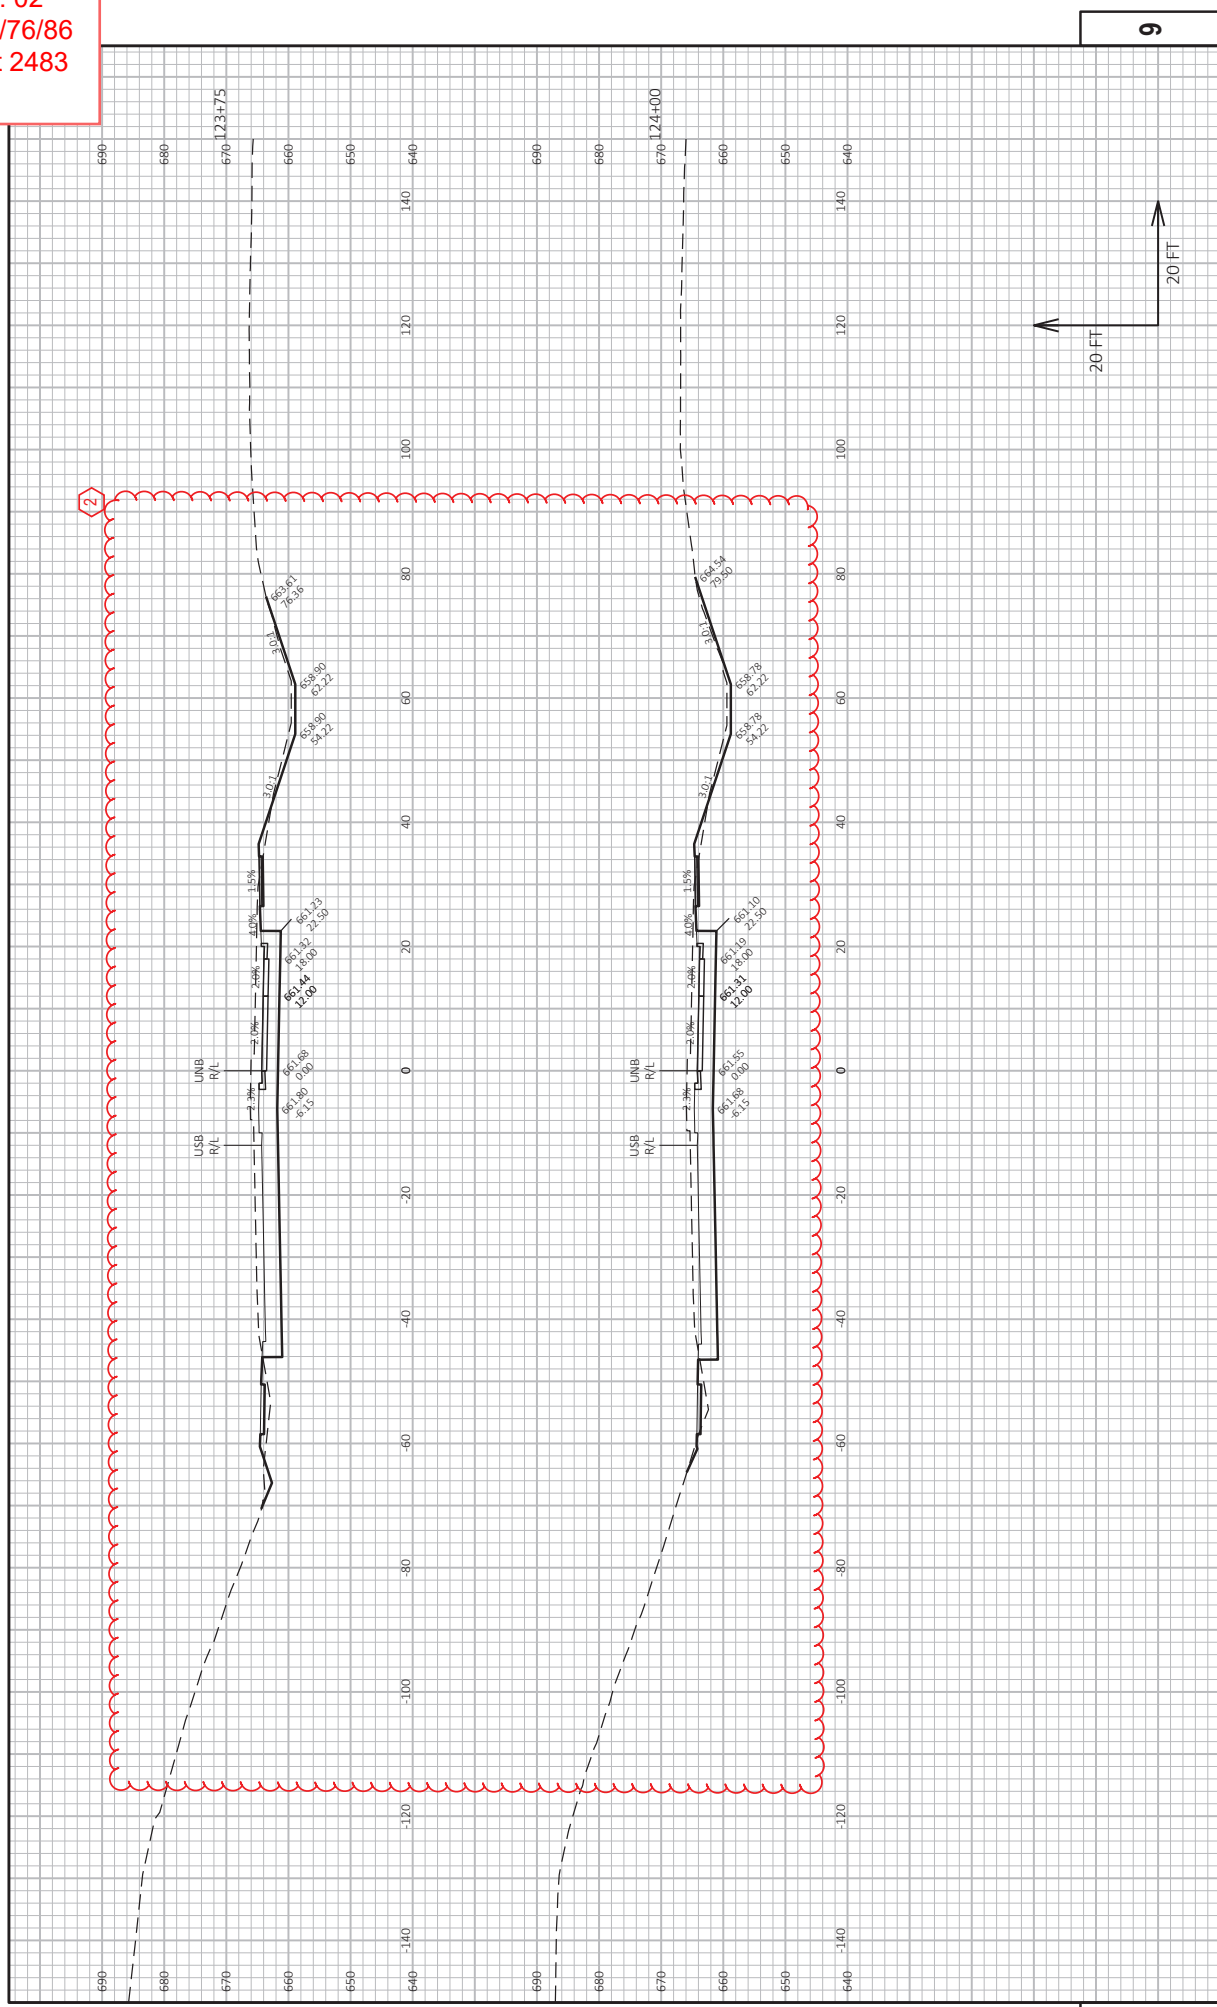


Addendum No. 02
 ID 1130-67-72/76/86
 Revised Sheet 2484
 July 2, 2025

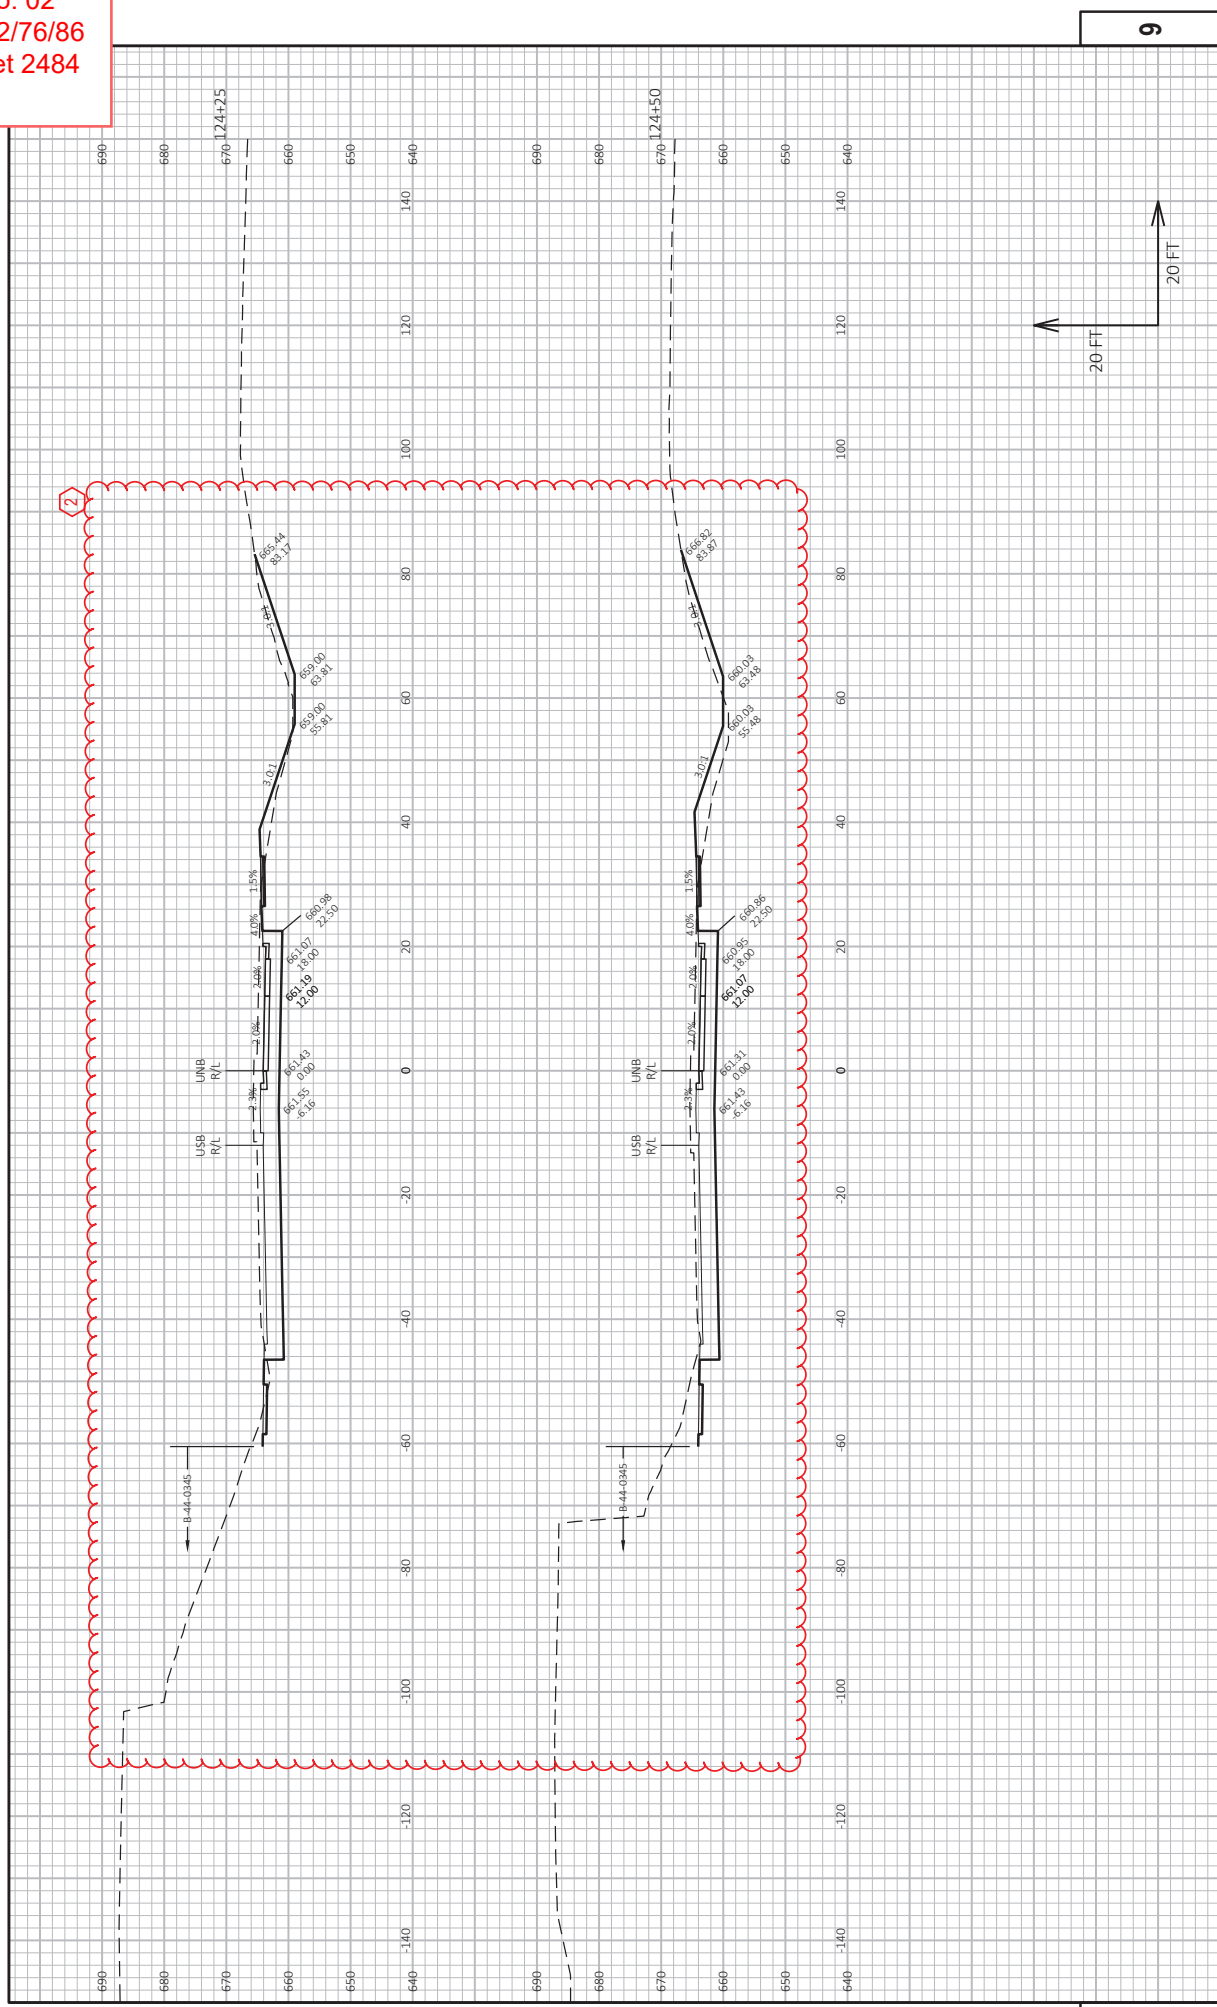


PROJECT NO: 1130-67-76
 COUNTY: OUTAGAMIE & BROWN
 CROSS SECTIONS: CTH U NB
 HWY: IH 41
 SHEET 2484
 PLOT DATE: 6/30/2025 11:12 PM
 PLOT BY: BARTZ, JEREMY P
 PLOT NAME: WISDOT\CADDS\SHEET 49

Addendum No. 02
 ID 1130-67-72/76/86
 Revised Sheet 2485
 July 2, 2025

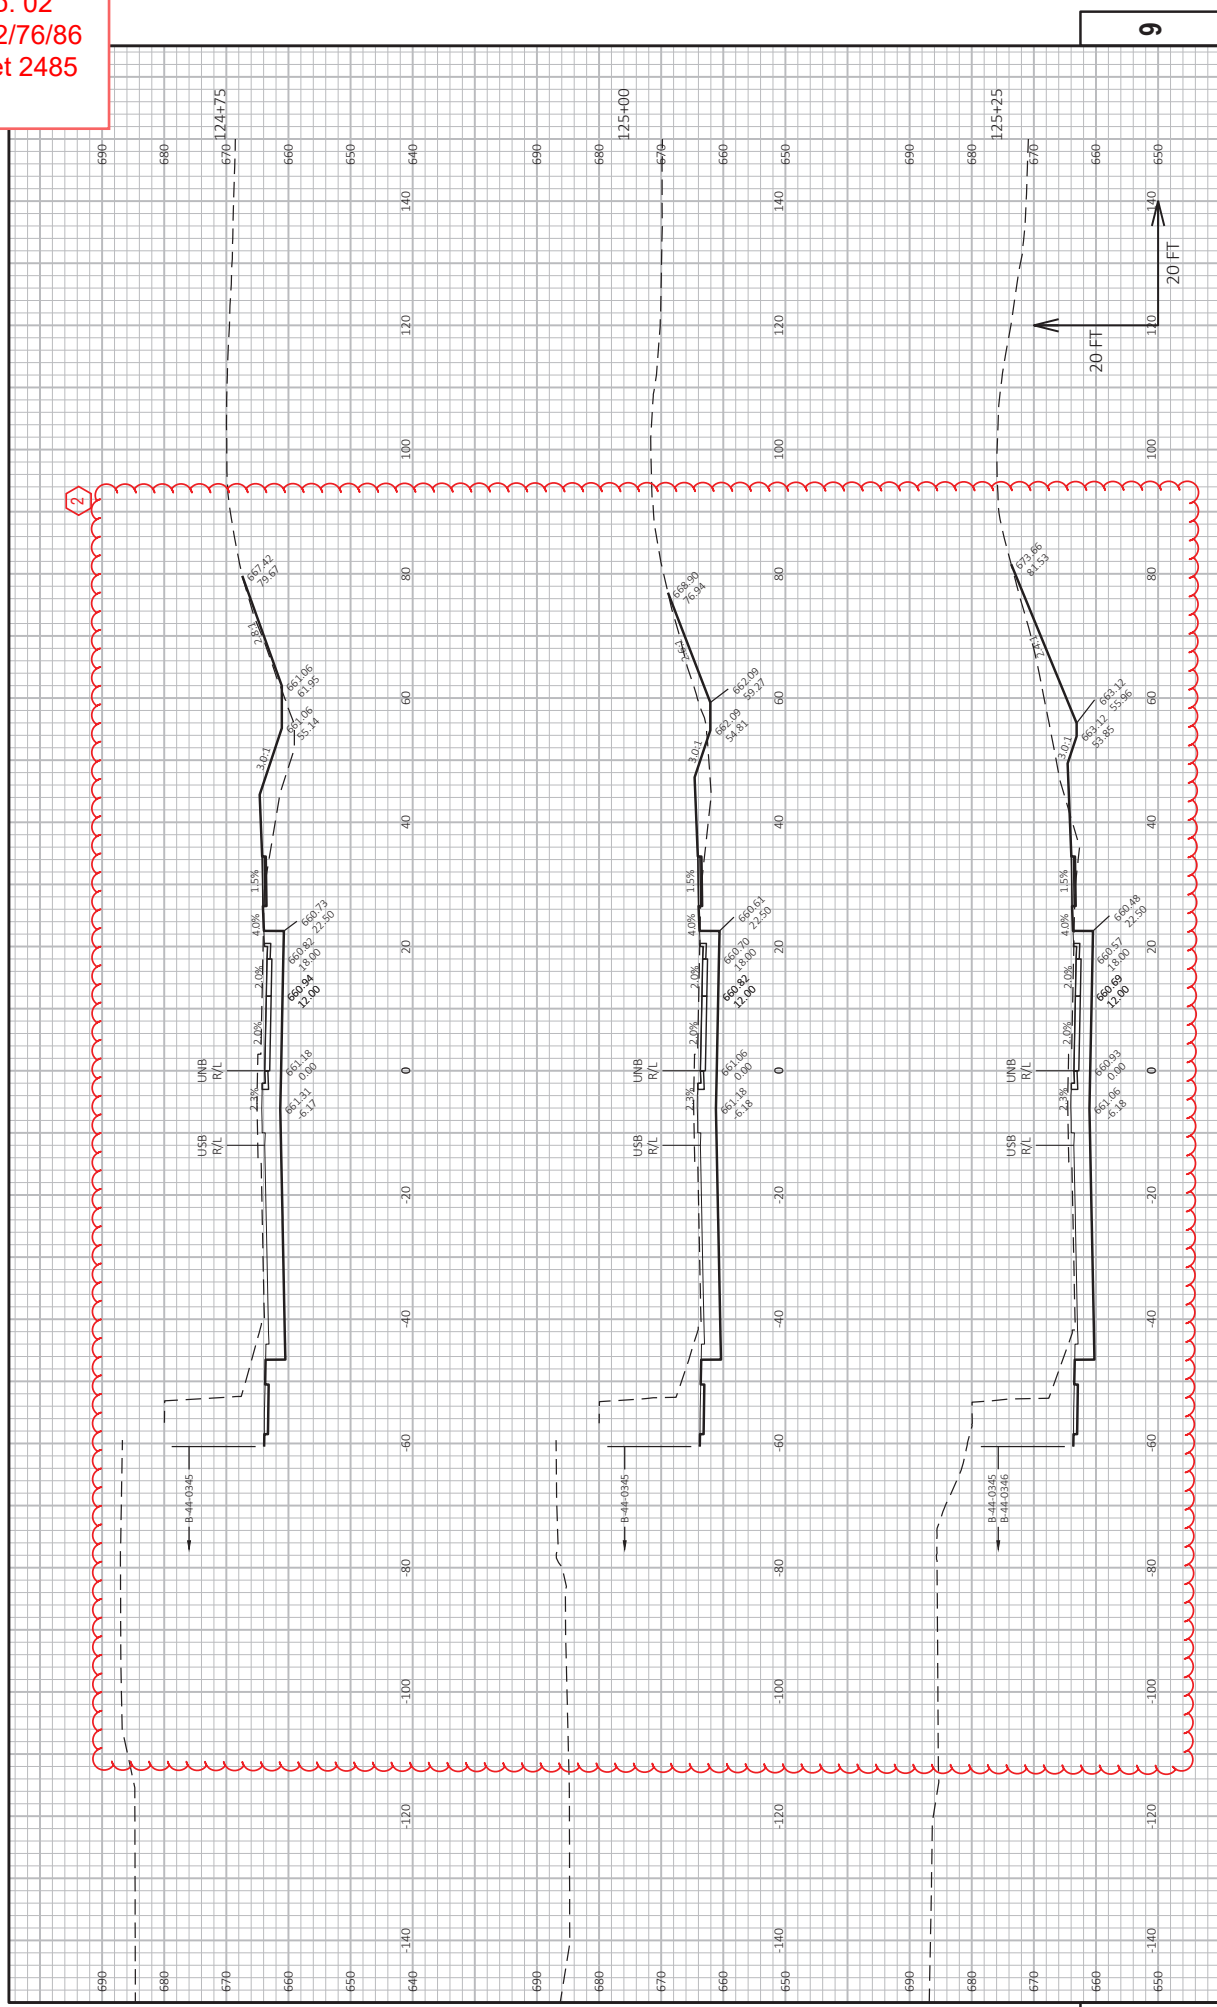


PROJECT NO: 1130-67-76	HWY: IH 41	COUNTY: OUTAGAMIE & BROWN	CROSS SECTIONS: CTH U NB	SHEET 2485
FILE NAME: C:\USERS\DT\BDC\ACDCDCS\WISDOT\11306770\SHEETS\1130-67-76\9007-AS_UNB.DWG	LAYOUT NAME: - 023	PLOT DATE: 6/30/2025 11:12 PM	PLOT BY: BARTZ, JEREMY P	PLOT NAME: WISDOT\CAD\05\SHEET 49

Addendum No. 02
 ID 1130-67-72/76/86
 Revised Sheet 2486
 July 2, 2025

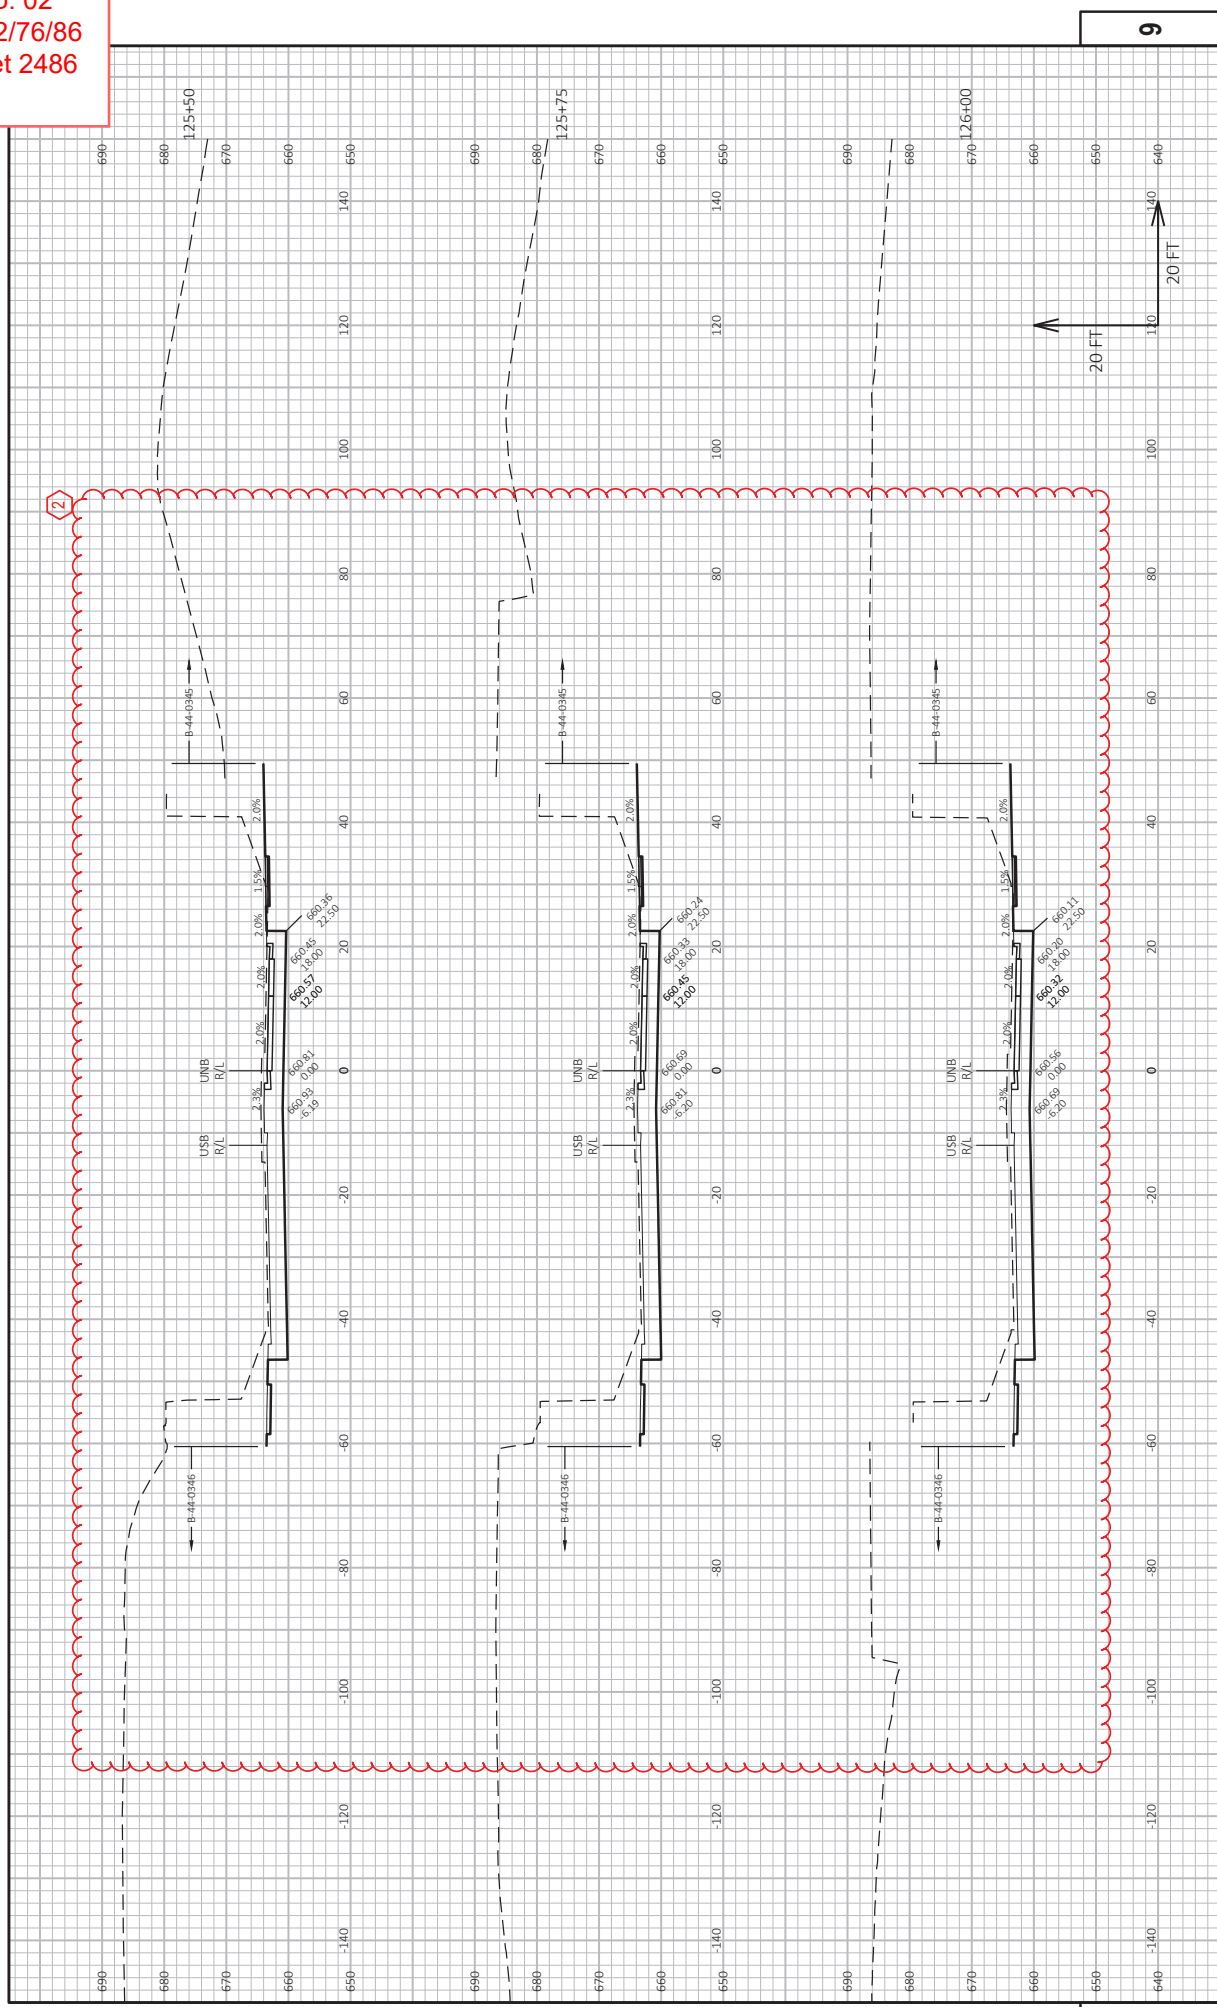



PROJECT NO: 1130-67-76 HWY: IH 41 COUNTY: OUTAGAMIE & BROWN CROSS SECTIONS: CTH U NB SHEET 2486
 FILE NAME: C:\USERS\DT\BDC\ACDCDCS\WISDOT\11306776\PROJECT FILES\USGN\11306776\SHETS\1130-67-76\9007-XS_UNB.DWG PLOT BY: BARTZ, JEREMY P. PLOT NAME: CTH U NB PLOT SCALE: 1 IN=20 FT HORZ. / 1 IN=20 FT VERT. WISDOT\CDCS\SHEET 49
 DATE: 6/30/2025 11:12 AM

Addendum No. 02
 ID 1130-67-72/76/86
 Revised Sheet 2487
 July 2, 2025

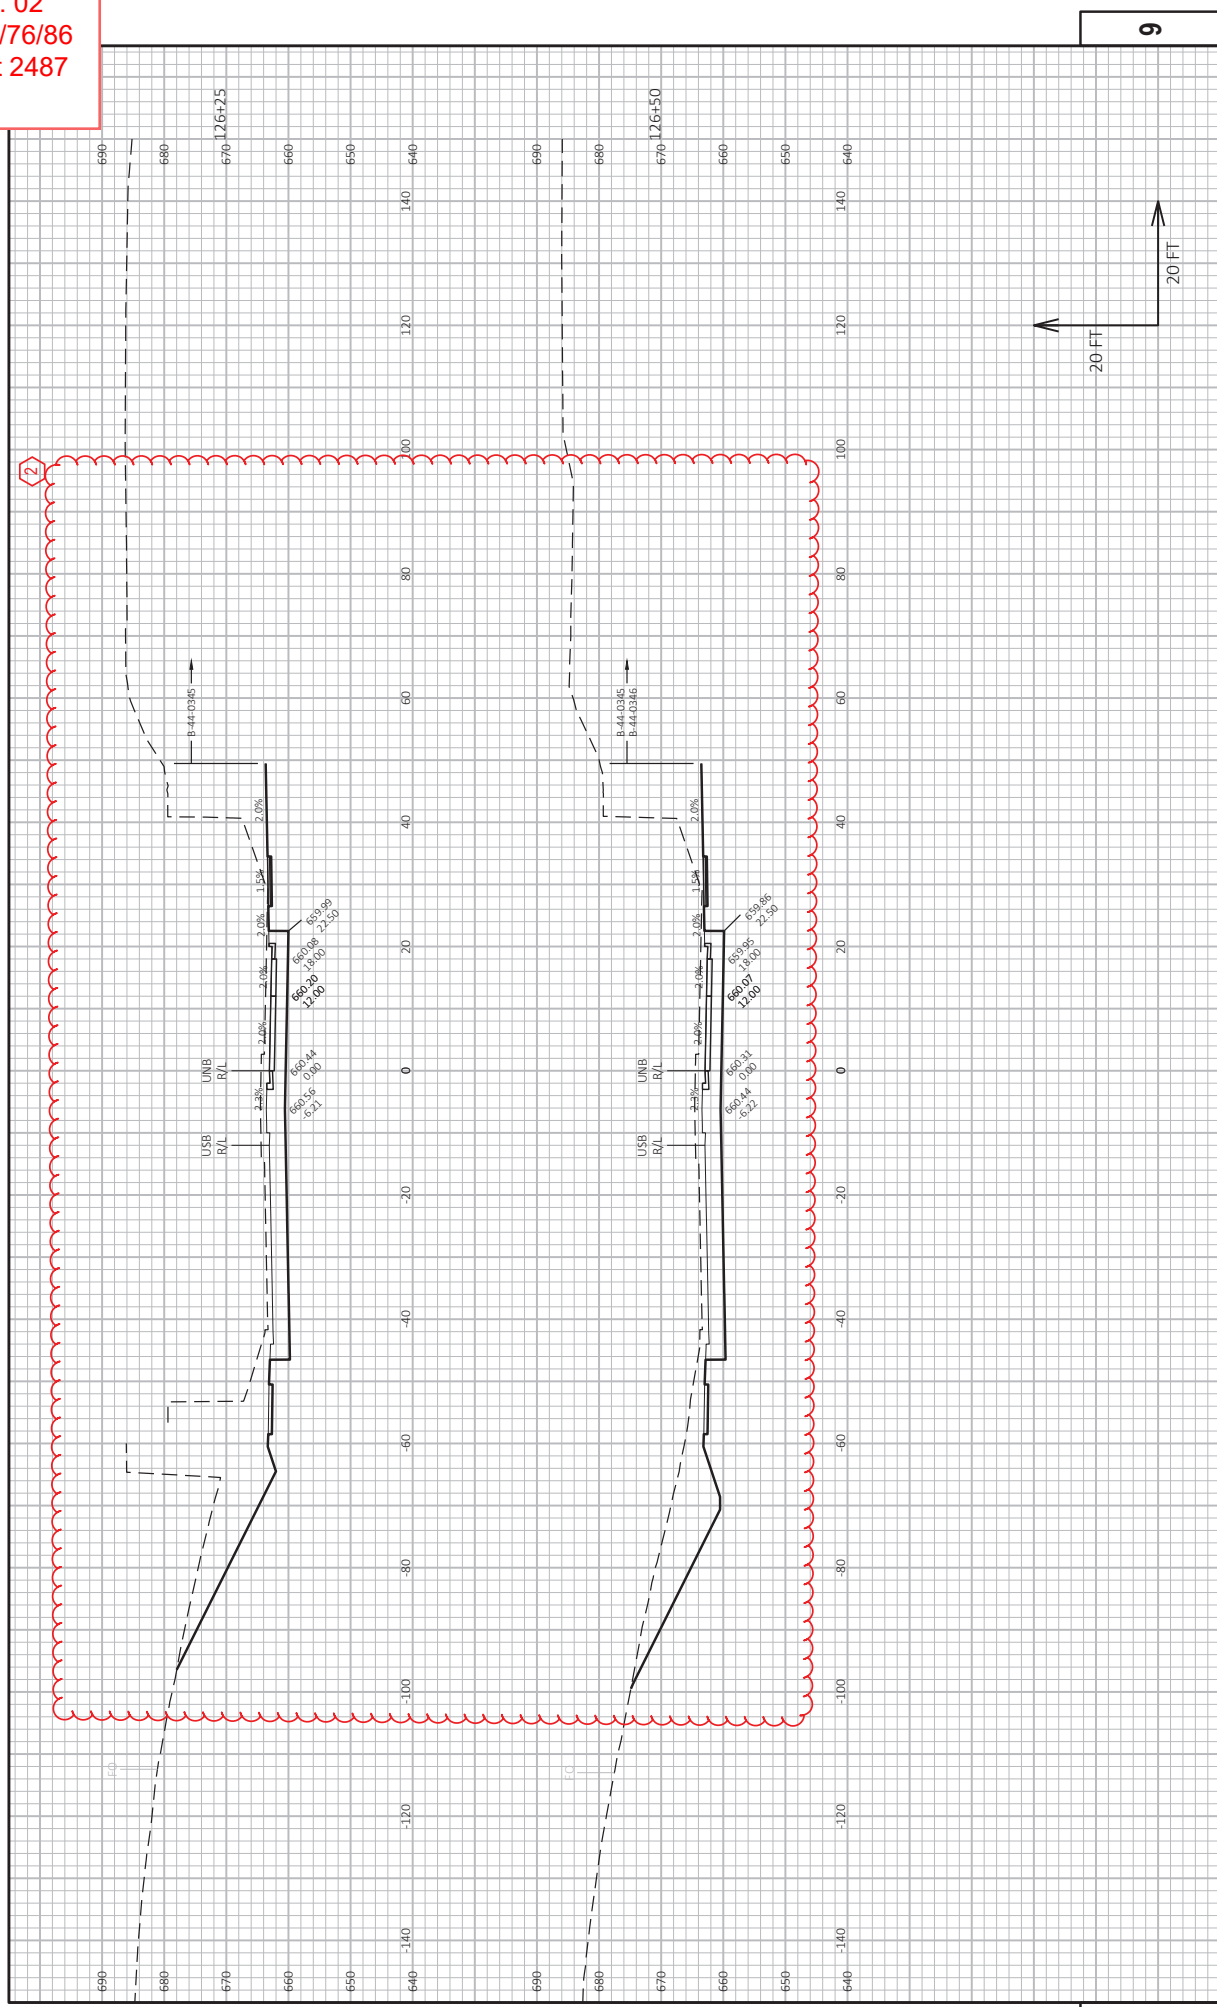


PROJECT NO: 1130-67-76 HWY: IH 41 COUNTY: OUTAGAMIE & BROWN CROSS SECTIONS: CTH U NB SHEET 2487
 FILE NAME: C:\USERS\DJM\DWG\ACDDCS\WISDOT\113067\PROJECT FILES\DWG\113067\03SHEETS\1130-67-76\90207-XS_UNB.DWG PLOT DATE: 6/30/2025 11:12 AM PLOT BY: BARTZ, JEREMY P. PLOT NAME: CTH U NB CROSS SECTIONS SHEET 49
 LAYOUT NAME: _025 WISDOT\CAD\05 SHEET 49

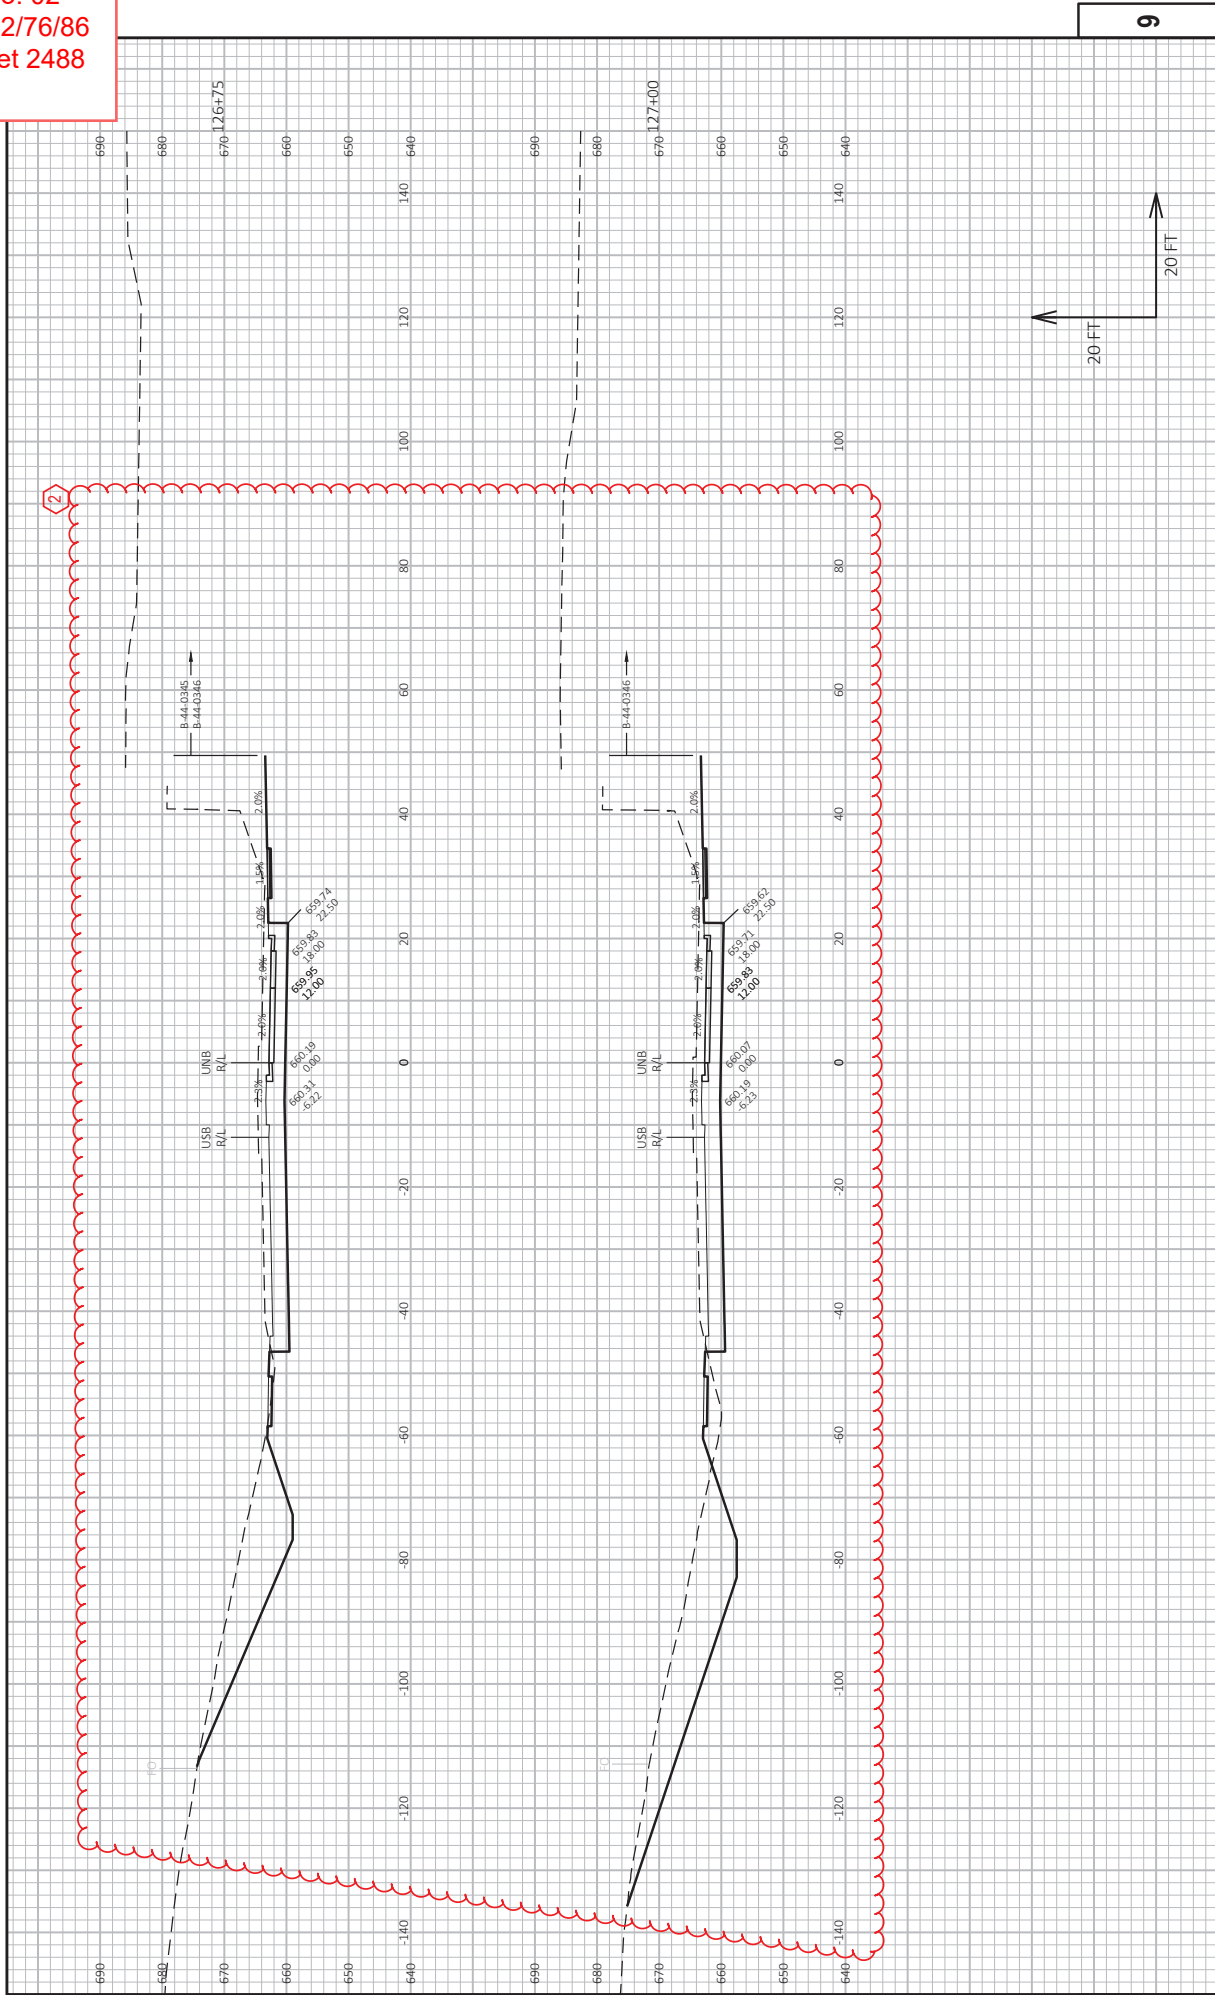

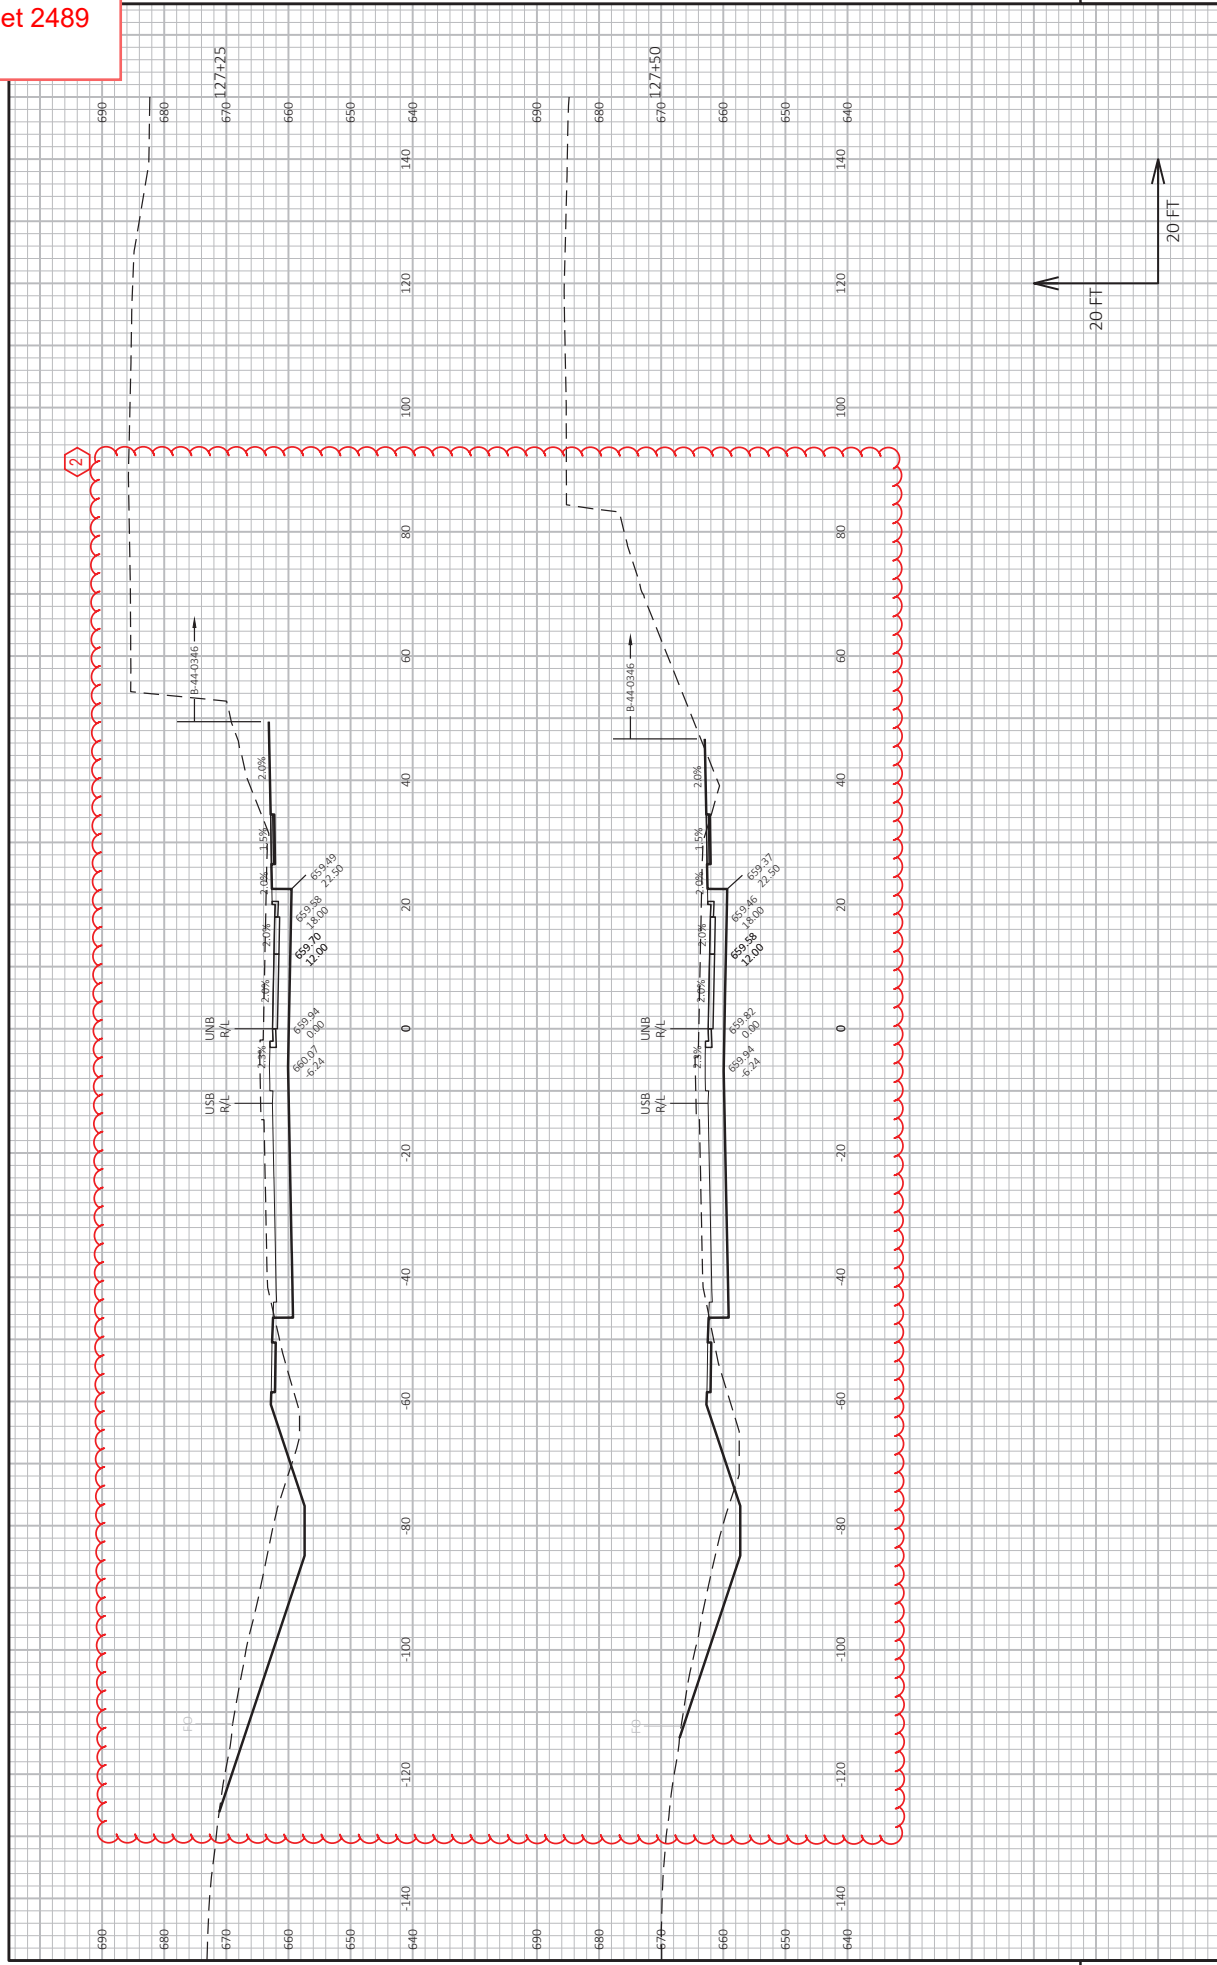


Addendum No. 02
 ID 1130-67-72/76/86
 Revised Sheet 2490
 July 2, 2025

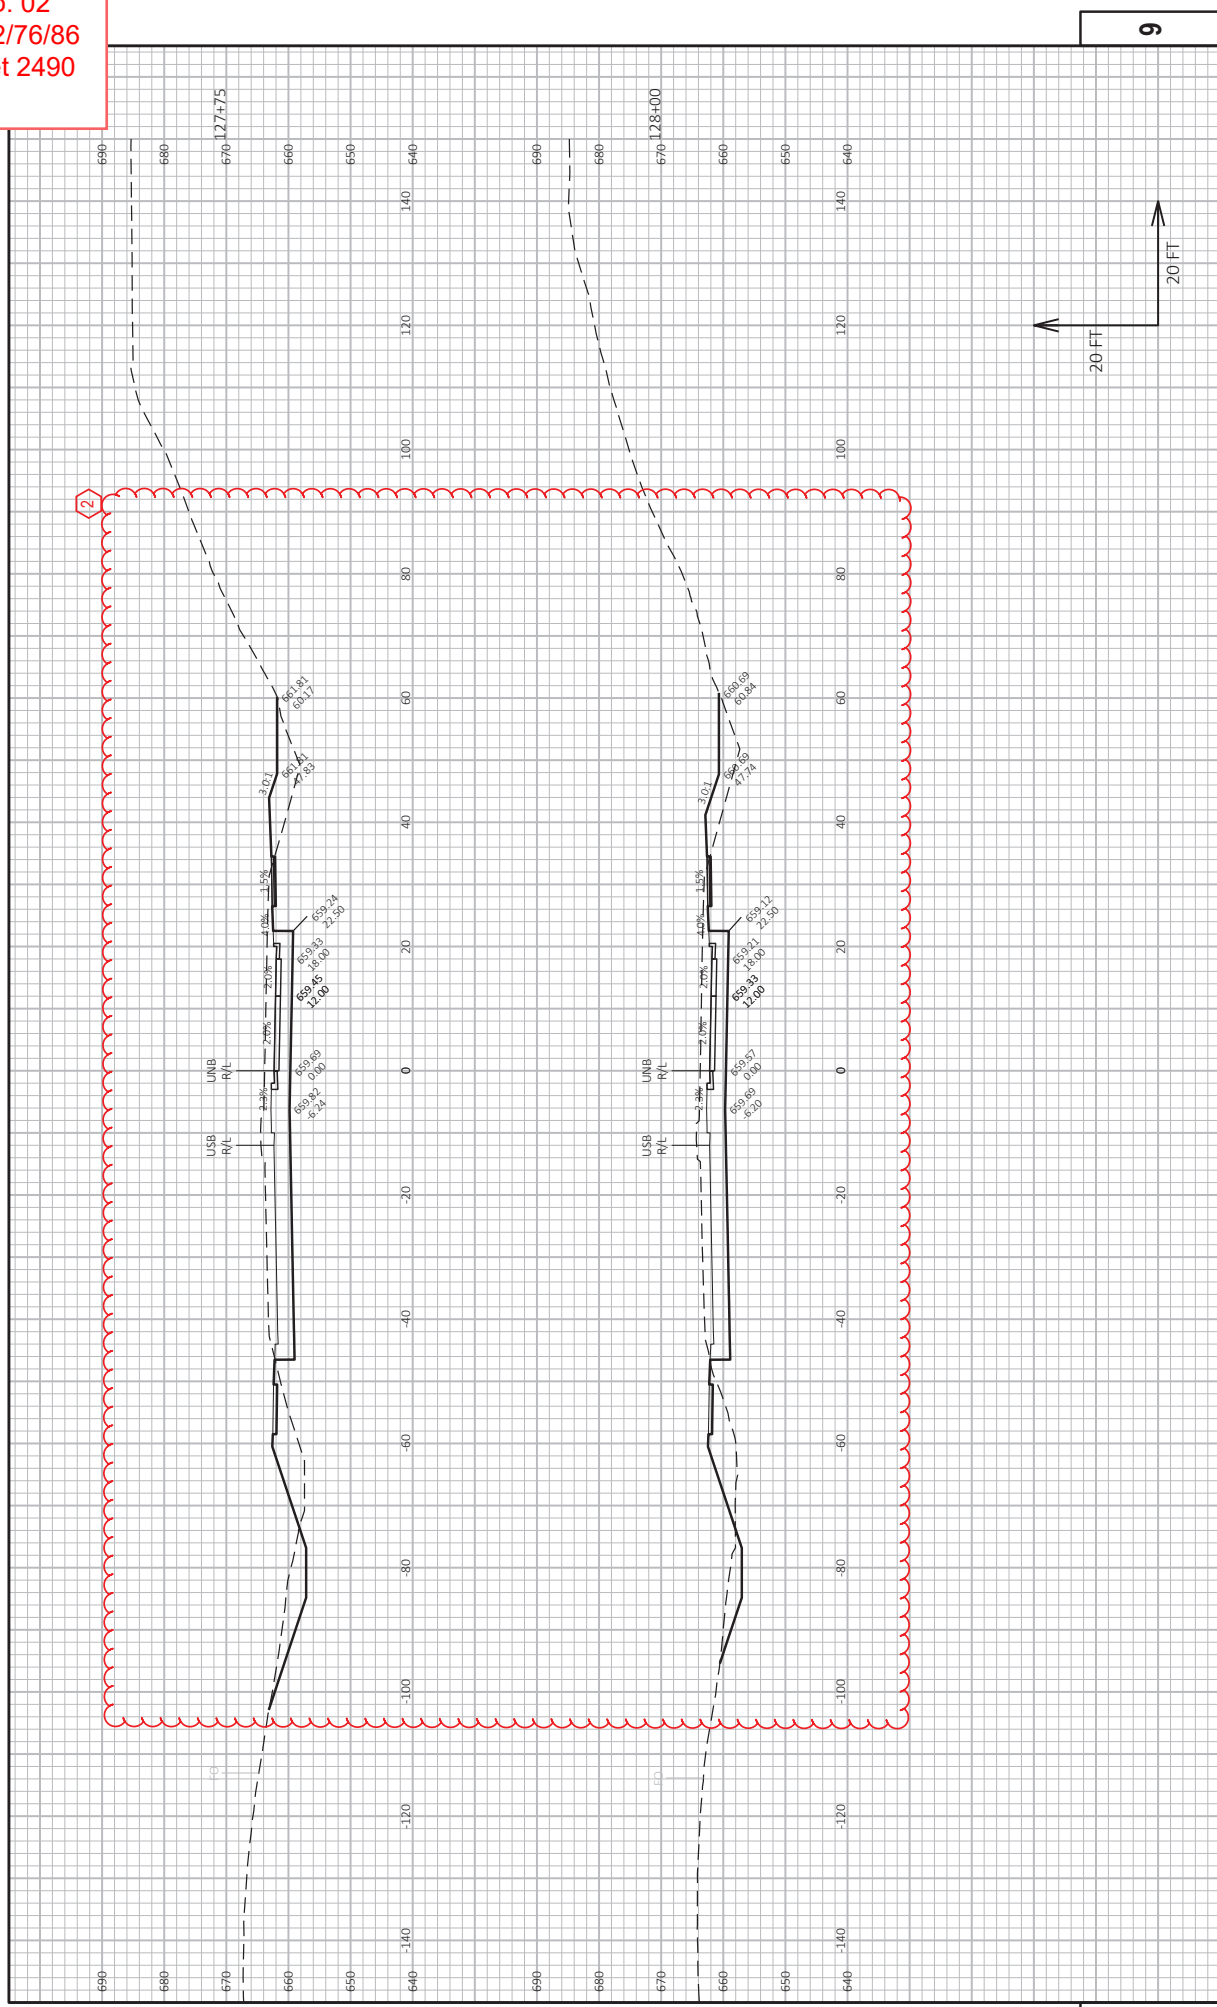


PROJECT NO: 1130-67-76 HWY: IH 41 COUNTY: OUTAGAMIE & BROWN CROSS SECTIONS: CTH U NB SHEET 2490
 FILE NAME: C:\USERS\DT\B\DC\ACDCDCS\WISDOT\11306770\PROJECT FILES\USGN\11306770\SHEETS\1130-67-76\9007-AS_UNB.DWG LAYOUT NAME: _028 PLOT BY: BARTZ, JEREMY P. PLOT NAME: CTH U NB FILE DATE: 6/30/2025 11:13 PM PLOT SCALE: 1 IN=20 FT HORZ. / 1 IN=20 FT VERT. WISDOT\CAD\05\SHEET 49

Addendum No. 02
 ID 1130-67-72/76/86
 Revised Sheet 2491
 July 2, 2025

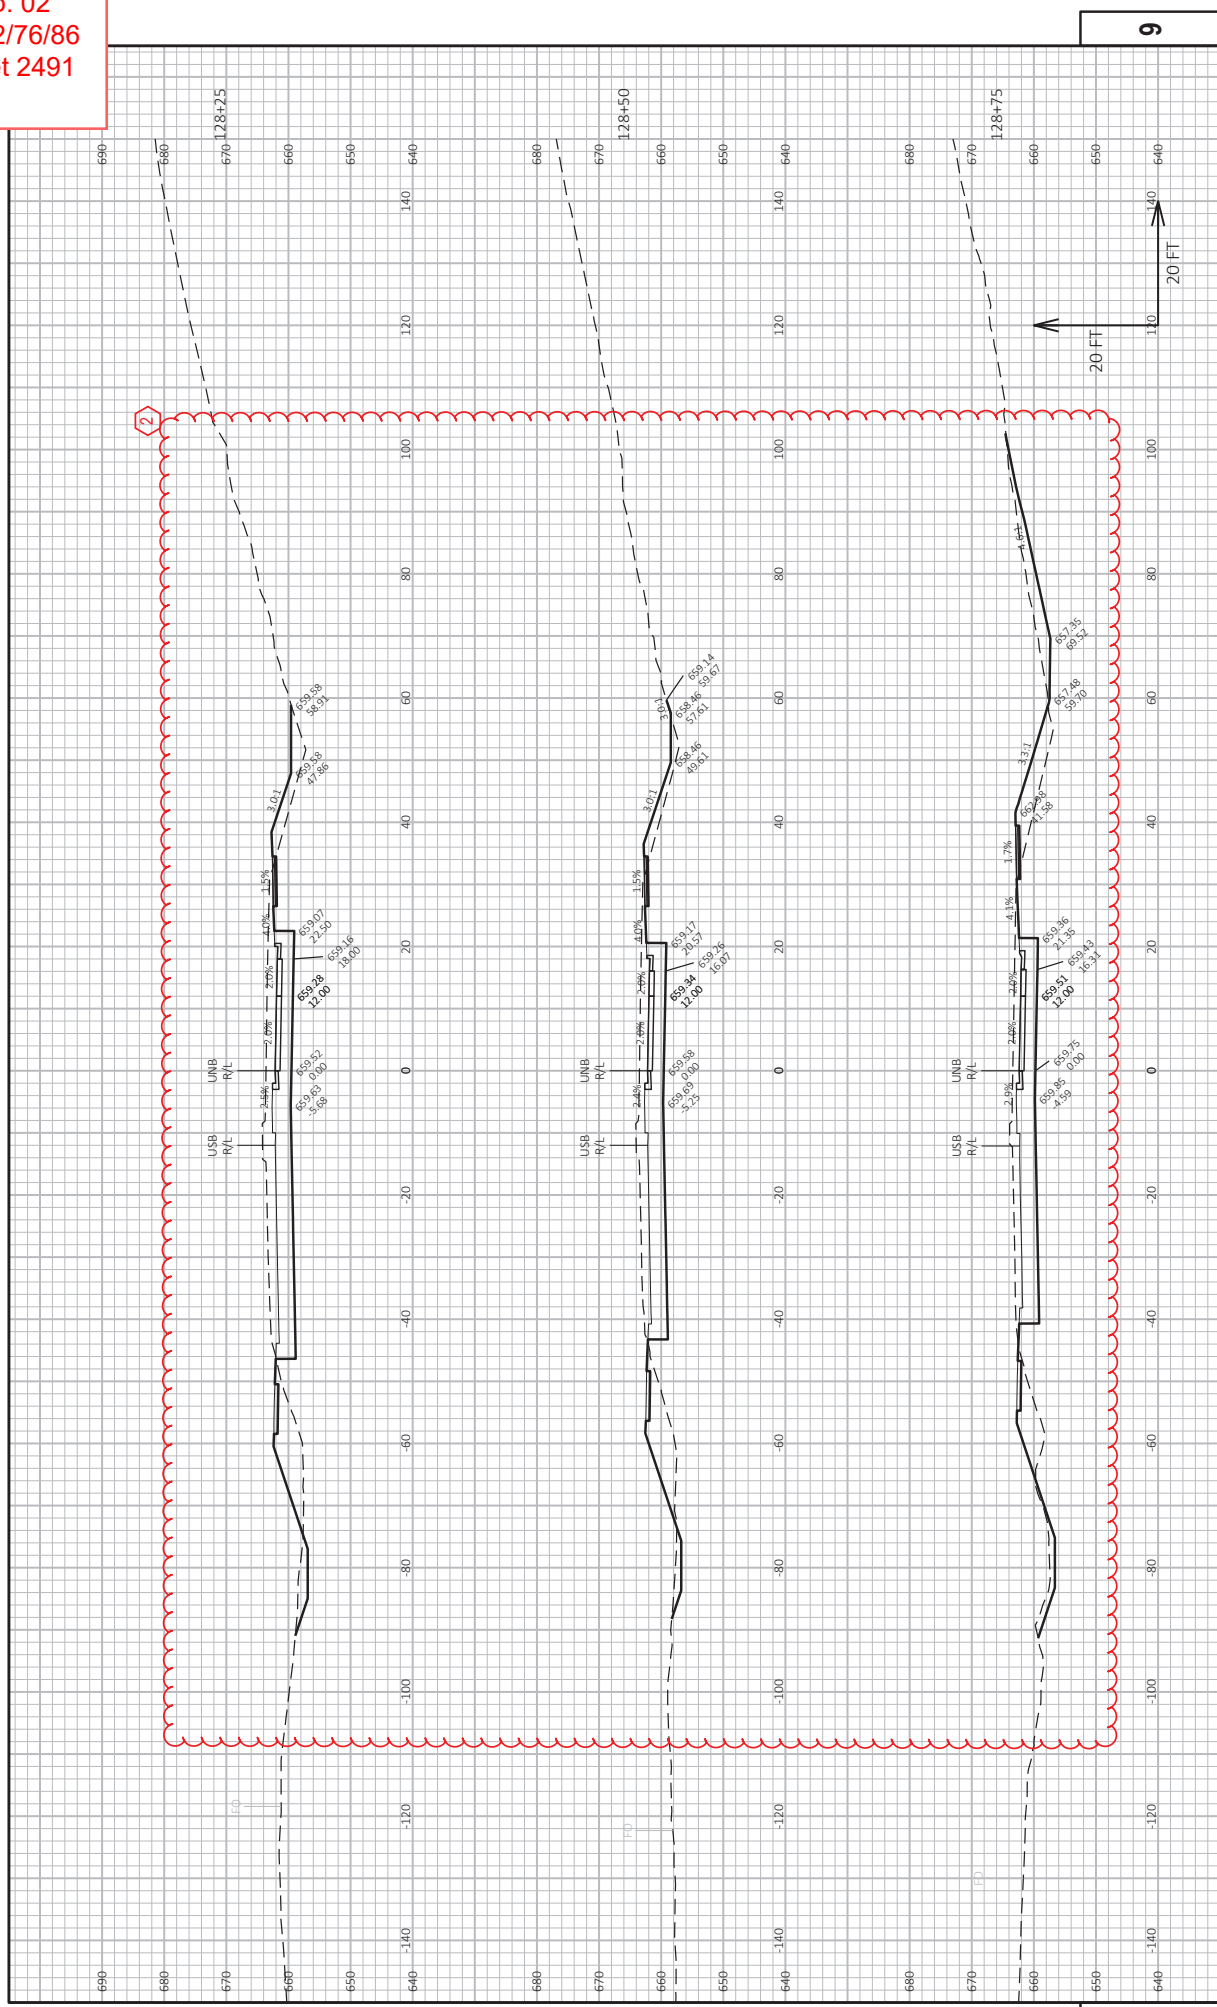


PROJECT NO: 1130-67-76 HWY: IH 41 COUNTY: OUTAGAMIE & BROWN CROSS SECTIONS: CTH U NB PLOT BY: BARTZ, JEREMY P. SHEET 2491 E

FILE NAME: C:\USERS\DT\B\DC\ACDCDCS\WISDOT\11306770\PROJECT FILES\USGN\11306770\1130-67-76\900207-XS_UNB.DWG LAYOUT NAME: -_029 PLOT DATE: 7/1/2025 3:27 PM PLOT NAME: WISDOT\CAD\DCS\SHEET 49

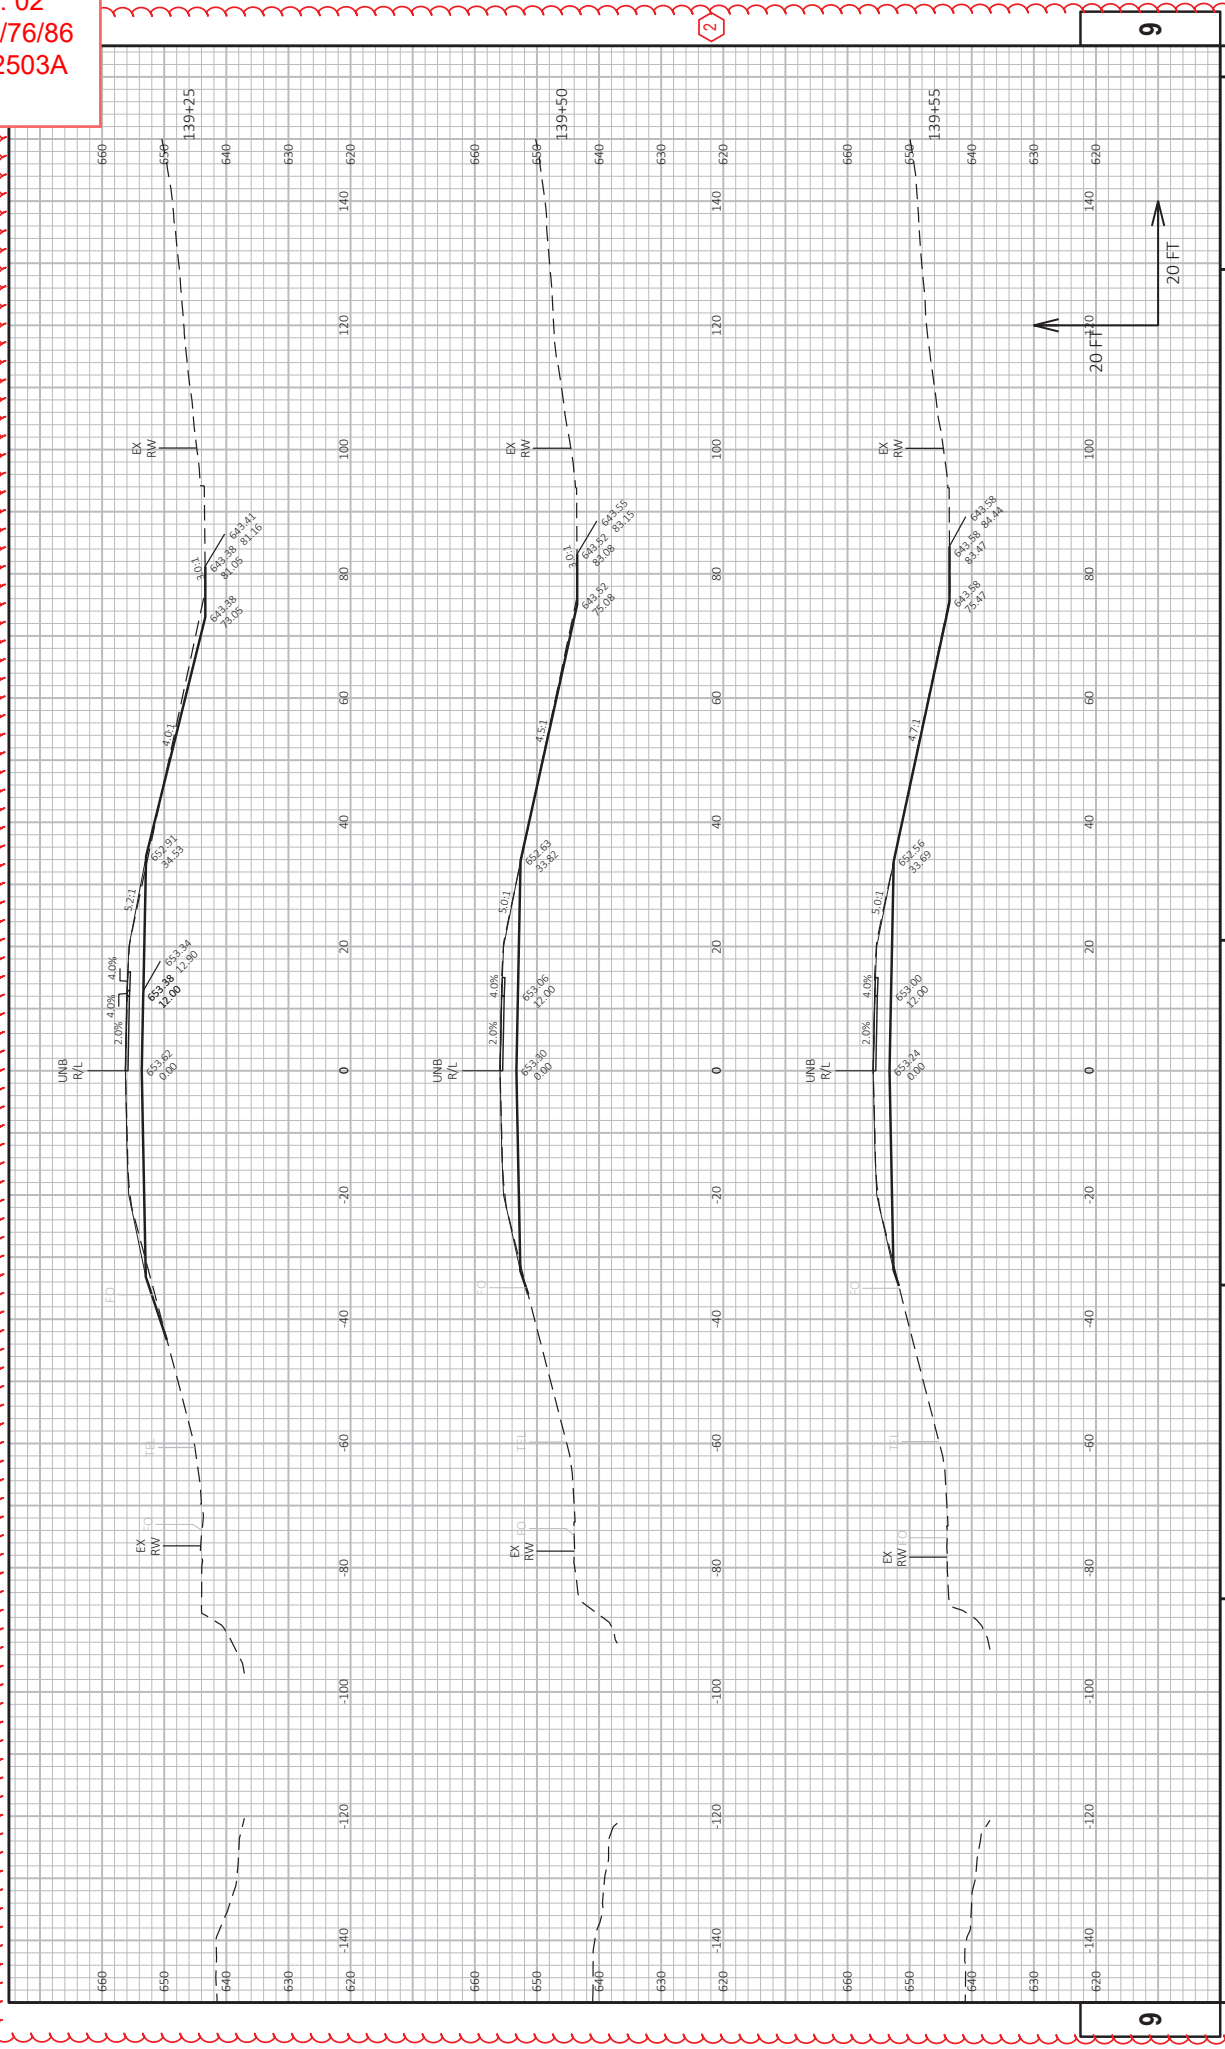

Addendum No. 02
 ID 1130-67-72/76/86
 Revised Sheet 2524
 July 2, 2025

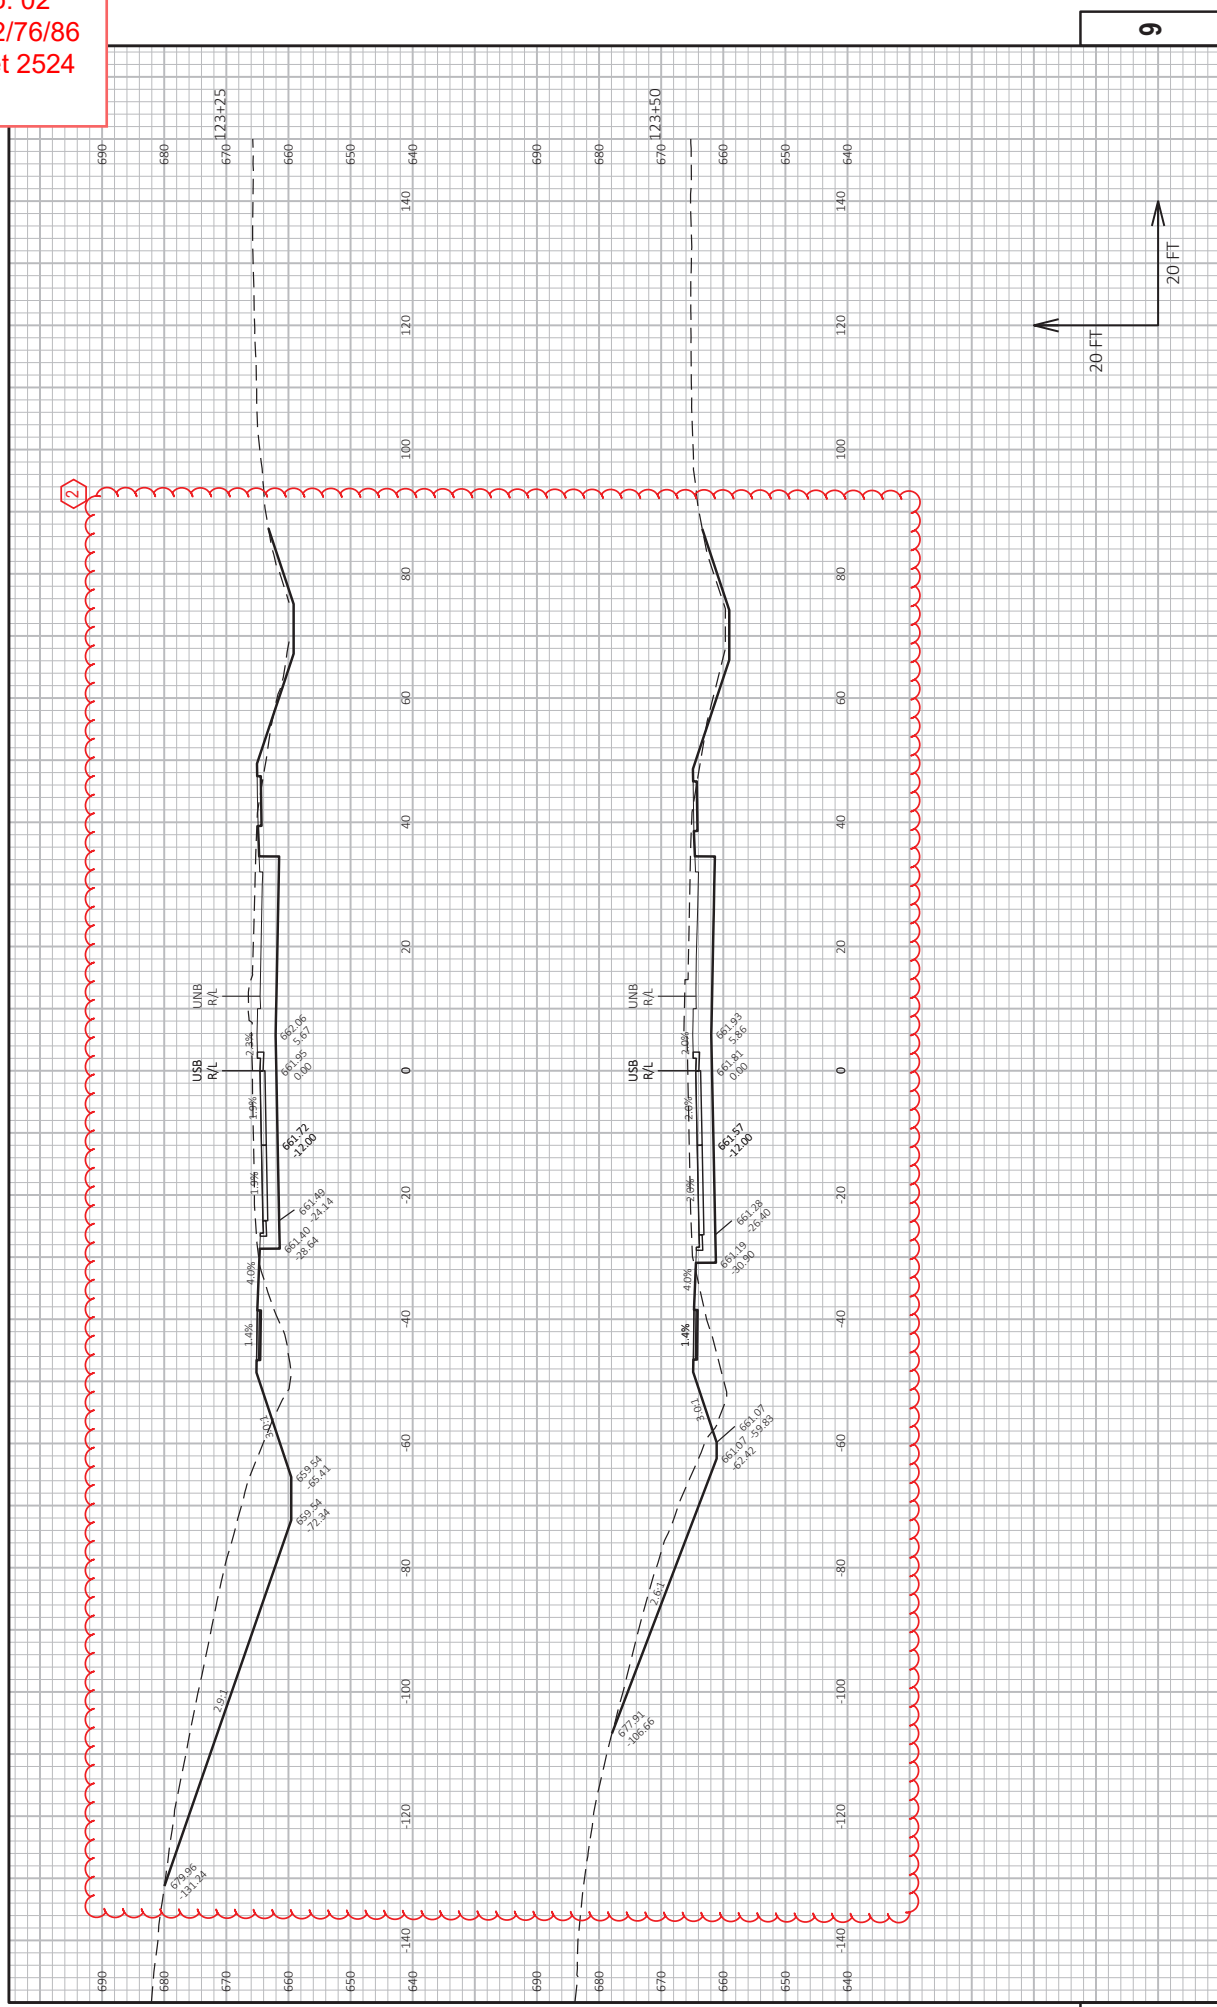



PROJECT NO: 1130-67-76 HWY: IH 41 COUNTY: OUTAGAMIE & BROWN CROSS SECTIONS: CTH U SB PLOT BY: BARTZ, JEREMY P. SHEET 2524 E


FILE NAME: C:\USERS\JTB\DWG\ACDDCS\WISDOT\11306703\PROJECT FILES\USG\11306703\SHEETS\1130-67-76\90208.XS_USB.DWG PLOT DATE: 7/1/2025 4:20 PM

LAYOUT NAME: _021


WISDOT\CAD\05\SHEET 49

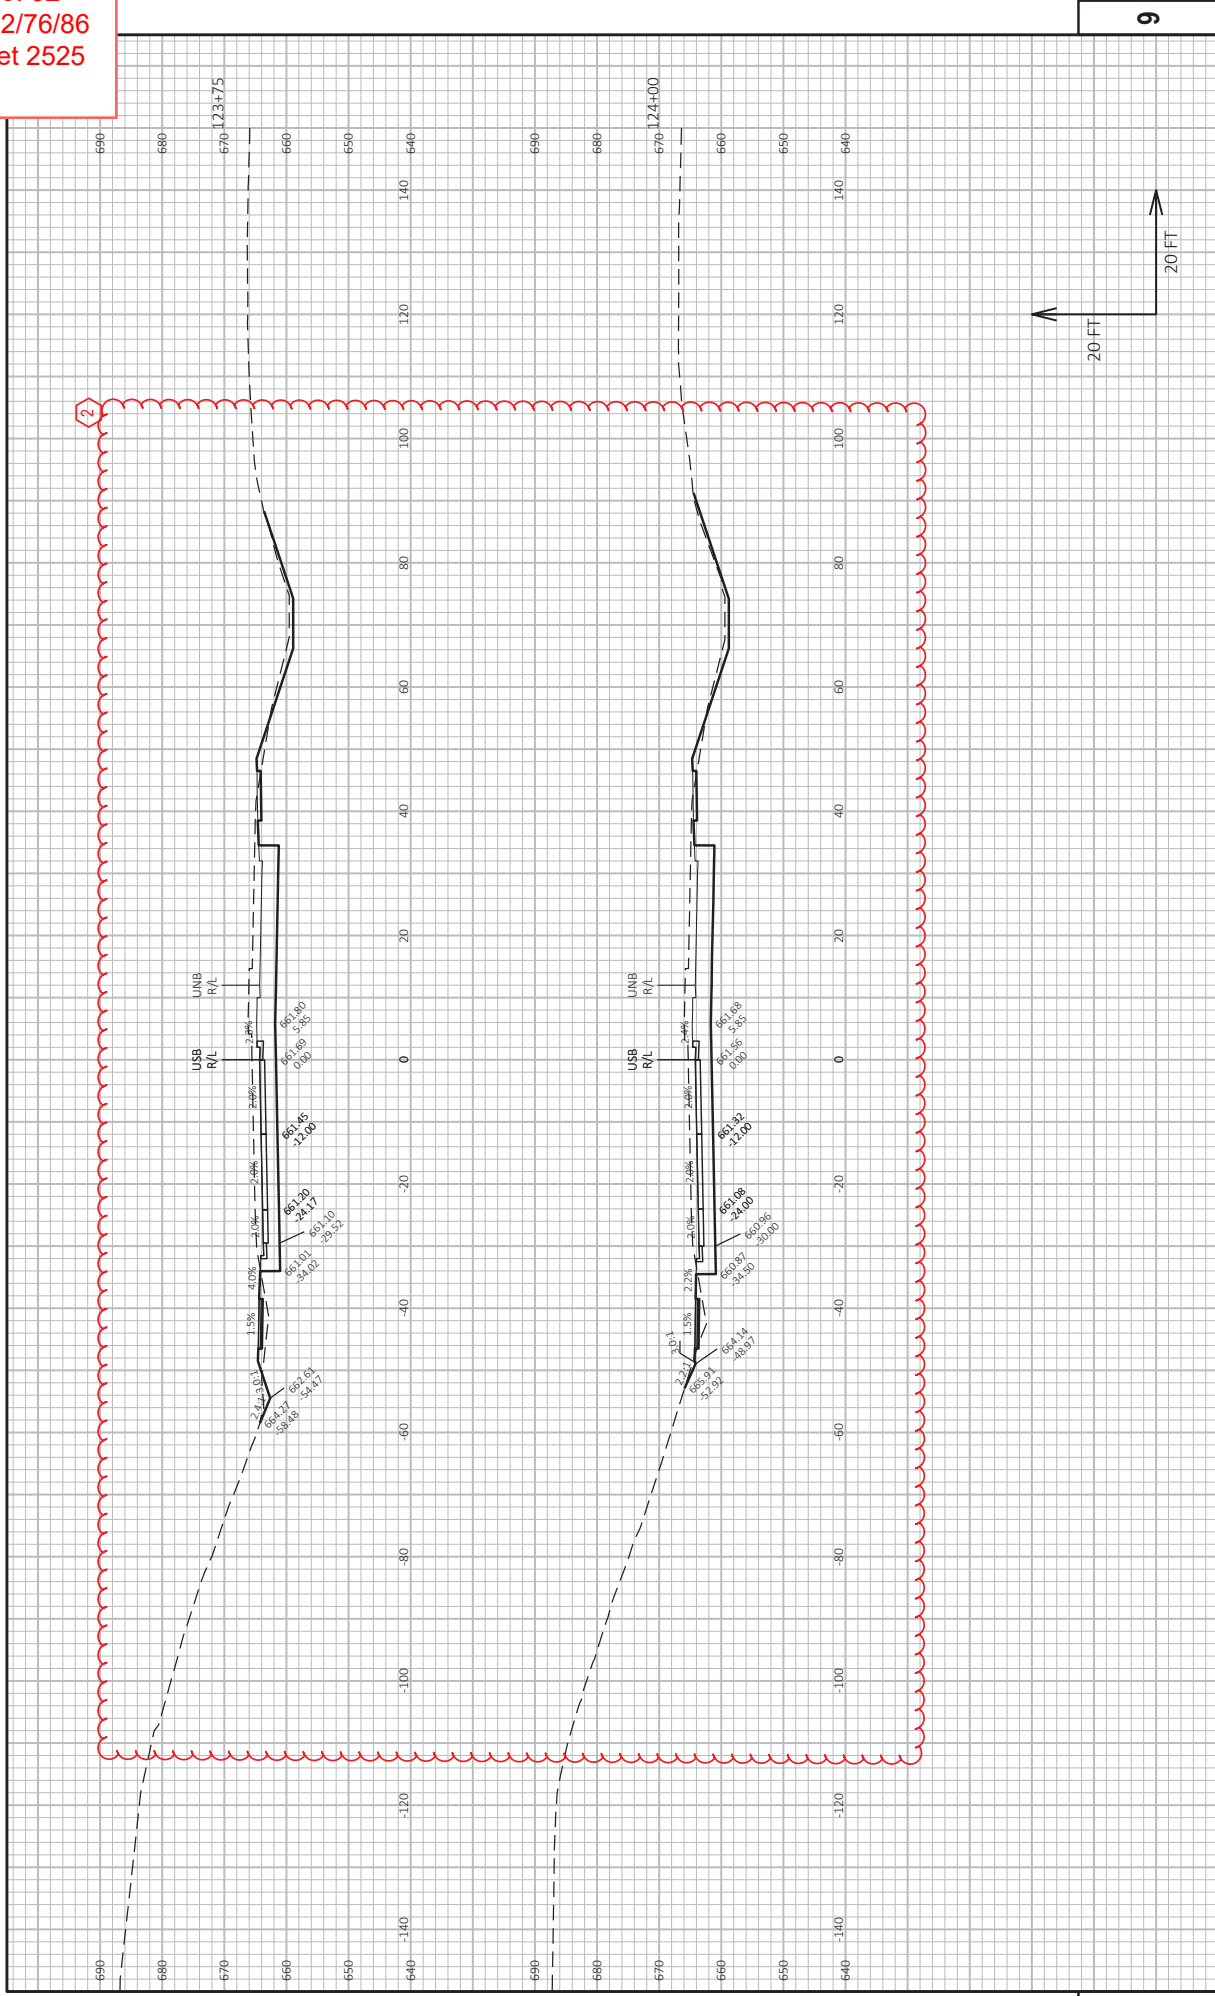

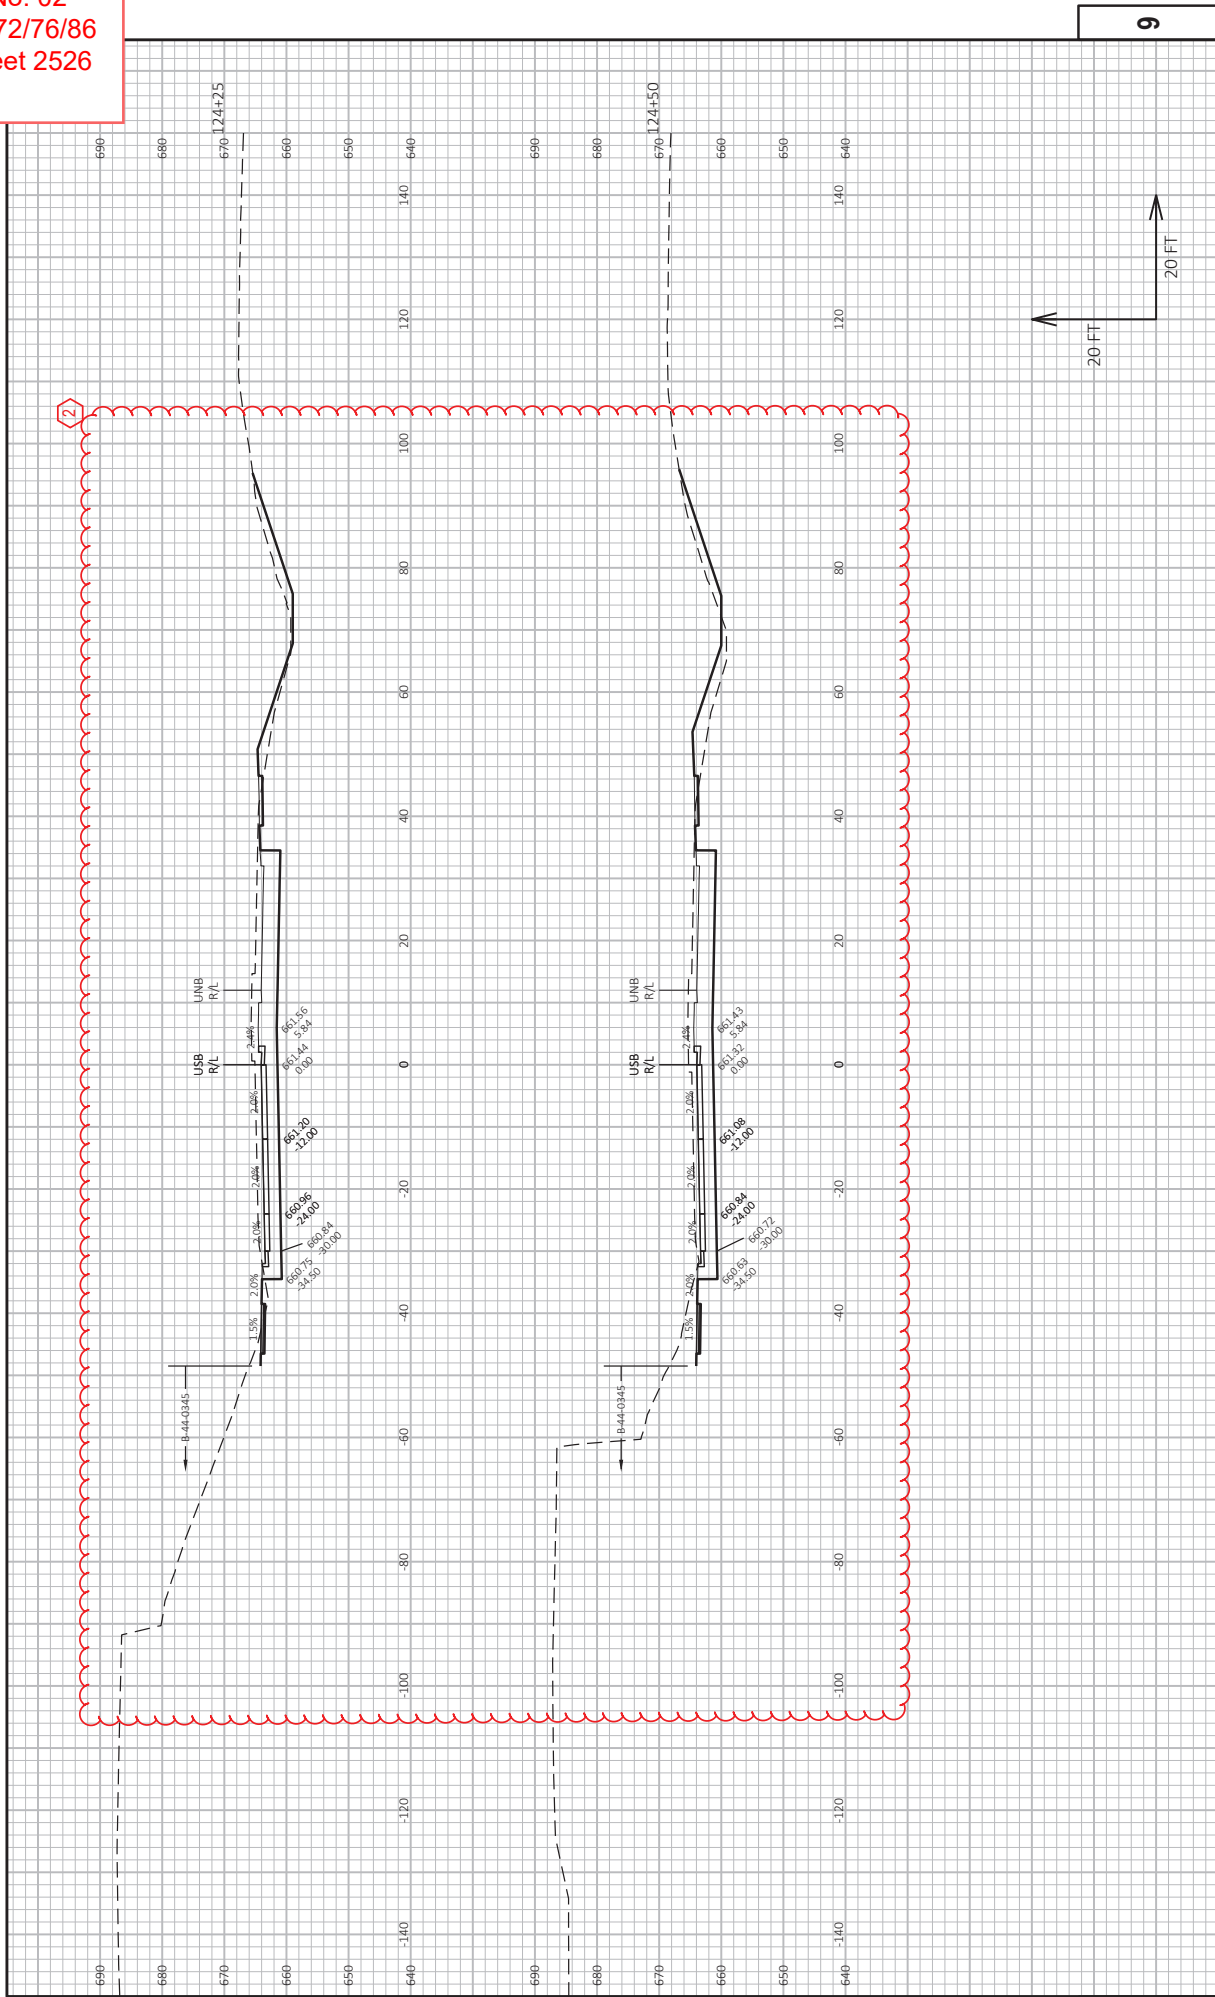

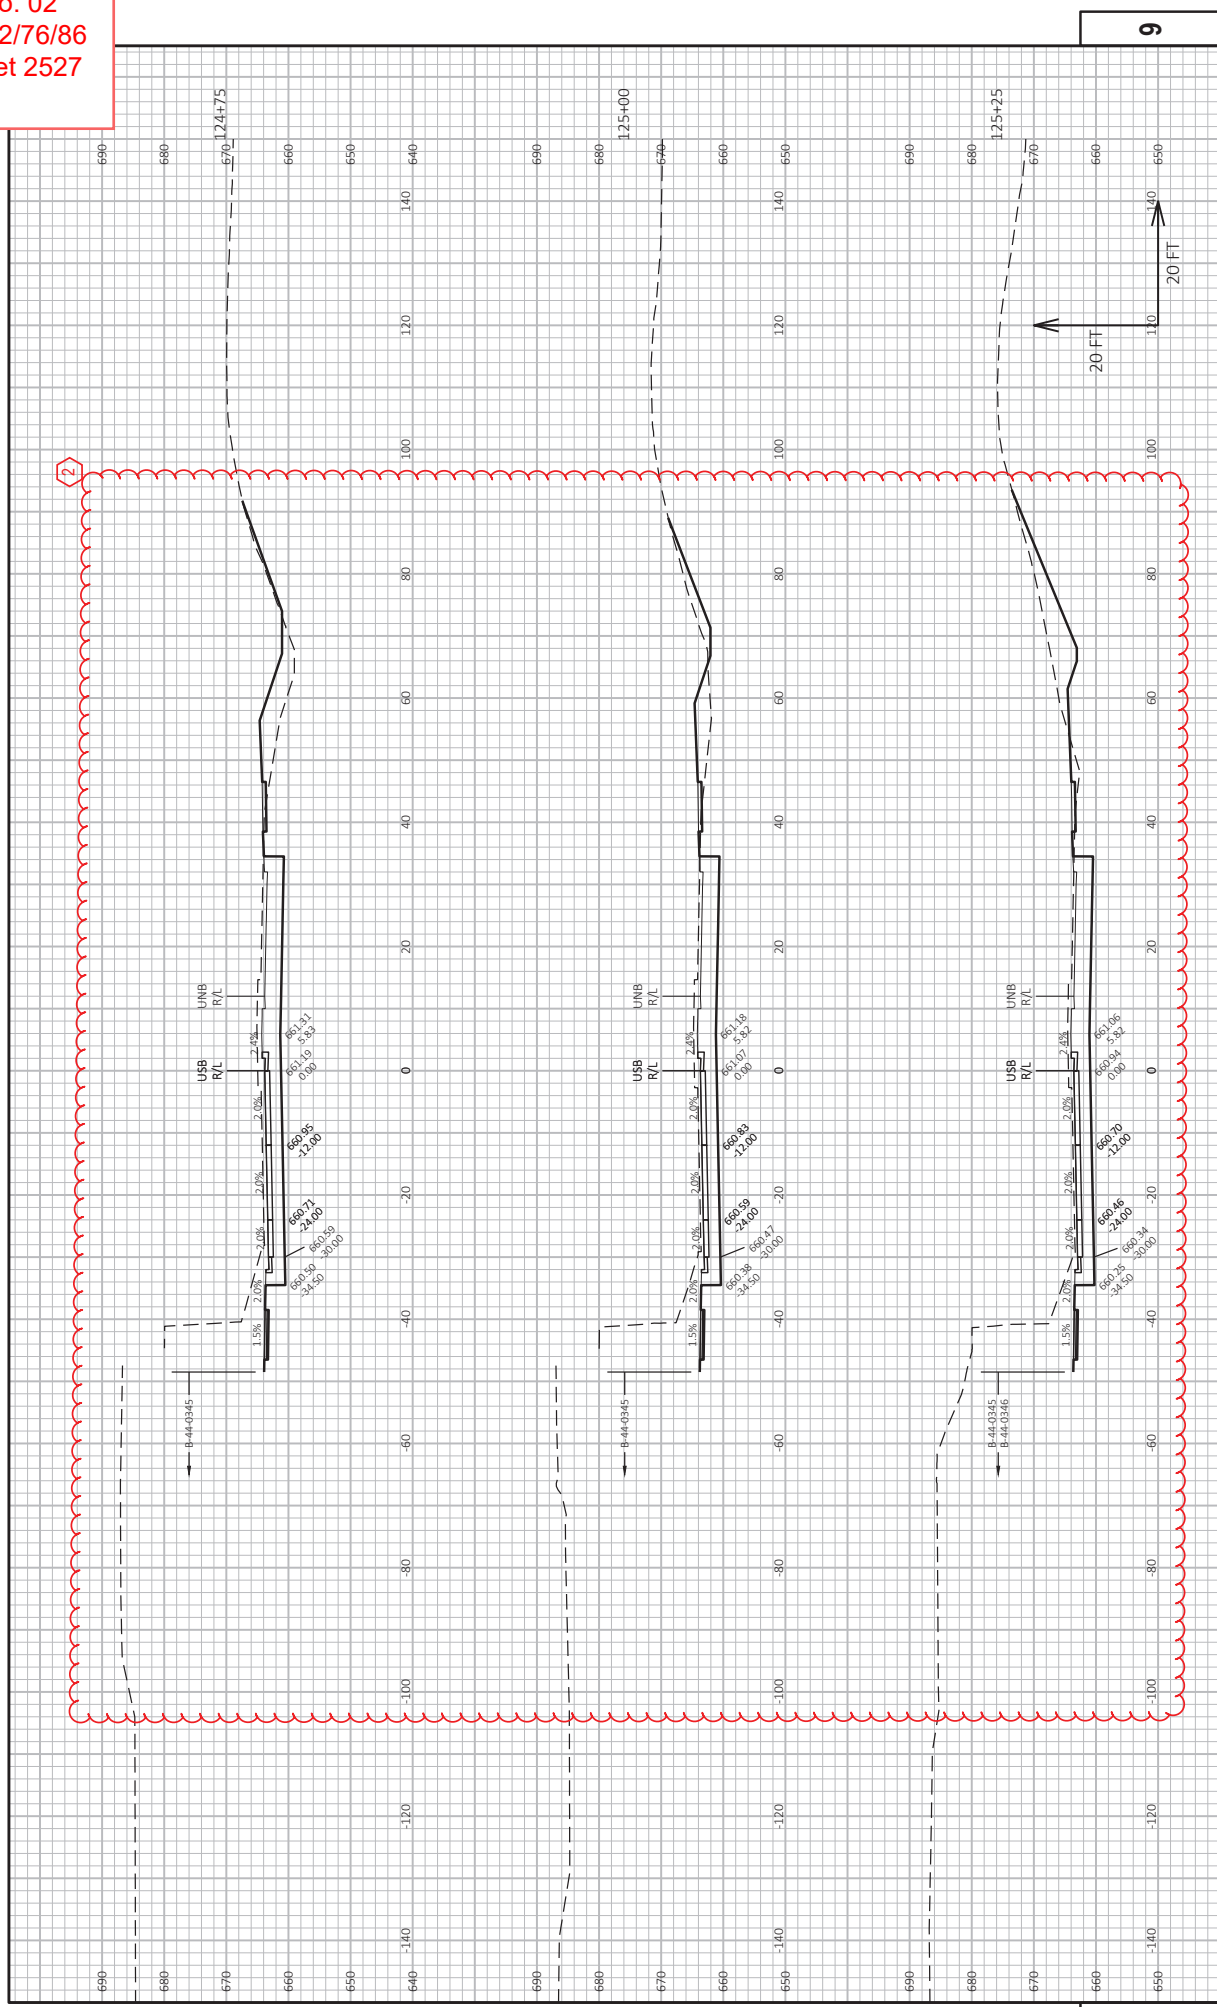


Addendum No. 02
 ID 1130-67-72/76/86
 Revised Sheet 2528
 July 2, 2025

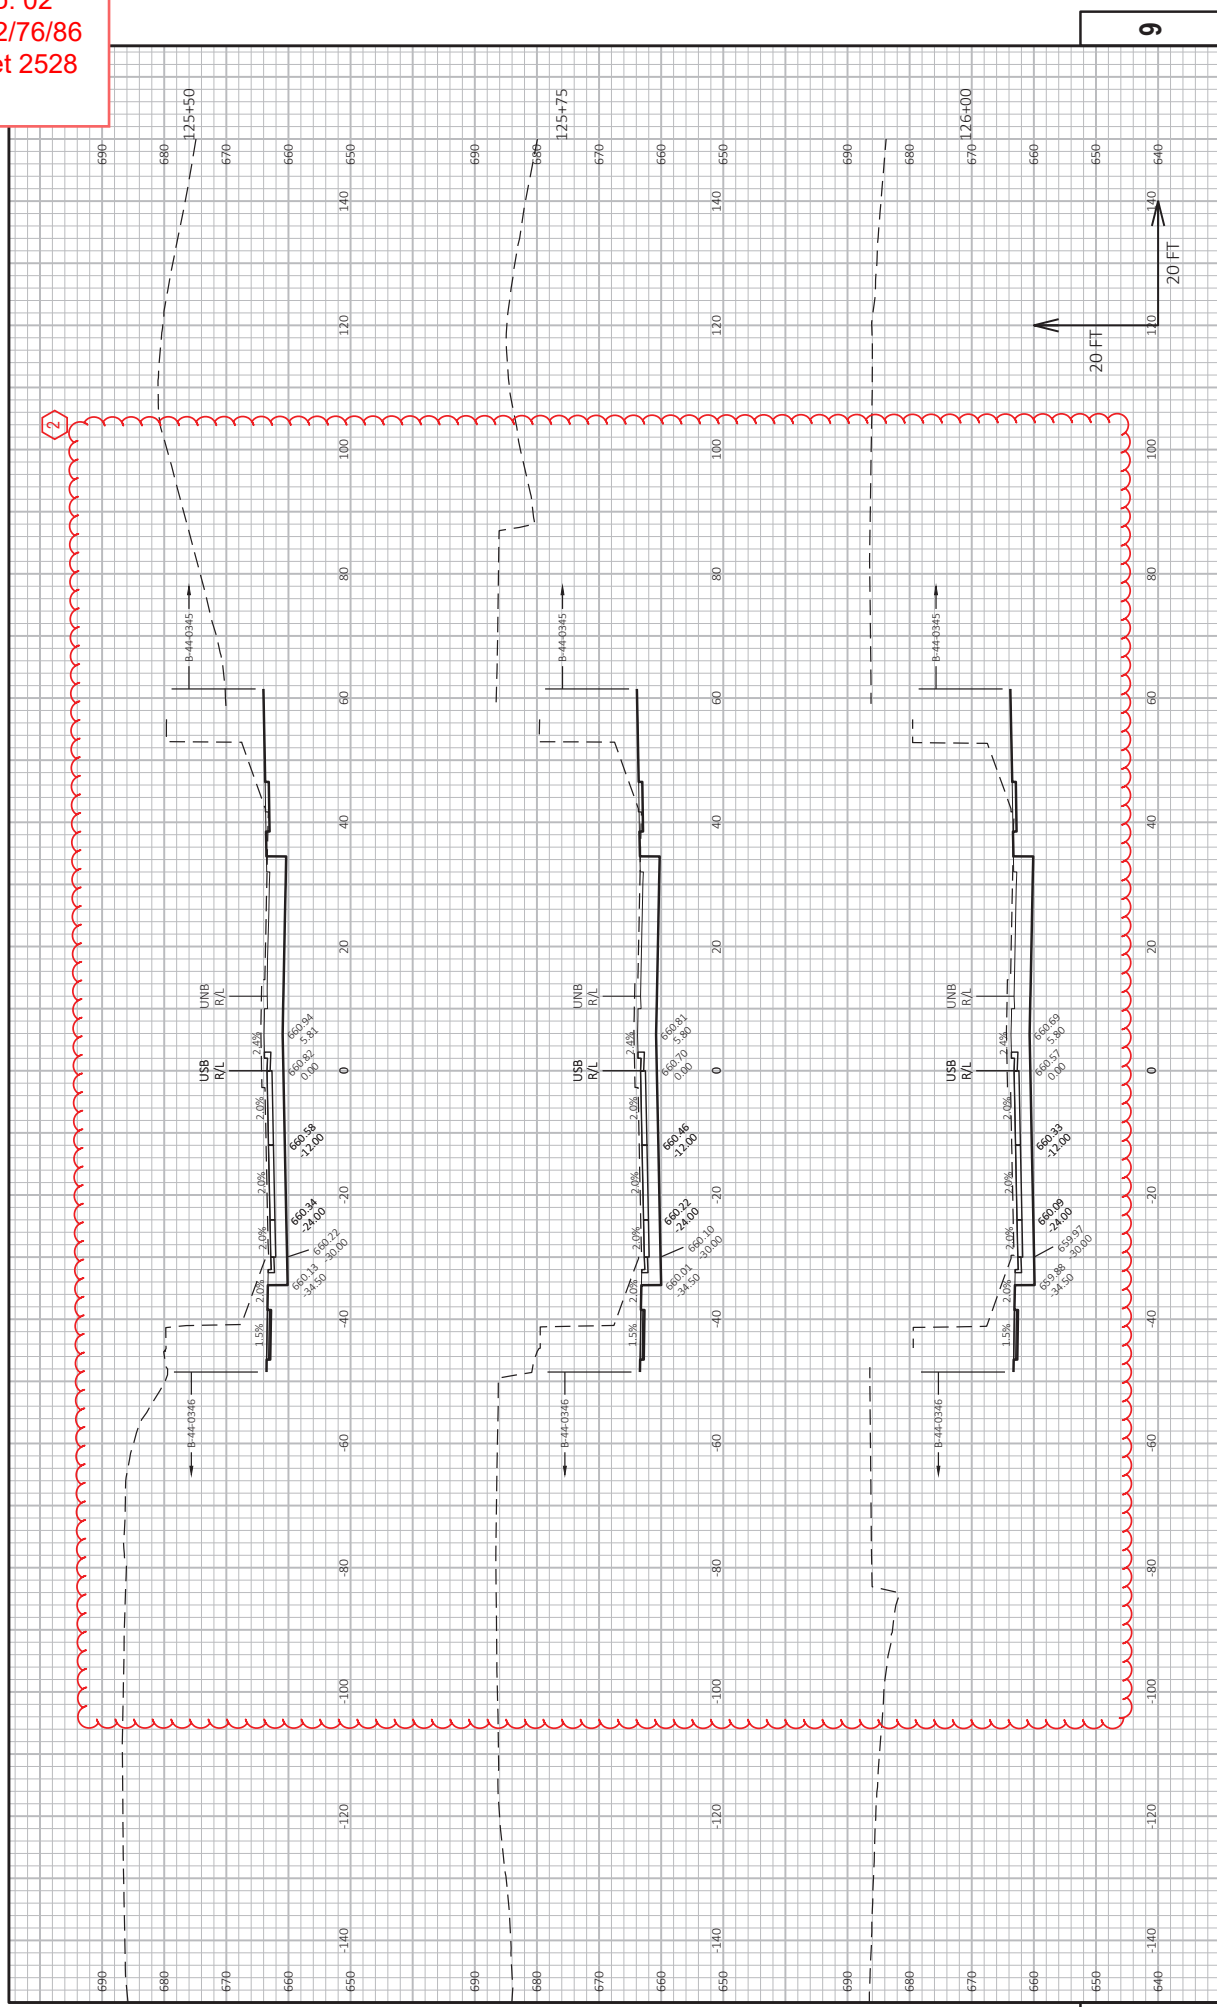


PROJECT NO: 1130-67-76 HWY: IH 41 COUNTY: OUTAGAMIE & BROWN CROSS SECTIONS: CTH U SB PLOT BY: BARTZ, JEREMY P. SHEET 2528 E

FILE NAME: C:\USERS\DT\B\DC\ACDCDCS\WISDOT\11306776\PROJECT FILES\USG\11306776\03\1130-67-76\90208.XS_USB.DWG PLOT DATE: 7/1/2025 3:50 PM PLOT SCALE: 1 IN=20 FT HORZ. / 1 IN=20 FT VERT. WISDOT\CAD\03\SHEET 49

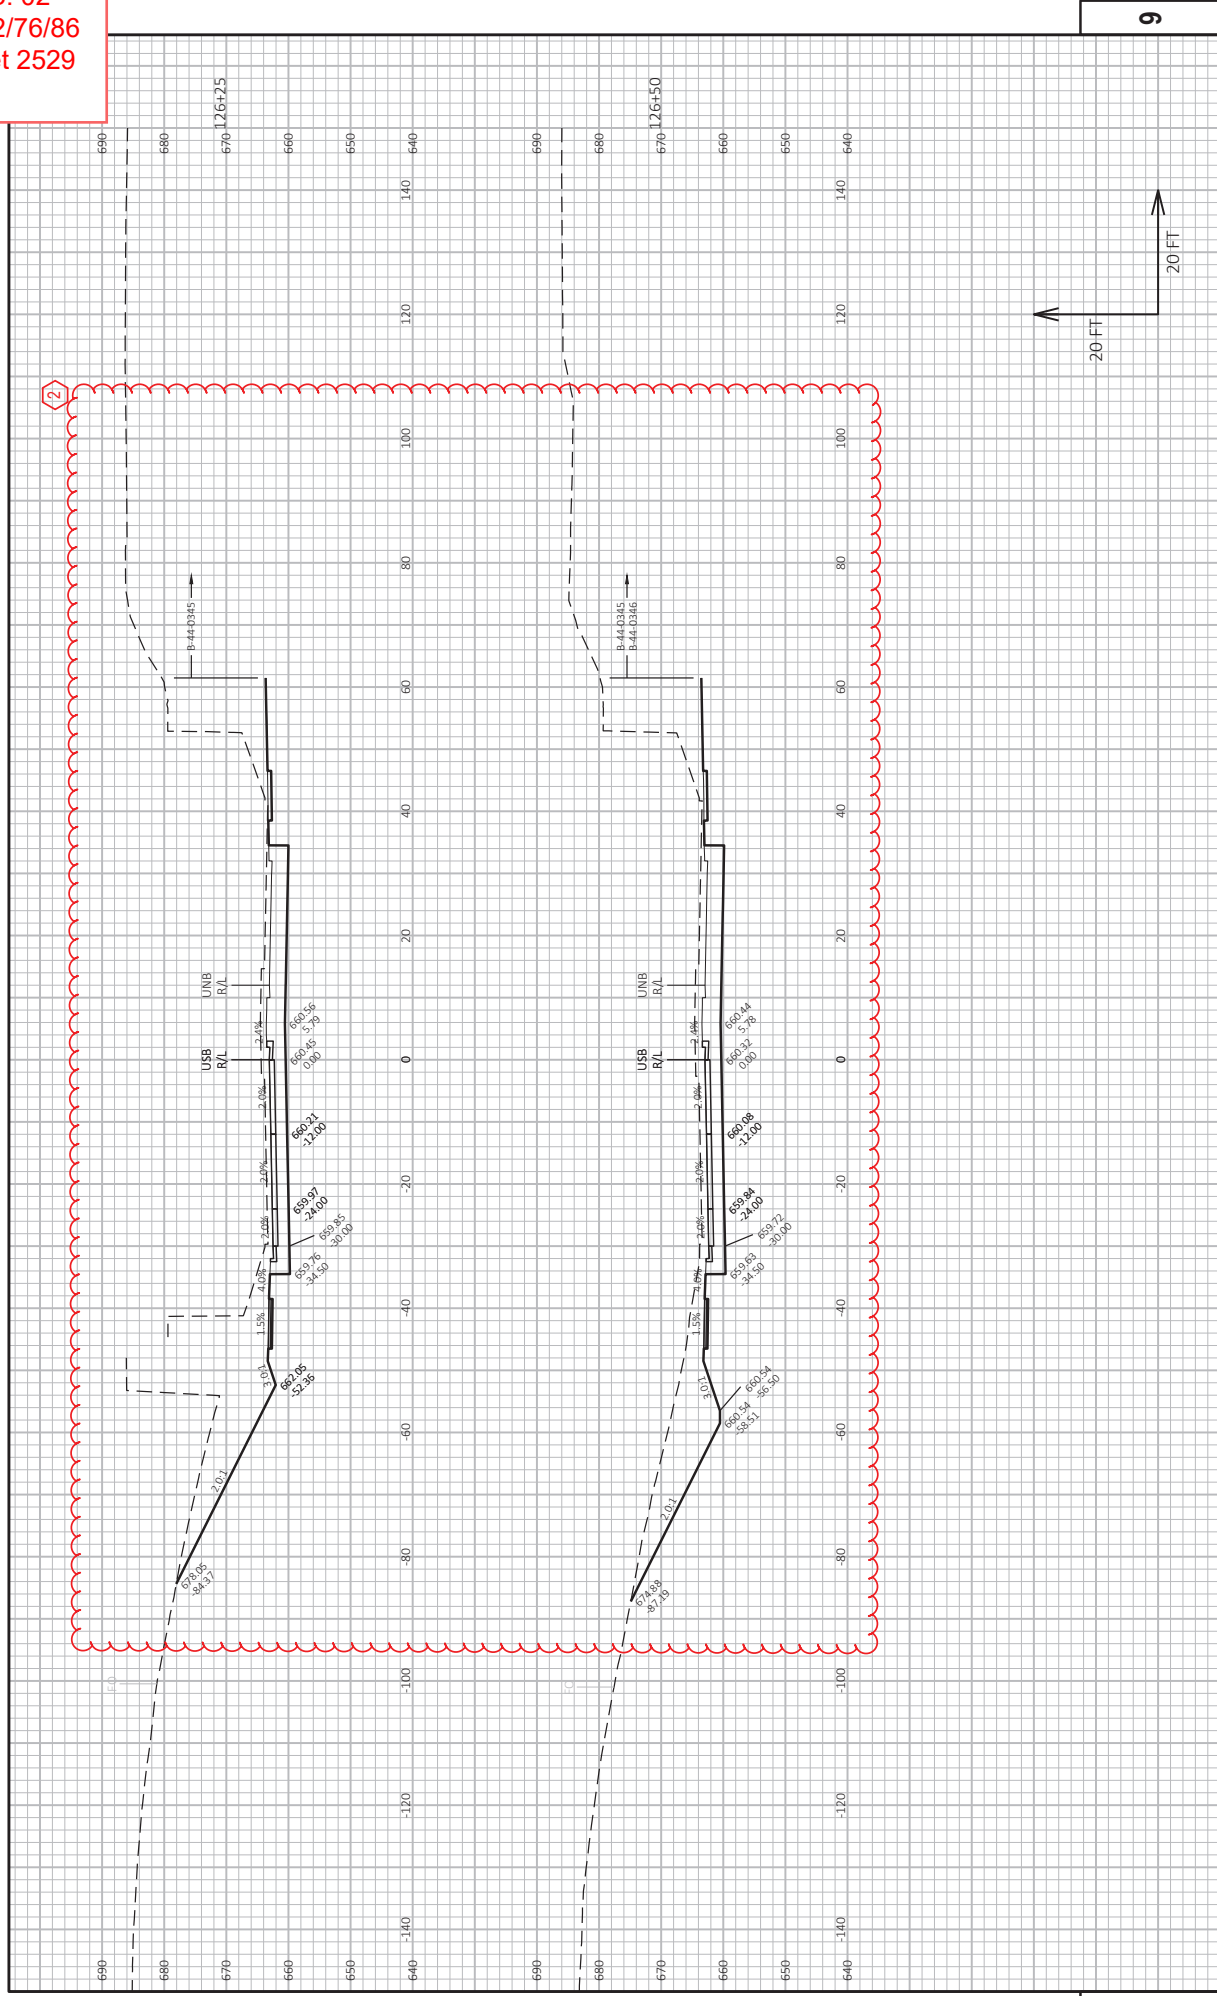


Addendum No. 02
 ID 1130-67-72/76/86
 Revised Sheet 2530
 July 2, 2025

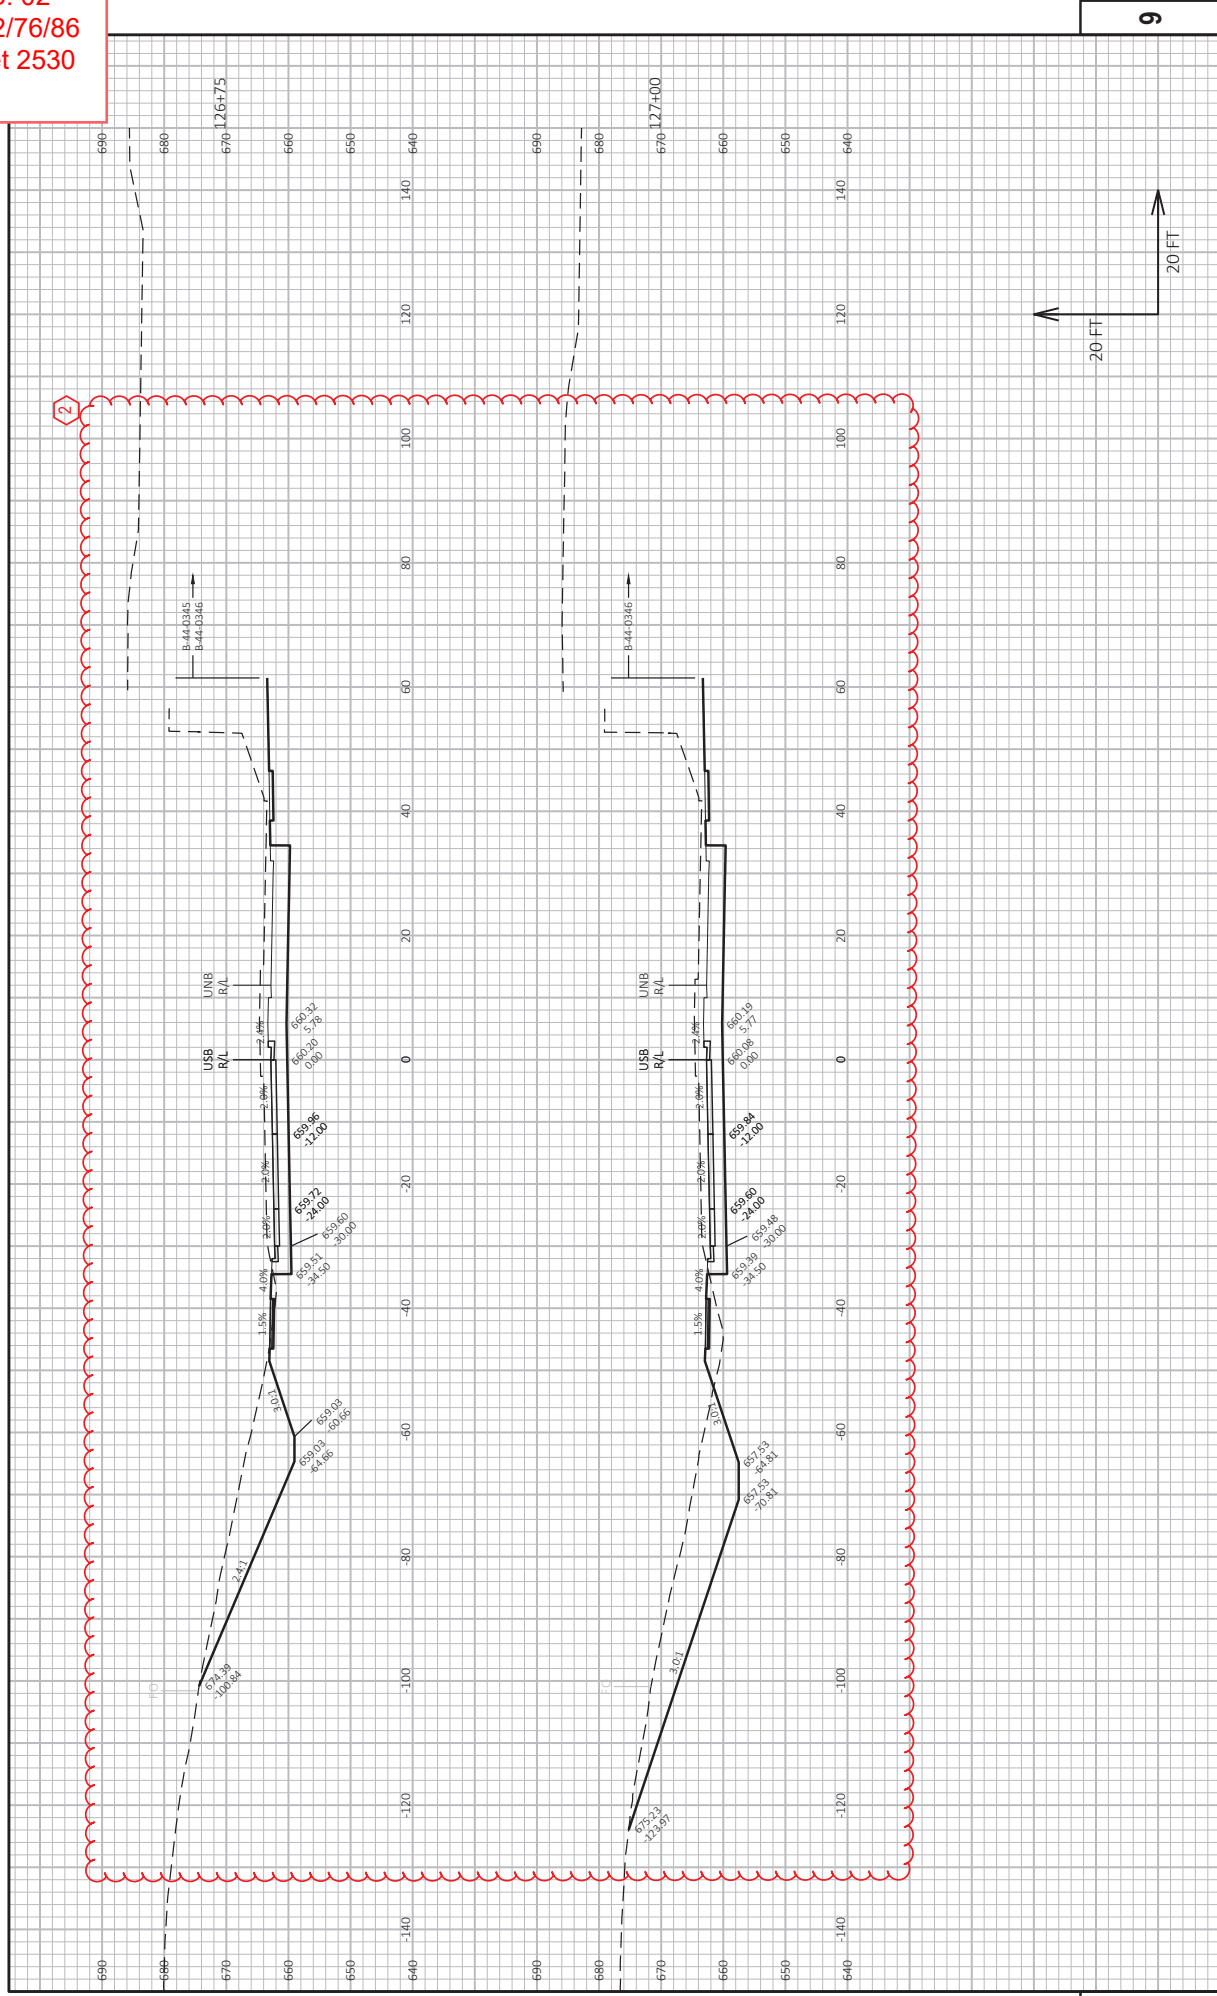

PROJECT NO: 1130-67-76 HWY: IH 41 COUNTY: OUTAGAMIE & BROWN CROSS SECTIONS: CTH U SB SHEET 2530
 FILE NAME: C:\USERS\JTB\DWG\ACDDCS\WISDOT\113067\03\PROJECT FILES\UDGN\113067\03\SHEETS\1130-67-76\90208.XS_USB.DWG PLOT BY: BARTZ, JEREMY P. PLOT NAME: WISDOT\CAD\05\SHEET 49
 LAYOUT NAME: _DOT PLOT DATE: 7/1/2025 3:50 PM PLOT SCALE: 1 IN=20 FT HORZ. / 1 IN=20 FT VERT.


Addendum No. 02
 ID 1130-67-72/76/86
 Revised Sheet 2531
 July 2, 2025

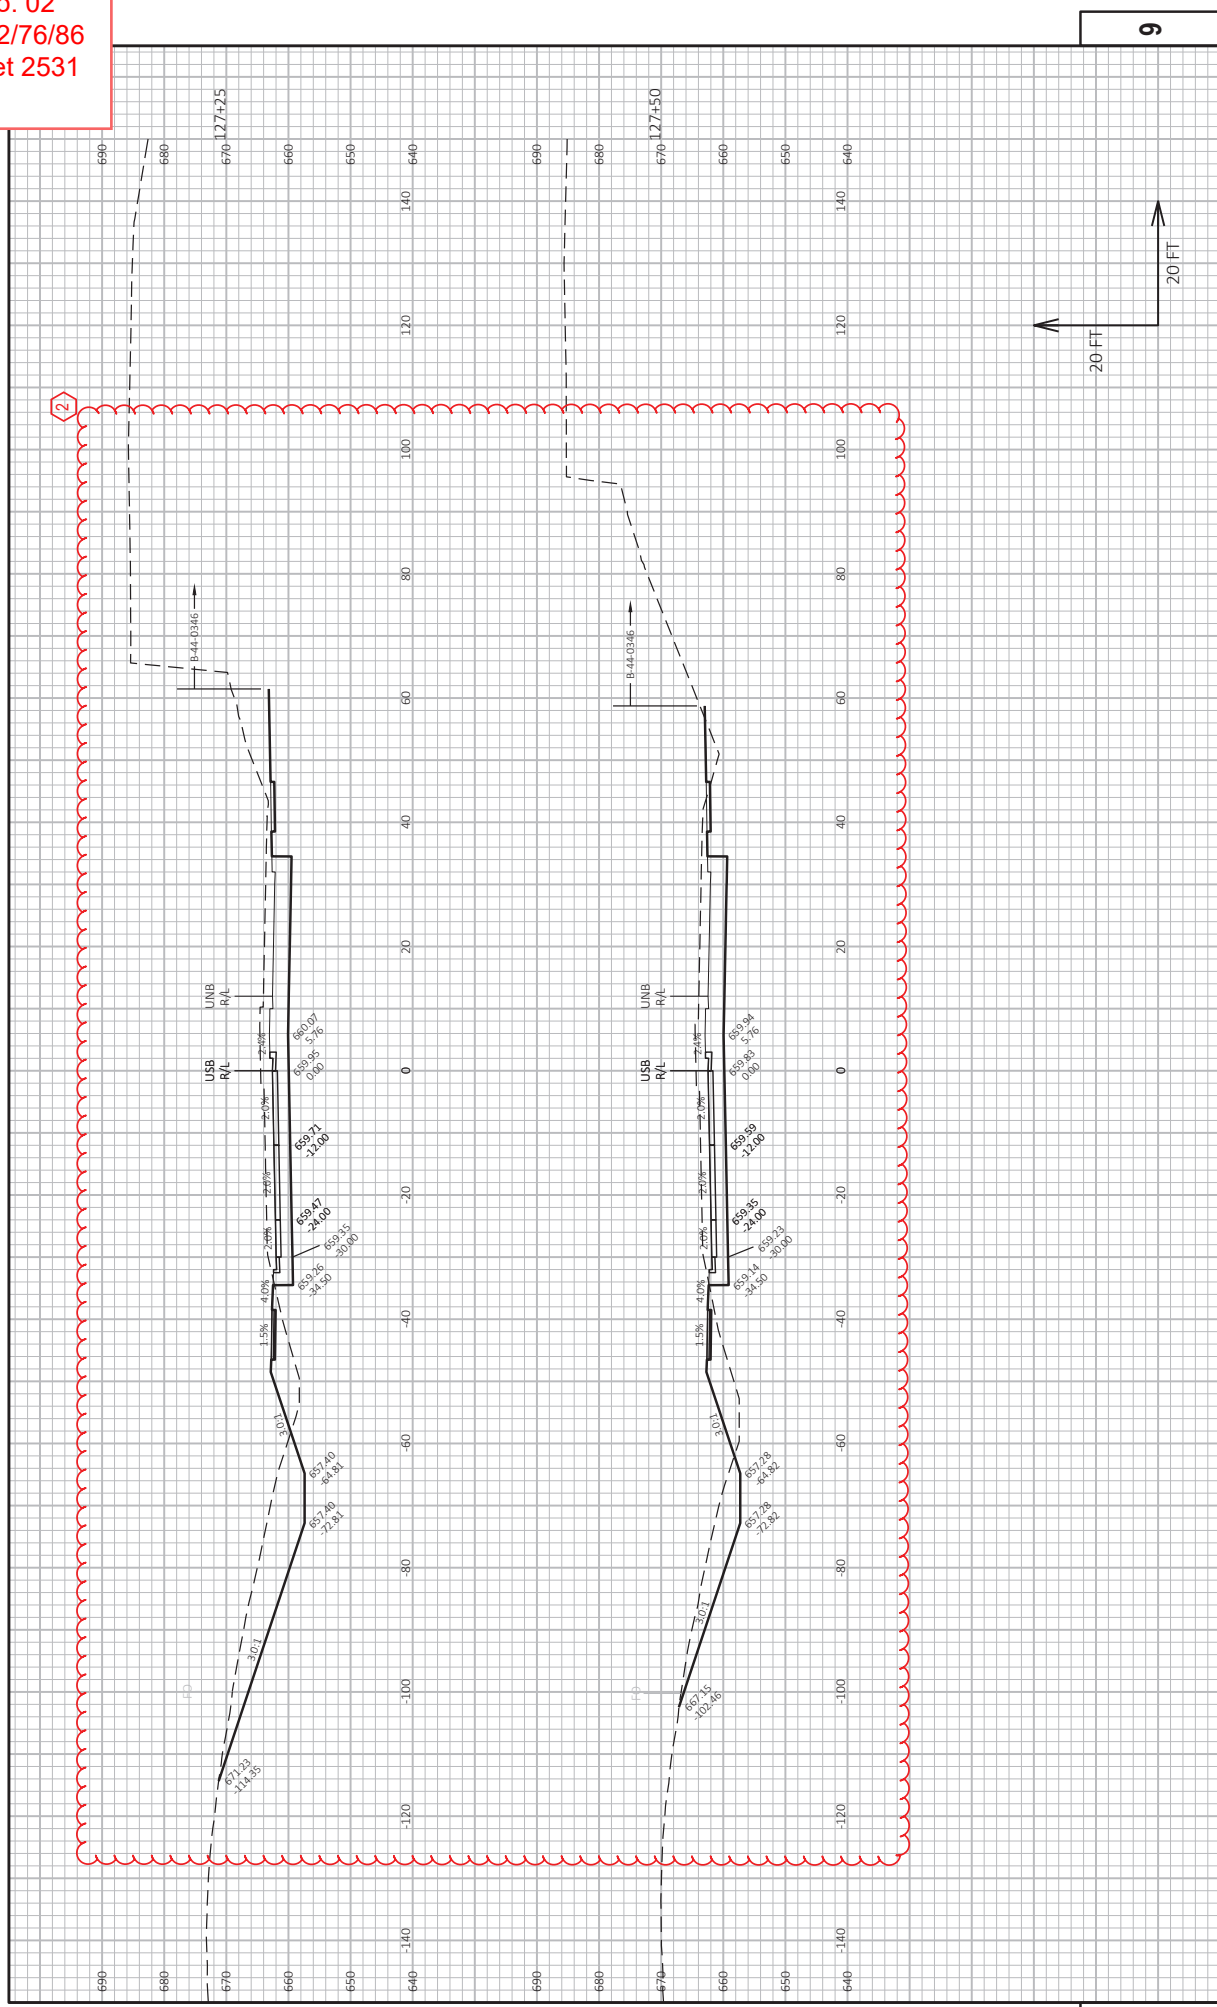

PROJECT NO: 1130-67-76 HWY: IH 41 COUNTY: OUTAGAMIE & BROWN CROSS SECTIONS: CTH U SB SHEET 2531

FILE NAME: C:\USERS\DOT\BDC\ACDDCS\WISDOT\113067\PROJECT FILES\IDGN\113067\03\1130-67-76\90208.XS_USB.DWG PLOT DATE: 7/1/2025 3:51 PM PLOT BY: BARTZ, JEREMY PLOT NAME: CTH U SB BARTZ, JEREMY PLOT SCALE: 1 IN=20 FT HORZ. / 1 IN=20 FT VERT. WISDOT\CAD\05\SHEET 49

Addendum No. 02
 ID 1130-67-72/76/86
 Revised Sheet 2532
 July 2, 2025

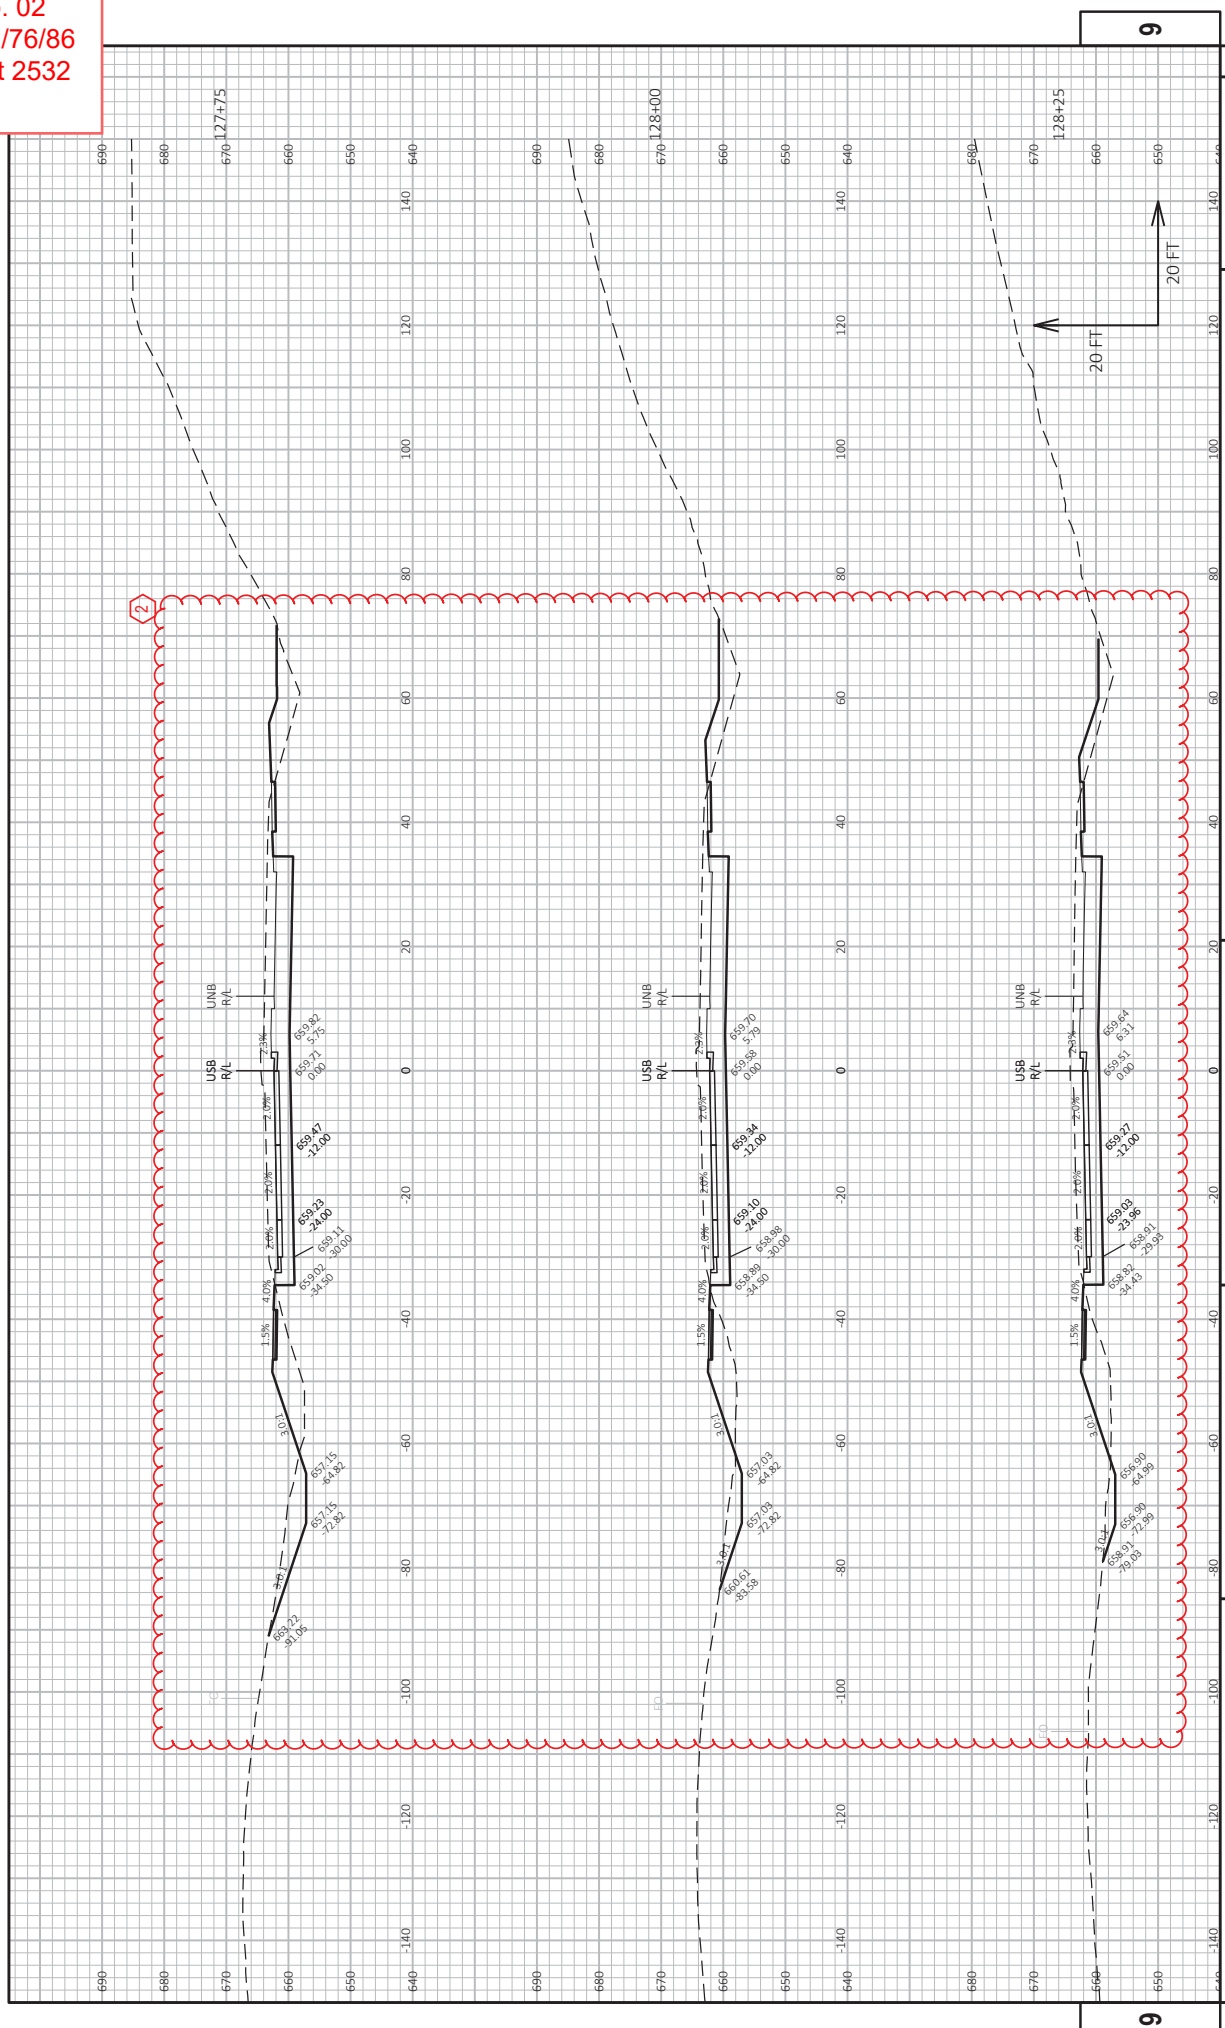

PROJECT NO: 1130-67-76
 COUNTY: OUTAGAMIE & BROWN
 CROSS SECTIONS: CTH U SB
 PLOT BY: BARTZ, JEREMY P
 PLOT DATE: 7/1/2025 3:51 PM
 SHEET 2532
 E
 FILE NAME: C:\USERS\DT\B\DC\ACDDCS\WISDOT\11306770\PROJECT FILES\USG\11306770\1130-67-76\90208.XS_USB.DWG
 LAYOUT NAME: _209
 PLOT SCALE: 1 IN=20 FT HORZ. / 1 IN=20 FT VERT.
 WISDOT\CAD\DS\SHEET 49



Proposal Schedule of Items

Proposal ID: 20250708004 Project(s): 1130-67-72, 1130-67-76, 1130-67-86

Federal ID(s): WISC 2025550, WISC 2025523, WISC 2025551

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0002	201.0105 Clearing	544.000 STA	_____.	_____.
0004	201.0205 Grubbing	544.000 STA	_____.	_____.
0006	203.0100 Removing Small Pipe Culverts	16.000 EACH	_____.	_____.
0008	203.0220 Removing Structure (structure) 001. B-44-0159	1.000 EACH	_____.	_____.
0010	203.0220 Removing Structure (structure) 002. B-44-0160	1.000 EACH	_____.	_____.
0012	203.0220 Removing Structure (structure) 003. B-44-0074	1.000 EACH	_____.	_____.
0014	203.0220 Removing Structure (structure) 004. B-44-0073	1.000 EACH	_____.	_____.
0016	203.0220 Removing Structure (structure) 005. B-44-0071	1.000 EACH	_____.	_____.
0018	203.0220 Removing Structure (structure) 006. B-44-0072	1.000 EACH	_____.	_____.
0020	203.0260 Removing Structure Over Waterway Minimal Debris (structure) 001. B-05-0053	1.000 EACH	_____.	_____.
0022	203.0260 Removing Structure Over Waterway Minimal Debris (structure) 002. B-05-0080	1.000 EACH	_____.	_____.
0024	204.0100 Removing Concrete Pavement	140,418.000 SY	_____.	_____.
0026	204.0150 Removing Curb & Gutter	3,996.000 LF	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20250708004 Project(s): 1130-67-72, 1130-67-76, 1130-67-86

Federal ID(s): WISC 2025550, WISC 2025523, WISC 2025551

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0028	204.0165 Removing Guardrail	6,172.000 LF	_____.	_____.
0030	204.0170 Removing Fence	46,330.000 LF	_____.	_____.
0032	204.0180 Removing Delineators and Markers	281.000 EACH	_____.	_____.
0034	204.0195 Removing Concrete Bases	6.000 EACH	_____.	_____.
0036	204.0210 Removing Manholes	10.000 EACH	_____.	_____.
0038	204.0220 Removing Inlets	46.000 EACH	_____.	_____.
0040	204.0245 Removing Storm Sewer (size) 001. 12-Inch	176.000 LF	_____.	_____.
0042	204.0245 Removing Storm Sewer (size) 002. 15-Inch	114.000 LF	_____.	_____.
0044	204.0245 Removing Storm Sewer (size) 003. 18-Inch	1,751.000 LF	_____.	_____.
0046	204.0245 Removing Storm Sewer (size) 004. 21-Inch	110.000 LF	_____.	_____.
0048	204.0245 Removing Storm Sewer (size) 005. 24-Inch	2,843.000 LF	_____.	_____.
0050	204.0245 Removing Storm Sewer (size) 006. 30-Inch	1,342.000 LF	_____.	_____.
0052	204.0245 Removing Storm Sewer (size) 007. 36-Inch	895.000 LF	_____.	_____.
0054	204.0245 Removing Storm Sewer (size) 008. 29x45-Inch	29.000 LF	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20250708004 Project(s): 1130-67-72, 1130-67-76, 1130-67-86

Federal ID(s): WISC 2025550, WISC 2025523, WISC 2025551

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0056	204.9060.S Removing (item description) 001. Removing Billboard Sign	1.000 EACH	_____.	_____.
0058	204.9060.S Removing (item description) 002. Removing Communication Vault	17.000 EACH	_____.	_____.
0060	204.9060.S Removing (item description) 003. Removing Retaining Wall R-44-10	1.000 EACH	_____.	_____.
0062	204.9060.S Removing (item description) 004. Removing Retaining Wall R-44-11	1.000 EACH	_____.	_____.
0064	204.9060.S Removing (item description) 005. Anchor Bolt Cover Shroud	3.000 EACH	_____.	_____.
0066	205.0100 Excavation Common	598,110.000 CY	_____.	_____.
0068	206.1001 Excavation for Structures Bridges (structure) 001. B-44-0341	1.000 EACH	_____.	_____.
0070	206.1001 Excavation for Structures Bridges (structure) 002. B-44-0342	1.000 EACH	_____.	_____.
0072	206.1001 Excavation for Structures Bridges (structure) 003. B-44-0343	1.000 EACH	_____.	_____.
0074	206.1001 Excavation for Structures Bridges (structure) 004. B-44-0344	1.000 EACH	_____.	_____.
0076	206.1001 Excavation for Structures Bridges (structure) 005. B-44-0345	1.000 EACH	_____.	_____.
0078	206.1001 Excavation for Structures Bridges (structure) 006. B-44-0346	1.000 EACH	_____.	_____.
0080	206.1001 Excavation for Structures Bridges (structure) 007. B-05-0694	1.000 EACH	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20250708004 Project(s): 1130-67-72, 1130-67-76, 1130-67-86

Federal ID(s): WISC 2025550, WISC 2025523, WISC 2025551

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0082	206.1001 Excavation for Structures Bridges (structure) 008. B-05-0695	1.000 EACH	_____.	_____.
0084	210.1500 Backfill Structure Type A	5,500.000 TON	_____.	_____.
0086	213.0100 Finishing Roadway (project) 001. 1130-67-72	1.000 EACH	_____.	_____.
0088	213.0100 Finishing Roadway (project) 002. 1130-67-76	1.000 EACH	_____.	_____.
0090	213.0100 Finishing Roadway (project) 003. 1130-67-86	1.000 EACH	_____.	_____.
0092	214.0100 Obliterating Old Road	17.000 STA	_____.	_____.
0094	305.0110 Base Aggregate Dense 3/4-Inch	11,837.000 TON	_____.	_____.
0096	305.0120 Base Aggregate Dense 1 1/4-Inch	213,938.000 TON	_____.	_____.
0098	310.0115 Base Aggregate Open-Graded	351.000 CY	_____.	_____.
0100	312.0110 Select Crushed Material	537,723.000 TON	_____.	_____.
0102	320.0105 Concrete Base 4-Inch	6,130.000 SY	_____.	_____.
0104	405.0100 Coloring Concrete WisDOT Red	750.000 CY	_____.	_____.
0106	405.0200 Coloring Concrete Custom	450.000 CY	_____.	_____.
0108	415.0090 Concrete Pavement 9-Inch	12,310.000 SY	_____.	_____.
0110	415.0095 Concrete Pavement 9 1/2-Inch	17,250.000 SY	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20250708004 Project(s): 1130-67-72, 1130-67-76, 1130-67-86

Federal ID(s): WISC 2025550, WISC 2025523, WISC 2025551

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0112	415.0210 Concrete Pavement Gaps	11.000 EACH	_____.	_____.
0114	415.0410 Concrete Pavement Approach Slab	1,569.000 SY	_____.	_____.
0116	415.2010 Concrete Truck Apron 12-inch	2,045.000 SY	_____.	_____.
0118	415.4100 Concrete Pavement Joint Filling	19,975.000 SY	_____.	_____.
0120	450.4000 HMA Cold Weather Paving	1,140.000 TON	_____.	_____.
0122	455.0605 Tack Coat	14,231.000 GAL	_____.	_____.
0124	460.2000 Incentive Density HMA Pavement	16,260.000 DOL	1.00000	16,260.00
0126	460.5223 HMA Pavement 3 LT 58-28 S	12,510.000 TON	_____.	_____.
0128	460.5224 HMA Pavement 4 LT 58-28 S	7,576.000 TON	_____.	_____.
0130	465.0120 Asphaltic Surface Driveways and Field Entrances	108.000 TON	_____.	_____.
0132	465.0125 Asphaltic Surface Temporary	7,732.000 TON	_____.	_____.
0134	465.0315 Asphaltic Flumes	102.000 SY	_____.	_____.
0136	501.1000.S Ice Hot Weather Concreting	55,646.000 LB	_____.	_____.
0138	502.0100 Concrete Masonry Bridges	2,714.000 CY	_____.	_____.
0140	502.3200 Protective Surface Treatment	13,169.000 SY	_____.	_____.
0142	502.3210 Pigmented Surface Sealer	1,972.000 SY	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20250708004 Project(s): 1130-67-72, 1130-67-76, 1130-67-86

Federal ID(s): WISC 2025550, WISC 2025523, WISC 2025551

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0144	503.0137 Prestressed Girder Type I 36W-Inch	2,022.000 LF	_____.	_____.
0146	503.0146 Prestressed Girder Type I 45W-Inch	8,345.000 LF	_____.	_____.
0148	503.0172 Prestressed Girder Type I 72W-Inch	2,380.000 LF	_____.	_____.
0150	505.0400 Bar Steel Reinforcement HS Structures	120,490.000 LB	_____.	_____.
0152	505.0600 Bar Steel Reinforcement HS Coated Structures	1,251,345.000 LB	_____.	_____.
0154	505.0800.S Bar Steel Reinforcement HS Stainless Structures	18,030.000 LB	_____.	_____.
0156	505.0904 Bar Couplers No. 4	872.000 EACH	_____.	_____.
0158	505.0905 Bar Couplers No. 5	84.000 EACH	_____.	_____.
0160	505.0906 Bar Couplers No. 6	35.000 EACH	_____.	_____.
0162	505.0908 Bar Couplers No. 8	24.000 EACH	_____.	_____.
0164	506.2605 Bearing Pads Elastomeric Non-Laminated	286.000 EACH	_____.	_____.
0166	506.4000 Steel Diaphragms (structure) 001. B-44-0341	15.000 EACH	_____.	_____.
0168	506.4000 Steel Diaphragms (structure) 002. B-44-0342	15.000 EACH	_____.	_____.
0170	506.4000 Steel Diaphragms (structure) 003. B-44-0343	24.000 EACH	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20250708004 Project(s): 1130-67-72, 1130-67-76, 1130-67-86

Federal ID(s): WISC 2025550, WISC 2025523, WISC 2025551

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0172	506.4000 Steel Diaphragms (structure) 004. B-44-0344	24.000 EACH	_____.	_____.
0174	506.4000 Steel Diaphragms (structure) 005. B-44-0345	52.000 EACH	_____.	_____.
0176	506.4000 Steel Diaphragms (structure) 006. B-44-0346	36.000 EACH	_____.	_____.
0178	506.4000 Steel Diaphragms (structure) 007. B-05-0694	14.000 EACH	_____.	_____.
0180	506.4000 Steel Diaphragms (structure) 008. B-05-695	16.000 EACH	_____.	_____.
0182	511.1100 Temporary Shoring	600.000 SF	_____.	_____.
0184	511.1200 Temporary Shoring (structure) 001. B-44-0342	1,020.000 SF	_____.	_____.
0186	511.1200 Temporary Shoring (structure) 002. B-44-0344	2,036.000 SF	_____.	_____.
0188	511.1200 Temporary Shoring (structure) 003. B-44-0345	1,850.000 SF	_____.	_____.
0190	511.1200 Temporary Shoring (structure) 004. B-05-0694	390.000 SF	_____.	_____.
0192	516.0500 Rubberized Membrane Waterproofing	274.000 SY	_____.	_____.
0194	517.1010.S Concrete Staining (structure) 001. B-44-0341	5,876.000 SF	_____.	_____.
0196	517.1010.S Concrete Staining (structure) 002. B-44-0342	5,876.000 SF	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20250708004 Project(s): 1130-67-72, 1130-67-76, 1130-67-86

Federal ID(s): WISC 2025550, WISC 2025523, WISC 2025551

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0198	517.1010.S Concrete Staining (structure) 003. B-44-0343	5,859.000 SF	_____.	_____.
0200	517.1010.S Concrete Staining (structure) 004. B-44-0344	5,922.000 SF	_____.	_____.
0202	517.1010.S Concrete Staining (structure) 005. B-44-0345	7,023.000 SF	_____.	_____.
0204	517.1010.S Concrete Staining (structure) 006. B-44-0346	6,047.000 SF	_____.	_____.
0206	522.0124 Culvert Pipe Reinforced Concrete Class III 24-Inch	144.000 LF	_____.	_____.
0208	522.0130 Culvert Pipe Reinforced Concrete Class III 30-Inch	168.000 LF	_____.	_____.
0210	522.0136 Culvert Pipe Reinforced Concrete Class III 36-Inch	330.000 LF	_____.	_____.
0212	522.0418 Culvert Pipe Reinforced Concrete Class IV 18-Inch	278.000 LF	_____.	_____.
0214	522.0424 Culvert Pipe Reinforced Concrete Class IV 24-Inch	588.000 LF	_____.	_____.
0216	522.0430 Culvert Pipe Reinforced Concrete Class IV 30-Inch	752.000 LF	_____.	_____.
0218	522.0436 Culvert Pipe Reinforced Concrete Class IV 36-Inch	331.000 LF	_____.	_____.
0220	522.1012 Apron Endwalls for Culvert Pipe Reinforced Concrete 12-Inch	1.000 EACH	_____.	_____.
0222	522.1015 Apron Endwalls for Culvert Pipe Reinforced Concrete 15-Inch	29.000 EACH	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20250708004 Project(s): 1130-67-72, 1130-67-76, 1130-67-86

Federal ID(s): WISC 2025550, WISC 2025523, WISC 2025551

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0224	522.1018 Apron Endwalls for Culvert Pipe Reinforced Concrete 18-Inch	93.000 EACH	_____.	_____.
0226	522.1024 Apron Endwalls for Culvert Pipe Reinforced Concrete 24-Inch	47.000 EACH	_____.	_____.
0228	522.1030 Apron Endwalls for Culvert Pipe Reinforced Concrete 30-Inch	21.000 EACH	_____.	_____.
0230	522.1036 Apron Endwalls for Culvert Pipe Reinforced Concrete 36-Inch	14.000 EACH	_____.	_____.
0232	522.2424 Culvert Pipe Reinforced Concrete Horizontal Elliptical Class HE-IV 24x38-Inch	44.000 LF	_____.	_____.
0234	522.2614 Apron Endwalls for Culvert Pipe Reinforced Concrete Horizontal Elliptical 14x23-Inch	6.000 EACH	_____.	_____.
0236	522.2619 Apron Endwalls for Culvert Pipe Reinforced Concrete Horizontal Elliptical 19x30-Inch	4.000 EACH	_____.	_____.
0238	531.1100 Concrete Masonry Ancillary Structures Type NS	46.200 CY	_____.	_____.
0240	531.1140 Steel Reinforcement HS Ancillary Structures Type NS	4,980.000 LB	_____.	_____.
0242	531.1160 Steel Reinforcement HS Coated Ancillary Structures Type NS	1,880.000 LB	_____.	_____.
0244	531.2024 Drilling Shaft 24-Inch	175.000 LF	_____.	_____.
0246	531.2030 Drilling Shaft 30-Inch	94.000 LF	_____.	_____.
0248	531.2036 Drilling Shaft 36-Inch	116.000 LF	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20250708004 Project(s): 1130-67-72, 1130-67-76, 1130-67-86

Federal ID(s): WISC 2025550, WISC 2025523, WISC 2025551

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0250	531.2042 Drilling Shaft 42-Inch	92.000 LF	_____.	_____.
0252	531.2048 Drilling Shaft 48-Inch	191.000 LF	_____.	_____.
0254	531.4050 Foundation Camera Pole 50-FT	2.000 EACH	_____.	_____.
0256	531.5330 Foundation Single-Shaft Type TC-III (structure) 001. S-44-0344	1.000 EACH	_____.	_____.
0258	531.5340 Foundation Single-Shaft Type TC-IV (structure) 001. S-44-0340	1.000 EACH	_____.	_____.
0260	531.5340 Foundation Single-Shaft Type TC-IV (structure) 002. S-44-0341	1.000 EACH	_____.	_____.
0262	531.5340 Foundation Single-Shaft Type TC-IV (structure) 003. S-05-0425	1.000 EACH	_____.	_____.
0264	531.5340 Foundation Single-Shaft Type TC-IV (structure) 004. S-44-0345	1.000 EACH	_____.	_____.
0266	531.5340 Foundation Single-Shaft Type TC-IV (structure) 005. S-44-0399	1.000 EACH	_____.	_____.
0268	531.5340 Foundation Single-Shaft Type TC-IV (structure) 006. S-44-0400	1.000 EACH	_____.	_____.
0270	531.5410 Foundation Single-Shaft Type TF-I (structure) 001. S-44-0346	2.000 EACH	_____.	_____.
0272	531.6020 Foundation Two-Shaft Type FC-II (structure) 001. S-44-0342	1.000 EACH	_____.	_____.
0274	531.6020 Foundation Two-Shaft Type FC-II (structure) 002. S-44-0343	1.000 EACH	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20250708004 Project(s): 1130-67-72, 1130-67-76, 1130-67-86

Federal ID(s): WISC 2025550, WISC 2025523, WISC 2025551

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0276	531.6020 Foundation Two-Shaft Type FC-II (structure) 003. S-44-0398	1.000 EACH	_____.	_____.
0278	531.6130 Foundation Two-Shaft Type FF-III (structure) 004. S-44-0397	2.000 EACH	_____.	_____.
0280	532.5020 Butterfly 2-Chord NS (structure) 001. S-44-0396	1.000 EACH	_____.	_____.
0282	532.5020 Butterfly 2-Chord NS (structure) 002. S-05-0426	1.000 EACH	_____.	_____.
0284	532.5330 Truss Cantilever 2-Chord Type III (structure) 001. S-44-0344	1.000 EACH	_____.	_____.
0286	532.5340 Truss Cantilever 2-Chord Type IV (structure) 001. S-44-0340	1.000 EACH	_____.	_____.
0288	532.5340 Truss Cantilever 2-Chord Type IV (structure) 002. S-44-0341	1.000 EACH	_____.	_____.
0290	532.5340 Truss Cantilever 2-Chord Type IV (structure) 003. S-44-0345	1.000 EACH	_____.	_____.
0292	532.5340 Truss Cantilever 2-Chord Type IV (structure) 004. S-44-0399	1.000 EACH	_____.	_____.
0294	532.5340 Truss Cantilever 2-Chord Type IV (structure) 005. S-44-0400	1.000 EACH	_____.	_____.
0296	532.5340 Truss Cantilever 2-Chord Type IV (structure) 006. S-05-0425	1.000 EACH	_____.	_____.
0298	532.5410 Truss Full Span 2-Chord Type I (structure) 001. S-44-0346	1.000 EACH	_____.	_____.
0300	532.6020 Truss Cantilever 4-Chord Type II (structure) 001. S-44-0342	1.000 EACH	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20250708004 Project(s): 1130-67-72, 1130-67-76, 1130-67-86

Federal ID(s): WISC 2025550, WISC 2025523, WISC 2025551

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0302	532.6020 Truss Cantilever 4-Chord Type II (structure) 002. S-44-0343	1.000 EACH	_____.	_____.
0304	532.6020 Truss Cantilever 4-Chord Type II (structure) 003. S-44-0398	1.000 EACH	_____.	_____.
0306	532.6130 Truss Full Span 4-Chord Type III (structure) 004. S-44-0397	1.000 EACH	_____.	_____.
0308	541.0300.S Noise Barriers Double-Sided Sound Absorptive (structure) 001. N-44-0021	21,076.000 SF	_____.	_____.
0310	550.0500 Pile Points	140.000 EACH	_____.	_____.
0312	550.1100 Piling Steel HP 10-Inch X 42 Lb	4,070.000 LF	_____.	_____.
0314	550.1120 Piling Steel HP 12-Inch X 53 Lb	33,820.000 LF	_____.	_____.
0316	601.0405 Concrete Curb & Gutter 18-Inch Type A	720.000 LF	_____.	_____.
0318	601.0407 Concrete Curb & Gutter 18-Inch Type D	230.000 LF	_____.	_____.
0320	601.0409 Concrete Curb & Gutter 30-Inch Type A	5,520.000 LF	_____.	_____.
0322	601.0551 Concrete Curb & Gutter 4-Inch Sloped 36-Inch Type A	850.000 LF	_____.	_____.
0324	601.0555 Concrete Curb & Gutter 6-Inch Sloped 36-Inch Type A	990.000 LF	_____.	_____.
0326	601.0557 Concrete Curb & Gutter 6-Inch Sloped 36-Inch Type D	2,710.000 LF	_____.	_____.
0328	601.0576 Concrete Curb & Gutter 4-Inch Sloped 30-Inch Type J	3,361.000 LF	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20250708004 Project(s): 1130-67-72, 1130-67-76, 1130-67-86

Federal ID(s): WISC 2025550, WISC 2025523, WISC 2025551

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0330	601.0578 Concrete Curb & Gutter 3-Inch Sloped 30-Inch Type R	1,025.000 LF	_____.	_____.
0332	601.0584 Concrete Curb & Gutter 4-Inch Sloped 30-Inch Type TBT	42.000 LF	_____.	_____.
0334	601.0600 Concrete Curb Pedestrian	220.000 LF	_____.	_____.
0336	602.0405 Concrete Sidewalk 4-Inch	81,592.000 SF	_____.	_____.
0338	602.0505 Curb Ramp Detectable Warning Field Yellow	568.000 SF	_____.	_____.
0340	602.0605 Curb Ramp Detectable Warning Field Radial Yellow	167.000 SF	_____.	_____.
0342	602.3010 Concrete Surface Drains	42.000 CY	_____.	_____.
0344	602.3210 Concrete Rumble Strips, Shoulder Divided Roadway	68,554.000 LF	_____.	_____.
0346	603.3559 Concrete Barrier Transition Type S42 to S56	2.000 EACH	_____.	_____.
0348	603.8000 Concrete Barrier Temporary Precast Delivered	127,710.000 LF	_____.	_____.
0350	603.8125 Concrete Barrier Temporary Precast Installed	127,710.000 LF	_____.	_____.
0352	603.8500 Anchoring Concrete Barrier Temporary Precast	1,405.000 LF	_____.	_____.
0354	603.8505 Anchoring Concrete Barrier Temporary Precast on Bridge Decks	135.000 LF	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20250708004 Project(s): 1130-67-72, 1130-67-76, 1130-67-86

Federal ID(s): WISC 2025550, WISC 2025523, WISC 2025551

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0356	604.0400 Slope Paving Concrete	5,078.000 SY	_____.	_____.
0358	606.0200 Riprap Medium	3,987.000 CY	_____.	_____.
0360	606.0300 Riprap Heavy	1,372.000 CY	_____.	_____.
0362	608.0312 Storm Sewer Pipe Reinforced Concrete Class III 12-Inch	92.000 LF	_____.	_____.
0364	608.0315 Storm Sewer Pipe Reinforced Concrete Class III 15-Inch	714.000 LF	_____.	_____.
0366	608.0318 Storm Sewer Pipe Reinforced Concrete Class III 18-Inch	2,105.000 LF	_____.	_____.
0368	608.0324 Storm Sewer Pipe Reinforced Concrete Class III 24-Inch	2,872.000 LF	_____.	_____.
0370	608.0330 Storm Sewer Pipe Reinforced Concrete Class III 30-Inch	991.000 LF	_____.	_____.
0372	608.0336 Storm Sewer Pipe Reinforced Concrete Class III 36-Inch	1,202.000 LF	_____.	_____.
0374	608.0412 Storm Sewer Pipe Reinforced Concrete Class IV 12-Inch	272.000 LF	_____.	_____.
0376	608.0415 Storm Sewer Pipe Reinforced Concrete Class IV 15-Inch	2,405.000 LF	_____.	_____.
0378	608.0418 Storm Sewer Pipe Reinforced Concrete Class IV 18-Inch	7,737.000 LF	_____.	_____.
0380	608.0424 Storm Sewer Pipe Reinforced Concrete Class IV 24-Inch	2,818.000 LF	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20250708004 Project(s): 1130-67-72, 1130-67-76, 1130-67-86

Federal ID(s): WISC 2025550, WISC 2025523, WISC 2025551

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0382	608.0430 Storm Sewer Pipe Reinforced Concrete Class IV 30-Inch	1,117.000 LF	_____.	_____.
0384	608.0436 Storm Sewer Pipe Reinforced Concrete Class IV 36-Inch	1,240.000 LF	_____.	_____.
0386	608.0515 Storm Sewer Pipe Reinforced Concrete Class V 15-Inch	25.000 LF	_____.	_____.
0388	608.0518 Storm Sewer Pipe Reinforced Concrete Class V 18-Inch	317.000 LF	_____.	_____.
0390	608.0524 Storm Sewer Pipe Reinforced Concrete Class V 24-Inch	115.000 LF	_____.	_____.
0392	608.2414 Storm Sewer Pipe Reinforced Concrete Horizontal Elliptical Class HE-IV 14x23-Inch	166.000 LF	_____.	_____.
0394	608.2419 Storm Sewer Pipe Reinforced Concrete Horizontal Elliptical Class HE-IV 19x30-Inch	292.000 LF	_____.	_____.
0396	608.2429 Storm Sewer Pipe Reinforced Concrete Horizontal Elliptical Class HE-IV 29x45-Inch	189.000 LF	_____.	_____.
0398	611.0420 Reconstructing Manholes	85.000 EACH	_____.	_____.
0400	611.0430 Reconstructing Inlets	27.000 EACH	_____.	_____.
0402	611.0530 Manhole Covers Type J	10.000 EACH	_____.	_____.
0404	611.0545 Manhole Covers Type L	2.000 EACH	_____.	_____.
0406	611.0609 Inlet Covers Type B-A	3.000 EACH	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20250708004 Project(s): 1130-67-72, 1130-67-76, 1130-67-86

Federal ID(s): WISC 2025550, WISC 2025523, WISC 2025551

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0408	611.0610 Inlet Covers Type BW	8.000 EACH	_____.	_____.
0410	611.0612 Inlet Covers Type C	4.000 EACH	_____.	_____.
0412	611.0624 Inlet Covers Type H	40.000 EACH	_____.	_____.
0414	611.0627 Inlet Covers Type HM	15.000 EACH	_____.	_____.
0416	611.0630 Inlet Covers Type HM-GJ	3.000 EACH	_____.	_____.
0418	611.0636 Inlet Covers Type HM-S	9.000 EACH	_____.	_____.
0420	611.0639 Inlet Covers Type H-S	40.000 EACH	_____.	_____.
0422	611.0642 Inlet Covers Type MS	50.000 EACH	_____.	_____.
0424	611.0652 Inlet Covers Type T	12.000 EACH	_____.	_____.
0426	611.0656 Inlet Covers Type VV-B	392.000 EACH	_____.	_____.
0428	611.2004 Manholes 4-FT Diameter	3.000 EACH	_____.	_____.
0430	611.2005 Manholes 5-FT Diameter	367.000 EACH	_____.	_____.
0432	611.2006 Manholes 6-FT Diameter	26.000 EACH	_____.	_____.
0434	611.2007 Manholes 7-FT Diameter	7.000 EACH	_____.	_____.
0436	611.3003 Inlets 3-FT Diameter	10.000 EACH	_____.	_____.
0438	611.3004 Inlets 4-FT Diameter	56.000 EACH	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20250708004 Project(s): 1130-67-72, 1130-67-76, 1130-67-86

Federal ID(s): WISC 2025550, WISC 2025523, WISC 2025551

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0440	611.3225 Inlets 2x2.5-FT	2.000 EACH	_____.	_____.
0442	611.3230 Inlets 2x3-FT	63.000 EACH	_____.	_____.
0444	611.3901 Inlets Median 1 Grate	14.000 EACH	_____.	_____.
0446	611.3902 Inlets Median 2 Grate	18.000 EACH	_____.	_____.
0448	611.8110 Adjusting Manhole Covers	3.000 EACH	_____.	_____.
0450	611.8120.S Cover Plates Temporary	151.000 EACH	_____.	_____.
0452	611.9850.S Pipe Grates (size) 001. 24-Inch	4.000 EACH	_____.	_____.
0454	612.0106 Pipe Underdrain 6-Inch	5,170.000 LF	_____.	_____.
0456	612.0406 Pipe Underdrain Wrapped 6-Inch	4,160.000 LF	_____.	_____.
0458	614.0150 Anchor Assemblies for Steel Plate Beam Guard	8.000 EACH	_____.	_____.
0460	614.0800 Crash Cushions Permanent	3.000 EACH	_____.	_____.
0462	614.0905 Crash Cushions Temporary	23.000 EACH	_____.	_____.
0464	614.2300 MGS Guardrail 3	1,075.500 LF	_____.	_____.
0466	614.2500 MGS Thrie Beam Transition	394.400 LF	_____.	_____.
0468	614.2610 MGS Guardrail Terminal EAT	13.000 EACH	_____.	_____.
0470	614.2620 MGS Guardrail Terminal Type 2	3.000 EACH	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20250708004 Project(s): 1130-67-72, 1130-67-76, 1130-67-86

Federal ID(s): WISC 2025550, WISC 2025523, WISC 2025551

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0472	616.0206 Fence Chain Link 6-FT	9,214.000 LF	_____.	_____.
0474	616.0700.S Fence Safety	500.000 LF	_____.	_____.
0476	618.0100 Maintenance and Repair of Haul Roads (project) 001. 1130-67-72	1.000 EACH	_____.	_____.
0478	618.0100 Maintenance and Repair of Haul Roads (project) 002. 1130-67-76	1.000 EACH	_____.	_____.
0480	618.0100 Maintenance and Repair of Haul Roads (project) 003. 1130-67-86	1.000 EACH	_____.	_____.
0482	619.1000 Mobilization	1.000 EACH	_____.	_____.
0484	620.0200 Concrete Median Blunt Nose	200.000 SF	_____.	_____.
0486	620.0300 Concrete Median Sloped Nose	1,098.000 SF	_____.	_____.
0488	623.0200 Dust Control Surface Treatment	417,440.000 SY	_____.	_____.
0490	624.0100 Water	3,561.000 MGAL	_____.	_____.
0492	625.0100 Topsoil	620.000 SY	_____.	_____.
0494	625.0500 Salvaged Topsoil	423,410.000 SY	_____.	_____.
0496	627.0200 Mulching	16,345.000 SY	_____.	_____.
0498	628.1504 Silt Fence	12,118.000 LF	_____.	_____.
0500	628.1520 Silt Fence Maintenance	38,037.000 LF	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20250708004 Project(s): 1130-67-72, 1130-67-76, 1130-67-86

Federal ID(s): WISC 2025550, WISC 2025523, WISC 2025551

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0502	628.1905 Mobilizations Erosion Control	30.000 EACH	_____.	_____.
0504	628.1910 Mobilizations Emergency Erosion Control	14.000 EACH	_____.	_____.
0506	628.2002 Erosion Mat Class I Type A	134,400.000 SY	_____.	_____.
0508	628.2004 Erosion Mat Class I Type B	293,429.000 SY	_____.	_____.
0510	628.2021 Erosion Mat Class II Type A	3,000.000 SY	_____.	_____.
0512	628.2039 Erosion Mat Class III Type D	340.000 SY	_____.	_____.
0514	628.6005 Turbidity Barriers	1,215.000 SY	_____.	_____.
0516	628.7005 Inlet Protection Type A	130.000 EACH	_____.	_____.
0518	628.7010 Inlet Protection Type B	510.000 EACH	_____.	_____.
0520	628.7015 Inlet Protection Type C	78.000 EACH	_____.	_____.
0522	628.7020 Inlet Protection Type D	35.000 EACH	_____.	_____.
0524	628.7504 Temporary Ditch Checks	5,971.000 LF	_____.	_____.
0526	628.7515.S Stone Ditch Checks	484.000 CY	_____.	_____.
0528	628.7555 Culvert Pipe Checks	207.000 EACH	_____.	_____.
0530	628.7560 Tracking Pads	26.000 EACH	_____.	_____.
0532	628.7570 Rock Bags	396.000 EACH	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20250708004 Project(s): 1130-67-72, 1130-67-76, 1130-67-86

Federal ID(s): WISC 2025550, WISC 2025523, WISC 2025551

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0534	629.0210 Fertilizer Type B	301.400 CWT	_____.	_____.
0536	630.0120 Seeding Mixture No. 20	441.000 LB	_____.	_____.
0538	630.0130 Seeding Mixture No. 30	17,548.000 LB	_____.	_____.
0540	630.0200 Seeding Temporary	4,711.000 LB	_____.	_____.
0542	630.0500 Seed Water	11,467.000 MGAL	_____.	_____.
0544	631.0300 Sod Water	70.000 MGAL	_____.	_____.
0546	631.1000 Sod Lawn	2,990.000 SY	_____.	_____.
0548	632.0101 Trees (species, root, size) 001. Cole's Select Serviceberry, B&B, 5-FT	9.000 EACH	_____.	_____.
0550	632.0201 Shrubs (species, root, size) 001. Hydrangea, "Limelight", cont, 3-FT	27.000 EACH	_____.	_____.
0552	632.0201 Shrubs (species, root, size) 002. Black Weigela, "Verweig", cont, 3-FT	63.000 EACH	_____.	_____.
0554	632.9101 Landscape Planting Surveillance and Care Cycles	18.000 EACH	_____.	_____.
0556	633.0100 Delineator Posts Steel	29.000 EACH	_____.	_____.
0558	633.0200 Delineators Flexible	581.000 EACH	_____.	_____.
0560	633.0500 Delineator Reflectors	29.000 EACH	_____.	_____.
0562	633.1000 Delineators Barrier Wall	13.000 EACH	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20250708004 Project(s): 1130-67-72, 1130-67-76, 1130-67-86

Federal ID(s): WISC 2025550, WISC 2025523, WISC 2025551

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0564	633.1100 Delineators Temporary	394.000 EACH	_____.	_____.
0566	633.5200 Markers Culvert End	162.000 EACH	_____.	_____.
0568	633.5350 Markers Permanent Flexible	14.000 EACH	_____.	_____.
0570	634.0612 Posts Wood 4x6-Inch X 12-FT	22.000 EACH	_____.	_____.
0572	634.0614 Posts Wood 4x6-Inch X 14-FT	58.000 EACH	_____.	_____.
0574	634.0616 Posts Wood 4x6-Inch X 16-FT	98.000 EACH	_____.	_____.
0576	634.0618 Posts Wood 4x6-Inch X 18-FT	46.000 EACH	_____.	_____.
0578	634.0620 Posts Wood 4x6-Inch X 20-FT	4.000 EACH	_____.	_____.
0580	634.0622 Posts Wood 4x6-Inch X 22-FT	2.000 EACH	_____.	_____.
0582	634.0624 Posts Wood 4x6-Inch X 24-FT	3.000 EACH	_____.	_____.
0584	635.0200 Sign Supports Structural Steel HS	11,000.000 LB	_____.	_____.
0586	637.1220 Signs Type I Reflective SH	2,731.500 SF	_____.	_____.
0588	637.2210 Signs Type II Reflective H	1,755.900 SF	_____.	_____.
0590	637.2215 Signs Type II Reflective H Folding	20.000 SF	_____.	_____.
0592	637.2230 Signs Type II Reflective F	330.390 SF	_____.	_____.
0594	638.2102 Moving Signs Type II	2.000 EACH	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20250708004 Project(s): 1130-67-72, 1130-67-76, 1130-67-86

Federal ID(s): WISC 2025550, WISC 2025523, WISC 2025551

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0596	638.2601 Removing Signs Type I	10.000 EACH	_____.	_____.
0598	638.2602 Removing Signs Type II	202.000 EACH	_____.	_____.
0600	638.3000 Removing Small Sign Supports	230.000 EACH	_____.	_____.
0602	638.3100 Removing Structural Steel Sign Supports	20.000 EACH	_____.	_____.
0604	640.1303.S Pond Liner Clay	9,220.000 CY	_____.	_____.
0606	643.0300 Traffic Control Drums	404,621.000 DAY	_____.	_____.
0608	643.0420 Traffic Control Barricades Type III	28,631.000 DAY	_____.	_____.
0610	643.0705 Traffic Control Warning Lights Type A	57,262.000 DAY	_____.	_____.
0612	643.0715 Traffic Control Warning Lights Type C	267,644.000 DAY	_____.	_____.
0614	643.0800 Traffic Control Arrow Boards	405.000 DAY	_____.	_____.
0616	643.0810.S Connected Arrow Board	195.000 DAY	_____.	_____.
0618	643.0900 Traffic Control Signs	196,827.000 DAY	_____.	_____.
0620	643.0910 Traffic Control Covering Signs Type I	1.000 EACH	_____.	_____.
0622	643.0920 Traffic Control Covering Signs Type II	16.000 EACH	_____.	_____.
0624	643.1000 Traffic Control Signs Fixed Message	264.000 SF	_____.	_____.
0626	643.1050 Traffic Control Signs PCMS	516.000 DAY	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20250708004 Project(s): 1130-67-72, 1130-67-76, 1130-67-86

Federal ID(s): WISC 2025550, WISC 2025523, WISC 2025551

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0628	643.1220.S Connected Work Zone Start and End Location Markers	2,840.000 DAY	_____.	_____.
0630	643.3150 Temporary Marking Line Removable Tape 4-Inch	6,736.000 LF	_____.	_____.
0632	643.3165 Temporary Marking Line Paint 6-Inch	399,376.000 LF	_____.	_____.
0634	643.3170 Temporary Marking Line Epoxy 6-Inch	165,640.000 LF	_____.	_____.
0636	643.3265 Temporary Marking Line Paint 10-Inch	16,435.000 LF	_____.	_____.
0638	643.3270 Temporary Marking Line Epoxy 10-Inch	6,041.000 LF	_____.	_____.
0640	643.3760 Temporary Marking Raised Pavement Marker Type I	1,947.000 EACH	_____.	_____.
0644	643.5000 Traffic Control	1.000 EACH	_____.	_____.
0646	645.0111 Geotextile Type DF Schedule A	3,152.000 SY	_____.	_____.
0648	645.0120 Geotextile Type HR	10,049.000 SY	_____.	_____.
0650	645.0130 Geotextile Type R	952.000 SY	_____.	_____.
0652	645.0140 Geotextile Type SAS	19,590.000 SY	_____.	_____.
0654	645.0220 Geogrid Type SR	19,590.000 SY	_____.	_____.
0656	646.1020 Marking Line Epoxy 4-Inch	1,873.000 LF	_____.	_____.
0658	646.2020 Marking Line Epoxy 6-Inch	191,604.000 LF	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20250708004 Project(s): 1130-67-72, 1130-67-76, 1130-67-86

Federal ID(s): WISC 2025550, WISC 2025523, WISC 2025551

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0660	646.2025 Marking Line Grooved Black Epoxy 6-Inch	177.000 LF	_____.	_____.
0662	646.2050 Marking Line Grooved Permanent Tape 6-Inch	177.000 LF	_____.	_____.
0664	646.3020 Marking Line Epoxy 8-Inch	174.000 LF	_____.	_____.
0666	646.4020 Marking Line Epoxy 10-Inch	4,879.000 LF	_____.	_____.
0668	646.4025 Marking Line Grooved Black Epoxy 10-Inch	1,082.000 LF	_____.	_____.
0670	646.4040 Marking Line Grooved Wet Ref Epoxy 10-Inch	9,642.000 LF	_____.	_____.
0672	646.4050 Marking Line Grooved Permanent Tape 10-Inch	1,082.000 LF	_____.	_____.
0674	646.5020 Marking Arrow Epoxy	36.000 EACH	_____.	_____.
0676	646.5120 Marking Word Epoxy	4.000 EACH	_____.	_____.
0678	646.5320 Marking Railroad Crossing Epoxy	2.000 EACH	_____.	_____.
0680	646.6120 Marking Stop Line Epoxy 18-Inch	321.000 LF	_____.	_____.
0682	646.6320 Marking Dotted Extension Epoxy 18-Inch	260.000 LF	_____.	_____.
0684	646.7020 Marking Diagonal Epoxy 6-Inch	242.000 LF	_____.	_____.
0686	646.7120 Marking Diagonal Epoxy 12-Inch	840.000 LF	_____.	_____.
0688	646.7220 Marking Chevron Epoxy 24-Inch	744.000 LF	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20250708004 Project(s): 1130-67-72, 1130-67-76, 1130-67-86

Federal ID(s): WISC 2025550, WISC 2025523, WISC 2025551

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0690	646.7320 Marking Chevron Epoxy 12-Inch	90.000 LF	_____.	_____.
0692	646.7420 Marking Crosswalk Epoxy Transverse Line 6-Inch	1,262.000 LF	_____.	_____.
0694	646.8120 Marking Curb Epoxy	64.000 LF	_____.	_____.
0696	646.8220 Marking Island Nose Epoxy	4.000 EACH	_____.	_____.
0698	646.9000 Marking Removal Line 4-Inch	1,351.000 LF	_____.	_____.
0700	652.0125 Conduit Rigid Metallic 2-Inch	172.000 LF	_____.	_____.
0702	652.0225 Conduit Rigid Nonmetallic Schedule 40 2-Inch	37,805.000 LF	_____.	_____.
0704	652.0235 Conduit Rigid Nonmetallic Schedule 40 3-Inch	3,537.000 LF	_____.	_____.
0706	652.0335 Conduit Rigid Nonmetallic Schedule 80 3-Inch	3,210.000 LF	_____.	_____.
0708	652.0615 Conduit Special 3-Inch	245.000 LF	_____.	_____.
0710	652.0700.S Install Conduit into Existing Item	8.000 EACH	_____.	_____.
0712	653.0154 Pull Boxes Non-Conductive 24x36-Inch	5.000 EACH	_____.	_____.
0714	653.0164 Pull Boxes Non-Conductive 24x42-Inch	94.000 EACH	_____.	_____.
0716	653.0222 Junction Boxes 18x12x6-Inch	2.000 EACH	_____.	_____.
0718	653.0900 Adjusting Pull Boxes	5.000 EACH	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20250708004 Project(s): 1130-67-72, 1130-67-76, 1130-67-86

Federal ID(s): WISC 2025550, WISC 2025523, WISC 2025551

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0720	653.0905 Removing Pull Boxes	3.000 EACH	_____.	_____.
0722	654.0105 Concrete Bases Type 5	65.000 EACH	_____.	_____.
0724	654.0107 Concrete Bases Type 7	16.000 EACH	_____.	_____.
0726	654.0230 Concrete Control Cabinet Bases Type L30	3.000 EACH	_____.	_____.
0728	655.0610 Electrical Wire Lighting 12 AWG	64,443.000 LF	_____.	_____.
0730	655.0620 Electrical Wire Lighting 8 AWG	34,959.000 LF	_____.	_____.
0732	655.0625 Electrical Wire Lighting 6 AWG	46,228.000 LF	_____.	_____.
0734	655.0630 Electrical Wire Lighting 4 AWG	39,600.000 LF	_____.	_____.
0736	656.0201 Electrical Service Meter Breaker Pedestal (location) 002. CB1900	1.000 EACH	_____.	_____.
0738	656.0201 Electrical Service Meter Breaker Pedestal (location) 003. CB300	1.000 EACH	_____.	_____.
0740	656.0201 Electrical Service Meter Breaker Pedestal (location) 004. MB9-2	1.000 EACH	_____.	_____.
0742	656.0501 Electrical Service Breaker Disconnect Box (location) 001. CB9-2	1.000 EACH	_____.	_____.
0744	656.0501 Electrical Service Breaker Disconnect Box (location) 002. CB10-1	1.000 EACH	_____.	_____.
0746	657.0210 Transformer Bases Breakaway 15-17 Inch Bolt Circle	16.000 EACH	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20250708004 Project(s): 1130-67-72, 1130-67-76, 1130-67-86

Federal ID(s): WISC 2025550, WISC 2025523, WISC 2025551

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0748	657.0255 Transformer Bases Breakaway 11 1/2-Inch Bolt Circle	65.000 EACH	_____.	_____.
0750	657.0322 Poles Type 5-Aluminum	62.000 EACH	_____.	_____.
0752	657.0337 Poles Type 17-Aluminum	16.000 EACH	_____.	_____.
0754	657.0620 Luminaire Arms Single Member 6-Inch Clamp 4-FT	16.000 EACH	_____.	_____.
0756	657.0709 Luminaire Arms Truss Type 4-Inch Clamp 12-FT	1.000 EACH	_____.	_____.
0758	657.0710 Luminaire Arms Truss Type 4 1/2-Inch Clamp 12-FT	62.000 EACH	_____.	_____.
0760	659.0601 Underdeck Lighting (structure) 001. B-44-0341	1.000 EACH	_____.	_____.
0762	659.0601 Underdeck Lighting (structure) 002. B-44-0342	1.000 EACH	_____.	_____.
0764	659.0601 Underdeck Lighting (structure) 003. B-44-0343	1.000 EACH	_____.	_____.
0766	659.0601 Underdeck Lighting (structure) 004. B-44-0344	1.000 EACH	_____.	_____.
0768	659.0601 Underdeck Lighting (structure) 005. B-44-0345	1.000 EACH	_____.	_____.
0770	659.0601 Underdeck Lighting (structure) 006. B-44-0346	1.000 EACH	_____.	_____.
0772	659.1120 Luminaires Utility LED B	63.000 EACH	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20250708004 Project(s): 1130-67-72, 1130-67-76, 1130-67-86

Federal ID(s): WISC 2025550, WISC 2025523, WISC 2025551

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0774	659.1125 Luminaires Utility LED C	16.000 EACH	_____.	_____.
0776	659.1210 Luminaires Underdeck LED B	12.000 EACH	_____.	_____.
0778	659.2130 Lighting Control Cabinets 120/240 30-Inch	2.000 EACH	_____.	_____.
0780	662.1026.S Ramp Closure Gates 26-FT	1.000 EACH	_____.	_____.
0782	662.1030.S Ramp Closure Gates 30-FT	1.000 EACH	_____.	_____.
0784	662.1040.S Ramp Closure Gates 40-FT	1.000 EACH	_____.	_____.
0786	670.0101 Field System Integrator	1.000 EACH	_____.	_____.
0788	670.0201 ITS Documentation	1.000 EACH	_____.	_____.
0790	671.0132 Conduit HDPE 3-Duct 2-Inch	20,764.000 LF	_____.	_____.
0792	671.0232 Conduit HDPE Directional Bore 3-Duct 2-Inch	2,809.000 LF	_____.	_____.
0794	671.0300 Fiber Optic Cable Marker	60.000 EACH	_____.	_____.
0796	673.0105 Communication Vault Type 1	18.000 EACH	_____.	_____.
0798	673.0200 Tracer Wire Marker Posts	38.000 EACH	_____.	_____.
0800	673.1225.S Install Pole Mounted Cabinet	6.000 EACH	_____.	_____.
0802	674.0200 Cable Microwave Detector	5,374.000 LF	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20250708004 Project(s): 1130-67-72, 1130-67-76, 1130-67-86

Federal ID(s): WISC 2025550, WISC 2025523, WISC 2025551

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0804	674.0300 Remove Cable	23,642.000 LF	_____.	_____.
0806	675.0300 Install Mounted Controller Microwave Detector Assembly	6.000 EACH	_____.	_____.
0808	677.0150 Install Camera Pole 50-FT	2.000 EACH	_____.	_____.
0810	677.0200 Install Camera Assembly	2.000 EACH	_____.	_____.
0812	677.9051.S Removing 50-FT Camera Pole	2.000 EACH	_____.	_____.
0814	678.0012 Install Fiber Optic Cable Outdoor Plant 12-CT	2,436.000 LF	_____.	_____.
0816	678.0072 Install Fiber Optic Cable Outdoor Plant 72-CT	24,776.000 LF	_____.	_____.
0818	678.0200 Fiber Optic Splice Enclosure	5.000 EACH	_____.	_____.
0820	678.0300 Fiber Optic Splice	160.000 EACH	_____.	_____.
0822	678.0400 Fiber Optic Termination	8.000 EACH	_____.	_____.
0824	678.0501 Communication System Testing	1.000 EACH	_____.	_____.
0826	678.0600 Install Ethernet Switches	2.000 EACH	_____.	_____.
0828	690.0150 Sawing Asphalt	3,124.000 LF	_____.	_____.
0830	690.0250 Sawing Concrete	1,700.000 LF	_____.	_____.
0832	715.0502 Incentive Strength Concrete Structures	16,284.000 DOL	1.00000	16,284.00



Proposal Schedule of Items

Proposal ID: 20250708004 Project(s): 1130-67-72, 1130-67-76, 1130-67-86

Federal ID(s): WISC 2025550, WISC 2025523, WISC 2025551

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0834	715.0603 Incentive Strength Concrete Barrier	40,629.000 DOL	1.00000	40,629.00
0836	715.0715 Incentive Flexural Strength Concrete Pavement	114,074.000 DOL	1.00000	114,074.00
0838	740.0440 Incentive IRI Ride	58,750.000 DOL	1.00000	58,750.00
0840	999.2000.S Installing and Maintaining Bird Deterrent System (station) 001. 1251NB+00	1.000 EACH	_____.	_____.
0842	999.2000.S Installing and Maintaining Bird Deterrent System (station) 002. 1251SB+00	1.000 EACH	_____.	_____.
0844	999.2000.S Installing and Maintaining Bird Deterrent System (station) 003. 1323NB+00	1.000 EACH	_____.	_____.
0846	999.2000.S Installing and Maintaining Bird Deterrent System (station) 004. 1322SB+00	1.000 EACH	_____.	_____.
0848	999.2000.S Installing and Maintaining Bird Deterrent System (station) 005. 1411NB+00	1.000 EACH	_____.	_____.
0850	999.2000.S Installing and Maintaining Bird Deterrent System (station) 006. 1411SB+00	1.000 EACH	_____.	_____.
0852	999.2000.S Installing and Maintaining Bird Deterrent System (station) 007. 1437NB+00	1.000 EACH	_____.	_____.
0854	999.2000.S Installing and Maintaining Bird Deterrent System (station) 008. 1436SB+00	1.000 EACH	_____.	_____.
0856	ASP.1T0A On-the-Job Training Apprentice at \$5.00/HR	2,100.000 HRS	5.00000	10,500.00
0858	ASP.1T0G On-the-Job Training Graduate at \$5.00/HR	5,760.000 HRS	5.00000	28,800.00



Proposal Schedule of Items

Proposal ID: 20250708004 Project(s): 1130-67-72, 1130-67-76, 1130-67-86

Federal ID(s): WISC 2025550, WISC 2025523, WISC 2025551

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0860	SPV.0035 Special 001. Roadway Embankment	144,555.000 CY	_____.	_____.
0862	SPV.0035 Special 002. HPC Masonry Structures	5,504.000 CY	_____.	_____.
0864	SPV.0055 Special 001. Incentive IRI Ride PCC Surfaces	162,300.000 DOL	1.00000	162,300.00
0866	SPV.0060 Special 001. Baseline CMP Progress Schedule	1.000 EACH	_____.	_____.
0868	SPV.0060 Special 002. CMP Progress Schedule and Accepted Revisions	1.000 EACH	_____.	_____.
0870	SPV.0060 Special 003. Salvaging Ramp Gate System	2.000 EACH	_____.	_____.
0872	SPV.0060 Special 004. Removing Storm Sewer Plug	2.000 EACH	_____.	_____.
0874	SPV.0060 Special 005. Reconnect Storm Sewer	89.000 EACH	_____.	_____.
0876	SPV.0060 Special 006. Storm Sewer Plug	51.000 EACH	_____.	_____.
0878	SPV.0060 Special 007. Median Inlet Cover Type Y	25.000 EACH	_____.	_____.
0880	SPV.0060 Special 008. Structure Lids	28.000 EACH	_____.	_____.
0882	SPV.0060 Special 009. Sealing Storm Structure	18.000 EACH	_____.	_____.
0884	SPV.0060 Special 010. Fastening Sewer Access Covers	4.000 EACH	_____.	_____.
0886	SPV.0060 Special 011. Pond 67-1320-LT Outlet Storm Sewer Structure	1.000 EACH	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20250708004 Project(s): 1130-67-72, 1130-67-76, 1130-67-86

Federal ID(s): WISC 2025550, WISC 2025523, WISC 2025551

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0888	SPV.0060 Special 012. Pond 67-1363-LT Outlet Storm Sewer Structure	1.000 EACH	_____.	_____.
0890	SPV.0060 Special 013. Pond 67-1391-LT Outlet Storm Sewer Structure	1.000 EACH	_____.	_____.
0892	SPV.0060 Special 014. Pond 67-1435-LT Outlet Storm Sewer Structure	1.000 EACH	_____.	_____.
0894	SPV.0060 Special 015. Detention Pond Anti Seep Collar	4.000 EACH	_____.	_____.
0896	SPV.0060 Special 016. Removing Cover Plates	52.000 EACH	_____.	_____.
0898	SPV.0060 Special 017. Fixed Message Sign Portable Support	6.000 EACH	_____.	_____.
0900	SPV.0060 Special 018. Fire Hydrant Sign Mounting	2.000 EACH	_____.	_____.
0902	SPV.0060 Special 019. Anchor Bolt Cover Shroud	61.000 EACH	_____.	_____.
0904	SPV.0060 Special 020. Concrete Bases Type 7 Tall	58.000 EACH	_____.	_____.
0906	SPV.0060 Special 021. Lighting Control Cabinets 277/480 30-Inch 3-Phase	1.000 EACH	_____.	_____.
0908	SPV.0060 Special 022. Electrical Service Main Lugs only Meter Pedestal 3-Phase 600V	1.000 EACH	_____.	_____.
0910	SPV.0060 Special 023. Concrete Transformer Pad	1.000 EACH	_____.	_____.
0912	SPV.0060 Special 024. Electrical Service Meter Breaker Pedestal Special	2.000 EACH	_____.	_____.
0914	SPV.0060 Special 025. Install Ethernet Extender	8.000 EACH	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20250708004 Project(s): 1130-67-72, 1130-67-76, 1130-67-86

Federal ID(s): WISC 2025550, WISC 2025523, WISC 2025551

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0916	SPV.0060 Special 026. Temporary Concrete Barrier Gate, 24-FT	1.000 EACH	_____.	_____.
0918	SPV.0060 Special 027. Emergency Response to Traffic Involving Concrete Barrier Temporary	10.000 EACH	_____.	_____.
0920	SPV.0060 Special 028. Emergency Response to Traffic Involving Crash Cushion Temporary	10.000 EACH	_____.	_____.
0922	SPV.0060 Special 029. Crash Cushions Temporary Left In Place	4.000 EACH	_____.	_____.
0924	SPV.0060 Special 030. Construction Staking Project 1130-67-72	1.000 EACH	_____.	_____.
0926	SPV.0060 Special 031. Construction Staking project 1130-67-76	1.000 EACH	_____.	_____.
0928	SPV.0060 Special 032. Construction Staking Project 1130-67-86	1.000 EACH	_____.	_____.
0930	SPV.0060 Special 033. Maintain and Remove Crash Cushions Temporary Left in Place	3.000 EACH	_____.	_____.
0932	SPV.0060 Special 034. Inlet Marker	363.000 EACH	_____.	_____.
0934	SPV.0075 Special 001. Street Sweeping	740.000 HRS	_____.	_____.
0936	SPV.0090 Special 001. HMA Longitudinal Joint Repair	8,774.000 LF	_____.	_____.
0938	SPV.0090 Special 002. Removing Existing Piling Steel	3,728.000 LF	_____.	_____.
0940	SPV.0090 Special 003. Concrete Barrier Type S42 Special	34,843.000 LF	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20250708004 Project(s): 1130-67-72, 1130-67-76, 1130-67-86

Federal ID(s): WISC 2025550, WISC 2025523, WISC 2025551

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0942	SPV.0090 Special 004. Concrete Barrier Type S56 Special	38,966.000 LF	_____.	_____.
0944	SPV.0090 Special 005. Concrete Curb and Gutter 36-Inch Special	4,640.000 LF	_____.	_____.
0946	SPV.0090 Special 006. Concrete Barrier Temporary Precast Left in Place	4,200.000 LF	_____.	_____.
0948	SPV.0090 Special 007. Maintain and Remove Concrete Barrier Temporary Precast Left in Place	27,190.000 LF	_____.	_____.
0950	SPV.0090 Special 008. Glare Screens Temporary	2,070.000 LF	_____.	_____.
0952	SPV.0165 Special 001. Longitudinal Grooving Bridge Deck	111,369.000 SF	_____.	_____.
0954	SPV.0180 Special 001. Concrete Pavement 10 1/2- Inch Special	316,379.000 SY	_____.	_____.
0956	SPV.0180 Special 002. Double Shredded Hardwood Mulch	620.000 SY	_____.	_____.
0958	204.0270 Abandoning Culvert Pipes 001. 30-Inch	1.000 EACH	_____.	_____.
0960	SPV.0060 Special 035. Temporary Bridge Widening B-44-0072	1.000 EACH	_____.	_____.
0962	SPV.0060 Special 036. Temporary Bridge Widening B-44-0074	1.000 EACH	_____.	_____.
0964	211.0400 Prepare Foundation for Asphaltic Shoulders	6.000 STA	_____.	_____.
0966	465.0105 Asphaltic Surface	2,576.000 TON	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20250708004 Project(s): 1130-67-72, 1130-67-76, 1130-67-86

Federal ID(s): WISC 2025550, WISC 2025523, WISC 2025551

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0968	SPV.0075 Special 002. Animal Carcass Removal	240.000 HRS	_____.	_____.
	Section: 0001		Total:	_____.
			Total Bid:	_____.