



Wisconsin Department of Transportation

September 29, 2025

Division of Transportation Systems Development

Bureau of Project Development
4822 Madison Yards Way, 4th Floor South
Madison, WI 53705

Telephone: (608) 266-1631
Facsimile (FAX): (608) 266-8459

NOTICE TO ALL CONTRACTORS:

Proposal #08: Project ID 1130-66-82, WISC 2026008
Appleton – De Pere
Buchanan St Overpass
IH 41
Outagamie County

Letting of October 14, 2025

This is Addendum No. 01, which provides for the following:

Special Provisions:

Revised Special Provisions	
Article No.	Description
11.9	Tinted Sealer Reseal, Item SPV.0165.03.

Added Special Provisions	
Article No.	Description
18.8	Concrete Staining – Excavation, Grading, Shaping, and Finishing, Structure B-44-330, Item SPV.0060.06; Concrete Staining – Excavation, Grading, Shaping, and Finishing, Structure B-44-331, Item SPV.0060.07; Concrete Staining – Excavation, Grading, Shaping, and Finishing, Structure B-44-179, Item SPV.0060.08; Concrete Staining – Excavation, Grading, Shaping, and Finishing, Structure B-44-333, Item SPV.0060.09; Concrete Staining – Excavation, Grading, Shaping, and Finishing, Structure B-44-338, Item SPV.0060.10; Concrete Staining – Excavation, Grading, Shaping, and Finishing, Structure R-44-50, Item SPV.0060.11; Concrete Staining – Excavation, Grading, Shaping, and Finishing, Structure R-44-51, Item SPV.0060.12.

Schedule of Items:

Added Bid Item Quantities					
Bid Item	Item Description	Unit	Proposal Total Prior to Addendum	Quantity Added	Proposal Total After Addendum
SPV.0060.06	Concrete Staining – Excavation, Grading, Shaping, and Finishing, Structure B-44-330	EA	0	1	1
SPV.0060.07	Concrete Staining – Excavation, Grading, Shaping, and Finishing, Structure B-44-331	EA	0	1	1
SPV.0060.08	Concrete Staining – Excavation, Grading, Shaping, and Finishing, Structure B-44-179	EA	0	1	1
SPV.0060.09	Concrete Staining – Excavation, Grading, Shaping, and Finishing, Structure B-44-333	EA	0	1	1
SPV.0060.10	Concrete Staining – Excavation, Grading, Shaping, and Finishing, Structure B-44-338	EA	0	1	1
SPV.0060.11	Concrete Staining – Excavation, Grading, Shaping, and Finishing, Structure R-44-50	EA	0	1	1
SPV.0060.12	Concrete Staining – Excavation, Grading, Shaping, and Finishing, Structure R-44-51	EA	0	1	1

Plan Sheets:

Revised Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of changes to sheet)
86	Miscellaneous quantities table for added bid items included.

Added Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of why sheet was added)
15A	Construction detail for added bid items included.

The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.

Sincerely,

Mike Coleman

Proposal Development Specialist
Proposal Management Section

ADDENDUM NO. 01

1130-66-82

September 29, 2025

Special Provisions

11.9 Tinted Sealer Reseal, Item SPV.0165.03.

Replace entire article language with the following:

A Description

This special provision describes providing a mixture of TK-Tri-Kote 26 and TK-Tint Paste 1100 to the exposed concrete surfaces of the structures as shown in the plans.

B Materials

Furnish TK-Tri-Kote 26 from the Wisconsin Product Acceptability List (PAL). The material is ready for use and requires no dilution.

Furnish TK-Tint Paste 1100. Follow the manufacturers recommendation for mixing TK-Tint Paste 1100 with TK-Tri-Kote 26 to color match Sherwin Williams SW 7039 Virtual Taupe.

C Construction

C.1 Test Area

Before applying the TK-Tri-Kote 26 UV mixed with TK-Tint Paste 1100 to the area on the structure as shown in the plans, apply to a 48 inch x 48 inch area of similar structural features as directed by the engineer. Prepare the surface for the test area in the same manner as proposed for the rest of the structure. Do not apply to other areas of the structure until the test area is approved by the engineer. Test area is to show the sealer mixture matches the department desired color and may require a new sealer mixer and additional test areas.

C.2 Surface Preparation

Surfaces must be clean, dry and free of oils, grease, and dust. Clean and dry surfaces before sealing. As a minimum, clean the surface using a 3000 psi water blast. Hold the nozzle of the water blaster approximately 6 inches from the concrete surface and move it continuously in a sweeping motion. Grit blasting of the surface is not allowed. Immediately before sealing, direct an air blast over the surface to remove dust and any loose particles. Surface water must be allowed to completely dissipate before application of the TK-Tri-Kote 26 UV and TK-Tint Paste 1100 mixture.

C.3 Application to Surfaces

Use a long nap applicator or paint roller to distribute the compound evenly. An airless sprayer or low-pressure spray equipment may be used but avoid heavy accumulation. Do not over apply.

Sprayers must be equipped with neoprene hose, washers, and gaskets as rubber or other materials will disintegrate. Ensure that application equipment is clean inside before filling and that the equipment is functioning properly.

Apply two coats to the surfaces shown in the plans. Conform to sealer manufacturer recommended application procedures and coverage rate. Allow the first coat to dry and become tack free before applying the second coat. Match or exceed the manufactures recommended drying time before applying second coat.

Apply in ambient temperatures above 40 degrees.

The TK-Tri-Kote 26, TK-Tint Paste 1100 and concrete substrate must be allowed to warm to 50 degrees prior to application.

D Measurement

The department will measure Tinted Sealer Reseal in area by the square foot of surface, acceptably completed.

E Payment

The department will pay for measured quantities at the contract unit price under the following bid item:

ITEM NUMBER	DESCRIPTION	UNIT
SPV.0165.03	Tinted Sealer Reseal	SF

Payment is full compensation for furnishing materials and treating and sealing surfaces including surface preparation and color-matching as required; applying two coats; preparing the test area, and waste material confinement, collection and disposal.

ner41-506 (07312025)

- 18.8. Concrete Staining – Excavation, Grading, Shaping, and Finishing, Structure B-44-330, Item SPV.0060.06; Concrete Staining – Excavation, Grading, Shaping, and Finishing, Structure B-44-331, Item SPV.0060.07; Concrete Staining – Excavation, Grading, Shaping, and Finishing, Structure B-44-179, Item SPV.0060.08; Concrete Staining – Excavation, Grading, Shaping, and Finishing, Structure B-44-333, Item SPV.0060.09; Concrete Staining – Excavation, Grading, Shaping, and Finishing, Structure B-44-338, Item SPV.0060.10; Concrete Staining – Excavation, Grading, Shaping, and Finishing, Structure R-44-50, Item SPV.0060.11; Concrete Staining – Excavation, Grading, Shaping, and Finishing, Structure R-44-51, Item SPV.0060.12.**

A Description

This special provision describes the required excavation, grading, shaping, and finishing to apply Concrete Stain on existing structures as shown in the plans.

B Vacant

C Construction

Excavate, grade, shape, and finish embankment slopes at the locations shown in the plans. If applicable, salvage existing material and replace in kind. When existing material cannot be salvaged, furnish materials and construct as the plans show and engineer directs conforming to the following standard specification standards:

205 Common excavation and material disposal

207 Embankment

208 Borrow

625 Topsoil

604 Slope Paving Crushed Aggregate

627 Mulching

628 Erosion mat

629 Fertilizer

630 Seeding and seed watering

D Measurement

The department will measure Concrete Staining – Excavation, Grading, Shaping, and Finishing by EACH structure location, acceptably completed.

E Payment

The department will pay for measured quantities at the contract unit price under the following bid item:

ITEM NUMBER	DESCRIPTION	UNIT
SPV.0060.06	Concrete Staining – Excavation Grading Shaping and Finishing Structure B-44-330	EACH
SPV.0060.07	Concrete Staining – Excavation Grading Shaping and Finishing Structure B-44-331	EACH
SPV.0060.08	Concrete Staining – Excavation Grading Shaping and Finishing Structure B-44-179	EACH
SPV.0060.09	Concrete Staining – Excavation Grading Shaping and Finishing Structure B-44-333	EACH
SPV.0060.10	Concrete Staining – Excavation Grading Shaping and Finishing Structure B-44-338	EACH
SPV.0060.11	Concrete Staining – Excavation Grading Shaping and Finishing Structure R-44-50	EACH
SPV.0060.12	Concrete Staining – Excavation Grading Shaping and Finishing Structure R-44-51	EACH

Payment for Concrete Staining – Excavation, Grading, Shaping, and Finishing is full compensation to allow for Concrete Staining at each structure plan location including required excavation, borrow, topsoil, mulch, erosion mat, fertilizer, seeding, and seed watering when the existing structure is outside the contract grading limits. If the work specified falls within the contract grading limits, the department will pay separately for that work under the associated contract bid items.

ner41-204 (09042025)

Schedule of Items

Attached, dated September 29, 2025, are the revised Schedule of Items Pages 1 – 11.

Plan Sheets

The following 8½ x 11-inch sheets are attached and made part of the plans for this proposal:


Revised: 86.

Added: 15A.

END OF ADDENDUM

NOTE

- EXCAVATION AS REQUIRED
- RESTORATION FOR DISTURBED AREA IS PAID FOR AS CONCRETE STAINING - EXCAVATION, GRADING, SHAPING, AND FINISHING STRUCTURE

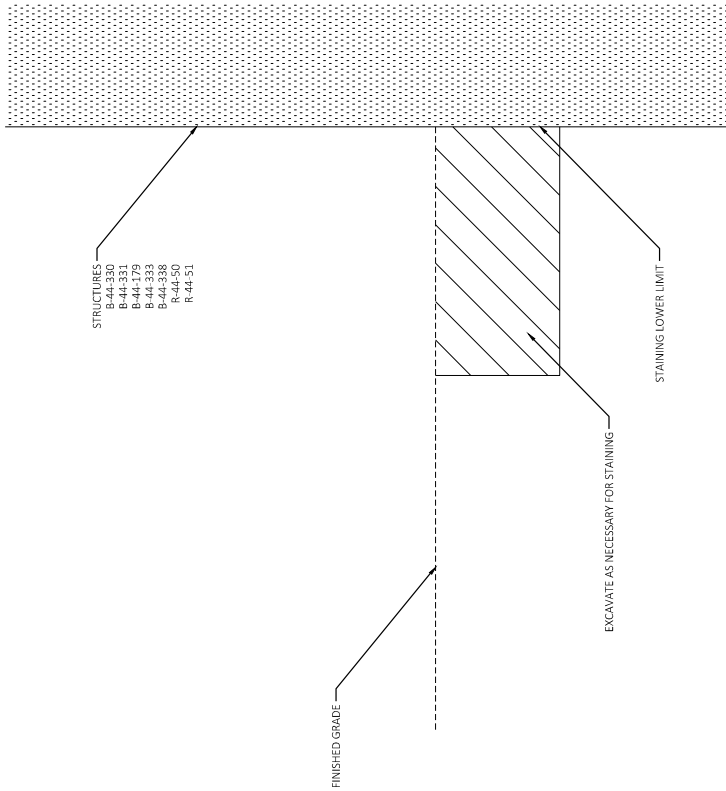

Addendum No. 01
ID 1130-66-82
Added Sheet 15A
September 29, 2025

PROJECT NO: 1130-66-82

HWY: IH 41

COUNTY: OUTAGAMIE

CONSTRUCTION DETAILS

SHEET 15A

E

FILE NAME: X:\PROJECTS\OUTAGAMIE\1220044\11306301 IH 41\DESIGN\3D SHEETSP\PLAN\021001-CD BUC.DWG
LAYOUT NAME: CD 7

PLOT DATE: 9/24/2025 12:58 PM

PLOT BY: ANDY BLOK

PLOT NAME:

PLOT SCALE: 1"=1'

W65007/CAD05 SHEET 42

CONNECTED TRAFFIC CONTROL ITEMS

STAGE	LOCATION	643.0810.S		643.1220.S	
		CONNECTED		CONNECTED	
		APPROXIMATE SERVICE DAYS	ARROW BOARD NO. IN SERVICE DAYS	WORK ZONE START AND END LOCATION MARKERS NO. IN SERVICE DAYS	
1	IH 41 NB IH 41 SB	4 4	1 1	4 4	2 2
STAGE 1 SUBTOTALS					
2	IH 41 NB (FULL CLOSURE) IH 41 SB (FULL CLOSURE) IH 41 NB (SINGLE LANE CLOSURE) IH 41 SB (SINGLE LANE CLOSURE)	2 2 2 2	4 2 1 1	8 4 2 2	2 2 2 2
STAGE 2 SUBTOTALS					
3	IH 41 NB IH 41 SB	20 20	1 1	20 20	2 2
STAGE 3 SUBTOTALS					
4	IH 41 NB (FULL CLOSURE) IH 41 SB (FULL CLOSURE) IH 41 NB (SINGLE LANE CLOSURE) IH 41 SB (SINGLE LANE CLOSURE)	2 2 3 3	4 2 1 1	8 4 3 3	2 2 2 2
STAGE 4 SUBTOTALS					
5	IH 41 NB IH 41 SB	20 20	1 1	20 20	2 2
STAGE 5 SUBTOTALS					
IH 41 NB - STRUCTURE STAINING IH 41 SB - STRUCTURE STAINING	10 10	1 1	10 10	2 2	20 20
STAINING SUBTOTALS					
TOTALS				142	252

CONSTRUCTION STAKING SURVEY PROJECT 1130-66-82

LOCATION	SPV. 0060.04 EACH
IH 41 AND BUCHANAN ST	1
TOTALS	1

PAVEMENT MARKING

STATION	TO	STATION	LOCATION	646.2020		646.4520	
				MARKING LINE		MARKING LINE	
				EPOXY 6-INCH (WHITE)	LF	EPOXY 4-INCH (YELLOW)	LF
60+25	-	70+20	BUCHANAN RD	1,990	1,990	---	---
1074+30	-	1085+05	IH 41 NB, LT	---	---	---	---
1079+05	-	1089+80	IH 41 SB, RT	---	---	---	1,050
1081+78	-	1082+29	IH 41 NB, RT	---	---	---	100
1081+82	-	1082+32	IH 41 SB, LT	---	---	---	100
SUBTOTALS				1,990	1,990	200	2,100
TOTALS				3,980			2,300

SAWING ASPHALT

STATION	TO	STATION	LOCATION	LF
60+25		BUCHANAN ST		25
70+20		BUCHANAN ST		25
1042+51	-	1043+11	IH 41 NB, RT	75
1042+51	-	1043+11	IH 41 SB, LT	75
TOTALS				200

STREET SWEEPING

LOCATION	SPV.0075.01 HRS
IH 41 AND BUCHANAN ST	30
TOTALS	30

CONCRETE STAINING - EXCAVATION, GRADING, SHAPING, AND FINISHING STRUCTURE

LOCATION	SPV.0060.06 EA	SPV.0060.07 EA	SPV.0060.08 EA	SPV.0060.09 EA	SPV.0060.10 EA	SPV.0060.11 EA	SPV.0060.12 EA
	B-44-330	B-44-179	B-44-333	B-44-338	R-44-50	R-44-51	
HOLLAND RD	1	---	---	---	---	---	---
VANDENBROEK RD	---	1	---	---	---	---	---
CTH N	---	---	1	---	---	---	---
CTH CC/ROSEHILL RD	---	---	---	1	---	---	---
CTH J/HV AND AVE	---	---	---	---	1	1	1
TOTALS	1	1	1	1	1	1	1

Addendum No. 01
ID 1130-66-82
Revised Sheet 86
September 29, 2025



Proposal Schedule of Items

Page 1 of 11

Proposal ID: 20251014008 Project(s): 1130-66-82

Federal ID(s): WISC 2026008

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0002	201.0105 Clearing	2.000 STA	_____.	_____.
0004	201.0205 Grubbing	2.000 STA	_____.	_____.
0006	203.0100 Removing Small Pipe Culverts	2.000 EACH	_____.	_____.
0008	203.0220 Removing Structure (structure) 01. B-44-338	1.000 EACH	_____.	_____.
0010	204.0110 Removing Asphaltic Surface	105.000 SY	_____.	_____.
0012	204.0120 Removing Asphaltic Surface Milling	890.000 SY	_____.	_____.
0014	204.0150 Removing Curb & Gutter	48.000 LF	_____.	_____.
0016	204.0157 Removing Concrete Barrier	110.000 LF	_____.	_____.
0018	204.0165 Removing Guardrail	1,150.000 LF	_____.	_____.
0020	204.0167 Removing Cable Barrier	695.000 LF	_____.	_____.
0022	204.0180 Removing Delineators and Markers	10.000 EACH	_____.	_____.
0024	204.0190 Removing Surface Drains	4.000 EACH	_____.	_____.
0026	205.0100 Excavation Common	2,098.000 CY	_____.	_____.
0028	206.1001 Excavation for Structures Bridges (structure) 01. B-44-332	1.000 EACH	_____.	_____.
0030	208.0100 Borrow	10,246.000 CY	_____.	_____.



Proposal Schedule of Items

Page 2 of 11

Proposal ID: 20251014008 Project(s): 1130-66-82

Federal ID(s): WISC 2026008

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0032	209.1500 Backfill Granular Grade 1	200.000 TON	_____.	_____.
0034	210.1500 Backfill Structure Type A	839.000 TON	_____.	_____.
0036	211.0101 Prepare Foundation for Asphaltic Paving (project) 01. 1130-66-82	1.000 EACH	_____.	_____.
0038	211.0400 Prepare Foundation for Asphaltic Shoulders	22.000 STA	_____.	_____.
0040	213.0100 Finishing Roadway (project) 01. 1130-66-82	1.000 EACH	_____.	_____.
0042	305.0110 Base Aggregate Dense 3/4-Inch	270.000 TON	_____.	_____.
0044	305.0120 Base Aggregate Dense 1 1/4-Inch	1,671.000 TON	_____.	_____.
0046	312.0110 Select Crushed Material	2,785.000 TON	_____.	_____.
0048	415.0080 Concrete Pavement 8-Inch	2,815.000 SY	_____.	_____.
0050	415.0410 Concrete Pavement Approach Slab	108.000 SY	_____.	_____.
0052	415.4100 Concrete Pavement Joint Filling	3,040.000 SY	_____.	_____.
0054	455.0605 Tack Coat	84.000 GAL	_____.	_____.
0056	460.2000 Incentive Density HMA Pavement	150.000 DOL	1.00000	150.00
0058	460.5223 HMA Pavement 3 LT 58-28 S	40.000 TON	_____.	_____.
0060	460.5224 HMA Pavement 4 LT 58-28 S	190.000 TON	_____.	_____.



Proposal Schedule of Items

Page 3 of 11

Proposal ID: 20251014008 Project(s): 1130-66-82

Federal ID(s): WISC 2026008

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0062	465.0315 Asphaltic Flumes	60.000 SY	_____.	_____.
0064	465.0510 Asphaltic Rumble Strips, Shoulder Divided Roadway	2,110.000 LF	_____.	_____.
0066	501.1000.S Ice Hot Weather Concreting	4,324.000 LB	_____.	_____.
0068	502.0100 Concrete Masonry Bridges	197.000 CY	_____.	_____.
0070	502.3200 Protective Surface Treatment	1,119.000 SY	_____.	_____.
0072	502.3210 Pigmented Surface Sealer	561.000 SY	_____.	_____.
0074	503.0155 Prestressed Girder Type I 54W-Inch	1,024.000 LF	_____.	_____.
0076	505.0400 Bar Steel Reinforcement HS Structures	10,070.000 LB	_____.	_____.
0078	505.0600 Bar Steel Reinforcement HS Coated Structures	122,300.000 LB	_____.	_____.
0080	506.2605 Bearing Pads Elastomeric Non-Laminated	20.000 EACH	_____.	_____.
0082	506.4000 Steel Diaphragms (structure) 01. B-44-332	16.000 EACH	_____.	_____.
0084	511.1200 Temporary Shoring (structure) 01. B-44-332	480.000 SF	_____.	_____.
0086	513.4091 Railing Tubular Screening	947.000 LF	_____.	_____.
0088	516.0500 Rubberized Membrane Waterproofing	38.000 SY	_____.	_____.



Proposal Schedule of Items

Page 4 of 11

Proposal ID: 20251014008 Project(s): 1130-66-82

Federal ID(s): WISC 2026008

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0090	517.1010.S Concrete Staining (structure) 01. B-44-332	7,886.000 SF	_____.	_____.
0092	517.1010.S Concrete Staining (structure) 02. B-44-330	7,349.000 SF	_____.	_____.
0094	517.1010.S Concrete Staining (structure) 03. B-44-331	4,686.000 SF	_____.	_____.
0096	517.1010.S Concrete Staining (structure) 04. B-44-179	9,615.000 SF	_____.	_____.
0098	517.1010.S Concrete Staining (structure) 05. B-44-333	4,279.000 SF	_____.	_____.
0100	517.1010.S Concrete Staining (structure) 06. B-44-338	5,113.000 SF	_____.	_____.
0102	517.1010.S Concrete Staining (structure) 07. R-44-57	4,958.000 SF	_____.	_____.
0104	517.1010.S Concrete Staining (structure) 08. R-44-50	1,372.000 SF	_____.	_____.
0106	517.1010.S Concrete Staining (structure) 09. R-44-51	1,798.000 SF	_____.	_____.
0108	522.0418 Culvert Pipe Reinforced Concrete Class IV 18-Inch	401.000 LF	_____.	_____.
0110	522.1012 Apron Endwalls for Culvert Pipe Reinforced Concrete 12-Inch	4.000 EACH	_____.	_____.
0112	522.1018 Apron Endwalls for Culvert Pipe Reinforced Concrete 18-Inch	4.000 EACH	_____.	_____.
0114	550.0010 Pre-Boring Unconsolidated Materials	86.000 LF	_____.	_____.



Proposal Schedule of Items

Page 5 of 11

Proposal ID: 20251014008 Project(s): 1130-66-82

Federal ID(s): WISC 2026008

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0116	550.1120 Piling Steel HP 12-Inch X 53 Lb	2,705.000 LF	_____.	_____.
0118	601.0150 Concrete Curb Integral Type D	1,254.000 LF	_____.	_____.
0120	602.0405 Concrete Sidewalk 4-Inch	9,250.000 SF	_____.	_____.
0122	602.3010 Concrete Surface Drains	10.000 CY	_____.	_____.
0124	603.1142 Concrete Barrier Type S42	224.000 LF	_____.	_____.
0126	603.8000 Concrete Barrier Temporary Precast Delivered	3,700.000 LF	_____.	_____.
0128	603.8125 Concrete Barrier Temporary Precast Installed	4,300.000 LF	_____.	_____.
0130	603.8500 Anchoring Concrete Barrier Temporary Precast	600.000 LF	_____.	_____.
0132	604.0600 Slope Paving Select Crushed Material	458.000 SY	_____.	_____.
0134	606.0200 Riprap Medium	233.000 CY	_____.	_____.
0136	608.0312 Storm Sewer Pipe Reinforced Concrete Class III 12-Inch	146.000 LF	_____.	_____.
0138	611.0624 Inlet Covers Type H	6.000 EACH	_____.	_____.
0140	611.3230 Inlets 2x3-FT	6.000 EACH	_____.	_____.
0142	612.0406 Pipe Underdrain Wrapped 6-Inch	727.000 LF	_____.	_____.
0144	614.0115 Anchorage for Steel Plate Beam Guard Type 2	2.000 EACH	_____.	_____.



Proposal Schedule of Items

Page 6 of 11

Proposal ID: 20251014008 Project(s): 1130-66-82

Federal ID(s): WISC 2026008

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0146	614.0305 Steel Plate Beam Guard Class A	178.000 LF	_____.	_____.
0148	614.0400 Adjusting Steel Plate Beam Guard	530.000 LF	_____.	_____.
0150	614.0905 Crash Cushions Temporary	4.000 EACH	_____.	_____.
0152	614.2300 MGS Guardrail 3	777.000 LF	_____.	_____.
0154	614.2610 MGS Guardrail Terminal EAT	2.000 EACH	_____.	_____.
0156	614.2620 MGS Guardrail Terminal Type 2	2.000 EACH	_____.	_____.
0158	616.0405 Fence Chain Link Salvaged 5-FT	325.000 LF	_____.	_____.
0160	616.0700.S Fence Safety	325.000 LF	_____.	_____.
0162	618.0100 Maintenance and Repair of Haul Roads (project) 01. 1130-66-82	1.000 EACH	_____.	_____.
0164	619.1000 Mobilization	1.000 EACH	_____.	_____.
0166	624.0100 Water	95.000 MGAL	_____.	_____.
0168	625.0100 Topsoil	3,170.000 SY	_____.	_____.
0170	625.0500 Salvaged Topsoil	9,740.000 SY	_____.	_____.
0172	628.1504 Silt Fence	1,745.000 LF	_____.	_____.
0174	628.1520 Silt Fence Maintenance	3,490.000 LF	_____.	_____.
0176	628.1905 Mobilizations Erosion Control	8.000 EACH	_____.	_____.



Proposal Schedule of Items

Page 7 of 11

Proposal ID: 20251014008 Project(s): 1130-66-82

Federal ID(s): WISC 2026008

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0178	628.1910 Mobilizations Emergency Erosion Control	5.000 EACH	_____.	_____.
0180	628.2002 Erosion Mat Class I Type A	12,910.000 SY	_____.	_____.
0182	628.7005 Inlet Protection Type A	6.000 EACH	_____.	_____.
0184	628.7015 Inlet Protection Type C	6.000 EACH	_____.	_____.
0186	628.7504 Temporary Ditch Checks	145.000 LF	_____.	_____.
0188	628.7515.S Stone Ditch Checks	25.000 CY	_____.	_____.
0190	628.7555 Culvert Pipe Checks	15.000 EACH	_____.	_____.
0192	628.7560 Tracking Pads	2.000 EACH	_____.	_____.
0194	628.7570 Rock Bags	140.000 EACH	_____.	_____.
0196	629.0210 Fertilizer Type B	8.000 CWT	_____.	_____.
0198	630.0130 Seeding Mixture No. 30	590.000 LB	_____.	_____.
0200	630.0300 Seeding Borrow Pit	40.000 LB	_____.	_____.
0202	630.0500 Seed Water	290.000 MGAL	_____.	_____.
0204	633.5200 Markers Culvert End	8.000 EACH	_____.	_____.
0206	634.0616 Posts Wood 4x6-Inch X 16-FT	1.000 EACH	_____.	_____.
0208	637.2230 Signs Type II Reflective F	9.000 SF	_____.	_____.



Proposal Schedule of Items

Page 8 of 11

Proposal ID: 20251014008 Project(s): 1130-66-82

Federal ID(s): WISC 2026008

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0210	638.2102 Moving Signs Type II	2.000 EACH	_____.	_____.
0212	638.2602 Removing Signs Type II	1.000 EACH	_____.	_____.
0214	638.3000 Removing Small Sign Supports	1.000 EACH	_____.	_____.
0216	638.4000 Moving Small Sign Supports	4.000 EACH	_____.	_____.
0218	643.0300 Traffic Control Drums	15,700.000 DAY	_____.	_____.
0220	643.0420 Traffic Control Barricades Type III	2,564.000 DAY	_____.	_____.
0222	643.0705 Traffic Control Warning Lights Type A	4,300.000 DAY	_____.	_____.
0224	643.0715 Traffic Control Warning Lights Type C	3,241.000 DAY	_____.	_____.
0226	643.0800 Traffic Control Arrow Boards	404.000 DAY	_____.	_____.
0228	643.0810.S Connected Arrow Board	142.000 DAY	_____.	_____.
0230	643.0900 Traffic Control Signs	4,958.000 DAY	_____.	_____.
0232	643.0920 Traffic Control Covering Signs Type II	144.000 EACH	_____.	_____.
0234	643.1050 Traffic Control Signs PCMS	279.000 DAY	_____.	_____.
0236	643.1220.S Connected Work Zone Start and End Location Markers	252.000 DAY	_____.	_____.
0238	643.5000 Traffic Control	1.000 EACH	_____.	_____.
0240	645.0111 Geotextile Type DF Schedule A	104.000 SY	_____.	_____.



Proposal Schedule of Items

Page 9 of 11

Proposal ID: 20251014008 Project(s): 1130-66-82

Federal ID(s): WISC 2026008

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0242	645.0120 Geotextile Type HR	691.000 SY	_____.	_____.
0244	645.0130 Geotextile Type R	100.000 SY	_____.	_____.
0246	646.2020 Marking Line Epoxy 6-Inch	3,980.000 LF	_____.	_____.
0248	646.4520 Marking Line Same Day Epoxy 4-Inch	2,300.000 LF	_____.	_____.
0250	652.0125 Conduit Rigid Metallic 2-Inch	24.000 LF	_____.	_____.
0252	652.0225 Conduit Rigid Nonmetallic Schedule 40 2-Inch	1,464.000 LF	_____.	_____.
0254	653.0164 Pull Boxes Non-Conductive 24x42-Inch	4.000 EACH	_____.	_____.
0256	653.0222 Junction Boxes 18x12x6-Inch	1.000 EACH	_____.	_____.
0258	654.0105 Concrete Bases Type 5	5.000 EACH	_____.	_____.
0260	690.0150 Sawing Asphalt	200.000 LF	_____.	_____.
0262	715.0502 Incentive Strength Concrete Structures	4,650.000 DOL	1.00000	4,650.00
0264	715.0603 Incentive Strength Concrete Barrier	112.000 DOL	1.00000	112.00
0266	715.0720 Incentive Compressive Strength Concrete Pavement	877.000 DOL	1.00000	877.00
0268	ASP.1T0A On-the-Job Training Apprentice at \$5.00/HR	2,400.000 HRS	5.00000	12,000.00
0270	ASP.1T0G On-the-Job Training Graduate at \$5.00/HR	2,100.000 HRS	5.00000	10,500.00



Proposal Schedule of Items

Page 10 of 11

Proposal ID: 20251014008 Project(s): 1130-66-82

Federal ID(s): WISC 2026008

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0272	SPV.0035 Special 01. HPC Masonry Structures	576.000 CY	_____.	_____.
0274	SPV.0060 Special 01. Existing Footing Opening	8.000 EACH	_____.	_____.
0276	SPV.0060 Special 02. Emergency Response to Traffic Involving Crash Cushion Temporary	5.000 EACH	_____.	_____.
0278	SPV.0060 Special 03. Emergency Response to Traffic Involving Concrete Barrier Temporary	5.000 EACH	_____.	_____.
0280	SPV.0060 Special 04. Construction Staking Survey Project 1130-66-82	1.000 EACH	_____.	_____.
0282	SPV.0060 Special 05. Decorative Silhouette	10.000 EACH	_____.	_____.
0284	SPV.0075 Special 01. Street Sweeping	30.000 HRS	_____.	_____.
0286	SPV.0090 Special 01. Removing Existing Bridge Chain Link Fencing	493.000 LF	_____.	_____.
0288	SPV.0090 Special 02. Fence Chain Link Polymer-Coated 6-Ft. B-44-179 Special	493.000 LF	_____.	_____.
0290	SPV.0165 Special 01. Longitudinal Grooving Bridge Deck	7,434.000 SF	_____.	_____.
0292	SPV.0165 Special 02. Wall Concrete Panel Mechanically Stabilized Earth R-44-57	4,483.000 SF	_____.	_____.
0294	SPV.0165 Special 03. Tinted Sealer Reseal	9,542.000 SF	_____.	_____.
0296	SPV.0060 Special 06. Concrete Staining - Excavation, Grading, Shaping, and Finishing B-44-330	1.000 EACH	_____.	_____.



Proposal Schedule of Items

Page 11 of 11

Proposal ID: 20251014008 Project(s): 1130-66-82

Federal ID(s): WISC 2026008

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0298	SPV.0060 Special 07. Concrete Staining - Excavation, Grading, Shaping, and Finishing B-44-331	1.000 EACH	_____.	_____.
0300	SPV.0060 Special 08. Concrete Staining - Excavation, Grading, Shaping, and Finishing B-44-179	1.000 EACH	_____.	_____.
0302	SPV.0060 Special 09. Concrete Staining - Excavation, Grading, Shaping, and Finishing B-44-333	1.000 EACH	_____.	_____.
0304	SPV.0060 Special 10. Concrete Staining - Excavation, Grading, Shaping, and Finishing B-44-338	1.000 EACH	_____.	_____.
0306	SPV.0060 Special 11. Concrete Staining - Excavation, Grading, Shaping, and Finishing R-44-50	1.000 EACH	_____.	_____.
0308	SPV.0060 Special 12. Concrete Staining - Excavation, Grading, Shaping, and Finishing R-44-51	1.000 EACH	_____.	_____.

Section: 0001

Total:

_____.

Total Bid:

_____.