



Wisconsin Department of Transportation

September 30, 2025

Division of Transportation Systems Development

Bureau of Project Development
4822 Madison Yards Way, 4th Floor South
Madison, WI 53705

Telephone: (608) 266-1631
Facsimile (FAX): (608) 266-8459

NOTICE TO ALL CONTRACTORS:

Proposal #29: 2025-03-73, WISC 2025600
C Brookfield, Capitol Dr
Brookfield RD to 124th St
STH 190
Waukesha County

Letting of October 14, 2025

This is Addendum No. 01, which provides for the following:

Schedule of Items:

Revised Bid Item Quantities					
Bid Item	Item Description	Unit	Proposal Total Prior to Addendum	Proposal Quantity Change (-)	Proposal Total After Addendum
465.0110	Asphaltic Surface Patching	TON	1000	-975	25

Plan Sheets:

Revised Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of changes to sheet)
15	Revised note under triple asterisks to state that the additional 6 inches of aggregate base removal will be paid for under bid item Removing Pavement for Base Patching.
476	Revised the MQ table for bid item Asphaltic Surface Patching to reduce the quantity to 25 tons.

Schedule of Items

Attached, dated September 30, 2025, are the revised Schedule of Items Page 4.

Plan Sheets

The following 8½ x 11-inch sheets are attached and made part of the plans for this proposal:

Revised: 15, 476.


The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.

Sincerely,

Mike Coleman

Proposal Development Specialist
Proposal Management Section

END OF ADDENDUM

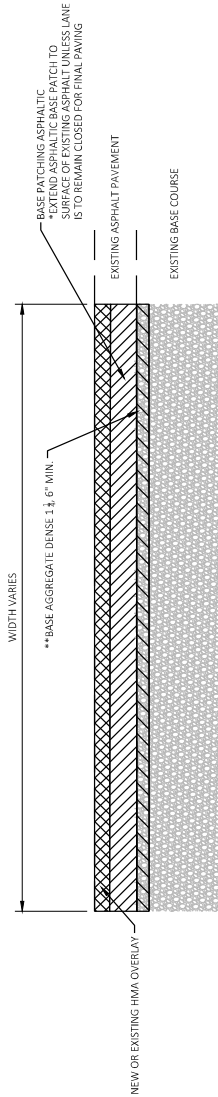

BASE PATCHING ASPHALTIC ***

NOTE:

- * UPPER LAYER AUNT 58-28.5 IS INCIDENTAL TO THE BASE PATCHING ASPHALTIC ITEM
- ** BASE AGGREGATE DENSE 1 1/2" PAID UNDER SEPARATE BID ITEM. ONLY REQUIRED FOR BASE PATCHES FOR LOOP
- *** THE ADDITIONAL 6 INCHES OF AGGREGATE REMOVAL REQUIRED FOR LOOP DETECTOR INSTALLATION WILL BE PAID FOR UNDER BID ITEM REMOVING PAVEMENT FOR BASE PATCHING.

Addendum No. 01
ID 2025-03-73
Revised Sheet 15
September 30, 2025

PROJECT NO: 2025-03-73	HWY: STH 190	COUNTY: WAUKESHA	CONSTRUCTION DETAILS	SHEET 15	E
FILE NAME: X:\WA\2020\202003190 DESIGN\TRANSPORTATION\SHEET\PLAN\021001_CD.DWG	LAYOUT NAME: 021001_cd	PLOT DATE: 9/29/2025 1:09 PM	PLOT BY: ROGASHI, DOUG	PLOT SCALE: #####	WISDOT/CAD05 SHEET 42

3

3

ASPHALTIC SURFACE PATCHING

465.0110

ASPHALTIC SURFACE PATCHING

TON

UNDISTRIBUTED

25

25

TOTALS

ASPHALTIC SURFACE TEMPORARY

465.0125

ASPHALTIC SURFACE TEMPORARY

TON

UNDISTRIBUTED

50

50

TOTALS

ASPHALTIC CURB

CATEGORY 0040

465.0310

ASPHALTIC CURB

LF

STATION TO STATION

138TH STREET

TOTALS

ASPHALTIC FLUMES

465.0315

ASPHALTIC FLUMES

SY

STATION TO STATION

STA 291+00 - CALHOUN RD

CALHOUN RD - PILGRIM RD

PILGRIM RD - LILLY RD

LILLY RD - STA 107+08

SUBTOTAL

CATEGORY 0040

138TH STREET

SUBTOTAL

TOTALS

CLEANING CULVERT PIPES

520.8700

CLEANING CULVERT PIPES

EACH

STATION TO STATION

STA 291+00 - CALHOUN RD

CALHOUN RD - PILGRIM RD

PILGRIM RD - LILLY RD

LILLY RD - STA 107+08

TOTALS

ASPHALTIC SURFACE SAFETY ISLANDS

465.0305

ASPHALTIC SURFACE SAFETY ISLANDS

TON

STATION TO STATION

STA 291+00 - CALHOUN RD

CALHOUN RD - PILGRIM RD

PILGRIM RD - LILLY RD

LILLY RD - STA 107+08

TOTALS

PROJECT NO: 2025-03-73

HWY: STH 190

COUNTY: WAUKESHA

MISCELLANEOUS QUANTITIES

ALL ITEMS CATEGORY 0010 UNLESS OTHERWISE NOTED

FILE NAME: X:\WU2020\2020190\Design Transportation\Sheets\Plan\030201_mq.pptx

PLLOT DATE: _____

PLLOT BY: _____

PLLOT NAME: _____

PLLOT SCALE: 1:1

SHEET: 476

E



Proposal Schedule of Items

Page 4 of 20

Proposal ID: 20251014029 Project(s): 2025-03-73

Federal ID(s): WISC 2025600

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0090	460.0105.S HMA Percent Within Limits (PWL) Test Strip Volumetrics	2.000 EACH	_____.	_____.
0092	460.0110.S HMA Percent Within Limits (PWL) Test Strip Density	4.000 EACH	_____.	_____.
0094	460.2005 Incentive Density PWL HMA Pavement	41,162.000 DOL	1.00000	41,162.00
0096	460.2010 Incentive Air Voids HMA Pavement	67,049.000 DOL	1.00000	67,049.00
0098	460.6223 HMA Pavement 3 MT 58-28 S	39,461.000 TON	_____.	_____.
0100	460.6224 HMA Pavement 4 MT 58-28 S	27,620.000 TON	_____.	_____.
0102	465.0105 Asphaltic Surface	30.000 TON	_____.	_____.
0104	465.0110 Asphaltic Surface Patching	25.000 TON	_____.	_____.
0106	465.0120 Asphaltic Surface Driveways and Field Entrances	89.000 TON	_____.	_____.
0108	465.0125 Asphaltic Surface Temporary	50.000 TON	_____.	_____.
0110	465.0305 Asphaltic Surface Safety Islands	25.000 TON	_____.	_____.
0112	465.0310 Asphaltic Curb	45.000 LF	_____.	_____.
0114	465.0315 Asphaltic Flumes	64.000 SY	_____.	_____.
0116	502.4205 Adhesive Anchors No. 5 Bar	46.000 EACH	_____.	_____.
0118	504.0100 Concrete Masonry Culverts	2.000 CY	_____.	_____.

