



Wisconsin Department of Transportation

January 6, 2026

Division of Transportation Systems Development

Bureau of Project Development
4822 Madison Yards Way, 4th Floor South
Madison, WI 53705

Telephone: (608) 266-1631
Facsimile (FAX): (608) 266-8459

NOTICE TO ALL CONTRACTORS:

Proposal #34: 9295-00-70, WISC 2026155
Shawano - STH 29
STH 22 to Whitnee Way
CTH BE
Shawano County

Letting of January 13, 2026

This is Addendum No. 01, which provides for the following:

Schedule of Items:

Revised Bid Item Quantities					
Bid Item	Item Description	Unit	Proposal Total Prior to Addendum	Proposal Quantity Change (-)	Proposal Total After Addendum
460.5223	HMA Pavement 3LT 58-28 S	TON	3046	+600	3646

Added Bid Item Quantities					
Bid Item	Item Description	Unit	Proposal Total Prior to Addendum	Quantity Added	Proposal Total After Addendum
460.2000	Incentive Density HMA Pavement	DOL	0	2340	2340

Deleted Bid Item Quantities					
Bid Item	Item Description	Unit	Proposal Total Prior to Addendum	Proposal Quantity Change (-)	Proposal Total After Addendum
305.0120	Base Aggregate Dense 1 ¼-Inch	TON	600	-600	0

Plan Sheets:

Revised Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of changes to sheet)
11	Typical Sections (Revised typical section for rubblizing to reflect slope correction to be completed with additional lower layer asphalt material)
27	Miscellaneous Quantities (removed 1 1/4" base aggregate dense from table)
28	Miscellaneous Quantities (revised tonnage for 3LT 58-28 S and revised PWL Mixture Use Table)

Schedule of Items

Attached, dated January 6, 2026, are the revised Schedule of Items Pages 1 – 5.

Plan Sheets

The following 8½ x 11-inch sheets are attached and made part of the plans for this proposal:
Revised: 11, 27 and 28.

The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.


Sincerely,

Mike Coleman

Proposal Development Specialist
Proposal Management Section

END OF ADDENDUM

* PROPOSED SHOULDERS ARE NARROWER THAN EXISTING. SEE HORIZONTAL POINT TO THE EXISTING GRAVEL HINGE POINT

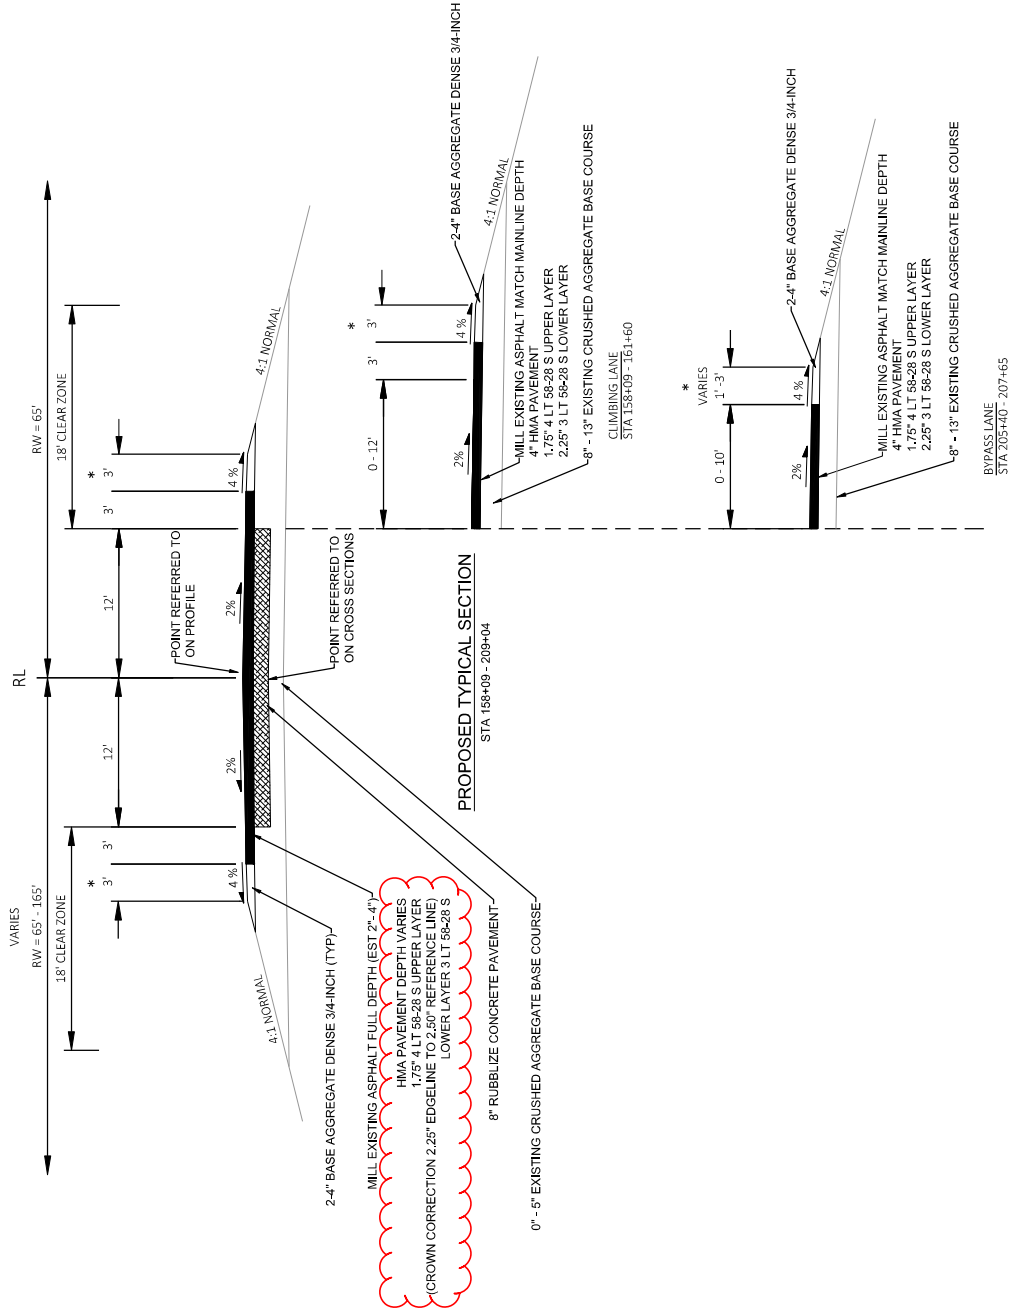

Addendum No. 01
ID 9295-00-70
Revised Sheet 11
January 6, 2026

PROJECT NO: 9295-00-70	HWY: CTH BE	COUNTY: SHAWANO	TYPICAL SECTIONS	SHEET 11	E
FILE NAME: X:\PROJECTS\SHAWANO\230099 CTH BE DESIGN\CD\SHSHEET\SHAW003001_73.DWG	12/19/2025 12:37 PM	DATE STRETCHCHECK	1 IN=10 FT	PLOT SCALE:	W65007CADD05 SHEET 42
LAYOUT NAME: - TYP (UD)					

EARTHWORK					
205.0100 COMMON EXCAVATION					
CATEGORY	STA	TO	STA	LOCATION	REMARKS
				CY	
0010	152+20	-	158+09	CTH BE	MAINLINE
0010	207+84	-	208+11	CTH BE	CURBAT CTHE
0010	248+80	-	249+38	CTH BE	CTH B/ ISLAND
0010	UNDISTRIBUTED			300	EBS
TOTAL:					832

RUMBLE STRIPS									
		465.0560 ASPHALTIC RUMBLE STRIPS, CENTERLINE				465.0580 TRANSVERSE RUMBLE STRIPS			
CATEGORY	STA	STA	LOCATION	LF	SY	REMARKS			
0010	--	-	157+07	CTH BE	35	WESTBOUND			
0010	--	-	158+30	CTH BE	35	WESTBOUND			
0010	--	-	164+30	CTH BE	35	WESTBOUND			
0010	162+00	-	442+38	CTH BE	24.575	WESTBOUND			
TOTAL:					24.575	105			

CULVERT ITEM SUMMARY									
CATEGORY	STA	LOCATION	CULVERT PIPE LINERS		CLEANING CULVERT PIPES FOR LINER VERIFICATION		RIPRAP MEDIUM CY	GEOTEXTILE TYPE HR SY	645,0120
			24-INCH LF	30-INCH LF	EACH	EACH			
0010	264+00	CTH BE	--	120	1	1	5	6	
0010	440+13	CTH BE	135	--	1		--	--	
TOTAL:			135	120	2	2	5	6	

ALL ITEMS 0010 CATEGORY UNLESS OTHERWISE LISTED

SHEET 27

WISDOT/CADDs SHEET 42

Addendum No. 01
ID 9295-00-70
Revised Sheet 28
January 6, 2026

HMA PAVEMENT SUMMARY

CATEGORY	STATION	TO	STATION	TACK COAT GAL	VOLUMETRICS EACH	HMA PERCENT WITHIN LIMITS (PWL) TEST STRIP DENSITY	HMA PAVEMENT 3 LT 58-28 S TON	HMA PAVEMENT 4 LT 58-28 S TON	ASPHALTIC SURFACE PATCHING TON	ASPHALTIC SURFACE FIELD ENTRANCES TON	REMARKS
0010	152+64	-	158+09	183			599	300	--	--	
0010	158+09	-	209+04	1,324			3,047	1,903	--	--	
0010	209+04	-	399+00	4,711			--	9,675	--	--	
0010	399+00	-	442+35	1,041	2	3	--	2,137	--	--	
0010	SIDEROADS 158+09 - 209+04			69			--	142	--	--	
0010	SIDEROADS 209+04 - 442+38			186			--	381	--	--	
0010	CURB AND GUTTER PATCHING			1			--	--	9	--	
0010	DRIVEWAYS			--			--	--	--	196	
TOTAL:				7,515	2	3	3,646	14,538	9	196	

PWL MIXTURE USAGE TABLE

LOCATION	STATION	MIXTURE USE	UNDERLYING SURFACE	BID ITEM	TONS	THICKNESS	MIXTURE ACCEPTANCE OMP AS PER SS 460	DENSITY ACCEPTANCE INCENTIVE DENSITY HMA PAVEMENT 460.2000 INCENTIVE DENSITY PWL HMA PAVEMENT 460.2005
12' DRIVING LANES (EB/WB)	152+64 - 158+09	LOWER LAYER	BASE AGGREGATE	3 LT 58-28 S	595	4"		
12' DRIVING LANES (EB/WB)	158+09 - 209+04	LOWER LAYER	RUBBLIZED CONCRETE	3 LT 58-28 S	3047	VARIABLE		
12' DRIVING LANES (ED/WO)	152+64 - 158+09	UPPER LAYER	3 LT 58-28 S	4 LT 58-28 S	170	2"	OMP AS PER SS 460	
12' DRIVING LANES (EB/WB)	158+09 - 209+04	UPPER LAYER	MILLED SURFACE	4 LT 58-28 S	1370	1.75"	PWL INCENTIVE AIR VOIDS HMA PAVEMENT 460.2010	
12' DRIVING LANES (EB/WB)	209+04 - 442+35	UPPER LAYER	MILLED SURFACE	4 LT 58-28 S	9220	2.5"	PWL INCENTIVE AIR VOIDS HMA PAVEMENT 460.2010	
SHOULDER (EB/WB)	152+64 - 158+09	UPPER LAYER	MILLED SURFACE	4 LT 58-28 S	130	2"	PWL INCENTIVE AIR VOIDS HMA PAVEMENT 460.2010	DEPARTMENT ACCEPTANCE (SS 460.3.3.2) *NOT ELIGIBLE FOR INCENTIVE
SHOULDER (EB/WB)	158+09 - 209+04	UPPER LAYER	MILLED SURFACE	4 LT 58-28 S	530	1.75"	PWL INCENTIVE AIR VOIDS HMA PAVEMENT 460.2010	DEPARTMENT ACCEPTANCE (SS 460.3.3.2) *NOT ELIGIBLE FOR INCENTIVE
CLIMBING LANE & SHOULDER (EB)	158+09 - 161+60	UPPER LAYER	MILLED SURFACE	4 LT 58-28 S	35	1.75"	PWL INCENTIVE AIR VOIDS HMA PAVEMENT 460.2010	DEPARTMENT ACCEPTANCE (SS 460.3.3.2) *NOT ELIGIBLE FOR INCENTIVE
BYPASS LANE (EB)	205+40 - 207+65	UPPER LAYER	MILLED SURFACE	4 LT 58-28 S	15	1.75"	PWL INCENTIVE AIR VOIDS HMA PAVEMENT 460.2010	DEPARTMENT ACCEPTANCE (SS 460.3.3.2) *NOT ELIGIBLE FOR INCENTIVE
SHOULDER (EB/WB)	209+04 - 442+35	UPPER LAYER	MILLED SURFACE	4 LT 58-28 S	2,383	2.5"	PWL INCENTIVE AIR VOIDS HMA PAVEMENT 460.2010	DEPARTMENT ACCEPTANCE (SS 460.3.3.2) *NOT ELIGIBLE FOR INCENTIVE
TURN LANE (WB)	249+70 - 252+90	UPPER LAYER	MILLED SURFACE	4 LT 58-28 S	30	2.5"	PWL INCENTIVE AIR VOIDS HMA PAVEMENT 460.2010	DEPARTMENT ACCEPTANCE (SS 460.3.3.2) *NOT ELIGIBLE FOR INCENTIVE
TURN LANE (EB)	246+00 - 248+03	UPPER LAYER	MILLED SURFACE	4 LT 58-28 S	20	2.5"	PWL INCENTIVE AIR VOIDS HMA PAVEMENT 460.2010	DEPARTMENT ACCEPTANCE (SS 460.3.3.2) *NOT ELIGIBLE FOR INCENTIVE
TURN LANE (WB)	262+58 - 265+80	UPPER LAYER	MILLED SURFACE	4 LT 58-28 S	25	2.5"	PWL INCENTIVE AIR VOIDS HMA PAVEMENT 460.2010	DEPARTMENT ACCEPTANCE (SS 460.3.3.2) *NOT ELIGIBLE FOR INCENTIVE
CLIMBING LANE (EB)	249+38 - 259+40	UPPER LAYER	MILLED SURFACE	4 LT 58-28 S	90	2.5"	PWL INCENTIVE AIR VOIDS HMA PAVEMENT 460.2010	DEPARTMENT ACCEPTANCE (SS 460.3.3.2) *NOT ELIGIBLE FOR INCENTIVE
SIDEROADS	VARIOUS	UPPER LAYER	BASE AGGREGATE	4 LT 58-28 S	520	2.5"	PWL INCENTIVE AIR VOIDS HMA PAVEMENT 460.2010	DEPARTMENT ACCEPTANCE (SS 460.3.3.2) *NOT ELIGIBLE FOR INCENTIVE
CURB & GUTTER PATCHES	VARIOUS	UPPER LAYER	BASE AGGREGATE	ASPHALTIC SURFACE	3	2.5"	(SS 465)	ORDINARY COMPACTION (SS 450.3.2.6.2)
CTH B MEDIAN ISLAND	VARIOUS	UPPER LAYER	BASE AGGREGATE	ASPHALTIC SURFACE	6	3.5"	(SS 465)	ORDINARY COMPACTION (SS 450.3.2.6.2)

ALL ITEMS 0010 CATEGORY UNLESS OTHERWISE LISTED

PROJECT NO: 9295-00-70

HWY: CTH BE

COUNTY: SHAWANO

MISCELLANEOUS QUANTITIES

SHEET

28

PLOT SCALE: 1"=1'

PLOT NAME:

PLOT DATE: 12/22/2025 9:23 AM

DATE STRECHCHECK

FILE NAME: X:\PROJECTS\SHAWANO\330099 CTH BE DESIGN\CD\330099\330099_1\CD (WEST) DWG

LAYOUT NAME: 02

WISDOT/CAD05 SHEET 42



Proposal Schedule of Items

Page 1 of 5

Proposal ID: 20260113034 Project(s): 9295-00-70

Federal ID(s): WISC 2026155

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0002	204.0110 Removing Asphaltic Surface	27.000 SY	_____.	_____.
0004	204.0115 Removing Asphaltic Surface Butt Joints	691.000 SY	_____.	_____.
0006	204.0120 Removing Asphaltic Surface Milling	106,846.000 SY	_____.	_____.
0008	204.0150 Removing Curb & Gutter	84.000 LF	_____.	_____.
0010	205.0100 Excavation Common	832.000 CY	_____.	_____.
0012	211.0101 Prepare Foundation for Asphaltic Paving (project) 01. 9295-00-70	1.000 EACH	_____.	_____.
0014	213.0100 Finishing Roadway (project) 01. 9295-00-70	1.000 EACH	_____.	_____.
0016	305.0110 Base Aggregate Dense 3/4-Inch	2,418.000 TON	_____.	_____.
0020	312.0110 Select Crushed Material	600.000 TON	_____.	_____.
0022	335.0100 Rubbilizing	13,563.000 SY	_____.	_____.
0024	455.0605 Tack Coat	7,515.000 GAL	_____.	_____.
0026	460.0105.S HMA Percent Within Limits (PWL) Test Strip Volumetrics	2.000 EACH	_____.	_____.
0028	460.0110.S HMA Percent Within Limits (PWL) Test Strip Density	3.000 EACH	_____.	_____.
0030	460.2005 Incentive Density PWL HMA Pavement	10,754.000 DOL	1.00000	10,754.00
0032	460.2007 Incentive Density HMA Pavement Longitudinal Joints	6,100.000 DOL	1.00000	6,100.00



Proposal Schedule of Items

Page 2 of 5

Proposal ID: 20260113034 Project(s): 9295-00-70

Federal ID(s): WISC 2026155

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0034	460.2010 Incentive Air Voids HMA Pavement	14,538.000 DOL	1.00000	14,538.00
0036	460.5223 HMA Pavement 3 LT 58-28 S	3,646.000 TON	_____	_____
0038	460.5224 HMA Pavement 4 LT 58-28 S	14,538.000 TON	_____	_____
0040	465.0110 Asphaltic Surface Patching	9.000 TON	_____	_____
0042	465.0120 Asphaltic Surface Driveways and Field Entrances	196.000 TON	_____	_____
0044	465.0560 Asphaltic Rumble Strips, Centerline	24,575.000 LF	_____	_____
0046	465.0580 Asphaltic Rumble Strips, Transverse	105.000 SY	_____	_____
0048	520.9700.S Culvert Pipe Liners (size) 01. 24-Inch	135.000 LF	_____	_____
0050	520.9700.S Culvert Pipe Liners (size) 02. 30-Inch	120.000 LF	_____	_____
0052	520.9750.S Cleaning Culvert Pipes for Liner Verification	2.000 EACH	_____	_____
0054	601.0553 Concrete Curb & Gutter 4-Inch Sloped 36-Inch Type D	84.000 LF	_____	_____
0056	606.0200 Riprap Medium	5.000 CY	_____	_____
0058	618.0100 Maintenance and Repair of Haul Roads (project) 01. 9295-00-70	1.000 EACH	_____	_____
0060	619.1000 Mobilization	1.000 EACH	_____	_____
0062	624.0100 Water	48.000 MGAL	_____	_____



Proposal Schedule of Items

Page 3 of 5

Proposal ID: 20260113034 Project(s): 9295-00-70

Federal ID(s): WISC 2026155

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0064	625.0100 Topsoil	1,545.000 SY	_____.	_____.
0066	628.1504 Silt Fence	829.000 LF	_____.	_____.
0068	628.1520 Silt Fence Maintenance	1,658.000 LF	_____.	_____.
0070	628.1905 Mobilizations Erosion Control	3.000 EACH	_____.	_____.
0072	628.1910 Mobilizations Emergency Erosion Control	3.000 EACH	_____.	_____.
0074	628.2006 Erosion Mat Urban Class I Type A	1,545.000 SY	_____.	_____.
0076	628.7555 Culvert Pipe Checks	98.000 EACH	_____.	_____.
0078	628.7570 Rock Bags	17.000 EACH	_____.	_____.
0080	629.0210 Fertilizer Type B	0.400 CWT	_____.	_____.
0082	630.0130 Seeding Mixture No. 30	27.000 LB	_____.	_____.
0084	630.0500 Seed Water	14.000 MGAL	_____.	_____.
0086	634.0612 Posts Wood 4x6-Inch X 12-FT	2.000 EACH	_____.	_____.
0088	638.2102 Moving Signs Type II	2.000 EACH	_____.	_____.
0090	638.4000 Moving Small Sign Supports	2.000 EACH	_____.	_____.
0092	642.5201 Field Office Type C	1.000 EACH	_____.	_____.
0094	643.0420 Traffic Control Barricades Type III	2,756.000 DAY	_____.	_____.



Proposal Schedule of Items

Page 4 of 5

Proposal ID: 20260113034 Project(s): 9295-00-70

Federal ID(s): WISC 2026155

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0096	643.0705 Traffic Control Warning Lights Type A	5,194.000 DAY	_____.	_____.
0098	643.0900 Traffic Control Signs	12,243.000 DAY	_____.	_____.
0100	643.0920 Traffic Control Covering Signs Type II	3.000 EACH	_____.	_____.
0102	643.1050 Traffic Control Signs PCMS	14.000 DAY	_____.	_____.
0104	643.5000 Traffic Control	1.000 EACH	_____.	_____.
0106	645.0120 Geotextile Type HR	6.000 SY	_____.	_____.
0108	645.0220 Geogrid Type SR	800.000 SY	_____.	_____.
0110	646.2040 Marking Line Grooved Wet Ref Epoxy 6-Inch	90,735.000 LF	_____.	_____.
0112	646.4040 Marking Line Grooved Wet Ref Epoxy 10-Inch	155.000 LF	_____.	_____.
0114	646.6120 Marking Stop Line Epoxy 18-Inch	41.000 LF	_____.	_____.
0116	646.8120 Marking Curb Epoxy	20.000 LF	_____.	_____.
0118	650.5000 Construction Staking Base	589.000 LF	_____.	_____.
0120	650.5500 Construction Staking Curb Gutter and Curb & Gutter	114.000 LF	_____.	_____.
0122	650.8000 Construction Staking Resurfacing Reference	26,329.000 LF	_____.	_____.
0124	650.9911 Construction Staking Supplemental Control (project) 01. 9295-00-70	1.000 EACH	_____.	_____.



Proposal Schedule of Items

Page 5 of 5

Proposal ID: 20260113034 Project(s): 9295-00-70

Federal ID(s): WISC 2026155

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0126	650.9920 Construction Staking Slope Stakes	589.000 LF	_____.	_____.
0128	690.0150 Sawing Asphalt	1,079.000 LF	_____.	_____.
0130	740.0440 Incentive IRI Ride	21,950.000 DOL	1.00000	21,950.00
0132	ASP.1T0A On-the-Job Training Apprentice at \$5.00/HR	2,000.000 HRS	5.00000	10,000.00
0134	ASP.1T0G On-the-Job Training Graduate at \$5.00/HR	1,260.000 HRS	5.00000	6,300.00
0136	SPV.0090 Special 01. Concrete Curb & Gutter 24-Inch Type D	30.000 LF	_____.	_____.
0138	460.2000 Incentive Density HMA Pavement	2,340.000 DOL	1.00000	2,340.00
Section: 0001			Total:	_____.
			Total Bid:	_____.