



Wisconsin Department of Transportation

January 9, 2026

Division of Transportation Systems Development

Bureau of Project Development
4822 Madison Yards Way, 4th Floor South
Madison, WI 53705

Telephone: (608) 266-1631
Facsimile (FAX): (608) 266-8459

NOTICE TO ALL CONTRACTORS:

Proposal #53: 8907-00-73
T Bloomer, 205th Avenue
McCann Creek Bridge, B-09-0319
Local Street
Chippewa County

Letting of January 13, 2026

This is Addendum No. 01, which provides for the following:

Schedule of Items:

Added Bid Item Quantities					
Bid Item	Item Description	Unit	Proposal Total Prior to Addendum	Quantity Added	Proposal Total After Addendum
643.5000	Traffic Control	EA	0	1	1

Deleted Bid Item Quantities					
Bid Item	Item Description	Unit	Proposal Total Prior to Addendum	Proposal Quantity Change (-)	Proposal Total After Addendum
506.0105	Structural Steel Carbon	LB	540.00	-540.00	0

Plan Sheets:

Revised Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of changes to sheet)
40	Cross Section & Quantities (removed bid item 506.0105 Structural Steel Carbon from the Total Estimated Quantities table)

Schedule of Items

Attached, dated January 9, 2026, are the revised Schedule of Items Pages 1 – 5.

Plan Sheets

The following 8½ x 11-inch sheets are attached and made part of the plans for this proposal:

Revised: 40

The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.

Sincerely,


Mike Coleman

Proposal Development Specialist
Proposal Management Section


END OF ADDENDUM

GENERAL NOTES

- DRAWINGS SHALL NOT BE SCALED.
- BAR STEEL REINFORCEMENT SHALL BE EMBEDDED 2" CLEAR UNLESS OTHERWISE SHOWN OR NOTED.
- THE FIRST OR FIRST TWO DIGITS OF THE BAR MARK SIGNIFIES THE BAR SIZE.
- BEVEL EXPOSED EDGES OF CONCRETE 1/4", UNLESS OTHERWISE NOTED.
- THE UPPER LIMITS OF "EXCAVATION FOR STRUCTURES B-9-319" SHALL BE THE EXISTING GROUNDLINE.
- AT THE BACK FACE OF ABUTMENT ALL VOLUME WHICH CANNOT BE PLACED BEFORE ABUTMENT CONSTRUCTION AND IS NOT OCCUPIED BY THE NEW STRUCTURE SHALL BE BACKFILLED WITH STRUCTURE BACKFILL TYPE A.
- EXCAVATION BELOW THE ABUTMENT AND ABUTMENT BEDDING MATERIALS REQUIRES ENGINEER APPROVAL. GEOTEXTILE SHALL BE SET AT THE BOTTOM OF EXCAVATION AND EXTEND 2'-0" ABOVE BOTTOM OF ABUTMENT.
- THE QUANTITY FOR BACKFILL STRUCTURE IS CALCULATED BASED ON THE DETAIL SHOWN IN THE PLANS.
- THE SLOPE OF THE FILL IN FRONT OF THE ABUTMENTS SHALL BE COVERED WITH HEAVY RIPRAP AND GEOTEXTILE TYPE HR TO THE EXTENT SHOWN ON SHEET 1 AND THE ABUTMENT DETAILS.
- AT ABUTMENTS, CONCRETE POURED UNDER WATER WILL BE ALLOWED AND SHALL BE DONE IN ACCORDANCE WITH SECTION 502.3.5.3 OF THE STANDARD SPECIFICATIONS.
- SLAB FALSEWORK SHALL BE SUPPORTED ON PILES OR THE SUBSTRUCTURE UNLESS AN ALTERNATE METHOD IS APPROVED BY THE ENGINEER.
- PROTECTIVE SURFACE TREATMENT TO BE APPLIED TO ENTIRE EXPOSED TOP OF SLAB, INCLUDING THE SLAB EDGE AND 1'-0" UNDER THE SLAB, THE TOP AND EXTERIOR EXPOSED FACE OF WINGS AND FRONT FACE OF ABUTMENT TO 1'-0" PAST THE EDGE OF SLAB.




01/07/2026

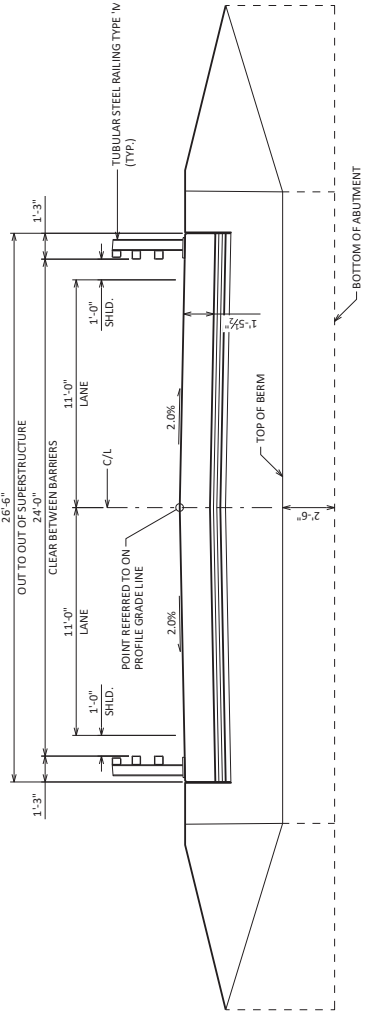


CROSS SECTION THRU ROADWAY

LOOKING UPSTATION
(PILING NOT SHOWN FOR CLARITY)

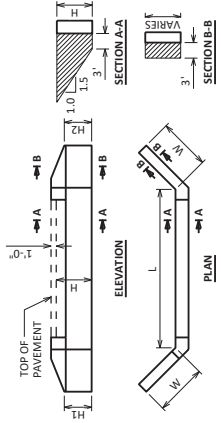


ABUTMENT BACKFILL DIAGRAM

- L = ABUTMENT BODY LENGTH AT BACKFACE (FT)
- H = AVERAGE ABUTMENT FILL HEIGHT (FT)
- H1 = WING 1 HEIGHT AT TIP (FT)
- H2 = WING 2 HEIGHT AT TIP (FT)
- W = WING LENGTH (FT)
- E_{EF} = EXPANSION FACTOR (1.20 FOR C/BID ITEMS AND 1.00 FOR TON BID ITEMS)
- V_c = (L/2)(H1+H2+H)(W)
- V_{conv} = V_c(EF/27)
- V_{conv} = V_c(2.0)

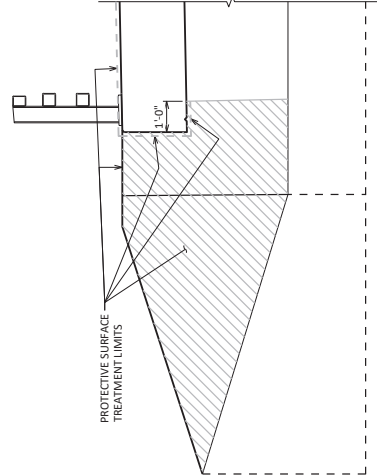

**PROTECTIVE SURFACE
TREATMENT DETAILS**

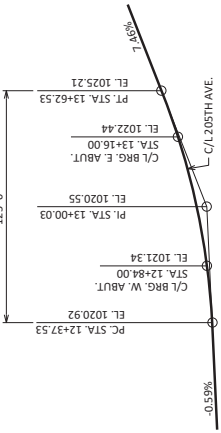

PROFILE GRADE LINE

TOTAL ESTIMATED QUANTITIES

BID ITEM NUMBER	BID ITEMS	UNIT	SUPER	WEST ABUT.	EAST ABUT.	TOTALS
203.0260	REMOVING STRUCTURE OVER WATERWAY WITH MINIMAL DEBRIS P-9-107	EACH	---	---	---	1
206.1001	EXCAVATION FOR STRUCTURES BRIDGES B-9-319	EACH	---	---	---	1
210.1500	BACKFILL STRUCTURE TYPE A	TON	---	135	135	270
502.0100	CONCRETE MASONRY BRIDGES	CY	53	25	25	103
502.3200	PROTECTIVE SURFACE TREATMENT	SY	118	14	14	146
505.0000	BAR STEEL REINFORCEMENT HS STRUCTURES	LB	1,980	1,980	1,980	3,960
505.0000	BAR STEEL REINFORCEMENT HS COATED STRUCTURES	LB	11,500	1,480	1,480	13,540
513.0001	STRUCTURAL STEEL CARBON RAILING TUBULAR TYPE M	LF	74	---	---	74
513.0061	RAILING TUBULAR TYPE M	LF	74	---	---	74
516.0500	RUBBERIZED MEMBRANE WATERPROOFING	SY	---	5	5	10
526.0101	TEMPORARY STRUCTURE 101+60	EACH	---	---	---	1
550.2104	PILING CIP CONCRETE 10 3/4 X 0.25-INCH	LF	---	245	245	490
606.0300	RIPPRAP HEAVY	CY	---	57	66	123
612.0006	PIPE UNDERDRAIN WRAPPED 6-INCH	LF	---	69	69	138
645.0111	GEOTEXTILE TYPE DF SCHEDULE A	SY	---	42	42	84
645.0120	GEOTEXTILE TYPE HR	SY	---	85	100	185
SPV.0090	FLASHING STAINLESS STEEL	LF	59	---	---	59
NON-BID ITEMS						
FILLER		SIZE	---	---	---	1/2", 3/4"

THIS SHEET WAS CREATED BY THE WISDOT BUREAU OF STRUCTURES STANDARD BRIDGE DESIGN TOOL VERSION 1.1.0.0


Addendum No. 01
ID 8907-00-73
Revised Sheet 40
January 9, 2026

TYPICAL SECTION THRU ABUTMENT

- ▲ BACKFILL PAY LIMITS: BACKFILL BEYOND PAY LIMITS SHALL BE INCIDENTAL TO EXCAVATION FOR STRUCTURES. LIMITS OF EXCAVATION SHALL BE DETERMINED BY THE CONTRACTOR.
- PIPE UNDERDRAIN WRAPPED (6-INCH), SLOPE 0.5% MIN. TO SUITABLE DRAINAGE. ATTACH RODENT SHIELD AT ENDS OF PIPE UNDERDRAIN. PLACE DISCHARGE AT EL. 1013.647.

RODENT SHIELD DETAIL

- * DIMENSIONS ARE APPROXIMATE. THE GRATE IS SIZED TO FIT INTO A PIPE COUPLING. ORIENT SO SLOTS ARE VERTICAL.
- THE RODENT SHIELD, PIPE COUPLING AND SCREWS SHALL BE CONSIDERED INCIDENTAL TO THE BID ITEM "PIPE UNDERDRAIN WRAPPED 6-INCH".
- THE RODENT SHIELD SHALL BE A PVC GRATE SIMILAR TO THIS DETAIL. THE GRATE IS COMMERCIALY AVAILABLE AS A FLOOR STRAINER. A PIPE COUPLING IS REQUIRED FOR THE ATTACHMENT OF THIS SHIELD TO THE EXPOSED END OF UNDERDRAIN. THE SHIELD SHALL BE 1.5" DEEPER THAN THE UNDERDRAIN WITH TWO OR MORE NO. 10 X 3-INCH STAINLESS STEEL SHEET METAL SCREWS.



NO.	DATE	REVISION	BY
1	1/7/26	REMOVE BID ITEM 506.0105	TAB

STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION	
STRUCTURE	B-9-319
DESIGN BY	WBS/VCH
DATE	1/7/26
CROSS SECTION & QUANTITIES	SHEET 2
40	



Proposal Schedule of Items

Page 1 of 5

Proposal ID: 20260113053 Project(s): 8907-00-73

Federal ID(s): N/A

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0002	201.0105 Clearing	6.000 STA	_____.	_____.
0004	201.0205 Grubbing	2.000 STA	_____.	_____.
0006	203.0260 Removing Structure Over Waterway Minimal Debris (structure) 01. P-09-107	1.000 EACH	_____.	_____.
0008	204.0170 Removing Fence	403.000 LF	_____.	_____.
0010	205.0100 Excavation Common	1,655.000 CY	_____.	_____.
0012	205.0506.S Excavation, Hauling, and Disposal of Creosote Contaminated Soil	30.000 TON	_____.	_____.
0014	206.1001 Excavation for Structures Bridges (structure) 01. B-09-139	1.000 EACH	_____.	_____.
0016	208.0100 Borrow	1,562.000 CY	_____.	_____.
0018	210.1500 Backfill Structure Type A	270.000 TON	_____.	_____.
0020	213.0100 Finishing Roadway (project) 01. 8907- 00-73	1.000 EACH	_____.	_____.
0022	305.0110 Base Aggregate Dense 3/4-Inch	12.000 TON	_____.	_____.
0024	305.0120 Base Aggregate Dense 1 1/4-Inch	385.000 TON	_____.	_____.
0026	455.0605 Tack Coat	12.000 GAL	_____.	_____.
0028	465.0105 Asphaltic Surface	46.000 TON	_____.	_____.
0030	502.0100 Concrete Masonry Bridges	103.000 CY	_____.	_____.



Proposal Schedule of Items

Page 2 of 5

Proposal ID: 20260113053 Project(s): 8907-00-73

Federal ID(s): N/A

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0032	502.3200 Protective Surface Treatment	146.000 SY	_____.	_____.
0034	505.0400 Bar Steel Reinforcement HS Structures	3,960.000 LB	_____.	_____.
0036	505.0600 Bar Steel Reinforcement HS Coated Structures	14,540.000 LB	_____.	_____.
0040	513.4061 Railing Tubular Type M	74.000 LF	_____.	_____.
0042	516.0500 Rubberized Membrane Waterproofing	10.000 SY	_____.	_____.
0044	520.2012 Culvert Pipe Temporary 12-Inch	54.000 LF	_____.	_____.
0046	526.0101 Temporary Structure (station) 01. 102+00	1.000 EACH	_____.	_____.
0048	550.2104 Piling CIP Concrete 10 3/4 X 0.25-Inch	490.000 LF	_____.	_____.
0050	606.0200 Riprap Medium	2.000 CY	_____.	_____.
0052	606.0300 Riprap Heavy	123.000 CY	_____.	_____.
0054	612.0406 Pipe Underdrain Wrapped 6-Inch	138.000 LF	_____.	_____.
0056	616.0100 Fence Woven Wire (height) 01. 4-Foot	403.000 LF	_____.	_____.
0058	618.0100 Maintenance and Repair of Haul Roads (project) 01. 8907-00-73	1.000 EACH	_____.	_____.
0060	619.1000 Mobilization	1.000 EACH	_____.	_____.
0062	624.0100 Water	6.100 MGAL	_____.	_____.



Proposal Schedule of Items

Page 3 of 5

Proposal ID: 20260113053 Project(s): 8907-00-73

Federal ID(s): N/A

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0064	625.0100 Topsoil	1,912.000 SY	_____.	_____.
0066	625.0500 Salvaged Topsoil	223.000 SY	_____.	_____.
0068	627.0200 Mulching	935.000 SY	_____.	_____.
0070	628.1504 Silt Fence	621.000 LF	_____.	_____.
0072	628.1520 Silt Fence Maintenance	621.000 LF	_____.	_____.
0074	628.1905 Mobilizations Erosion Control	6.000 EACH	_____.	_____.
0076	628.1910 Mobilizations Emergency Erosion Control	3.000 EACH	_____.	_____.
0078	628.2008 Erosion Mat Urban Class I Type B	202.000 SY	_____.	_____.
0080	628.2023 Erosion Mat Class II Type B	226.000 SY	_____.	_____.
0082	628.6005 Turbidity Barriers	320.000 SY	_____.	_____.
0084	628.7504 Temporary Ditch Checks	60.000 LF	_____.	_____.
0086	628.7555 Culvert Pipe Checks	8.000 EACH	_____.	_____.
0088	629.0210 Fertilizer Type B	0.300 CWT	_____.	_____.
0090	630.0175 Seeding Mixture No. 75	1.700 LB	_____.	_____.
0092	630.0200 Seeding Temporary	6.600 LB	_____.	_____.
0094	630.0300 Seeding Borrow Pit	5.000 LB	_____.	_____.



Proposal Schedule of Items

Page 4 of 5

Proposal ID: 20260113053 Project(s): 8907-00-73

Federal ID(s): N/A

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0096	630.0400 Seeding Nurse Crop	1.900 LB	_____.	_____.
0098	630.0500 Seed Water	95.000 MGAL	_____.	_____.
0100	634.0616 Posts Wood 4x6-Inch X 16-FT	4.000 EACH	_____.	_____.
0102	637.2230 Signs Type II Reflective F	12.000 SF	_____.	_____.
0104	638.2602 Removing Signs Type II	4.000 EACH	_____.	_____.
0106	638.3000 Removing Small Sign Supports	4.000 EACH	_____.	_____.
0108	642.5001 Field Office Type B	1.000 EACH	_____.	_____.
0110	643.0300 Traffic Control Drums	1,660.000 DAY	_____.	_____.
0112	643.0420 Traffic Control Barricades Type III	1,320.000 DAY	_____.	_____.
0114	643.0705 Traffic Control Warning Lights Type A	2,640.000 DAY	_____.	_____.
0116	643.0715 Traffic Control Warning Lights Type C	858.000 DAY	_____.	_____.
0118	643.0900 Traffic Control Signs	2,152.000 DAY	_____.	_____.
0120	643.1070 Traffic Control Cones 42-Inch	1,188.000 DAY	_____.	_____.
0122	645.0105 Geotextile Type C	1,334.000 SY	_____.	_____.
0124	645.0111 Geotextile Type DF Schedule A	84.000 SY	_____.	_____.
0126	645.0120 Geotextile Type HR	185.000 SY	_____.	_____.



Proposal Schedule of Items

Page 5 of 5

Proposal ID: 20260113053 Project(s): 8907-00-73

Federal ID(s): N/A

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0128	650.4500 Construction Staking Subgrade	388.000 LF	_____.	_____.
0130	650.5000 Construction Staking Base	388.000 LF	_____.	_____.
0132	650.6000 Construction Staking Pipe Culverts	1.000 EACH	_____.	_____.
0134	650.6501 Construction Staking Structure Layout (structure) 01. B-09-319	1.000 EACH	_____.	_____.
0136	650.9911 Construction Staking Supplemental Control (project) 01. 8907-00-73	1.000 EACH	_____.	_____.
0138	650.9920 Construction Staking Slope Stakes	388.000 LF	_____.	_____.
0140	690.0150 Sawing Asphalt	40.000 LF	_____.	_____.
0142	715.0502 Incentive Strength Concrete Structures	618.000 DOL	1.00000	618.00
0144	999.2000.S Installing and Maintaining Bird Deterrent System (station) 01. STA 13+00	1.000 EACH	_____.	_____.
0146	SPV.0060 Special 01. Salvage and Reinstall Signs	1.000 EACH	_____.	_____.
0148	SPV.0090 Special 01. Flashing Stainless Steel	59.000 LF	_____.	_____.
0150	643.5000 Traffic Control	1.000 EACH	_____.	_____.
Section: 0001			Total:	_____.
			Total Bid:	_____.