

GENERAL NOTES

THE LOCATIONS OF EXISTING AND PROPOSED UTILITY INSTALLATIONS AS SHOWN ON THE PLANS ARE APPROXIMATE. THERE MAY BE OTHER UTILITY INSTALLATIONS WITHIN THE PROJECT AREA THAT ARE NOT SHOWN.

RIGHT OF WAY LINES SHOWN ON THE CROSS SECTIONS ARE APPROXIMATE.

CONTRACTOR WILL BE RESPONSIBLE FOR RESHAPING AND SEEDING ANY PREVIOUSLY GRASSED AREAS WHICH ARE DISTURBED BY HIS OPERATION OUTSIDE OF THE NORMAL CONSTRUCTION LIMITS.

NO TREES OR SHRUBS ARE TO BE REMOVED WITHOUT APPROVAL OF THE ENGINEER

ORDER OF SECTION 2 SHEETS

- GENERAL NOTES
- TYPICAL SECTIONS
- CONSTRUCTION DETAILS
- DETOURS

UTILITY CONTACTS

COMMUNICATION

AT&T WISCONSIN
RICK PODOLAK
304 S DEWEY ST
EAU CLAIRE, WI 54701
PHONE: (715) 839-5565
EMAIL: RP4514@ATT.COM

SPECTRUM
ALAN ZARECKI
1201 MCCANN DR
ALTOONA, WI 54720
PHONE: (715) 214-1175
EMAIL: CHTR_WI_CONST@CHARTER.COM

WATER

CITY OF MENOMONIE
JEREMY HOYT
800 WILSON AVE
MENOMONIE, WI 54751
PHONE: (715) 232-2207
EMAIL: JHOYT@MENOMONIE-WI.GOV

ELECTRICITY

XCEL ENERGY
MEGAN BOLDIG
14104 W HAMILTON AVENUE
P.O. BOX 8
EAU CLAIRE, WI 54702
PHONE: (715) 232-7412
EMAIL: MEGAN.N.BOLDIG@XCELENERGY.COM

GAS/PETROLEUM

XCEL ENERGY
BRIAN MELLO
2001 OLD HWY 35 S
HUDSON, WI 54016
PHONE: (715) 377-1810
EMAIL: BRIAN.M.MELLO@XCELENERGY.COM

DNR LIAISON

WISDOT REGIONAL DNR LIAISON
LEAH NICOL
1300 WEST CLAIREMONT AVENUE
EAU CLAIRE, WI 54701
PHONE: (715) 934-9014
EMAIL: LEAH.NICOL@WISCONSIN.GOV

CONSULTANT CONTACT

CORRE, INC.
KEVIN MEYER, PE
1802 WARDEN STREET
EAU CLAIRE, WI 54703
PHONE: (608) 828-1011
EMAIL: KMEYER@CORREINC.COM

DIGGERSHOTLINE


Dial 811 or (800)242-8511

www.DiggersHotline.com

RUNOFF COEFFICIENT TABLE


	HYDROLOGIC SOIL GROUP											
	A			B			C			D		
	SLOPE RANGE (PERCENT)			SLOPE RANGE (PERCENT)			SLOPE RANGE (PERCENT)			SLOPE RANGE (PERCENT)		
LAND USE:	0-2	2-6	6 & OVER	0-2	2-6	6 & OVER	0-2	2-6	6 & OVER	0-2	2-6	6 & OVER
ROW CROPS	.08 .22	.16 .30	.22 .38	.12 .26	.20 .34	.27 .44	.15 .30	.24 .37	.33 .50	.19 .34	.28 .41	.38 .56
MEDIAN STRIP- TURF	.19 .24	.20 .26	.24 .30	.19 .25	.22 .28	.26 .33	.20 .26	.23 .30	.30 .37	.20 .27	.25 .32	.30 .40
SIDE SLOPE- TURF			.25 .32			.27 .34			.28 .36			.30 .38
PAVEMENT:												
ASPHALT						.70 - .95						
CONCRETE						.80 - .95						
BRICK						.70 - .80						
DRIVES, WALKS						.75 - .85						
ROOFS						.75 - .95						
GRAVEL ROADS, SHOULDERS						.40 - .60						

TOTAL PROJECT AREA = 2.59 ACRES
TOTAL AREA EXPECTED TO BE DISTURBED BY CONSTRUCTION ACTIVITIES = 0 ACRES




EXISTING TYPICAL SECTION

STA 675+45
STA 678+95



PROJECT NO: 7610-00-77	HWY: STH 29	COUNTY: DUNN	ADVANCED WARNING SIGNING	SHEET	E
------------------------	-------------	--------------	--------------------------	-------	---



TRAFFIC CONTROL NOTES

TRAFFIC CONTROL DEVICES SHALL BE ADJUSTED TO FIT FIELD CONDITIONS AS DIRECTED BY THE ENGINEER.

THE EXACT NUMBER, LOCATION, AND SPACING OF ALL SIGNS AND DEVICES SHALL BE ADJUSTED TO FIT FIELD CONDITIONS AS APPROVED BY THE ENGINEER.

THE SPACING BETWEEN SIGNS SHOULD BE ADJUSTED TO NOT CONFLICT WITH AND TO PROVIDE A MINIMUM OF 200 FT (500 FT DESIRABLE) DISTANCE TO EXISTING SIGNS.

ALL SIGNS ARE 48"X48" UNLESS OTHERWISE NOTED IN THE PLANS.

"WO" IS THE SAME AS "W" EXCEPT THE BACKGROUND IS ORANGE.

ALL SIGNS, TEMPORARY OR EXISTING, WHICH CONFLICT WITH TRAFFIC CONTROL "IN USE" SHALL BE REMOVED OR COVERED AS NEEDED AND AS APPROVED BY THE ENGINEER.

ALL EXISTING CONFLICTING PAVEMENT MARKING SHOULD BE REMOVED.

DRIVEWAY ASSISTANCE DEVICE SHALL BE CONTROLLED BY THE TEMPORARY TRAFFIC SIGNAL CONTROLLER VIA WIRELESS OR HARD WIRE INTERCONNECT.

DURING TRAFFIC SIGNAL EMERGENCY FLASH, THE DRIVEWAY ASSISTANCE DEVICE SHALL FLASH RED.

CONTRACTOR SHALL CONDUCT AN EDUCATION SESSION WITH PROPERTY OWNERS WITHIN 7 DAYS PRIOR TO IMPLEMENTING ALTERNATING OPERATION. THE CONTRACTOR SHALL HAVE A REPRESENTATIVE AT EACH DRIVEWAY FOR THE FIRST 12 HOURS OF OPERATION TO ANSWER QUESTIONS OF PROPERTY OWNERS.


TEMPORARY TRAFFIC SIGNAL SHALL OPERATION PRE-TIMED UNLESS VEHICLE DETECTION IS PROVIDED AT EACH APPROACH AND DRIVEWAY.

EACH DRIVEWAY ASSISTANCE DEVICE MUST HAVE ONE SIGNAL HEAD CONSISTING OF THREE LED INDICATIONS AS FOLLOWS; ONE 12 IN. DIAMETER STEADY RED BALL INDICATION CENTERED OVER ONE 12 IN. DIAMETER YELLOW FLASHING LEFT ARROW AND ONE 12 IN. DIAMETER YELLOW FLASHING RIGHT ARROW.

TEMPORARY TRAFFIC SIGNAL TIMINGS


INTERVAL	PHASE TIME (SECONDS)	CUMULATIVE TIME (SECONDS)	PHASE 1 EB STH 29	PHASE 2 SB DRIVEWAY	PHASE 3 WB STH 29	PHASE 4 NB DRIVEWAY
1	38	38	GREEN	FYA (L)	RED	FYA (R)
2	4	42	YELLOW	FYA (L)	RED	FYA (R)
3	18	60	RED	RED	RED	RED
1	38	98	RED	FYA (R)	GREEN	FYA (L)
2	4	102	RED	FYA (R)	YELLOW	FYA (L)
3	18	120	RED	RED	RED	RED



FYA (L) - FLASHING YELLOW ARROW, LEFT
FYA (R) - FLASHING YELLOW ARROW, RIGHT





DRIVEWAY ASSISTANCE DEVICE THREE HEAD DEVICE
ELEVATION VIEW


TEMPORARY TRAFFIC SIGNAL PHASING



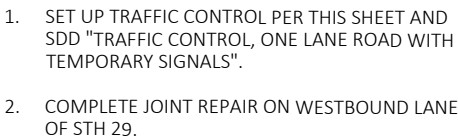



TEMPORARY TRAFFIC SIGNAL TIMING (PRE-TIMED SETTINGS)					
DRY RUN RD		SB		NB	
PHASE 1 (SECS)		PHASE 2 (SECS)		PHASE 3 (SECS)	
GREEN		RED		RED	
YELLOW		RED		RED	
RED		RED		RED	
RED		GREEN		RED	
RED		YELLOW		RED	
RED		RED		RED	
RED		RED		GREEN	
RED		RED		YELLOW	
RED		RED		RED	



TEMPORARY TRAFFIC SIGNAL TIMING (PRE-TIMED SETTINGS)					
DRY RUN RD		SB		NB	
PHASE 1 (SECS)		PHASE 2 (SECS)		PHASE 3 (SECS)	
GREEN		RED		RED	
YELLOW		RED		RED	
RED		RED		RED	
RED		GREEN		RED	
RED		YELLOW		RED	
RED		RED		RED	
RED		RED		GREEN	
RED		RED		YELLOW	
RED		RED		RED	

EXACT NUMBER, LOCATION AND SPACING OF SIGNS AND DEVICES
MAY BE ADJUSTED TO FIT FIELD CONDITIONS AS DIRECTED BY THE
ENGINEER.


	TYPE III BARRICADE
	TYPE III BARRICADE WITH ATTACHED SIGN
	SIGN ON TEMPORARY SUPPORT
	SIGN ON EXISTING SUPPORT
	WORK ZONE
	DIRECTION OF TRAFFIC
	SIGN NUMBER
	DETOUR ROUTE



N

PROJECT NO: 7610-00-77	HWY: STH 29	COUNTY: DUNN	DETOURS	SHEET	E
------------------------	-------------	--------------	---------	-------	---

WISDOT/CADDS SHEET 42



Estimate Of Quantities

7610-00-77

Line	Item	Item Description	Unit	Total	Qty
0002	213.0100	Finishing Roadway (project) 01. 7610-00-77	EACH	1.000	1.000
0004	502.3101	Expansion Device	LF	77.000	77.000
0006	502.3200	Protective Surface Treatment	SY	35.000	35.000
0008	502.3210	Pigmented Surface Sealer	SY	4.000	4.000
0010	502.4205	Adhesive Anchors No. 5 Bar	EACH	80.000	80.000
0012	505.0600	Bar Steel Reinforcement HS Coated Structures	LB	2,210.000	2,210.000
0014	505.0904	Bar Couplers No. 4	EACH	26.000	26.000
0016	505.0905	Bar Couplers No. 5	EACH	6.000	6.000
0018	505.0906	Bar Couplers No. 6	EACH	10.000	10.000
0020	509.1000	Joint Repair	SY	37.000	37.000
0022	509.1500	Concrete Surface Repair	SF	45.000	45.000
0024	509.2100.S	Concrete Masonry Deck Repair	CY	14.000	14.000
0026	517.0901.S	Preparation and Coating of Top Flanges (structure) 01. B-17-0005	EACH	1.000	1.000
0028	517.3001.S	Structure Overcoating Cleaning and Priming (structure) 01. B-17-0005	EACH	1.000	1.000
0030	517.4001.S	Containment and Collection of Waste Materials (structure) 01. B-17-0005	EACH	1.000	1.000
0032	517.6001.S	Portable Decontamination Facility	EACH	1.000	1.000
0034	603.8000	Concrete Barrier Temporary Precast Delivered	LF	650.000	650.000
0036	603.8125	Concrete Barrier Temporary Precast Installed	LF	1,287.500	1,287.500
0038	603.8500	Anchoring Concrete Barrier Temporary Precast	LF	587.500	587.500
0040	614.0905	Crash Cushions Temporary	EACH	4.000	4.000
0042	618.0100	Maintenance and Repair of Haul Roads (project) 01. 7610-00-77	EACH	1.000	1.000
0044	619.1000	Mobilization	EACH	1.000	1.000
0046	642.5001	Field Office Type B	EACH	1.000	1.000
0048	643.0300	Traffic Control Drums	DAY	1,750.000	1,750.000
0050	643.0420	Traffic Control Barricades Type III	DAY	1,306.000	1,306.000
0052	643.0705	Traffic Control Warning Lights Type A	DAY	1,386.000	1,386.000
0054	643.0715	Traffic Control Warning Lights Type C	DAY	839.000	839.000
0056	643.0900	Traffic Control Signs	DAY	3,889.000	3,889.000
0058	643.3180	Temporary Marking Line Removable Tape 6-Inch	LF	2,320.000	2,320.000
0060	643.3850	Temporary Marking Stop Line Removable Tape 18-Inch	LF	61.000	61.000
0062	643.5000	Traffic Control	EACH	1.000	1.000
0064	644.1601	Temporary Pedestrian Curb Ramp	DAY	31.000	31.000
0066	644.1810	Temporary Pedestrian Barricade	LF	981.000	981.000
0068	645.0120	Geotextile Type HR	SY	80.000	80.000
0070	646.2020	Marking Line Epoxy 6-Inch	LF	1,740.000	1,740.000
0072	646.9000	Marking Removal Line 4-Inch	LF	1,740.000	1,740.000
0074	650.9911	Construction Staking Supplemental Control (project) 01. 7610-00-77	EACH	1.000	1.000
0076	661.0101	Temporary Traffic Signals for Bridges (structure) 01. B-17-0005	EACH	1.000	1.000
0078	999.2000.S	Installing and Maintaining Bird Deterrent System (station) 01. 677+50	EACH	1.000	1.000
0080	ASP.1T0A	On-the-Job Training Apprentice at \$5.00/HR	HRS	300.000	300.000
0082	ASP.1T0G	On-the-Job Training Graduate at \$5.00/HR	HRS	300.000	300.000
0084	SPV.0035	Special 01. Partially Grouted Riprap	CY	40.000	40.000
0086	SPV.0045	Special 01. Driveway Assistance Device System	DAY	126.000	126.000
0088	SPV.0180	Special 01. Abutment Seat Cleaning and Sealing	SY	22.000	22.000


	603.8000 CONCRETE BARRIER TEMPORARY PRECAST DELIVERED	603.8125 CONCRETE BARRIER TEMPORARY PRECAST INSTALLED	603.8500 ANCHORING CONCRETE BARRIER TEMPORARY PRECAST	614.0905 CRASH CUSHIONS TEMPORARY	BACK WIDTH	OBJECT MARKING PATTERN	CRASH TEST LEVEL	TRAFFIC DIRECTION	TRAFFIC LOCATION	CRASH CUSHION SHIELDS	REMARKS
LOCATION	LF	LF	LF	EACH	FT						
PROJECT	650	650	300	2	2	M-3R (W5-58F	TL-3	NIDIRECTIONA	RT	TEMPORARY BARRIER	STAGE 1
PROJECT	-	637.5	287.5	2	2	M-3R (W5-58F	TL-3	NIDIRECTIONA	RT	TEMPORARY BARRIER	STAGE 2 & 3
TOTAL 0010	650.0	1,287.5	587.5	4							

CATEGORY	LOCATION	DAYS	643.0300 TRAFFIC CONTROL DRUMS		643.0420 BARRICADES TYPE III		643.0705 WARNING LIGHTS TYPE A		643.0715 WARNING LIGHTS TYPE C		643.0900 TRAFFIC CONTROL SIGNS		SPV.0045.01 DEVICE SYSTEM	
			EACH	DAY	EACH	DAY	EACH	DAY	EACH	DAY	EACH	DAY	EACH	DAY
0010	PROJECT	20	23	460	16	320	18	360	14	280	43	860	-	-
0010	PROJECT	20	30	600	20	400	18	360	13	260	43	860	-	-
0010	PROJECT	23	30	690	20	460	18	414	13	299	45	1,035	-	-
0010	PROJECT	63	-	-	2	126	4	252	-	-	18	1,134	2	126
TOTAL 0010			1,750		1,306		1,386		839		3,889		126	



CATEGORY	LOCATION	644.1601 TEMPORARY PEDESTRIAN CURB RAMP		644.1810 TEMPORARY PEDESTRIAN BARRICADE		REMARKS
		DAY	LF	DAY	LF	
0010	PROJECT	-	464			STAGE 2
0010	PROJECT	31	517			STAGE 3
TOTAL 0010		31	981			

CATEGORY	LOCATION	643.3180 TEMPORARY MARKING LINE REMOVABLE TAPE 6- INCH	643.3850 TEMPORARY MARKING STOP LINE REMOVABLE TAPE 18-INCH	646.2020 MARKING LINE EPOXY 6-INCH	646.9000 MARKING REMOVAL LINE 4- INCH	REMARKS
		LF	LF	LF	LF	
0010	PROJECT	1,110	61	-	1,740	STAGE 1
0010	PROJECT	1,210	-	-	-	STAGE 2
0010	PROJECT	-	-	1,740	-	POST CONSTRUCTION
TOTAL 0010		2,320	61	1,740	1,740	

BENCHMARK TABLE					
BENCHMARK	STATION	OFFSET	Y	X	ELEV
2	675+43.61	-18.053	170334.610	158614.601	793.04
3	678+92.31	-17.600	170259.100	158955.033	794.80




PROJECT NO: 7610-00-77	HWY: STH 29	COUNTY: DUNN	PLAN SHEETS	SHEET	E
------------------------	-------------	--------------	-------------	-------	---



PROJECT NO: 7610-00-77	HWY: STH 29	COUNTY: DUNN	PLAN SHEETS	SHEET	E
------------------------	-------------	--------------	-------------	-------	---

Standard Detail Drawing List

09G02-05A	BRIDGE TEMPORARY TRAFFIC SIGNAL INSTALLATION
09G02-05B	BRIDGE TEMPORARY TRAFFIC SIGNAL INSTALLATION
09G02-05C	BRIDGE TEMPORARY TRAFFIC SIGNAL INSTALLATION
14B07-16A	CONCRETE BARRIER TEMPORARY PRECAST, 12'-6"
14B07-16B	CONCRETE BARRIER TEMPORARY PRECAST, 12'-6"
14B07-16C	CONCRETE BARRIER TEMPORARY PRECAST, 12'-6"
14B07-16D	CONCRETE BARRIER TEMPORARY PRECAST, 12'-6"
14B07-16E	CONCRETE BARRIER TEMPORARY PRECAST, 12'-6"
14B07-16F	CONCRETE BARRIER TEMPORARY PRECAST, 12'-6"
14B07-16G	CONCRETE BARRIER TEMPORARY PRECAST, 12'-6"
14B07-16H	CONCRETE BARRIER TEMPORARY PRECAST, 12'-6"
14B07-16I	CONCRETE BARRIER TEMPORARY PRECAST, 12'-6"
14B07-16J	CONCRETE BARRIER TEMPORARY PRECAST, 12'-6"
14B07-16K	CONCRETE BARRIER TEMPORARY PRECAST, 12'-6"
14B07-16L	CONCRETE BARRIER TEMPORARY PRECAST, 12'-6"
14B07-16M	CONCRETE BARRIER TEMPORARY PRECAST, 12'-6"
14B07-16N	CONCRETE BARRIER TEMPORARY PRECAST, 12'-6"
14B08-02A	CRASH CUSHION/SAND BARREL ARRAY AND OTHER TEMPORARY BARRIER LAYOUT DETAILS
14B08-02B	CRASH CUSHION/SAND BARREL ARRAY AND OTHER TEMPORARY BARRIER LAYOUT DETAILS
14B08-02C	CRASH CUSHION/SAND BARREL ARRAY AND OTHER TEMPORARY BARRIER LAYOUT DETAILS
14B08-02D	CRASH CUSHION/SAND BARREL ARRAY AND OTHER TEMPORARY BARRIER LAYOUT DETAILS
14B08-02E	CRASH CUSHION/SAND BARREL ARRAY AND OTHER TEMPORARY BARRIER LAYOUT DETAILS
15C02-09A	BARRICADES AND SIGNS FOR MAINLINE CLOSURES
15C02-09B	BARRICADES AND SIGNS FOR VARIOUS CLOSURES
15C02-09C	DETOUR SIGNING FOR MAINLINE CLOSURES
15C02-09F	ADVANCED WIDTH RESTRICTION SIGNING
15C08-24A	PERMANENT LONGITUDINAL PAVEMENT MARKINGS
15C08-24B	TEMPORARY LONGITUDINAL PAVEMENT MARKING
15D30-11A	TRAFFIC CONTROL, PEDESTRIAN ACCOMMODATION
15D30-11B	TRAFFIC CONTROL, PEDESTRIAN ACCOMMODATION
15D30-11C	TRAFFIC CONTROL, PEDESTRIAN ACCOMMODATION
15D30-11H	TRAFFIC CONTROL, PEDESTRIAN ACCOMMODATION
15D33-09	TRAFFIC CONTROL, ONE LANE ROAD WITH TEMPORARY SIGNALS



TYPICAL BRIDGE TEMPORARY TRAFFIC SIGNAL LOCATION

LEGEND

- WOOD POLE (NON-BREAKAWAY)
- WOOD POST (BREAKAWAY)
- SIGNAL CABLE
- SIGNAL CABLE W/MESSENGER
- DIRECTION OF TRAFFIC
- LED TRAFFIC SIGNAL WITH BACKPLATE

GENERAL NOTES

DETAILS OF CONSTRUCTION, MATERIALS AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE CONTRACT.

POLE MOUNTED TRAFFIC SIGNAL CONTROL CABINET MAY BE MOUNTED ON THE SERVICE POLE IF THE ELECTRICAL UTILITY ALLOWS THE INSTALLATION.

WHEN UTILITY POLES ARE USED TO SPAN THE TEMPORARY OVERHEAD CABLE, WRITTEN PERMISSION MUST BE OBTAINED FROM THE OWNER OF THE POLES AND GIVEN TO THE PROJECT MANAGER. ALL PERTINENT UTILITY AND CODE CLEARANCES SHALL BE MAINTAINED.

WOOD POLES (NON-BREAKAWAY) SHALL BE NO CLOSER TO EDGE OF PAVEMENT THAN OFFSET DISTANCE CHART ALLOWS OR 4 FEET BEHIND PROTECTIVE BARRIER (BEAM GUARD, ETC.).


WOOD POSTS (BREAKAWAY) SHALL BE NO CLOSER THAN 2 FEET OUTSIDE OF SHOULDER.

VERTICAL CLEARANCE ETC. PER NEC.


TRAFFIC SIGNAL FACES SHALL BE TYPICALLY PLACED 12 FEET FROM EDGE OF PAVEMENT.

EACH TRAFFIC SIGNAL SHALL HAVE A BACKPLATE.


SIGNING, PAVEMENT MARKING AND LANE CONTROL REQUIREMENTS SHALL CONFORM TO STANDARD DETAIL DRAWING 15D33.



TYPICAL DROP TO TRAFFIC SIGNAL FACE



POLE MOUNT CABINET INSTALLATION



GROUND MOUNT CABINET INSTALLATION

MINIMUM POLE LENGTHS	CLASS	POLE BURIAL DEPTHS
25'	V	5'
30'	V	6'
35'	IV	7'
40'	IV	8'
45'	IV	9'


OFFSET DISTANCES FOR TEMPORARY NON-BREAKAWAY POLES	
SPEED LIMIT	OFFSET DISTANCE*
GREATER THAN 45 MPH	18 FT
45 MPH OR LESS	12 FT
45 MPH OR LESS W/CURBS	2 FT

* NOTE: OFFSET MEASURED FROM OUTER EDGE OF OUTSIDE THRU LANE.

BRIDGE TEMPORARY TRAFFIC SIGNAL INSTALLATION

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
March 2018 /S/ Ahmet Demirbilek
DATE ROADWAY STANDARDS DEVELOPMENT
FHWA ENGINEER




GENERAL NOTES

USE 3/4" DRILL IN WOOD POLE TO PROVIDE FOR 5/8" BOLTS.

TYPICAL DEAD-ENDINGS OR GUYING

BRIDGE TEMPORARY TRAFFIC SIGNAL INSTALLATION	
STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION	
APPROVED June 2015 DATE	/S/ Ahmet Demerbilek ROADWAY STANDARDS DEVELOPMENT ENGINEER
FHWA	




TRAILER MOUNTED TRAFFIC SIGNAL

GENERAL NOTES

DETAIL OF CONSTRUCTION, MATERIALS AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE CONTRACT.

SIGNING, PAVEMENT MARKING AND LANE CONTROL REQUIREMENTS SHALL CONFORM TO STANDARD DETAIL DRAWING 15D33.



TYPICAL TRAILER MOUNTED TRAFFIC SIGNAL LOCATION


LEGEND

- POST MOUNTED SIGN
- TEMPORARY PRECAST CONCRETE BARRIER
- TRAILER MOUNTED TRAFFIC SIGNAL
- REMOVE PAVEMENT MARKINGS
- DIRECTION OF TRAFFIC


BRIDGE TEMPORARY TRAFFIC SIGNAL INSTALLATION

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION



APPROVED
June 2015
DATE /S/ Ahmet Demerbilek
ROADWAY STANDARDS DEVELOPMENT
ENGINEER
FHWA




CROSS SECTION




ANCHOR BLOCK
DETAIL




PROFILE VIEW



PLAN VIEW
TEMPORARY BARRIER



LIFTING SLOT DETAIL
(TYP.)




PROFILE VIEW
TEMPORARY BARRIER REINFORCEMENT

GENERAL NOTES

PLACE BARRIER ON PAVED SURFACE. BEFORE PLACEMENT OF TEMPORARY BARRIER, REMOVE ALL LOOSE MATERIAL FROM PAVED SURFACE.


LOOP BARS C1, C2 AND C3 ARE NOT FOR PLACEMENT OR MOVEMENT OF BARRIER.

- 100 PERMANENTLY FORM INTO ONE END OF BARRIER THE FOLLOWING INFORMATION:
 - A. TYPE OF BARRIER: WI-CBTP
 - B. MANUFACTURER
 - C. DATE OF MANUFACTURE (MONTH AND YEAR)
- 101 1" OPTIONAL CHAMFER
- 102 SEE LIFTING SLOT DETAIL
- 103 SEE ANCHOR BLOCK DETAIL
- 104 1 3/4" MIN. CLEAR COVER
- 105 2" MIN. CLEAR COVER
- 106 1" MIN. CLEAR COVER
- 107 ± 1/8" MEASURED FROM FACE OF CONCRETE BARRIER TO OUTSIDE OF LOOP BAR (TYP.)
- 108 USE DELINEATORS CONFORMING TO SECTION 633 OF THE STANDARD SPECIFICATIONS. CONTRACTOR MY USE ALTERNATE SHAPES AND HOUSING. INSTALL DELINEATORS ACCORDING TO MANUFACTURERS INSTRUCTION. INSTALL YELLOW REFLECTORS WHEN BARRIER IS LOCATED LEFT OF TRAFFIC AND WHITE WHEN BARRIER IS LOCATED RIGHT OF TRAFFIC. SPACE DELINEATORS A MAXIMUM OF 25 FEET APART, PROVIDE TOP MOUNTED DELINEATORS IN ADDITION TO SIDE MOUNTED DELINEATORS ON BARRIER INSTALLATIONS LOCATED ON A CURVED ALIGNMENT LONGER THAT 200 FEET AND ON BARRIERS USED TO SEPARATE OPPOSING TRAFFIC.




CONCRETE BARRIER
TEMPORARY PRECAST,
12' - 6"


STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION






B4 BAR DETAIL





B5 BAR DETAIL



PROFILE VIEW
LOOP BAR ASSEMBLY








C BAR DETAILS




GENERAL NOTES

- (300) SET WITH 3 5/8" WOOD BLOCK.
- (301) HOLE IS OPTIONAL.
- (302) CONNECTOR PIN ASSEMBLY.
- (303) CONCRETE PAVEMENT, APPROACH SLAB, OR DECK.
- (304) CONCRETE DECK.
- (305) DO NOT USE ON CONCRETE BRIDGE DECK WITH ASPHALT OVERLAY OR CONCRETE PAVEMENT WITH ASPHALT OVERLAY.
- (306) MINIMUM OF 2" OF ASPHALT.
- (307) ASPHALT ANCHOR PIN ASSEMBLY
- (308) IF DRILLING A PILOT HOLE, THE MAX. DIA. OF THE HOLE IS 3/4"
- (309) WHEN THERE IS ASPHALT OVERLAYING CONCRETE PAVEMENT, A 1 5/8" DIA. PILOT HOLE CAN BE DRILLED INTO THE OVERLAY AND CONCRETE. IF NEEDED DRILL A 3/4" PILOT HOLE IN BASE COURSE.




**CONCRETE BARRIER
TEMPORARY PRECAST,
12' - 6"**


STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION




PLAN VIEW
TRANSITION FROM FREE STANDING TO ANCHORED BARRIER




PROFILE VIEW
ANCHORED BARRIER NEAR EXPANSION JOINT




CROSS SECTION
FREE STANDING BARRIER



CROSS SECTION
**ANCHORED BARRIER FOR OBJECTS ABOVE
THE GRADE LINE AND NEAR THE BARRIER**



CROSS SECTION
ANCHORED BARRIER NEAR VERTICAL DROP OFF



CROSS SECTION
ANCHORED BARRIER NEAR A SLOPE

GENERAL NOTES

- (400) NO SINGLE CONCRETE BARRIER SECTION SHALL BE ANCHORED TO BOTH THE BRIDGE DECK AND THE APPROACH SLAB. ALL ANCHOR BOLT LOCATIONS SHALL BE ANCHORED TO THE DECK IN ACCORDANCE WITH THE DETAIL. NO MORE THAN ONE ANCHOR BOLT SHALL BE ELIMINATED FROM A BARRIER SECTION WHEN SPANNING AN EXPANSION JOINT.
- (401) CONCRETE DECK
- (402) CONCRETE DECK OR APPROACH SLAB.
- (403) EXPANSION JOINT
- (404) ADHESIVE ANCHOR SHOWN. SEE ANCHOR DETAILS.
- (405) ANCHORED TEMPORARY BARRIER
- (406) TRANSITION FROM ANCHORED TEMPORARY BARRIER TO FREE STANDING
- (407) FREE STANDING BARRIER
- (408) REMOVE ALL ANCHORS WHEN NO LONGER NEEDED. FILL CONCRETE PAVEMENTS, DECKS AND APPROACH SLABS WITH NON-SHRINK COMMERCIAL GROUT FROM THE APPROVED PRODUCT LIST. FILL ASPHALT PAVEMENTS WITH ASTM D6690 TYPE II RUBBERIZED CRACK FILLER.
- (409) TRAFFIC SIDE
- (410) NON-TRAFFIC SIDE
- (411) ANCHOR LOCATION. SEE ANCHORING DETAILS.
- (412) WORK AREA
- (413) AREA FREE OF OBJECTS AND WORKERS
- (414) GRADE LINE
- (415) EXTENDED GRADE LINE
- (416) ANCHORED TEMPORARY BARRIER. SEE BOLT THROUGH DECK, REMOVABLE ADHESIVE ANCHOR, OR AN ASPHALT ANCHOR ROD DETAILS FOR MORE INFORMATION. ASPHALT ANCHOR ROD SHOWN.
- (417) WHEN OBJECTS EXTEND ABOVE THE GRADE. A MINIMUM OF 1 FOOT IS REQUIRED FROM BACK OF BARRIER TO OBJECT.
- (418) OBJECTS ARE NOT TO BE PLACED ON, MOUNTED TO, OR ALLOWED TO LEAN AGAINST THE BARRIER WITHOUT WRITTEN PERMISSION OF THE PROJECT ENGINEER.
- (419) DEPTHS OF 3 FEET OR MORE.
- (420) $Y = 6.5'$
- (421) OFFSET FROM BACK OF BARRIER EDGE:
- | | |
|-------------------|------|
| CONCRETE PAVEMENT | 0.5' |
| ASPHALT | 0.5' |
- (422) POSTED SPEED (MPH):
- | | |
|---------------|------|
| 45 OR GREATER | 4.0' |
| 40 OR LOWER | 2.0' |

CONCRETE BARRIER
TEMPORARY PRECAST,
12' - 6"

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

GENERAL NOTES

- 500 EXISTING RIGID BARRIERS (VARIES)

501 TEMPORARY BARRIER

502 SEE OTHER DETAIL ON HOW TO ANCHOR TEMPORARY BARRIER (BARRIER ASPHALT ANCHOR SHOWN).

503 ANCHORS ARE REQUIRED ON BOTH SIDE OF THE TEMPORARY BARRIER.

504 NESTED RAILS ARE REQUIRED ON BOTH SIDES OF THE TEMPORARY BARRIER FOR ALL INSTALLATIONS.

505 TRAFFIC TRAVELS FROM PERMANENT BARRIER TO TEMPORARY BARRIER.
- 506 TRAFFIC TRAVELS FROM TEMPORARY BARRIER TO PERMANENT BARRIER.

507 VERTICAL BARRIER

508 SAFETY SHAPE BARRIER

509 SINGLE SLOPE BARRIER

510 CAP END PLATE PLACED FLUSH WITH UPSTREAM END OF RIGID BARRIER.

511 BENT THRIE BEAM TO FIT.

512 THRIE BEAM PIECES ARE OFFSET 15 1/4" TO PREVENT INTERFERENCE FROM THE ANCHORS ON OPPOSING SIDES.
- 513 TWO (2) P1, P2 AND P3 ARE REQUIRED

514 FIVE (5) N1, N2 AND N3 ARE REQUIRED


515 TWO (2) R1, R2 AND R3 ARE REQUIRED

516 CUT WOOD BLOCK TO FIT.


517 SEE THRIE BEAM RAIL TERMINAL CONNECTOR DETAIL ASSEMBLY.

518 CAP ASSEMBLY


519 4" MAX. GAP BETWEEN TEMPORARY BARRIER AND RIGID BARRIER.
- 520 ALL TWELVE SPLICE HOLES REQUIRE M1 AND M2




PLAN VIEW
TRANSITION TO RIGID BARRIER




PLAN DETAIL VIEW
TRANSITION TO RIGID BARRIER




FRONT DETAIL VIEW
TRANSITION TO RIGID BARRIER




CROSS SECTION
TEMPORARY BARRIER
PLACEMENT SINGLE SLOPE




CROSS SECTION
TEMPORARY BARRIER
PLACEMENT SAFETY SHAPE



CROSS SECTION
TEMPORARY BARRIER
PLACEMENT VERTICAL





BACK DETAIL VIEW
TRANSITION TO RIGID BARRIER



517 DETAIL PLAN VIEW
THRIE BEAM RAIL TERMINAL CONNECTOR ASSEMBLY

CONCRETE BARRIER
TEMPORARY PRECAST,
12' - 6"

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION



GENERAL NOTES


STITCH WELD GUSSET PLATES AND END PLATES ON THREE SIDES

STITCH WELD TWO SIDE PLATES TO TOP PLATE, END PLATE AND GUSSETS.


600 SIDE PLATES (S3) NOT SHOWN FOR CLARITY.

**CONCRETE BARRIER
TEMPORARY PRECAST,
12' - 6"**


STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION




SIDE VIEW
T4



SIDE VIEW
T3



SIDE VIEW
TOP PLATE T1



PLAN VIEW
TOP PLATE T1

END
VIEW

END
VIEW


GENERAL NOTES

STITCH WELD GUSSET PLATES AND END PLATES ON THRIE SIDES


STITCH WELD TWO SIDE PLATES TO TOP PLATE, END PLATE AND GUSSETS.

SIDE PLATES, TOP PLATE, END PLATE AND GUSSETS ARE 12 GAUGE ASTM A36 GALVANIZED STEEL.


(700) SIDE PLATES (T3 AND T4) NOT SHOWN FOR CLARITY.




END VIEW
56 INCH TOP CAP




DETAIL "A"




DETAIL "B"




ISOMETRIC
56 INCH TOP CAP



SIDE VIEW
56 INCH TOP CAP (700)



END PLATE T2





GUSSET PLATES
T5 - T16



GUSSET DIMENSIONS				
GUSSET NO.	A	B	C	D
T5	22 13/16"	5 1/16"	2 5/16"	8 1/16"
T6	21"	5 7/8"	2 3/16"	8 1/16"
T7	19 3/16"	6 1/16"	1 15/16"	8 1/16"
T8	17 3/8"	6 1/4"	1 13/16"	8 1/16"
T9	15 9/16"	6 5/16"	1 9/16"	8 1/16"
T10	13 3/4"	6 5/8"	1 7/16"	8 1/16"
T11	11 15/16"	6 13/16"	1 1/4"	8 1/16"
T12	10 1/8"	7"	1 1/16"	8 1/16"
T13	8 5/16"	7 3/16"	7/8"	8 1/16"
T14	6 1/2"	7 3/8"	1 1/16"	8 1/16"
T15	4 1/16"	7 9/16"	1/2"	8"
T16	2 7/8"	7 3/4"	1/4"	8"

CONCRETE BARRIER
TEMPORARY PRECAST,
12' - 6"

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION




- GENERAL NOTES**
- 800 FREE STANDING TEMPORARY BARRIER
 - 801 GAP STIFFENER ASSEMBLY
 - 802 THRIE BEAMS ARE NESTED ON BOTH SIDES OF THE TEMPORARY BARRIER.
 - 803 SEE THRIE BEAM RAIL TERMINAL CONNECTOR DETAIL




PORTABLE CONCRETE BARRIER GAP THRIE BEAM COVER


CONCRETE BARRIER TEMPORARY PRECAST, 12' - 6"
STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION




**PLAN VIEW
GAP WITHIN SPACING**




**PLAN VIEW
TEMPORARY BARRIER GAP OVER 4" TO 1' MAX.**



**PLAN VIEW
TEMPORARY BARRIER GAP OVER 1' TO 4' MAX.**



**PLAN VIEW
TEMPORARY BARRIER GAP OVER 4' TO 7' MAX.**




**PLAN VIEW
TEMPORARY BARRIER GAP OVER 7' TO 12.5' MAX.**

GENERAL NOTES


- 900 SEE OTHER DETAILS FOR TEMPORARY GAP HARDWARE (TYP.)
- 901 TEMPORARY BARRIER GAP
- 902 GAP STIFFENER ASSEMBLY CENTERED IN THE GAP.
- 903 GAP STIFFENER ASSEMBLY IS OFFSET 18 3/4" FROM CENTER
- 904 MINIMUM NUMBER OF GAP STIFFENERS SHOWN FOR THE GAP RANGE SHOWN.
- 905 MINIMUM OF 8 CONTINUOUS FREE STANDING TEMPORARY BARRIERS

**CONCRETE BARRIER
TEMPORARY PRECAST,
12' - 6"**


STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION




PROFILE VIEW
STIFFENER ASSEMBLY
CENTER PANEL U1




FLAT PATTERN
STIFFENER ASSEMBLY
SIDE PANEL U2




PROFILE VIEW
STIFFENER ASSEMBLY
BOTTOM PANEL U3




SECTION A - A




SECTION B - B




PLAN VIEW



PROFILE VIEW



SIDE VIEW




ISOMETRIC

GAP STIFFENER ASSEMBLY




PLAN VIEW




SIDE VIEW

ELEVATION VIEW
W1 TOE PLATE




CONCRETE BARRIER
TEMPORARY PRECAST,
12' - 6"

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION




ELEVATION VIEW

**THRIE BEAM
TERMINAL CONNECTOR**



ELEVATION VIEW


**ADDITIONAL THRIE BEAM
TERMINAL CONNECTOR HOLE DETAIL**




**PLATE WASHER DETAIL
G2, H3**

GENERAL NOTES

- (1100) 1" DIA. HOLE
- (1101) $\frac{3}{4}"$ DIA. HOLE
- (1102) PROVIDE HOLES IN THRIE BEAM TERMINAL CONNECTOR TO LIMIT STEEL REINFORCEMENT OR LOOP BAR CONFLICT. CONTRACTOR MAY FIELD DRILL ADDITIONAL HOLE OR PROVIDE THRIE BEAM TERMINAL CONNECTOR WITH ADDITIONAL HOLES FROM SUPPLIER.




SLOTTED THRIE BEAM RAIL K1




**SECTION THROUGH
BEAM K1**

**CONCRETE BARRIER
TEMPORARY PRECAST,
12' - 6"**

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION




SIDE ELEVATION
(FOR CONNECTION TO LEFT END OF BARRIER)




SIDE ELEVATION
LOOP BAR ASSEMBLY INVERTED FOR OPPOSITE END
(FOR CONNECTION TO RIGHT END OF BARRIER)

GENERAL NOTES
(1200) SEE LIFTING SLOT DETAIL. LOCATION OF LIFTING SLOTS DETERMINED BY CONTRACTOR.




FLARE AT BARRIER END


POSTED SPEED, (MPH)	FLARE RATE
40 OR LESS	6:1
45 OR GREATER	8:1




PLAN VIEW




B12




FRONT ELEVATION



END SECTION



BENT BAR DETAIL



BAR	A	B
B6	10"	1"
B7	1'- 1"	1 1/4"
B8	1'- 5"	1 5/8"
B9	1'- 8"	1 7/8"
B10	2'- 0 1/2"	2 3/8"
B11	2'- 3"	2 3/4"

B BARS
2 OF EACH SIZE REQUIRED
FOR STIRRUP ASSEMBLY

**CONCRETE BARRIER
TEMPORARY PRECAST,
12' - 6"**

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

6

SDD 14B07-16m

BILL OF MATERIALS - CONCRETE BARRIER PRECAST

PART	DESCRIPTION	MATERIALS SPECIFICATIONS	NOTES
A1	PRECAST TEMPORARY BARRIER - CONCRETE	MIN. = f'c 5000 PSI	
B1	REBAR	STANDARD SPEC. 505.2 GRADE 60 UNCOATED REBAR	#5 REBAR, LENGTH 12'-2"
B2	REBAR	STANDARD SPEC. 505.2 GRADE 60 UNCOATED REBAR	#4 REBAR, LENGTH 12'-2"
B3	REBAR	STANDARD SPEC. 505.2 GRADE 60 UNCOATED REBAR	#5 REBAR, LENGTH 12'-2"
B4	REBAR	STANDARD SPEC. 505.2 GRADE 60 UNCOATED REBAR	#4 REBAR, LENGTH 6'-0"
B5	REBAR	STANDARD SPEC. 505.2 GRADE 60 UNCOATED REBAR	#6 REBAR, LENGTH 2'-11"
B6	REBAR	STANDARD SPEC. 505.2 GRADE 60 UNCOATED REBAR	#4 REBAR, LENGTH 1'-11"
B7	REBAR	STANDARD SPEC. 505.2 GRADE 60 UNCOATED REBAR	#4 REBAR, LENGTH 2'-2"
B8	REBAR	STANDARD SPEC. 505.2 GRADE 60 UNCOATED REBAR	#4 REBAR, LENGTH 2'-6"
B9	REBAR	STANDARD SPEC. 505.2 GRADE 60 UNCOATED REBAR	#4 REBAR, LENGTH 2'-9"
B10	REBAR	STANDARD SPEC. 505.2 GRADE 60 UNCOATED REBAR	#4 REBAR, LENGTH 3'-2"
B11	REBAR	STANDARD SPEC. 505.2 GRADE 60 UNCOATED REBAR	#4 REBAR, LENGTH 3'-4"
B12	REBAR	STANDARD SPEC. 505.2 GRADE 60 UNCOATED REBAR	#4 REBAR, LENGTH 12'-0"
B13	REBAR	STANDARD SPEC. 505.2 GRADE 60 UNCOATED REBAR	#4 REBAR, LENGTH 7'-9"
B14	REBAR	STANDARD SPEC. 505.2 GRADE 60 UNCOATED REBAR	#5 REBAR, LENGTH 11'-9"
C1	LOOP BAR	ASTM A709 GRADE 70 SMOOTH BAR OR ASTM A706 GRADE 60 REBAR UNCOATED	¾" DIA.
C2	LOOP BAR	ASTM A709 GRADE 70 SMOOTH BAR OR ASTM A706 GRADE 60 REBAR UNCOATED	¾" DIA.
C3	LOOP BAR	ASTM A709 GRADE 70 SMOOTH BAR OR ASTM A706 GRADE 60 REBAR UNCOATED	¾" DIA.
D1	CONNECTION PIN - ROD	ASTM A36 MIN. STRENGTH 36 KSI / ASTM A529 MAX. STRENGTH 50 KSI / ASTM A572 MAX STRENGTH 50 KSI / ASTM A709 MAX STRENGTH 50 KSI / ASTM A992 MAX STRENGTH 50 KSI	1 ¼" DIA.
D2	CONNECTION PIN - TOP PLATE	ASTM A36 MIN. STRENGTH 36 KSI / ASTM A529 MAX. STRENGTH 50 KSI / ASTM A572 MAX STRENGTH 50 KSI / ASTM A709 MAX STRENGTH 50 KSI / ASTM A992 MAX STRENGTH 50 KSI	
G1	BOLT THROUGH ANCHOR - THREADED ROD	HOT DIP AASHTO M232 CLASS / ASTM A153 CLASS C / ASTM F2329 C OR MECHANICAL GALVANIZE TO AASHTO M298 CLASS 55 TYPE 2 / ASTM B695 CLASS 55 TYPE 2 A307 GRADE A OR SAE J429 GRADE 2 UNC	1 ⅝" DIA.
G2	BOLT THROUGH ANCHOR - WASHER, SQUARE	ASTM A36 MIN. STRENGTH 36 KSI / ASTM A529 MAX. STRENGTH 50 KSI / ASTM A572 MAX STRENGTH 50 KSI / ASTM A709 MAX STRENGTH 50 KSI / ASTM A992 MAX STRENGTH 50 KSI	
G3	BOLT THROUGH ANCHOR - NUT	HOT DIP AASHTO M232 CLASS / ASTM A153 CLASS C / ASTM F2329 C OR MECHANICAL GALVANIZE TO AASHTO M298 CLASS 55 TYPE 2 / ASTM B695 CLASS 55 UNC OVER TAP NUTS AS SPECIFIED IN AASHTO 291 / ASTM A 563 HEAVY HEX HEAD ASTM A563DH OR SAE J995 GRADE 5	
H1	ADHESIVE ANCHOR - ADHESIVE	ICC-ES-AC308 5 ¼" EMBEDMENT WITH A MIN. BOND STRENGTH OF 1,650 PSI. SEE 603.2 AND 603.3.1.2 OF THE WISCONSIN STANDARD SPECIFICATIONS FOR MORE INFORMATION ON ADHESIVE ANCHORS.	
H2	ADHESIVE ANCHOR - THREADED ROD	HOT DIP AASHTO M232 CLASS / ASTM A153 CLASS C / ASTM F2329 C OR MECHANICAL GALVANIZE TO AASHTO M298 CLASS 55 TYPE 2 / ASTM B695 CLASS 55 TYPE 2 A307 GRADE A / SAE J429 GRADE 2 UNC	1 ⅝" DIA.
H3	ADHESIVE ANCHOR - WASHER, SQUARE	ASTM A36 MIN. STRENGTH 36 KSI / ASTM A529 MAX. STRENGTH 50 KSI / ASTM A572 MAX STRENGTH 50 KSI / ASTM A709 MAX STRENGTH 50 KSI / ASTM A992 MAX STRENGTH 50 KSI	
H4	ADHESIVE ANCHOR - NUT	HOT DIP AASHTO M232 CLASS / ASTM A153 CLASS C / ASTM F2329 C OR MECHANICAL GALVANIZE TO AASHTO M298 CLASS 55 TYPE 2 / ASTM B695 CLASS 55 UNC OVER TAP NUTS AS SPECIFIED IN AASHTO 291 / ASTM A 563 HEAVY HEX HEAD ASTM A563DH OR SAE J995 GRADE 5	
J1	ASPHALT ANCHOR PIN - ROD	ASTM A36 MIN. STRENGTH 36 KSI / ASTM A529 MAX. STRENGTH 50 KSI / ASTM A572 MAX STRENGTH 50 KSI / ASTM A709 MAX STRENGTH 50 KSI / ASTM A992 MAX STRENGTH 50 KSI	1 ½" DIA.
J2	ASPHALT ANCHOR PIN - STOP PLATE	ASTM A36 MIN. STRENGTH 36 KSI / ASTM A529 MAX. STRENGTH 50 KSI / ASTM A572 MAX STRENGTH 50 KSI / ASTM A709 MAX STRENGTH 50 KSI / ASTM A992 MAX STRENGTH 50 KSI	
K1	THRIE BEAM RAIL	AASHTO M180 CLASS A TYPE 2 APPROVED PRODUCER	12 GAUGE
L1	THRIE BEAM RAIL - TERMINAL	AASHTO M180 CLASS A TYPE 2 APPROVED PRODUCER	12 GAUGE

PART	DESCRIPTION	MATERIALS SPECIFICATIONS	NOTES
M1	SPLICE BOLT	HOT DIP AASHTO M232 CLASS / ASTM A153 CLASS C / ASTM F2329 C OR MECHANICAL GAL. TO AASHTO M298 CLASS 55 TYPE 2 / ASTM B695 CLASS 55 TYPE 2 UNC AASHTO M180 HEAD ASTM A307 GRADE B OR SAE J429 GRADE 2 OR ASTM F1554 GRADE 36	⅝" DIA.
M2	SPLICE BOLT - NUT	HOT DIP AASHTO M232 CLASS / ASTM A153 CLASS C / ASTM F2329 C OR MECHANICAL GALVANIZE TO AASHTO M298 CLASS 55 TYPE 2 / ASTM B695 CLASS 55 UNC OVER TAP NUTS AS SPECIFIED IN AASHTO 291 / ASTM A 563 AASHTO M180 RECESSED HEAVY HEX HEAD ASTM A563DH OR SAE J995 GRADE 5	
N1	THRIE BEAM RAIL TERMINAL - MECHANICAL ANCHOR	HOT DIP AASHTO M232 CLASS / ASTM A153 CLASS C / ASTM F2329 C OR MECHANICAL GALVANIZE TO AASHTO M298 CLASS 55 TYPE 2 / ASTM B695 CLASS 55 UNC OVER TAP NUTS AS SPECIFIED IN AASHTO 291 / ASTM A 563 AASHTO M180 RECESSED HEAVY HEX HEAD ASTM A563DH OR SAE J995 GRADE 5	¾" DIA. LENGTH 6"
N2	THRIE BEAM RAIL TERMINAL - WASHER	HOT DIP AASHTO M232 CLASS / ASTM A153 CLASS C / ASTM F2329 C OR MECHANICAL GALVANIZE TO AASHTO M298 CLASS 55 TYPE 2 / ASTM B695 CLASS 55 TYPE 2 F436 TYPE 1	
N3	THRIE BEAM RAIL TERMINAL MECHANICAL OR ADHESIVE ANCHOR	MINIMUM MECHANICAL OR ADHESIVE ANCHOR STRENGTH REQUIREMENTS: ULTIMATE TENSILE LOAD 17.9 KIPS AND ULTIMATE SHEAR LOAD 21.96 KIPS. SEE 603.2 AND 603.3.1.2 OF THE WISCONSIN STANDARD SPECIFICATIONS FOR MORE INFORMATION ON ADHESIVE ANCHORS.	
P1	THRIE BEAM RAIL CONNECTION 1-BOLT	HOT DIP AASHTO M232 CLASS / ASTM A153 CLASS C / ASTM F2329 C OR MECHANICAL GALVANIZE TO AASHTO M298 CLASS 55 TYPE 2 / ASTM B695 CLASS 55 UNC OVER TAP NUTS AS SPECIFIED IN AASHTO 291 / ASTM A 563 AASHTO M180 RECESSED HEAVY HEX HEAD ASTM A563DH OR SAE J995 GRADE 5	¾" DIA.
P2	THRIE BEAM RAIL CONNECTION 1-WASHER	HOT DIP AASHTO M232 CLASS / ASTM A153 CLASS C / ASTM F2329 C OR MECHANICAL GAL. TO AASHTO M298 CLASS 55 TYPE 2 / ASTM B695 CLASS 55 TYPE 2 F436 TYPE 1	
P3	THRIE BEAM RAIL CONNETION 1- MECHANICAL OR ADHESIVE ANCHOR	MINIMUM MECHANICAL OR ADHESIVE ANCHOR STRENGTH REQUIREMENTS: ULTIMATE TENSILE LOAD 9.48 KIPS AND ULTIMATE SHEAR LOAD 10.48 KIPS. SEE 603.2 AND 603.3.1.2 OF THE WISCONSIN STANDARD SPECIFICATIONS FOR MORE INFORMATION ON ADHESIVE ANCHORS.	
Q1	BLOCK WOOD	SEE STANDARD SPEC. 614	
R1	CAP - BOLT	HOT DIP AASHTO M232 CLASS / ASTM A153 CLASS C / ASTM F2329 C OR MECHANICAL GALVANIZE TO AASHTO M298 CLASS 55 TYPE 2 / ASTM B695 CLASS 55 UNC OVER TAP NUTS AS SPECIFIED IN AASHTO 291 / ASTM A 563 AASHTO M180 RECESSED HEAVY HEX HEAD ASTM A563DH OR SAE J995 GRADE 5	⅝" DIA.
R2	CAP- BOLT - WASHER	HOT DIP AASHTO M232 CLASS / ASTM A153 CLASS C / ASTM F2329 C OR MECHANICAL GAL. TO AASHTO M298 CLASS 55 TYPE 2 / ASTM B695 CLASS 55 TYPE 2 F436 TYPE 1	
R3	CAP - BOLT - MECHANICAL ANCHOR	MINIMUM MECHANICAL OR ADHESIVE ANCHOR STRENGTH REQUIREMENTS ULTIMATE TENSILE LOAD 12.14 KIPS AND ULTIMATE SHEAR LOAD 17.5 KIPS.SEE 603.2 AND 603.3.1.2 OF THE WISCONSIN STANDARD SPECIFICATIONS FOR MORE INFORMATION ON ADHESIVE ANCHORS.	12 GAUGE
S1	CAP 42-INCH TOP PLATE	AASHTO M111 / ASTM A123 ASTM A36 MIN. STRENGTH 36 KSI, OR ASTM A529 MAX. STRENGTH 50 KSI, OR ASTM A572 MAX. STRENGTH 50 KSI, OR ASTM A709 MAX. STRENGTH 50 KSI, OR ASTM A992 MAX. STRENGTH 50 KSI	12 GAUGE
S2	CAP 42-INCH END PLATE	AASHTO M111 / ASTM A123 ASTM A36 MIN. STRENGTH 36 KSI, OR ASTM A529 MAX. STRENGTH 50 KSI, OR ASTM A572 MAX. STRENGTH 50 KSI, OR ASTM A709 MAX. STRENGTH 50 KSI, OR ASTM A992 MAX. STRENGTH 50 KSI	12 GAUGE
S3	CAP 42-INCH SIDE PLATE	AASHTO M111 / ASTM A123 ASTM A36 MIN. STRENGTH 36 KSI, OR ASTM A529 MAX. STRENGTH 50 KSI, OR ASTM A572 MAX. STRENGTH 50 KSI, OR ASTM A709 MAX. STRENGTH 50 KSI, OR ASTM A992 MAX. STRENGTH 50 KSI	12 GAUGE
S4	CAP 42-INCH GUSSET 1	AASHTO M111 / ASTM A123 ASTM A36 MIN. STRENGTH 36 KSI, OR ASTM A529 MAX. STRENGTH 50 KSI, OR ASTM A572 MAX. STRENGTH 50 KSI, OR ASTM A709 MAX. STRENGTH 50 KSI, OR ASTM A992 MAX. STRENGTH 50 KSI	12 GAUGE
S5	CAP 42-INCH GUSSET 2	AASHTO M111 / ASTM A123 ASTM A36 MIN. STRENGTH 36 KSI, OR ASTM A529 MAX. STRENGTH 50 KSI, OR ASTM A572 MAX. STRENGTH 50 KSI, OR ASTM A709 MAX. STRENGTH 50 KSI, OR ASTM A992 MAX. STRENGTH 50 KSI	12 GAUGE
S6	CAP 42-INCH GUSSET 3	AASHTO M111 / ASTM A123 ASTM A36 MIN. STRENGTH 36 KSI, OR ASTM A529 MAX. STRENGTH 50 KSI, OR ASTM A572 MAX. STRENGTH 50 KSI, OR ASTM A709 MAX. STRENGTH 50 KSI, OR ASTM A992 MAX. STRENGTH 50 KSI	12 GAUGE
S7	CAP 42-INCH GUSSET 4	AASHTO M111 / ASTM A123 ASTM A36 MIN. STRENGTH 36 KSI, OR ASTM A529 MAX. STRENGTH 50 KSI, OR ASTM A572 MAX. STRENGTH 50 KSI, OR ASTM A709 MAX. STRENGTH 50 KSI, OR ASTM A992 MAX. STRENGTH 50 KSI	12 GAUGE

6

SDD 14B07-16m

CONCRETE BARRIER
TEMPORARY PRECAST,
12' - 6"

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

BILL OF MATERIALS - CONCRETE BARRIER PRECAST


PART	DESCRIPTION	MATERIALS SPECIFICATIONS	NOTES
T1	CAP 56-INCH TOP PLATE	AASHTO M111 / ASTM A123 ASTM A36 MIN. STRENGTH 36 KSI, OR ASTM A529 MAX. STRENGTH 50 KSI, OR ASTM A572 MAX. STRENGTH 50 KSI, OR ASTM A709 MAX. STRENGTH 50 KSI, OR ASTM A992 MAX. STRENGTH 50 KSI	12 GAUGE
T2	CAP 56-INCH END PLATE	AASHTO M111 / ASTM A123 ASTM A36 MIN. STRENGTH 36 KSI, OR ASTM A529 MAX. STRENGTH 50 KSI, OR ASTM A572 MAX. STRENGTH 50 KSI, OR ASTM A709 MAX. STRENGTH 50 KSI, OR ASTM A992 MAX. STRENGTH 50 KSI	12 GAUGE
T3	CAP 56-INCH SIDE PLATE 1	AASHTO M111 / ASTM A123 ASTM A36 MIN. STRENGTH 36 KSI, OR ASTM A529 MAX. STRENGTH 50 KSI, OR ASTM A572 MAX. STRENGTH 50 KSI, OR ASTM A709 MAX. STRENGTH 50 KSI, OR ASTM A992 MAX. STRENGTH 50 KSI	12 GAUGE
T4	CAP 56-INCH SIDE PLATE 2	AASHTO M111 / ASTM A123 ASTM A36 MIN. STRENGTH 36 KSI, OR ASTM A529 MAX. STRENGTH 50 KSI, OR ASTM A572 MAX. STRENGTH 50 KSI, OR ASTM A709 MAX. STRENGTH 50 KSI, OR ASTM A992 MAX. STRENGTH 50 KSI	12 GAUGE
T5	CAP 56-INCH GUSSET 1	AASHTO M111 / ASTM A123 ASTM A36 MIN. STRENGTH 36 KSI, OR ASTM A529 MAX. STRENGTH 50 KSI, OR ASTM A572 MAX. STRENGTH 50 KSI, OR ASTM A709 MAX. STRENGTH 50 KSI, OR ASTM A992 MAX. STRENGTH 50 KSI	12 GAUGE
T6	CAP 56-INCH GUSSET 2	AASHTO M111 / ASTM A123 ASTM A36 MIN. STRENGTH 36 KSI, OR ASTM A529 MAX. STRENGTH 50 KSI, OR ASTM A572 MAX. STRENGTH 50 KSI, OR ASTM A709 MAX. STRENGTH 50 KSI, OR ASTM A992 MAX. STRENGTH 50 KSI	12 GAUGE
T7	CAP 56-INCH GUSSET 3	AASHTO M111 / ASTM A123 ASTM A36 MIN. STRENGTH 36 KSI, OR ASTM A529 MAX. STRENGTH 50 KSI, OR ASTM A572 MAX. STRENGTH 50 KSI, OR ASTM A709 MAX. STRENGTH 50 KSI, OR ASTM A992 MAX. STRENGTH 50 KSI	12 GAUGE
T8	CAP 42-INCH GUSSET 4	AASHTO M111 / ASTM A123 ASTM A36 MIN. STRENGTH 36 KSI, OR ASTM A529 MAX. STRENGTH 50 KSI, OR ASTM A572 MAX. STRENGTH 50 KSI, OR ASTM A709 MAX. STRENGTH 50 KSI, OR ASTM A992 MAX. STRENGTH 50 KSI	12 GAUGE
T9	CAP 42-INCH GUSSET 5	AASHTO M111 / ASTM A123 ASTM A36 MIN. STRENGTH 36 KSI, OR ASTM A529 MAX. STRENGTH 50 KSI, OR ASTM A572 MAX. STRENGTH 50 KSI, OR ASTM A709 MAX. STRENGTH 50 KSI, OR ASTM A992 MAX. STRENGTH 50 KSI	12 GAUGE
T10	CAP 42-INCH GUSSET 6	AASHTO M111 / ASTM A123 ASTM A36 MIN. STRENGTH 36 KSI, OR ASTM A529 MAX. STRENGTH 50 KSI, OR ASTM A572 MAX. STRENGTH 50 KSI, OR ASTM A709 MAX. STRENGTH 50 KSI, OR ASTM A992 MAX. STRENGTH 50 KSI	12 GAUGE
T11	CAP 42-INCH GUSSET 7	AASHTO M111 / ASTM A123 ASTM A36 MIN. STRENGTH 36 KSI, OR ASTM A529 MAX. STRENGTH 50 KSI, OR ASTM A572 MAX. STRENGTH 50 KSI, OR ASTM A709 MAX. STRENGTH 50 KSI, OR ASTM A992 MAX. STRENGTH 50 KSI	12 GAUGE
T12	CAP 42-INCH GUSSET 8	AASHTO M111 / ASTM A123 ASTM A36 MIN. STRENGTH 36 KSI, OR ASTM A529 MAX. STRENGTH 50 KSI, OR ASTM A572 MAX. STRENGTH 50 KSI, OR ASTM A709 MAX. STRENGTH 50 KSI, OR ASTM A992 MAX. STRENGTH 50 KSI	12 GAUGE
T13	CAP 42-INCH GUSSET 9	AASHTO M111 / ASTM A123 ASTM A36 MIN. STRENGTH 36 KSI, OR ASTM A529 MAX. STRENGTH 50 KSI, OR ASTM A572 MAX. STRENGTH 50 KSI, OR ASTM A709 MAX. STRENGTH 50 KSI, OR ASTM A992 MAX. STRENGTH 50 KSI	12 GAUGE
T14	CAP 42-INCH GUSSET 10	AASHTO M111 / ASTM A123 ASTM A36 MIN. STRENGTH 36 KSI, OR ASTM A529 MAX. STRENGTH 50 KSI, OR ASTM A572 MAX. STRENGTH 50 KSI, OR ASTM A709 MAX. STRENGTH 50 KSI, OR ASTM A992 MAX. STRENGTH 50 KSI	12 GAUGE
T15	CAP 42-INCH GUSSET 11	AASHTO M111 / ASTM A123 ASTM A36 MIN. STRENGTH 36 KSI, OR ASTM A529 MAX. STRENGTH 50 KSI, OR ASTM A572 MAX. STRENGTH 50 KSI, OR ASTM A709 MAX. STRENGTH 50 KSI, OR ASTM A992 MAX. STRENGTH 50 KSI	12 GAUGE
T16	CAP 42-INCH GUSSET 12	AASHTO M111 / ASTM A123 ASTM A36 MIN. STRENGTH 36 KSI, OR ASTM A529 MAX. STRENGTH 50 KSI, OR ASTM A572 MAX. STRENGTH 50 KSI, OR ASTM A709 MAX. STRENGTH 50 KSI, OR ASTM A992 MAX. STRENGTH 50 KSI	12 GAUGE
U1	GAP STIFFENER	AASHTO M111 / ASTM A123 ASTM A36 MIN. STRENGTH 36 KSI, OR ASTM A529 MAX. STRENGTH 50 KSI, OR ASTM A572 MAX. STRENGTH 50 KSI, OR ASTM A709 MAX. STRENGTH 50 KSI, OR ASTM A992 MAX. STRENGTH 50 KSI	
U2	GAP STIFFENER - CONNECTOR PLATE 1	AASHTO M111 / ASTM A123 ASTM A36 MIN. STRENGTH 36 KSI, OR ASTM A529 MAX. STRENGTH 50 KSI, OR ASTM A572 MAX. STRENGTH 50 KSI, OR ASTM A709 MAX. STRENGTH 50 KSI, OR ASTM A992 MAX. STRENGTH 50 KSI	
U3	GAP STIFFENER - CONNECTOR PLATE 2	AASHTO M111 / ASTM A123 ASTM A36 MIN. STRENGTH 36 KSI, OR ASTM A529 MAX. STRENGTH 50 KSI, OR ASTM A572 MAX. STRENGTH 50 KSI, OR ASTM A709 MAX. STRENGTH 50 KSI, OR ASTM A992 MAX. STRENGTH 50 KSI	

PART	DESCRIPTION	MATERIALS SPECIFICATIONS	NOTES
V1	THRIE BEAM RAIL TERMINAL MECHANICAL OR ADHESIVE ANCHOR	MINIMUM MECHANICAL OR ADHESIVE ANCHOR STRENGTH REQUIREMENTS ULTIMATE TENSILE LOAD 24.0 KIPS AND ULTIMATE SHEAR LOAD 21.5 KIPS. SEE 603.2 AND 603.3.1.2 OF THE WISCONSIN STANDARD SPECIFICATIONS FOR MORE INFORMATION ON ADHESIVE ANCHORS.	¾" DIA.
V2	GAP STIFFENER - BOLT - NUT	HOT DIP AASHTO M232 CLASS / ASTM A153 CLASS C / ASTM F2329 C O R MECHANICAL GALVANIZE TO AASHTO M298 CLASS 50 TYPE 1 / ASTM B695 CLASS 50 TYPE 1 UNC OVER TAP NUTS AS SPECIFIED IN AASHTO 291/ASTM A 563 HEAVY HEX HEAD ASTM A563DH OR SAE J995 GRADE 5	
W1	TOE PLATE	AASHTO M111/ASTM A123 ASTM A36 MIN STRENGTH 36 KSI, OR ASTM A529 MAX. STRENGTH 50 KSI, OR ASTM A572 MAX. STRENGTH 50 KSI, OR ASTM A709 MAX. STRENGTH 50 KSI, OR ASTM A992 MAX. STRENGTH 50 KSI	
X1	TOE PLATE - CONNECTION BOLT	HOT DIP AASHTO M232 CLASS / ASTM A153 CLASS C / ASTM F2329 C OR MECHANICAL GALVANIZE TO AASHTO M298 CLASS 55 TYPE 2 / ASTM B695 CLASS 55 TYPE 2 UNC HEAVY HEX HEAD OR AASTHO M180 HEAD, ASTM F3125 GRADE A325 TYPE 1 HEAVY HEX HEAD OR SAE J429 GRADE 5 HEAVY HEX HEAD / ASTM A449 TYPE 1 HEAVY HEX HEAD. BOLTS MAY BE FULLY THREADED. PROVIDE ENOUGH THREADING FOR PROPER TIGHTENING OF BOLT.	¾" DIA.
X2	TOE PLATE - CONNECTION BOLT - WASHER	HOT DIP AASHTO M232 CLASS / ASTM A153 CLASS C / ASTM F2329 C OR MECHANICAL GALVANIZE TO AASHTO M298 CLASS 55 TYPE 2 / ASTM B695 CLASS 55 TYPE 2 F436 TYPE 1 (HARDEN WASHER ONLY)	
X3	TOE PLATE - CONNECTION BOLT - NUT	HOT DIP AASHTO M232 CLASS / ASTM A153 CLASS C / ASTM F2329 C OR MECHANICAL GALVANIZE TO AASHTO M298 CLASS 55 TYPE 2 / ASTM B695 CLASS 55 UNC OVER TAP NUTS AS SPECIFIED IN AASHTO 291 / ASTM A 563 HEAVY HEX HEAD ASTM A563DH OR SAE J995 GRADE 5	

CONCRETE BARRIER
TEMPORARY PRECAST,
12' - 6"

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
February 2023 DATE /S/ Rodney Taylor
ROADWAY STANDARDS DEVELOPMENT
ENGINEER
FHWA




DIMENSION A TABLE ⁽²⁾

FACILITY	POSTED SPEED MPH	DIMENSION A	
		MIN. FT	MAX. FT
FREEWAY/EXPRESSWAY	ALL	15	20
NON-FREEWAY/EXPRESSWAY	GREATER THAN OR EQUAL TO 45	10	15
NON-FREEWAY/EXPRESSWAY	LESS THAN 45	8	10
AADT LESS THAN 1,500	ALL	8	10

DIMENSION B TABLE⁽²⁾

POSTED SPEEDS MPH	DIMENSION B FT
20	115
25	155
30	200
35	250
40	305
45	360
50	425
55	495
60	570
65	645

CRASH CUSHION/SAND BARREL ARRAY AND TEMPORARY BARRIER INSTALLATION FOR TRAFFIC ON ONE SIDE OF BARRIER



**CRASH CUSHION/SAND BARREL ARRAY AND TEMPORARY BARRIER
INSTALLATION FOR TRAFFIC ON BOTH SIDES OF BARRIER**

GENERAL NOTES

SEE STANDARD DETAIL DRAWING 14B7 FOR MORE INFORMATION.

DETAILS PROVIDE A GENERAL LAYOUT OF TEMPORARY CONCRETE BARRIER, CRASH CUSHIONS, SAND BARREL ARRAYS AND TIE DOWN TRANSITIONS. DETAILS PROVIDED MAY NOT FIT ALL POSSIBLE SITUATIONS OR SITE CONDITIONS. SEE OTHER SECTIONS OF THE CONTRACT OR PROJECT ENGINEER FOR MORE DETAILS.

ADDITIONAL TEMPORARY BARRIER MAY BE REQUIRED TO PROTECT TRAVELING PUBLIC FROM HAZARDS, CONTRACTOR'S OPERATIONS OR TO CONTROL TRAFFIC.

TEMPORARY BARRIER MAY BE REQUIRED TO BE ANCHORED TO PAVEMENT OR BRIDGE DECK.

FOR DETAILS ON CRASH CUSHION OR SAND BARREL ARRAYS SEE OTHER SECTIONS OF THE PLAN AND MANUFACTURE'S DETAILS.

SLOPES LEADING TO TEMPORARY BARRIER, CRASH CUSHION OR SAND BARREL ARRAY ARE 10:1 OR LESS.


- ① FOR DEFLECTION INFORMATION SEE STANDARD DETAIL DRAWING 14B7.
- ② VALUES PROVIDED MAY NOT FIT ALL POSSIBLE SITUATIONS OR SITE CONDITIONS. SEE OTHER SECTIONS OF THE CONTRACT OR PROJECT ENGINEER FOR MORE DETAILS.
- ③ ANCHOR TEMPORARY BARRIER ACCORDING TO CRASH CUSHION OR SAND BARREL MANUFACTURER'S RECOMMENDATIONS. IF MANUFACTURER'S RECOMMENDATIONS ARE NOT PROVIDED, ANCHOR 3 PINS ON TRAFFIC SIDE.

LEGEND


- | | |
|--|---|
| DIRECTION OF TRAVEL |  |
| CRASH CUSHION OR
SAND BARREL ARRAY |  |
| SEE FREE STANDING TRANSITION
TO TIED-DOWN SYSTEM DETAILS |  |
| SEE BI-DIRECTIONAL TRANSITION
TO TIED-DOWN SYSTEM DETAILS |  |
| 3 PINS PLACED ON
TRAFFIC SIDE OF BARRIER |  |
| PERMANENT CONCRETE BARRIER
OR CONCRETE PARAPET |  |
| FREE STANDING TEMPORARY
BARRIER |  |

CRASH CUSHION/SAND BARREL ARRAY AND OTHER TEMPORARY BARRIER LAYOUT DETAILS

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION



**CRASH CUSHION/SAND BARREL ARRAY AND TEMPORARY BARRIER
INSTALLATION FOR TRAFFIC ON ONE SIDE - FLARED INSTALLATION**




**TRANSITION FROM FREE STANDING TEMPORARY BARRIER
TO ANCHORED BARRIER**

LEGEND


DIRECTION OF TRAVEL	
CRASH CUSHION OR SAND BARREL ARRAY	
SEE FREE STANDING TRANSITION TO TIED-DOWN SYSTEM DETAILS	
SEE BI-DIRECTIONAL TRANSITION TO TIED-DOWN SYSTEM DETAILS	
3 PINS PLACED ON TRAFFIC SIDE OF BARRIER	
PERMANENT CONCRETE BARRIER OR CONCRETE PARAPET	
FREE STANDING TEMPORARY BARRIER	

**CRASH CUSHION/SAND BARREL
ARRAY AND OTHER TEMPORARY
BARRIER LAYOUT DETAILS**


STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION




TEMPORARY BARRIER OVERLAP - ONE-WAY TRAFFIC



TEMPORARY BARRIER OVERLAP - TWO-WAY TRAFFIC



**ENDING TEMPORARY BARRIER
DOWNSTREAM - UNANCHORED**




**ENDING TEMPORARY BARRIER
DOWNSTREAM - ANCHORED**

LEGEND


DIRECTION OF TRAVEL	
CRASH CUSHION OR SAND BARREL ARRAY	
SEE FREE STANDING TRANSITION TO TIED-DOWN SYSTEM DETAILS	
SEE BI-DIRECTIONAL TRANSITION TO TIED-DOWN SYSTEM DETAILS	
3 PINS PLACED ON TRAFFIC SIDE OF BARRIER	
PERMANENT CONCRETE BARRIER OR CONCRETE PARAPET	
FREE STANDING TEMPORARY BARRIER	

**CRASH CUSHION/SAND BARREL
ARRAY AND OTHER TEMPORARY
BARRIER LAYOUT DETAILS**

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION




CONNECTING TEMPORARY BARRIER TO PERMANENT
CONCRETE BARRIER-TRAFFIC ON ONE SIDE




CONNECTING TEMPORARY BARRIER TO PERMANENT
CONCRETE BARRIER-TRAFFIC ON BOTH SIDES

LEGEND

- DIRECTION OF TRAVEL
- CRASH CUSHION OR SAND BARREL ARRAY
- SEE FREE STANDING TRANSITION TO TIED-DOWN SYSTEM DETAILS
- SEE BI-DIRECTIONAL TRANSITION TO TIED-DOWN SYSTEM DETAILS
- 3 PINS PLACED ON TRAFFIC SIDE OF BARRIER
- PERMANENT CONCRETE BARRIER OR CONCRETE PARAPET
- FREE STANDING TEMPORARY BARRIER



OVERLAPPING TEMPORARY BARRIER AND PERMANENT BARRIER -
ONE WAY TRAFFIC







OVERLAPPING TEMPORARY BARRIER AND PERMANENT BARRIER -
TWO WAY TRAFFIC

CRASH CUSHION/SAND BARREL
ARRAY AND OTHER TEMPORARY
BARRIER LAYOUT DETAILS

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

LEGEND




- DIRECTION OF TRAVEL 
- CRASH CUSHION OR SAND BARREL ARRAY 
- SEE FREE STANDING TRANSITION TO TIED-DOWN SYSTEM DETAILS 
- SEE BI-DIRECTIONAL TRANSITION TO TIED-DOWN SYSTEM DETAILS 
- 3 PINS PLACED ON TRAFFIC SIDE OF BARRIER 
- PERMANENT CONCRETE BARRIER OR CONCRETE PARAPET 
- FREE STANDING TEMPORARY BARRIER 

DIMENSION C TABLE

2

AVAILABLE DEFLECTION DISTANCE	MINIMUM LENGTH OF BARRIER BEYOND HAZARD FT
GREATER THAN 8'	12.5
LESS THAN OR EQUAL TO 8' BUT GREATER THAN 4'	50
LESS THAN OR EQUAL TO 4'	100

6




6


CRASH CUSHION/SAND BARREL
ARRAY AND OTHER TEMPORARY
BARRIER LAYOUT DETAILS

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
June, 2015 /S/ Jerry H. Zogg
DATE ROADWAY STANDARDS DEVELOPMENT
FHWA ENGINEER



DETAIL A
MAINLINE CLOSURE WITH POSTED DETOUR
WORK ZONE GREATER THAN OR EQUAL TO ½ MILE FROM
DETOUR ROUTE (1000 FEET IF URBAN)




DETAIL B
MAINLINE CLOSURE WITH POSTED DETOUR
WORK ZONE LESS THAN ½ MILE FROM
DETOUR ROUTE (1000 FEET IF URBAN)

- LEGEND**
- SIGN ON PERMANENT SUPPORT
 - TYPE III BARRICADE
 - TYPE III BARRICADE WITH ATTACHED SIGN
 - TYPE "A" WARNING LIGHT (FLASHING)
 - WORK AREA
 - FLAGS, 16" X 16" MIN. (ORANGE)

- DETOUR M4 - 8
- EAST M3 - X
- XX M1 - 4 OR XX M1 - 6 OR COUNTY M1 - 5A
- OR M05 - 1 OR M06 - 1

SPEED LIMIT (MPH)	"STOP AHEAD" ADVANCE WARNING DISTANCE (FT)
25	200
30	200
35	350
40	350
45	500
50	550
55	750

SEE SDD 15C2-SHEET "b"
FOR GENERAL NOTES
AND FOOTNOTES ① THROUGH ⑦




DETAIL C
MAINLINE CLOSURE, NO POSTED DETOUR

**BARRICADES AND SIGNS
FOR MAINLINE CLOSURES**


STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
May 2023 /S/ Andrew Heidtke
DATE WORK ZONE ENGINEER

FHWA



DETAIL D
ROAD CLOSURE BARRICADE DETAIL
APPROACH VIEW



DETAIL E
LANE CLOSURE BARRICADE DETAIL
APPROACH VIEW

SEE SDD 15C2 - SHEET "a" FOR LEGEND

GENERAL NOTES

THE EXACT NUMBER, LOCATION, AND SPACING OF ALL SIGNS AND BARRICADES SHALL BE ADJUSTED TO FIT FIELD CONDITIONS AS APPROVED BY THE ENGINEER.

ANY SIGNS TEMPORARY OR EXISTING, WHICH CONFLICT WITH TRAFFIC CONTROL "IN USE", SHALL BE REMOVED OR COVERED AS NEEDED AND AS APPROVED BY THE ENGINEER.

THE SPACING BETWEEN TRAFFIC CONTROL SIGNS SHOULD BE ADJUSTED TO NOT CONFLICT WITH AND SHOULD PROVIDE A DESIRABLE MINIMUM OF 200 FEET CLEARANCE TO EXISTING SIGNS THAT WILL REMAIN IN PLACE.

BARRICADES THAT MUST BE MOVED FOR A WORK OPERATION SHALL BE IMMEDIATELY RE-ESTABLISHED UPON COMPLETION OF THE OPERATION, OR FOR CONTINUING OPERATIONS, AT THE END OF EACH WORKING DAY.

SIGNS THAT WILL BE IN PLACE LESS THAN 7 CONTINUOUS DAYS AND NIGHTS MAY BE MOUNTED ON PORTABLE SUPPORTS.

ALL TYPE III BARRICADES SHALL HAVE RAILS REFLECTORIZED ON BOTH FACES. STRIPES SHALL BE PROPERLY SLOPED DOWN TOWARD THE TRAFFIC SIDE OR AS SHOWN IN THE ROAD CLOSURE BARRICADE DETAIL "D" FOR FULL ROAD CLOSURES.

TYPE "A" LOW - INTENSITY FLASHING WARNING LIGHTS SHALL BE VISIBLE ON BOTH SIDES OF THE BARRICADE.

THE R11 - 2, R11 - 3, M4 - 9, R11 - 4, AND R10 - 61 SIGNS PLACED ON THE BARRICADES SHALL COVER NO MORE THAN THE TOP RAIL. THE SIGNS SHALL NOT COVER ANY PORTION OF THE MIDDLE RAIL OR BOTTOM RAILS.

"WO" AND "MO" SIGNS ARE THE SAME AS "W" AND "M" SIGNS EXCEPT THE BACKGROUND IS ORANGE.

ALL SIGNS SHALL BE 48" X 48" UNLESS OTHERWISE NOTED BELOW:

- R11 - 2 SHALL BE 48" X 30"
- R11 - 3 SHALL, R11 - 4 AND R10 - 61 SHALL BE 60 " X 30"
- M4 - 9 SHALL BE 30" X 24"
- M3 - X SHALL BE 24" X 12" (36" X 18" IF NEEDED TO MATCH EXISTING SIGNS)
- M4 - 8 SHALL BE 24" X 12" (36" X 18" IF NEEDED TO MATCH EXISTING SIGNS)
- M1 - 4, M1 - 5A AND M1 - 6 SHALL BE 24" X 24" (36" X 36" IF NEEDED TO MATCH EXISTING SIGNS)
- MO5 - 1 AND MO6 - 1 SHALL BE 21" X 21" (30" X 30" IF NEEDED TO MATCH EXISTING SIGNS)
- D1 - X SHALL BE AS SHOWN ON SPECIFIC PROJECT SIGNING DETAIL SHEETS.
- R1 - 1 SHALL BE 36" X 36"


- 1 TWO WARNING LIGHTS SHALL BE PROVIDED ON THE CENTER BARRICADE AND A MINIMUM OF ONE WARNING LIGHT SHALL BE PROVIDED ON EACH OF THE OTHER BARRICADES WITHIN THE ROADWAY LIMITS. SPACING OF THE WARNING LIGHTS SHALL BE UNIFORM TO THE EDGE OF ROADWAY AS SHOWN (APPROX. 8 FOOT LIGHT SPACING).
- 2 THESE SIGNS AND BARRICADES ARE NOT REQUIRED IF ROAD CLOSURE BEGINS AT AN INTERSECTION.
- 3 FOR ROAD CLOSURE WITHOUT LOCAL ACCESS TO PROJECT, SEE ROAD CLOSURE BARRICADE DETAIL "D".
- 4 FOR ROAD CLOSURE WITH LOCAL ACCESS TO PROJECT, SEE ROAD CLOSURE BARRICADE DETAIL "E".
- 5 FOR BRIDGE OR CULVERT REPLACEMENTS, SUBSTITUTE "BRIDGE OUT" INSTEAD OF "ROAD CLOSED" ON R11 - 2 AND R11 - 3 SIGNS.
- 6 INSTALL DETOUR AND COMMUNITY GUIDE SIGNS AND ARROWS ONLY IF SPECIFIED IN THE CONTRACT. IF THERE ARE EXISTING ROUTE MARKER ASSEMBLIES THAT WILL REMAIN IN PLACE, ADJUST THE LOCATION OF THE DETOUR ROUTE SIGNS TO CORRESPOND WITH THE EXISTING ASSEMBLIES. MODIFY EXISTING SIGNS WHERE POSSIBLE. SEE SPECIFIC PROJECT DETOUR SIGNING DETAIL SHEETS. IF DETOUR SIGNS ARE BEING INSTALLED BY OTHERS, PLACE THE CONTRACTED TRAFFIC CONTROL SIGNS TO ALLOW FOR PLACEMENT OF ALL WARNING, DETOUR AND GUIDE SIGNS AS SHOWN.
- 7 "EAST" CARDINAL DIRECTION MARKERS AND RIGHT TURN ARROWS ARE SHOWN. USE OTHER CARDINAL DIRECTIONS AND ARROWS AS APPROPRIATE.

BARRICADES AND SIGNS
FOR
VARIOUS CLOSURES

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
May 2023 /S/ Andrew Heidtke
DATE WORK ZONE ENGINEER


FHWA



**THIS DRAWING PROVIDES GENERAL GUIDANCE
ON TYPICAL DETOUR SIGN LAYOUT AND SPACING.
SEE PROJECT DETOUR SIGNING SHEETS FOR
SPECIFIC DETAILS FOR EACH PROJECT.**

SEE SPECIFIC PROJECT DETOUR
SIGNING DETAIL SHEETS AND
DETAIL A OR B ON SDD SHEET 15C02 - SHEET "a"

SDD 15C02 - 09c



DETAIL F DETOUR SIGNING

GENERAL NOTES

THE EXACT NUMBER, LOCATION AND SPACING OF ALL SIGNS SHALL BE ADJUSTED TO FIT FIELD CONDITIONS AS APPROVED BY THE ENGINEER.

IF THERE ARE EXISTING ROUTE MARKER ASSEMBLIES THAT WILL REMAIN IN PLACE, ADJUST THE LOCATION OF THE DETOUR ROUTE SIGNS TO CORRESPOND WITH THE EXISTING ASSEMBLIES. SEE SPECIFIC PROJECT DETOUR SIGNING DETAIL SHEETS. MODIFY EXISTING SIGNS WHERE POSSIBLE.

THE SPACING BETWEEN TRAFFIC CONTROL AND DETOUR SIGNS SHOULD BE ADJUSTED TO NOT CONFLICT WITH AND TO PROVIDE A DESIRABLE MINIMUM OF 200 FEET CLEARANCE TO EXISTING SIGNS THAT WILL REMAIN IN PLACE.

ANY SIGNS TEMPORARY OR EXISTING, WHICH CONFLICT WITH TRAFFIC CONTROL "IN USE" SHALL BE REMOVED OR COVERED AS NEEDED AND AS APPROVED BY THE ENGINEER.

SIGNS THAT WILL BE IN PLACE LESS THAN 7 CONTINUOUS DAYS AND NIGHTS MAY BE MOUNTED ON PORTABLE SUPPORTS.

"MO" SIGNS ARE THE SAME AS "M" SIGNS EXCEPT THE BACKGROUND IS ORANGE.

SIGN SIZES SHALL BE AS FOLLOWS:

M3-X SHALL BE 24" X 12" (36" X 18" IF NEEDED TO MATCH EXISTING SIGNS)
M4-8 SHALL BE 24" X 12" (36" X 18" IF NEEDED TO MATCH EXISTING SIGNS)
M1-4, M1-5A AND M1-6 SHALL BE 24" X 24" (36" X 36" IF NEEDED TO MATCH EXISTING SIGNS)
M05-1 AND M06-1 SHALL BE 21" X 21" (30" X 30" IF NEEDED TO MATCH EXISTING SIGNS)
M4-9 AND M4-59 SHALL BE 30" X 24"
M4-8a SHALL BE 24" X 18"
G20-51 SHALL BE 60" X 24"
W20-2A SHALL BE 48" X 48"
D1-X SHALL BE AS SHOWN ON SPECIFIC PROJECT SIGNING DETAIL SHEETS.

* OPTIONAL SIGNS. SEE SPECIFIC PROJECT DETOUR SIGNING DETAIL SHEETS.

**** FOR A TOWN ROAD OR LOCAL STREET DETOURED ONTO A STATE TRUNK HIGHWAY, PLACE A ROAD NAME PLAQUE ABOVE THE M4-9 SIGN AS SPECIFIED IN THE CONTRACT.**

DETOUR SIGNING FOR MAINLINE CLOSURES


STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
May 2023
DATE


/S/ Andrew Heidtke
WORK ZONE ENGINEER

FHWA

SDD15C02 - 09c



WIDTH RESTRICTION SIGNING



WIDTH RESTRICTION SIGNING
2 LANE HIGHWAY

LEGEND

⊙ SIGN ON PERMANENT SUPPORT

GENERAL NOTES

- THE EXACT NUMBER, LOCATION AND SPACING OF ALL SIGNS SHALL BE ADJUSTED TO FIT FIELD CONDITIONS AS APPROVED BY THE ENGINEER.
- THE SPACING BETWEEN SIGNS SHOULD BE ADJUSTED TO NOT CONFLICT WITH AND TO PROVIDE A DESIRABLE MINIMUM OF 200 FEET CLEARANCE TO EXISTING SIGNS THAT WILL REMAIN IN PLACE.
- ANY SIGNS TEMPORARY OR EXISTING, WHICH CONFLICT WITH TRAFFIC CONTROL "IN USE" SHALL BE REMOVED OR COVERED AS NEEDED AND AS APPROVED BY THE ENGINEER.
- ALL SIGNS ARE 48" X 48" UNLESS OTHERWISE NOTED.
- "WO" SIGNS ARE THE SAME AS "W" SIGNS EXCEPT THE BACKGROUND IS ORANGE.
- WIDTH ON SIGN TO BE APPROXIMATELY ONE FOOT LESS THAN AVAILABLE WIDTH.
- * PLACE 500 FEET AFTER THE W20 - 1A AND 500 FEET BEFORE ADDITIONAL SIGNS FOR ROADWAYS WITH A PRE - CONSTRUCTION SPEED LIMIT OF 45 MPH OR MORE. FOR 35-40 MPH, USE 350 FOOT TYPICAL SPACING. FOR 25-30 MPH, USE 200 FOOT TYPICAL SPACING.
- ** SIGN SHALL BE VISIBLE FROM ROADWAY.
- *** ADDITIONAL SIGNS NEEDED IF THERE IS AN ON RAMP BETWEEN SIGNS.




ADVANCED WIDTH RESTRICTION SIGNING	
STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION	
APPROVED May 2023 DATE	/S/ Andrew Heidtke WORK ZONE ENGINEER
FHWA	



PERMANENT PAVEMENT MARKING

APPROVED
December 2024
DATE

/S/ Jeannie Silver
Statewide Pavement Marking Engineer



TEMPORARY BARRIER OFFSET FROM EDGE LINE


GENERAL NOTES

DETAILS OF CONSTRUCTION NOT SHOWN ON THIS DRAWING SHALL CONFORM TO STANDARD SPECIFICATIONS AND SPECIAL PROVISIONS.


LEGEND

DIRECTION OF TRAFFIC


* CONFIRM MARKING LINE WIDTH WITH THE MISCELLANEOUS QUANTITIES



TWO WAY TRAFFIC




ONE WAY TRAFFIC





FREEWAYS AND EXPRESSWAYS

TEMPORARY PAVEMENT MARKING


TEMPORARY LONGITUDINAL PAVEMENT MARKING	
STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION	
APPROVED December 2024 DATE	/S/ Jeannie Silver Statewide Pavement Marking Engineer
FHWA	



NARROW SIDEWALK PASSING DETAIL



TEMPORARY PEDESTRIAN ACCESS




LEGEND

GENERAL NOTES

BARRICADE DEVICE SELECTED FROM APPROVED PRODUCT LIST

- REFLECTIVE SHEETING SHALL FOLLOW THE REQUIREMENTS IN THE APPROVED PRODUCTS LISTING FOR SIGN SHEETING.
 - SHEETING REQUIRED ON MORE THAN 50% OF BARRICADE WIDTH.
 - PLACE SHEETING ON BOTH SIDES OF THE BARRICADE.
 - USE THIS DETAIL FOR SHEETING PLACEMENT REFERENCE.
 - WHEN THE TEMPORARY PEDESTRIAN ACCESS ROUTE RUNS PARALLEL ON THE ROADWAY SURFACE, THE MAXIMUM CROSS SLOPE WILL MATCH THE EXISTING ROADWAY CROSS SLOPE.
- WHERE SIGNS FOR TEMPORARY PEDESTRIAN ACCOMMODATIONS ARE SHOWN BEING PLACED BEHIND TEMPORARY PEDESTRIAN BARRICADE, THE SIGNS MAY BE MOUNTED ON THE TEMPORARY PEDESTRIAN BARRICADE INSTEAD. A CORRUGATED POLYPROPYLENE OR POLYETHYLENE PLASTIC SIGN BASE SHALL BE USED IF MOUNTED ON THE BARRICADE. THE TOP OF THE SIGN SHALL BE MOUNTED BELOW THE TOP OF THE BARRICADE TO ALLOW A CONTINUOUS HAND-TRAILING EDGE.




TEMPORARY PEDESTRIAN BARRICADE *




TEMPORARY PEDESTRIAN FLAGGING

TRAFFIC CONTROL,
PEDESTRIAN
ACCOMMODATION

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION




PERSPECTIVE VIEW



FRONT VIEW

TEMPORARY CURB RAMP PARALLEL TO CURB



SIDE VIEW

GENERAL NOTES

CURB RAMPS SHALL BE 48" MIN. WIDTH WITH A FIRM, STABLE AND SLIP RESISTANT SURFACE.

CURB RAMPS AND LANDINGS SHALL HAVE A 1:48 (2.1%) MAX. CROSS-SLOPE.



CLEAR SPACE OF 48" X 48" SHALL BE PROVIDED ABOVE AND BELOW THE CURB RAMP. LATERAL JOINTS OR GAPS BETWEEN SURFACES SHALL BE LESS THAN 1/2" WIDTH.

CHANGES BETWEEN SURFACE HEIGHTS SHALL NOT EXCEED 1/2". LATERAL EDGES MAY BE VERTICAL UP TO 1/4" HIGH AND SHALL BE BEVELED AT 1:2 BETWEEN 1/4" AND 1/2".

- ① INSTALL CONTRASTING TEMPORARY DETECTABLE WARNING FIELD AT PEDESTRIAN STREET CROSSINGS, AS SHOWN IN THE PLANS.
- ② PROTECTIVE EDGING WITH A 2" MIN. HEIGHT SHALL BE INSTALLED WHEN A CURB RAMP OR LANDING PLATFORM HAS A VERTICAL DROP OF 6" OR GREATER OR HAS A SIDE APRON SLOPE STEEPER THAN 1:3 (33%). PROTECTIVE EDGING SHOULD BE CONSIDERED WHEN CURB RAMPS OR LANDING PLATFORMS HAVE A VERTICAL DROP OF 3" OR MORE.
- ③ DETECTABLE EDGING WITH 6" MIN. HEIGHT AND CONTRASTING COLOR SHALL BE INSTALLED ON ALL CURB RAMP LANDINGS WHERE THE WALKWAY CHANGES DIRECTION (TURNS).
- ④ DO NOT RESTRICT WATER FLOW IN THE GUTTER SYSTEM.
- ⑤ ENSURE CURB RAMP IS OUT OF THE GUTTER PAN.
- ⑥ IF ONLY PART OF THE END PANEL OF TEMPORARY PEDESTRIAN BARRICADE PANEL IS NEEDED, EXTEND EXCESS PORTION OF TEMPORARY PEDESTRIAN BARRICADE PANEL HERE.
- ⑦ LANDING TO BE SLOPED A MAXIMUM OF 2.1% IN ALL DIRECTIONS OF PEDESTRIAN TRAVEL.

TRAFFIC CONTROL,
PEDESTRIAN
ACCOMMODATION

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION



TEMPORARY CURB RAMP PERPENDICULAR TO CURB

GENERAL NOTES

CURB RAMPS SHALL BE 48" MINIMUM WIDTH WITH A FIRM, STABLE AND SLIP RESISTANT SURFACE.

ALTERNATE SIDEWALK WORK BETWEEN LEFT AND RIGHT SIDE OF ROADWAY TO MAINTAIN PEDESTRIAN ACCESS.

CURB RAMPS AND LANDINGS SHALL HAVE A 1:48 (2.1%) MAX. CROSS-SLOPE.

CLEAR SPACE OF 48" X 48" SHALL BE PROVIDED ABOVE AND BELOW THE CURB RAMP.

LATERAL JOINTS OR GAPS BETWEEN SURFACES SHALL BE LESS THAN ½" WIDTH.

CHANGES BETWEEN SURFACE HEIGHTS SHALL NOT EXCEED ½". LATERAL EDGES MAY BE VERTICAL UP TO ¼" HIGH AND SHALL BE BEVELED AT 1:2 BETWEEN ¼" AND ½".

- ① INSTALL CONTRASTING TEMPORARY DETECTABLE WARNING FIELD AT PEDESTRIAN STREET CROSSINGS, AS SHOWN IN THE PLANS
- ② PROTECTIVE EDGING WITH A 2" MIN. HEIGHT SHALL BE INSTALLED WHEN A CURB RAMP OR LANDING PLATFORM HAS A VERTICAL DROP OF 6" OR GREATER OR HAS A SIDE APRON SLOPE STEEPER THAN 1:3 (33%). PROTECTIVE EDGING SHOULD BE CONSIDERED WHEN CURB RAMPS OR LANDING PLATFORMS HAVE A VERTICAL DROP OF 3" OR MORE.
- ③ DETECTABLE EDGING WITH 6" MIN. HEIGHT AND CONTRASTING COLOR SHALL BE INSTALLED ON ALL CURB RAMP LANDINGS WHERE THE WALKWAY CHANGES DIRECTION (TURNS).
- ④ DO NOT RESTRICT WATER FLOW IN THE GUTTER SYSTEM.
- ⑤ CAN ONLY BE USED FOR RAMPS WITH 6" OR LESS OF VERTICAL CHANGE.

**TRAFFIC CONTROL,
PEDESTRIAN ACCOMMODATION**


STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

LEGEND

- SIGN ON TEMPORARY SUPPORT
- TRAFFIC CONTROL DRUM
- WORK AREA
- UNDER PEDESTRIAN TRAFFIC
- TEMPORARY CURB RAMP
- TEMPORARY PEDESTRIAN SURFACE "A"
- TEMPORARY PEDESTRIAN SURFACE "B"
- TEMPORARY PEDESTRIAN BARRICADE
- DIRECTION OF TRAFFIC

GENERAL NOTES

- TYPICAL TEMPORARY PEDESTRIAN BARRICADE PANEL IS 6 FEET LONG.
- WHERE TEMPORARY BARRICADE RUNS PARALLEL ALONG SIDEWALK, PLACE THE FACE OF THE BARRICADE AT THE EDGE OF THE SIDEWALK.
- SHOULDER OR LANE CLOSURE ADVANCE WARNING AND BUFFER SPACE REQUIRED.
 - PLACE EXCESS PORTION OF TEMPORARY PEDESTRIAN BARRICADE PANEL PAST THE SIDEWALK ON THE SIDE AWAY FROM THE ROAD.
 - MOUNTING HEIGHT OF 5 FEET FROM THE SURFACE TO THE BOTTOM OF SIGN.
 - USE EXISTING PAVEMENT SURFACE. IF EXISTING PAVEMENT SURFACE HAS BEEN REMOVED, USE A TEMPORARY PEDESTRIAN SURFACE. WHEN THE TEMPORARY PEDESTRIAN ACCESS ROUTE RUNS PARALLEL ON THE ROADWAY SURFACE, THE MAXIMUM CROSS SLOPE WILL MATCH THE EXISTING ROADWAY CROSS SLOPE.



SIDEWALK BYPASS, SINGLE SIDE


TRAFFIC CONTROL,
PEDESTRIAN ACCOMMODATION

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

LEGEND

- TYPE III BARRICADE WITH ATTACHED SIGN
- SIGN ON PERMANENT SUPPORT
- TRAFFIC CONTROL DRUM WITH TYPE "C" STEADY BURN LIGHT
- TRAFFIC CONTROL DRUM
- FLAGS, 16" X 16" MIN. (ORANGE)
- REMOVING PAVEMENT MARKING
- DIRECTION OF TRAFFIC
- ASPHALTIC PAVEMENT WIDENING
- CONCRETE BARRIER TEMPORARY PRECAST
- TEMPORARY SIGNAL. SEE SDD 09G02 FOR EXACT PLACEMENT

WIDTH ON SIGN TO BE APPROX. 1-FOOT LESS THAN AVAILABLE WIDTH. (OMIT IF AVAILABLE WIDTH IS MORE THAN 16 FEET)



GENERAL NOTES

- THE EXACT NUMBER, LOCATION, AND SPACING OF ALL SIGNS AND DEVICES SHALL BE ADJUSTED TO FIT FIELD CONDITIONS AS APPROVED BY THE ENGINEER.
- THE SPACING BETWEEN TRAFFIC CONTROL SIGNS SHOULD BE ADJUSTED TO NOT CONFLICT WITH AND TO PROVIDE A MINIMUM OF 200 FEET (500 FEET DESIRABLE) CLEARANCE TO EXISTING SIGNS THAT WILL REMAIN IN PLACE..
- THIS LANE CLOSURE IS TYPICAL FOR CLOSING RIGHT LANE - REVERSE FOR CLOSING LEFT LANE.
- ALL SIGNS ARE 48" x 48" UNLESS OTHERWISE NOTED.
- "WO" IS THE SAME AS "W" EXCEPT THE BACKGROUND IS ORANGE.
- ANY SIGNS TEMPORARY OR EXISTING, WHICH CONFLICT WITH TRAFFIC CONTROL "IN USE" SHALL BE REMOVED OR COVERED AS NEEDED OR AS APPROVED BY THE ENGINEER.
- REMOVE PAVEMENT MARKING AND PLACE TEMPORARY PAVEMENT MARKING LINES IF THE CLOSURE IS TO BE IN PLACE FOR 4 OR MORE CONTINUOUS DAYS AND NIGHTS.
- INSTALL OVERHEAD TEMPORARY SIGNAL HEADS ABOVE THE MIDDLE OF THE TRAVEL LANE THEY ARE CONTROLLING.
- 500 FOOT SPACING SHOWN IS FOR ROADWAYS WITH A PRE-CONSTRUCTION REGULATORY SPEED LIMIT OF 45 MPH OR MORE. FOR 35 - 40 MPH, USE 350 FOOT TYPICAL SPACING. FOR 25 - 30 MPH, USE 200 FOOT TYPICAL SPACING.
 - USE 300 FOOT SPACING IF THE PRE - CONSTRUCTION REGULATORY SPEED IS 35 MPH OR LESS.
 - DIMENSION DETERMINED BY CBTP TAPER FROM EDGE LINE TO TANGENT SECTION OF THE ROAD.
 - TEMPORARY PAVEMENT MARKING LINE, 18 INCH WHITE STOP LINE.
 - 700 FOOT TEMPORARY PAVEMENT MARKING LINE, 6 INCH DOUBLE YELLOW . WHEN THE DISTANCE FOR THE PRECEDING NO - PASSING ZONE IS LESS THAN THE MINIMUM DISTANCE BETWEEN ZONES AS INDICATED IN THE SPECIFICATIONS, THE TWO ZONES SHALL BE CONNECTED.
 - SEE SDD 15C02 - SHEET "F" FOR ADVANCED WIDTH RESTRICTION SIGNING.

**TRAFFIC CONTROL,
ONE LANE ROAD
WITH TEMPORARY SIGNALS**



STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
May 2023
DATE



/S/ Andrew Heidtke
WORK ZONE ENGINEER

FHWA

URBAN AREA



RURAL AREA (See Note 2)



POST EMBEDMENT DEPTH

Area of Sign Installation (Sq. Ft.)	D (Min)
20 or Less	4'
Greater than 20	5'

- Signs wider than 4 feet or 20 sq.ft or larger, shall be mounted on multiple posts. Refer to plate A4-4.
- If signs are mounted on or behind barrier wall, see A4-10 sign plate.
The Double Arrow sign (W12-1D) shall be mounted at a height of 2'-3" (±) 3". The Chevron sign (W1-8), Roundabout Chevron panel (R6-4B), Enhanced Reference Markers, Clearance Markers (W5-52), Mile Markers (D10 series), In Road Object Markers (W5-54) & End of Road Markers (W5-56) shall be mounted at a height of 4'-3" (±) 3".
- For expressways and freeways, mounting height is 7'- 3" (±) 3" or 6'-3" (±) 3" depending upon existence of a sub-sign.
- Minimum mounting height for signs mounted on traffic signal poles is 5'- 3" (±) 3".
- Offset distance shall be consistent with existing signs or consistent throughout length of project.
- Folding signs shall be mounted at a height of 5'-3" (±) 3" or as directed by the Engineer.

* * The existence of curb and gutter does not in itself mandate the vertical clearance illustrated. That height is typically measured where there is sidewalk adjacent to the roadway or parking is permitted. In the absence of sidewalk vertical clearance is measured from the top of the curb. Offset of signs is measured from the flow line.

* 6 feet from edge of a paved shoulder or 12 feet from the edge of pavement (edge line location) or 2 feet from outside edge of gravel, whichever is greater unless directed by project engineer.

TYPICAL INSTALLATION
OF PERMANENT TYPE II
SIGNS ON SINGLE POSTS

WISCONSIN DEPT OF TRANSPORTATION

APPROVED

Matthew R. Rauch
for State Traffic Engineer

DATE 12/6/23

PLATE NO. A4-3.23


PROJECT NO:

HWY:

COUNTY:

SHEET NO:


E



ELEVATION VIEW


DETAIL OF WOOD 4 X 6 SIGN POST IN BOX-OUT

- NOTES:**
1. ALL MATERIAL TO BE APPROVED BY ENGINEER PRIOR TO INSTALLATION
 2. SEE SIGN PLATE A4-8 FOR SIGN HARDWARE REQUIREMENTS
 3. 18 INCH X 18 INCH SQUARE BOX-OUTS MAY BE USED FOR INSTALLATIONS IN EXISTING CONCRETE OR ASPHALT LOCATIONS.



ELEVATION VIEW

DETAIL OF STEEL 2 X 2 SIGN POST IN BOX-OUT



PLAN VIEW

FOR NEW CONCRETE/ASPHALT INSTALLATIONS

**SIGN POST
BOX-OUTS
A4-3B**

WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
for State Traffic Engineer

DATE 1/27/14 PLATE NO. A4-3B.1

PROJECT NO:


HWY:

COUNTY:



SHEET NO:

E


URBAN AREA




RURAL AREA (See Note 3)



2' Min - 4' Max (See Note 6)



48" DIAMOND WARNING SIGN



48" DIAMOND WARNING SIGN

GENERAL NOTES

1. For 3 or 4 post installations, individual post spacing shall be greater than 3'-6".
2. See tables below for required number of posts.
3. For expressways and freeways, mounting height is 7'-3" (±) 3" or 6'-3" (±) 3" depending upon existence of sub-sign.
4. The (±) tolerance for mounting height is 3 inches.
5. J-Assemblies are considered to be one sign for mounting height.
6. Offset distance shall be consistent with existing signs or consistent throughout length of project.
7. Folding signs shall be mounted at a height of 5'-3" (±) 3" or as directed by the engineer.
8. The Double Arrow sign (W12-1) shall be mounted at a height of 2'-3" (±) 3". The Chevron sign (W1-8), Roundabout Chevron panel (R6-4B), Clearance Markers (W5-52), Mile Markers (D10 series), In Road Object Markers (W5-54) & End of Road Markers (W5-56) shall be mounted at a height of 4'-3" (±) 3".

* 6 feet from edge of a paved shoulder or 12 feet from the edge of pavement (edge line location) or 2 feet from outside edge of gravel, whichever is greater unless directed by project engineer.

** The existence of curb and gutter does not in itself mandate the vertical clearance illustrated. That height is typically measured where there is sidewalk adjacent to the roadway or parking is permitted. In the absence of sidewalk vertical clearance is measured from the top of the curb. Offset of signs is measured from the flow line.

*** See A4-3 sign plate for signs 4' or less in width and less than 20 S.F. in area.

SIGN SHAPE OTHER THAN DIAMOND (TWO POSTS REQUIRED)	
L	E
Greater than 48" Less than 60"	12"
60" to 108"	L/5

SIGN SHAPE OTHER THAN DIAMOND (THREE POSTS REQUIRED)	
L	E
Greater than 108" to 144"	12"

POST EMBEDMENT DEPTH

Area of Sign Installation (Sq.Ft.)	D (Min)
20 or Less	4'
Greater than 20	5'

TYPICAL INSTALLATION
OF TYPE II SIGNS
ON MULTIPLE POSTS

WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
for State Traffic Engineer

DATE 12/6/23 PLATE NO. A4-4.16



PROJECT NO:

HWY:

COUNTY:

SHEET NO:

E



Nuts, bolts and lags used for mounting signs shall have hexagonal heads and shall be either :

- a. Hot dip galvanized in accordance with ASTM Designation: A 153, Class D, or SC 3
- b. Electro-galvanized in accordance with ASTM Designation : B 633, TYPE III, SC 3.


Threads on bolts and nuts shall be manufactured with sufficient allowance for the cadmium plate or galvanized coating to permit the nuts to run freely on the bolts.

- STRINGER BOLTING TO ALUMINUM SIGNS (SEE SIGN PLATE A4-18)
- MACHINE BOLTS - $\frac{5}{16}$ " X 1-3/4" Length w/ lock nuts
- WOOD POSTS (4" x 6")
- LAG SCREWS - $\frac{3}{8}$ " X 3" (NO STRINGERS ON BACK OF SIGN)
 $\frac{3}{8}$ " X 4" (STRINGERS ON BACK OF SIGN)
- SQUARE STEEL POSTS (2" x 2")
- MACHINE BOLTS - $\frac{3}{8}$ " X 3-1/4" Length w/ nuts (NO STRINGER ON BACK OF SIGN)
 $\frac{3}{8}$ " X 5" Length w/ nuts (STRINGERS ON BACK OF SIGN)
- RIVETS - $\frac{9}{32}$ " (6605-9-6) BULB-TITE, TRI-FOLD, ALUMINUM BODY/MANDREL
O.D. FLANGE .720-.765 INCH, GRIP RANGE .042-.375 INCH
- WASHERS (ALL POSTS) -
- 1-1/4" O.D. X $\frac{3}{8}$ " I.D. X $\frac{1}{16}$ " STEEL
 - 1-1/4" O.D. X $\frac{3}{8}$ " I.D. X .080 NYLON


* Two different fastening systems are shown for illustration purposes. On any individual sign, either one or the other system shall be used. Actual number of fasteners per sign varies with the sign area, but normally there are two. For a single post installation, all signs greater than 9 sq. ft. require the use of 3 fasteners.

ATTACHMENT OF SIGNS TO POSTS	
WISCONSIN DEPT OF TRANSPORTATION	
APPROVED	<i>Matthew R. Rauch</i> For State Traffic Engineer
DATE 4/1/2020	PLATE NO. A4-8.9



TELESCOPIC TUBING ANCHORS
TWO PIECE SYSTEM



DETAIL OF TUBULAR STEEL SIGN POST
(IN POURED CONCRETE OR ASPHALT)



DETAIL OF TUBULAR STEEL SIGN POST
(IN LOCATIONS OTHER THAN POURED CONCRETE OR ASPHALT)



Area of Sign Installation (Sq. Ft.)	Number of Required Posts
9 or less	1
Greater than 9 less than or equal to 18	2
Greater than 18 less than or equal to 27	3

Signs wider than 3 feet or larger than 9 sq. ft shall be mounted on multiple posts (see above table).


TUBULAR STEEL
SIGN POST
A4-9

WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
for State Traffic Engineer

DATE 2/05/15 PLATE NO. A4-9.9

7



GENERAL NOTES

1. All 4 x 6 Wood Posts shall be modified by having two 1½" diameter holes drilled perpendicular to the roadway centerline.

7

4 X 6 WOOD POST MODIFICATIONS

WISCONSIN DEPT OF TRANSPORTATION

APPROVED

Chester J. Spang
for State Traffic Engineer

DATE 3/27/97

PLATE NO. A4-11.2

PROJECT NO:

HWY:




COUNTY:

SHEET NO:


E

BANDING

SINGLE SIGN




WASHER PLACEMENT



WASHERS (ALL POSTS) -
1-1/4" O.D. X 3/8" I.D. X 1/16" STEEL
1-1/4" O.D. X 3/8" I.D. X .080 NYLON
FOR ALL TYPE H SIGNS

CHANNEL
SEE TYPICAL PANEL
INSTALLATION SHEET

"J" ASSEMBLY




SEE DETAIL B

1. Any sign over 3 feet in width shall use the V-Block banding method. See A5-10 standard plate.
2. Signs 3 feet or greater in height shall have three bracket bands installed. Signs less than 3 feet in height shall have two bracket bands installed.
3. Banding and assembly bracket shall be stainless steel. All bands shall be 3/4" in width and 0.025" thickness.
4. ALL SIGN MOUNTING BOLTS AND WASHERS SHALL BE EITHER:
 - a. Hot dip or mechanically galvanized in accordance with ASTM Designation: A 153, Class D
 - b. Electro-galvanized in accordance with ASTM designation: B 633, Type III, SC 3

STANDARD SIGN
SIGN BANDING DETAILS


WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
for State Traffic Engineer
DATE 6/10/19 PLATE NO. A5-9.4



VIEW FROM
BACK

VIEW FROM SIDE



VIEW FROM TOP

GENERAL NOTES

1. WOOD 4"X6" POST MATERIAL SHALL CONFORM TO 507.2.2 OF THE WISDOT STANDARD SPECIFICATIONS
2. BLOCK BANDING AND CLIPS SHALL BE STAINLESS STEEL, $\frac{3}{4}$ " WIDTH AND 0.025" THICKNESS
3. SIGNS 3' OR GREATER IN HEIGHT SHALL UTILIZE 3 BLOCK BANDS. SIGNS UNDER 3' IN HEIGHT SHALL UTILIZE 2 BLOCK BANDS
4. ACTUAL NUMBER OF FASTENERS PER SIGN VARIES WITH THE SIGN AREA, BUT NORMALLY THERE ARE TWO. FOR SIGNS GREATER THAN 9 S.F. 3 FASTENERS SHALL BE USED.
5. ALL SIGN MOUNTING BOLTS AND WASHERS SHALL BE EITHER:
 - a. Hot dip or mechanically galvanized in accordance with ASTM Designation: A 153, Class D
 - b. Electro-galvanized in accordance with ASTM Designation : B 633, TYPE III, SC 3
6. ALL BOLTS SHALL HAVE HEXAGONAL HEADS.
7. STEEL WASHERS SHALL BE $\frac{1}{4}$ " O.D. X $\frac{3}{8}$ " I.D. X $\frac{1}{16}$ "
8. NYLON WASHERS SHALL BE $\frac{1}{4}$ " O.D. X $\frac{3}{8}$ " I.D. X .080 FOR TYPE H OR TYPE F FACE SIGN

✱ LAG BOLTS SHALL BE $\frac{3}{8}$ " X $2\frac{1}{2}$ "

BLOCK BANDING DETAIL
(V-BLOCK OPTION)

WISCONSIN DEPT OF TRANSPORTATION


APPROVED *Matthew R. Rauch*
for State Traffic Engineer

DATE 4/19/2022 PLATE NO. A5-10.3

PROJECT NO:


SHEET NO:

E



NOTES

1. Sign is Type II - Type F Reflective
2. Color:
Background - Orange
Message - Black
3. Message Series - D
4. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.
4. M4-9L is the same as M4-9R except the arrow is reversed.



Arrow Detail

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1																											
2	30	24	1 1/2	3/8	1/2	5	4	7	8	11 1/2	12	9	3/4	4 7/8													5.00
2M	30	24	1 1/2	3/8	1/2	5	4	7	8	11 1/2	12	9	3/4	4 7/8													5.00
3	30	24	1 1/2	3/8	1/2	5	4	7	8	11 1/2	12	9	3/4	4 7/8													5.00
4	48	36	1 7/8	1/2	5/8	8	6	10 1/2	11 5/8	20 5/8	20 1/2	13 1/4	1 1/8	6 7/8													12.0
5	48	36	1 7/8	1/2	5/8	8	6	10 1/2	11 5/8	20 5/8	20 1/2	13 1/4	1 1/8	6 7/8													12.0

STANDARD SIGN
M4-9 R & L

WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
For State Traffic Engineer

DATE 2/9/2023 PLATE NO. M4-9R.6

PROJECT NO: HWY: COUNTY: SHEET NO: **E**

7



7

NOTES

1. Sign is Type II-Type F Reflective
2. Color:

Background - Orange

Message - Black
3. Message Series - D



Arrow Detail

M4 - 9RA

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1																											
2S	30	24	1 1/2	3/8	1/2	5	3	11	2	12 5/8	4	8	6	1/2	3												5.00
2M	30	24	1 1/2	3/8	1/2	5	3	11	2	12 5/8	4	8	6	1/2	3												5.00
3																											
4																											
5																											

STANDARD SIGN

M4-9RA

WISCONSIN DEPT OF TRANSPORTATION


APPROVED *Matthew R. Rauch*

for State Traffic Engineer

DATE 2/9/2023


PLATE NO. M4-9RA.3

7



M4-59R

- NOTES
- 1. Sign is Type II - Type F Reflective
 - 2. Color:
Background - Orange
Message - Black
 - 3. Message Series - D
 - 4. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown when base material is metal.
 - 5. M4-59L is the same as M4-59R except the arrow is reversed.



Arrow Detail

7

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1																											
2S	30	30	1 7⁄8	3⁄8	1⁄2	5	3 1⁄2	2 3⁄4	16 5⁄8	11 1⁄2	12	10 1⁄2	3⁄4	4 7⁄8	2 1⁄8												6.25
2M	30	30	1 7⁄8	3⁄8	1⁄2	5	3 1⁄2	2 3⁄4	16 5⁄8	11 1⁄2	12	10 1⁄2	3⁄4	4 7⁄8	2 1⁄8												6.25
3	30	30	1 7⁄8	3⁄8	1⁄2	5	3 1⁄2	2 3⁄4	16 5⁄8	11 1⁄2	12	10 1⁄2	3⁄4	4 7⁄8	2 1⁄8												6.25
4	48	48	2 1⁄4	1⁄2	5⁄8	8	5 5⁄8	4 3⁄8	26 5⁄8	20 5⁄8	20 1⁄2	17	1 1⁄8	6 7⁄8	3 3⁄8												16.0
5	48	48	2 1⁄4	1⁄2	5⁄8	8	5 5⁄8	4 3⁄8	26 5⁄8	20 5⁄8	20 1⁄2	17	1 1⁄8	6 7⁄8	3 3⁄8												16.0

PROJECT NO:


HWY:

COUNTY:

SHEET NO:

E


7



M4-60R

NOTES

1. Sign is Type II- Type F Reflective
2. Color:
Background - Orange
Message - Black
3. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.
4. M4-60L is the same as M4-60R except the arrow is reversed.




Arrow Detail

7

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1																											
2S	30	24	1 1/2	3/8	1/2	2 1/2	11	6	2	3 1/4	7	6	2														5.00
2M	30	24	1 1/2	3/8	1/2	2 1/2	11	6	2	3 1/4	7	6	2														5.00
3																											
4																											
5																											

PROJECT NO:	HWY:	COUNTY:	SHEET NO:	E
-------------	------	---------	-----------	---


7



R3-1

NOTES

1. Sign is Type II - Type H Reflective
2. Color:
Background - White
Message - See note 3
3. Border & Arrow are non reflective black, the circle with diagonal bar is reflective red.




ARROW DETAIL

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1	24		1 1/2	3/8	1/2	10 1/2	4	7 1/2	2	1 1/2	2 1/2	45	8 1/2	5	6	1/2	12										4.0
2S	24		1 1/2	3/8	1/2	10 1/2	4	7 1/2	2	1 1/2	2 1/2	45°	8 1/2	5	6	1/2	12										4.0
2M	36		2 1/4	5/8	3/4	15 3/4	6	11 1/4	3	2 1/4	3 3/4	45	12 3/4	7 1/2	9	3/4	18										9.0
3	36		2 1/4	5/8	3/4	15 3/4	6	11 1/4	3	2 1/4	3 3/4	45	12 3/4	7 1/2	9	3/4	18										9.0
4	36		2 1/4	5/8	3/4	15 3/4	6	11 1/4	3	2 1/4	3 3/4	45°	12 3/4	7 1/2	9	3/4	18										9.0
5	48		2 1/4	3/4	1	21	8	15	4	3	5	45°	17	10	12	1	24										16.0


PROJECT NO:	HWY:	COUNTY:	SHEET NO:	E
-------------	------	---------	-----------	---

7



NOTES

1. Sign is Type II - Type H Reflective
2. Color:
Background - White
Message - See note 3
3. Border & Arrow are non reflective black, the circle with diagonal bar is reflective red.




ARROW DETAIL

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1	24		1 1/2	3/8	1/2	10 1/2	4	7 1/2	2	1 1/2	2 1/2	45°	8 1/2	5	6	1/2											4.0
2S	24		1 1/2	3/8	1/2	10 1/2	4	7 1/2	2	1 1/2	2 1/2	45°	8 1/2	5	6	1/2											4.0
2M	36		2 1/4	5/8	3/4	15 3/4	6	11 1/4	3	2 1/4	3 3/4	45°	12 3/4	7 1/2	9	3/4											9.0
3	36		2 1/4	5/8	3/4	15 3/4	6	11 1/4	3	2 1/4	3 3/4	45°	12 3/4	7 1/2	9	3/4											9.0
4	36		2 1/4	5/8	3/4	15 3/4	6	11 1/4	3	2 1/4	3 3/4	45°	12 3/4	7 1/2	9	3/4											9.0
5	48		2 1/4	3/4	1	21	8	15	4	3	5	45°	17	10	12	1											16.0


PROJECT NO:		HWY:		COUNTY:		SHEET NO:		E
-------------	--	------	--	---------	--	-----------	--	---

7



NOTES

- 1. Sign is Type II - Type H Reflective
- 2. Color:
Background - White
Message - Black
- 3. Message Series - D



7

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Areq. sq. ft.
1																											
2S	24	36	1 1/2	3/8	1/2	5	3	7	2 1/2	4	8	8 3/8	9	1	3	5	5 5/8	6 1/4	60°	5 1/4	2 1/4	7 1/8	1/2	3/8	1 3/8		6.0
2M	24	36	1 1/2	3/8	1/2	5	3	7	2 1/2	4	8	8 3/8	9	1	3	5	5 5/8	6 1/4	60°	5 1/4	2 1/4	7 1/8	1/2	3/8	1 3/8		6.0
3																											
4																											
5																											


PROJECT NO:

HWY:

COUNTY:


SHEET NO:

E



NOTES

- 1. Signs are Type II - Type H Reflective
- 2. Color:
 - Background - White
 - Message - Black
- 3. Message Series - R10-11 - D except line 1 is Series E
R10-11D - Series C
- 4. Signs used with Driveway Assistance Device Only



SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	v	W	X	Y	Z	Area sq. ft.
1																											
2S	24	30	1 1/2	3/8	1/2	5	4	2	2 3/4	1 1/2	4 5/8	6 3/8	6 1/4	3	9 1/4	6	8 1/4	1	8 1/4	1 3/8	8 3/8	3 7/8	8 5/8				5.0
2M	24	30	1 1/2	3/8	1/2	5	4	2	2 3/4	1 1/2	4 5/8	6 3/8	6 1/4	3	9 1/4	6	8 1/4	1	8 1/4	1 3/8	8 3/8	3 7/8	8 5/8				5.0
3																											
4																											
5																											

STANDARD SIGN

R10-11

WISCONSIN DEPT OF TRANSPORTATION


APPROVED

Matthew R. Rauch
for State Traffic Engineer

DATE 11/22/23

PLATE NO. R10-11.1

7



R10-17A

NOTES

- 1. Sign is Type II - Type H Reflective
- 2. Color:
Background - White
Message - Black
- 3. Message Series - D

7

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1																											
2S	30	36	1 7/8	1/2	5/8	4	3 3/8	2 1/4	3 5/8	7 3/4	6 3/4	10 3/8	9 1/2	8 3/8	6 5/8											7.5	
2M	30	36	1 7/8	1/2	5/8	4	3 3/8	2 1/4	3 5/8	7 3/4	6 3/4	10 3/8	9 1/2	8 3/8	6 5/8											7.5	
3																											
4																											
5																											

PROJECT NO:

HWY:

COUNTY:

SHEET NO:


E

STANDARD SIGN
R10-17A

WISCONSIN DEPT OF TRANSPORTATION


APPROVED *Matthew R. Rauch*
For State Traffic Engineer

DATE 2/5/24 PLATE NO. R10-17A.3




R11-2


- NOTES
1. Sign is Type II - Type H Reflective
 2. Color:
Background - White
Message - Black
 3. Message Series - D
 4. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.
 5. Modify the message as required.



R11-2R



R11-2T




R11-2L

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1																											
2S	48	30	1 7/8	1/2	5/8	8	5	4	13 1/4	13 1/2	19	14	15	13	15 5/8												10.0
2M	48	30	1 7/8	1/2	5/8	8	5	4	13 1/4	13 1/2	19	14	15	13	15 5/8												10.0
3	48	30	1 7/8	1/2	5/8	8	5	4	13 1/4	13 1/2	19	14	15	13	15 5/8												10.0
4	48	30	1 7/8	1/2	5/8	8	5	4	13 1/4	13 1/2	19	14	15	13	15 5/8												10.0
5	48	30	1 7/8	1/2	5/8	8	5	4	13 1/4	13 1/2	19	14	15	13	15 5/8												10.0

STANDARD SIGN R11-2	
WISCONSIN DEPT OF TRANSPORTATION	
APPROVED	<i>Matthew R. Rauch</i> For State Traffic Engineer
DATE 2/5/24	PLATE NO. R11-2.12

PROJECT NO:	HWY:	COUNTY:	SHEET NO:	E
-------------	------	---------	-----------	---

7



R11-4

NOTES

- 1. Sign is Type II - Type H Reflective
- 2. Color:
Background - White
Message - Black
- 3. Message Series - C
- 4. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.

7

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1																											
2S	60	30	1 7/8	1/2	5/8	6	5	4	2 1/2	16 1/8		7/8	23 3/8	3 1/4	3	16 3/4	5 1/4	2 1/4	24 1/4								12.5
2M	60	30	1 7/8	1/2	5/8	6	5	4	2 1/2	16 1/8		7/8	23 3/8	3 1/4	3	16 3/4	5 1/4	2 1/4	24 1/4								12.5
3																											
4																											
5																											


PROJECT NO:

HWY:

COUNTY:

SHEET NO:


E



W12-52

NOTES

- 1. Sign is Type II - Type F Reflective
- 2. Color:
Background - Orange
Message - Black
- 3. Message Series - See note 5
- 4. The top line is series E, the numerals are series C, and the bottom line is series D.
- 5. Substitute appropriate numerals and adjust spacing as required.



ARROW DETAIL

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1																											
2S	48		3	¾	1	6	12	11 ⅜	9 ⅝	11 ½	16	13	12	15 ⅝	8	9 ¼	1 ¼	10 ⅝									16.0
2M	48		3	¾	1	6	12	11 ⅜	9 ⅝	11 ½	16	13	12	15 ⅝	8	9 ¼	1 ¼	10 ⅝									16.0
3																											
4																											
5																											







STANDARD SIGN

W12-52

WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
For State Traffic Engineer

DATE 3/10/2024 PLATE NO. W12-52.8



NOTES

- 1. Sign is Type II - Type F Reflective
- 2. Color:
Background - Orange
Message - Black
- 3. Message Series - See note 5
- 4. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.
- 5. Line 1 is Series D.
Line 2 is Series D for AHEAD and Series C for all other distances.

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	v	w	X	Y	Z	Area sq. ft.
1	36		2 1/4	5/8	3/4	6	5	1	2 1/4	14 3/4	15	11 5/8	9	1 3/8	1 7/8	5 5/8	10 1/8	2 1/2	1 1/8	4 1/2	3 1/2	8	1 3/4	10 3/4			9.0
2S	48		3	3/4	1	8	7	1 1/4	3	19 3/4	20	15 1/2	12	1 7/8	2 5/8	7 1/2	13 1/2	3 3/8	1 1/2	6	4 5/8	10 5/8	2 3/8	14 3/8			16.0
2M	48		3	3/4	1	8	7	1 1/4	3	19 3/4	20	15 1/2	12	1 7/8	2 5/8	7 1/2	13 1/2	3 3/8	1 1/2	6	4 5/8	10 5/8	2 3/8	14 3/8			16.0
3	48		3	3/4	1	8	7	1 1/4	3	19 3/4	20	15 1/2	12	1 7/8	2 5/8	7 1/2	13 1/2	3 3/8	1 1/2	6	4 5/8	10 5/8	2 3/8	14 3/8			16.0
4	48		3	3/4	1	8	7	1 1/4	3	19 3/4	20	15 1/2	12	1 7/8	2 5/8	7 1/2	13 1/2	3 3/8	1 1/2	6	4 5/8	10 5/8	2 3/8	14 3/8			16.0
5	48		3	3/4	1	8	7	1 1/4	3	19 3/4	20	15 1/2	12	1 7/8	2 5/8	7 1/2	13 1/2	3 3/8	1 1/2	6	4 5/8	10 5/8	2 3/8	14 3/8			16.0

STANDARD SIGN
W20-2A,B,C,D,F & G

WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
For State Traffic Engineer


DATE 1/10/2024 PLATE NO. W20-2.7

PROJECT NO:


HWY:

COUNTY:


SHEET NO: E




W20-3A




W20-3D




W20-3C



W20-3B



W20-3G



W20-3F

NOTES

1. Sign is Type II - Type F Reflective
2. Color:
Background - Orange
Message - Black
3. Message Series - see note 5
4. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.
5. Lines 1 and 2 are Series D.
Line 3 is Series D for AHEAD and Series C for all other distances.


SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	v	W	X	Y	Z	Area sq. ft.
1	36		2 1/4	5/8	3/4	5	3 3/8	3 1/2	1 1/8	4	8 3/8	8 7/8	12 1/2	11	9	6	10 1/8	2 1/2	1 7/8	5 5/8	8	1 3/8	4 1/2	3 1/2	10 3/4	1 3/4	9.0
2S	48		3	3/4	1	7	4 1/2	4 3/4	1 1/2	5 1/4	11 3/4	12 1/2	17 1/4	14 5/8	12	8	13 1/2	3 3/8	2 5/8	7 1/2	10 5/8	1 7/8	6	4 5/8	14 3/8	2 3/8	16.0
2M	48		3	3/4	1	7	4 1/2	4 3/4	1 1/2	5 1/4	11 3/4	12 1/2	17 1/4	14 5/8	12	8	13 1/2	3 3/8	2 5/8	7 1/2	10 5/8	1 7/8	6	4 5/8	14 3/8	2 3/8	16.0
3	48		3	3/4	1	7	4 1/2	4 3/4	1 1/2	5 1/4	11 3/4	12 1/2	17 1/4	14 5/8	12	8	13 1/2	3 3/8	2 5/8	7 1/2	10 5/8	1 7/8	6	4 5/8	14 3/8	2 3/8	16.0
4	48		3	3/4	1	7	4 1/2	4 3/4	1 1/2	5 1/4	11 3/4	12 1/2	17 1/4	14 5/8	12	8	13 1/2	3 3/8	2 5/8	7 1/2	10 5/8	1 7/8	6	4 5/8	14 3/8	2 3/8	16.0
5	48		3	3/4	1	7	4 1/2	4 3/4	1 1/2	5 1/4	11 3/4	12 1/2	17 1/4	14 5/8	12	8	13 1/2	3 3/8	2 5/8	7 1/2	10 5/8	1 7/8	6	4 5/8	14 3/8	2 3/8	16.0

STANDARD SIGN
W20-3A, B, C, D, F & G

WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
for State Traffic Engineer

DATE 1/10/2024 PLATE NO. W20-3.8



NOTES

- 1. Sign is Type II - Type F Reflective
- 2. Color:
Background - Orange
Message - Black
- 3. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.
- 4. W01-4L is the same as W01-4R except the arrow is reversed along the vertical centerline.

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1	36		2 1/4	5/8	3/4	5 1/4	4	12 3/8	7 7/8	16 7/8	10 1/2	1 5/8	6	4 1/2	1	1/2	2 1/4	7 1/2									9.0
2S	48		3	3/4	1	7	5 1/4	16 1/2	10 1/2	22 1/2	14	2 1/4	8	6	1 1/4	5/8	3	10									16.0
2M	48		3	3/4	1	7	5 1/4	16 1/2	10 1/2	22 1/2	14	2 1/4	8	6	1 1/4	5/8	3	10									16.0
3	48		3	3/4	1	7	5 1/4	16 1/2	10 1/2	22 1/2	14	2 1/4	8	6	1 1/4	5/8	3	10									16.0
4	48		3	3/4	1	7	5 1/4	16 1/2	10 1/2	22 1/2	14	2 1/4	8	6	1 1/4	5/8	3	10									16.0
5	48		3	3/4	1	7	5 1/4	16 1/2	10 1/2	22 1/2	14	2 1/4	8	6	1 1/4	5/8	3	10									16.0


STANDARD SIGN
W01-4

WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
for State Traffic Engineer

DATE 1/24/2024 PLATE NO. W01-4.2

7



NOTES

- 1. Sign is Type II - Type F Reflective
- 2. Color:
Background - Orange
Message - Black
- 3. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.

7

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1																											
2S	48	24	1 7/8	1/2	5/8		12	13 1/4	1	7 1/2	6 1/2	3 1/4	19 1/2	39													8.0
2M	48	24	1 7/8	1/2	5/8		12	13 1/4	1	7 1/2	6 1/2	3 1/4	19 1/2	39													8.0
3	60	30	1 7/8	1/2	5/8		15	16 1/4	1 1/4	9 1/4	8	4	24 3/8	48 3/4													12.5
4	60	30	1 7/8	1/2	5/8		15	16 1/4	1 1/4	9 1/4	8	4	24 3/8	48 3/4													12.5
5	60	30	1 7/8	1/2	5/8		15	16 1/4	1 1/4	9 1/4	8	4	24 3/8	48 3/4													12.5

STANDARD SIGN
W01-6

WISCONSIN DEPT OF TRANSPORTATION

APPROVED
Matthew R. Rauch
for State Traffic Engineer

DATE 1/24/2024 PLATE NO. W01-6.2


PROJECT NO:

HWY:


COUNTY:

SHEET NO:

E



W05-52L



W05-52R

NOTES

- 1. Sign is Type II - Type F Reflective
- 2. Color:
 - Background - Orange
 - Message - Black
- 4. Alternate colors of stripes as shown.

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1																											
2S	12	36	1 1/2			4 3/8	3 1/2	5 5/8	45°	4	4																3.0
2M	12	36	1 1/2			4 3/8	3 1/2	5 5/8	45°	4	4																3.0
3	18	54	1 1/2			6	5 1/2	8 1/2	45°	6	6 9/16																6.75
4																											
5																											

PROJECT NO:


HWY:

COUNTY:


SHEET NO:

E

7



W057-52



* See note 5

NOTES

- 1. Sign is Type II - Type F Reflective
- 2. Color:
Background - Orange
Message - Black
- 3. Message Series - C
- 4. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.
- 5. Substitute appropriate numerals to the nearest quarter mile and optically adjust spacing to achieve proper balance.

7

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1	36	24	1 1/2	3/8	1/2	6	4 1/2	3	4 3/4	14 5/8	10 5/8	11 3/8	2	12													6.0
2S	48	36	2 1/4	1/2	5/8	8	7	6	6 3/8	19 1/2	14	15	2 3/4	16 3/8													12.0
2M	48	36	2 1/4	1/2	5/8	8	7	6	6 3/8	19 1/2	14	15	2 3/4	16 3/8													12.0
3	48	36	2 1/4	1/2	5/8	8	7	6	6 3/8	19 1/2	14	15	2 3/4	16 3/8													12.0
4	48	36	2 1/4	1/2	5/8	8	7	6	6 3/8	19 1/2	14	15	2 3/4	16 3/8													12.0
5	48	36	2 1/4	1/2	5/8	8	7	6	6 3/8	19 1/2	14	15	2 3/4	16 3/8													12.0

STANDARD SIGN
W057-52

WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
for State Traffic Engineer

DATE 2/1/2024 PLATE NO. W057-52.3

DESIGN DATA

LIVE LOAD:
TAKEN FROM HSI, 02/01/2025
INVENTORY RATING HS-15
OPERATING RATING HS-25
WISCONSIN STANDARD PERMIT
VEHICLE (WIS-SPV) 180 KIPS

MATERIAL PROPERTIES

CONCRETE MASONRY, DECK REPAIR f'c = 4,000 PSI
HIGH STRENGTH BAR STEEL
REINFORCEMENT GRADE 60 fy = 60,000 PSI

TRAFFIC DATA


AADT (2046) = 6,287
DESIGN SPEED = 35 MPH

LEGEND

(X) INDICATES WING NUMBER


LIST OF DRAWINGS

- GENERAL PLAN
- CROSS SECTION, QUANTITIES & NOTES
- WEST ABUTMENT
- EAST ABUTMENT
- STRIP SEAL EXPANSION JOINT DETAILS - 1
- STRIP SEAL EXPANSION JOINT DETAILS - 2
- STRIP SEAL EXPANSION JOINT DETAILS - 3
- SUPERSTRUCTURE DETAILS




PLAN

(JOINT REPLACEMENT - 4 SPAN CONTINUOUS STEEL DECK GIRDER BRIDGE)



May 22, 2025



ELEVATION

NORMAL TO RED CEDAR RIVER

BRIDGE OFFICE CONTACT
AARON BONK, P.E.
TELEPHONE: (608) 261-0261

CONSULTANT CONTACT
ERIC PRICE, P.E.
TELEPHONE: (608) 826-6146

NO.	DATE	REVISION	BY
CORRE 			
STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION			
ACCEPTED	 EMK		05/22/25
CHIEF STRUCTURES DESIGN ENGINEER		DATE	
STRUCTURE B-17-5			
STH 29 OVER RED CEDAR RIVER			
COUNTY	DUNN	TOWN/CITY/VILLAGE	MENOMONIE
DESIGN SPEC. REHABILITATION N/A			
DESIGNED BY	WCAB	DESIGN CK'D	ETP
DRAWN BY	WCAB	PLANS CK'D	ETP
GENERAL PLAN			SHEET 1 OF 8

SCALE =

GENERAL NOTES

DRAWINGS SHALL NOT BE SCALED.

SEE ROAD PLANS FOR ADDITIONAL TRAFFIC CONTROL DETAILS.

THE FIRST DIGIT OF A THREE DIGIT BAR MARK SIGNIFIES THE BAR SIZE.

BAR STEEL REINFORCEMENT SHALL BE EMBEDDED 2" CLEAR UNLESS SHOWN OR NOTED OTHERWISE.

DIMENSIONS SHOWN ARE BASED ON THE ORIGINAL PLANS WHICH ARE AVAILABLE FROM THE WISCONSIN DEPARTMENT OF TRANSPORTATION.

THE PROPOSED WORK CONSISTS OF REPLACING THE JOINTS AT BOTH ABUTMENTS, ZONE PAINTING AT BOTH ABUTMENTS AND SLOPE RESTORATION AT THE ABUTMENTS.

EXPANSION JOINT ASSEMBLY, INCLUDING ANCHOR STUDS AND HARDWARE, SHALL BE PAID FOR AT THE LINEAR FOOT UNIT PRICE BID FOR "EXPANSION DEVICE".

MATERIALS, EQUIPMENT, ETC. SHALL NOT BE STOCKPILED/STORED ON THE BRIDGE DECK WITHOUT PRIOR APPROVAL FROM THE ENGINEER.

JOINT REPAIR AREAS SHALL BE FILLED WITH "CONCRETE MASONRY DECK REPAIR".

CLEAN, STRAIGHTEN, AND EXTEND EXISTING BAR STEEL REINFORCEMENT 24 BAR DIAMETERS INTO NEW CONSTRUCTION WHERE APPLICABLE.

ANY EXCAVATION REQUIRED TO COMPLETE THE JOINT REPAIR IS INCIDENTAL TO THE BID ITEM "CONCRETE MASONRY DECK REPAIR".

PIGMENTED SURFACE SEALER TO BE APPLIED TO THE FRONT FACE AND TOP OF REBUILT PARAPET SECTIONS AT THE ABUTMENTS.

PROTECTIVE SURFACE TREATMENT SHALL BE APPLIED TO THE TOP SURFACE OF THE COMPLETED JOINT REPAIR AREAS.

ALL CONCRETE REMOVAL SHALL BE DEFINED WITH A ½" DEEP SAW CUT.

PARTIALLY GROUTED RIP RAP AND GEOTEXTILE TYPE HR TO BE USED TO FILL IN VOIDS IN THE EXISTING SLOPE PROTECTION AT THE ABUTMENTS AS DIRECTED BY THE ENGINEER.


BREAK UP EXISTING GROUTED RIPRAP AND LEAVE IN PLACE. INCIDENTAL TO "PARTIALLY GROUTED RIPRAP".

CONCRETE SURFACE REPAIR LOCATIONS AND QUANTITIES ARE APPROXIMATE. FINAL LOCATION AND QUANTITY TO BE DETERMINED BY FIELD ENGINEER.

CLEAN AND PAINT ALL EXISTING EXPOSED STEEL INCLUDING GIRDERS, DIAPHRAGMS, BEARINGS, AND HARDWARE WITHIN 5 FEET OF THE ENDS OF THE GIRDERS. COLOR TO BE AMS STANDARD COLOR NO. 25240 (BLUE).

LEGEND

(X) INDICATES GIRDER NUMBER



CROSS SECTION THRU BRIDGE

(LOOKING EAST)

TOTAL ESTIMATED QUANTITIES

BID ITEM NUMBER	BID ITEM	UNIT	WEST ABUTMENT	EAST ABUTMENT	SUPER.	TOTALS
502.3101	EXPANSION DEVICE	LF	--	--	77	77
502.3200	PROTECTIVE SURFACE TREATMENT	SY	6	6	23	35
502.3210	PIGMENTED SURFACE SEALER	SY	1	1	2	4
502.4205	ADHESIVE ANCHORS NO. 5 BAR	EACH	40	40	--	80
505.0600	BAR STEEL REINFORCEMENT HS COATED STRUCTURES	LB	360	360	1,490	2,210
505.0904	BAR COUPLERS NO. 4	EACH	--	--	26	26
505.0905	BAR COUPLERS NO. 5	EACH	3	3	--	6
505.0906	BAR COUPLERS NO. 6	EACH	--	--	10	10
509.1000	JOINT REPAIR	SY	--	--	37	37
509.1500	CONCRETE SURFACE REPAIR	SF	25	15	5	45
509.2100.S	CONCRETE MASONRY DECK REPAIR	CY	2.7	2.7	8.3	14
517.0901.S	PREPARATION AND COATING OF TOP FLANGES B-17-5	EACH	--	--	--	1
517.3001.S	STRUCTURE OVERCOATING CLEANING AND PRIMING B-17-5	EACH	--	--	--	1
517.4001.S	CONTAINMENT AND COLLECTION OF WASTE MATERIALS B-17-5	EACH	--	--	--	1
517.6001.S	PORTABLE DECONTAMINATION FACILITY	EACH	--	--	--	1
645.0120	GEOTEXTILE TYPE HR	SY	30	50	--	80
SPV.0035.01	PARTIALLY GROUTED RIPRAP	CY	15	25	--	40
SPV.0180.01	ABUTMENT SEAT CLEANING AND SEALING	SY	11	11	--	22

ALL ITEMS ARE CATEGORY 0020

NO.	DATE	REVISION	BY
STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION			
STRUCTURE B-17-5			
		DRAWN BY	PLANS CK'D ETP
		WCAB	
CROSS SECTION, QUANTITIES & NOTES		SHEET 2 OF 8	

SCALE =

BILL OF BARS - WEST ABUTMENT

BAR MARK	NO. REQ'D			LENGTH	BENT	BAR SERIES	LOCATION		
	STAGE 1	STAGE 2	STAGE 3						
COATED BARS								TOTAL WEIGHT = 360 LBS	
A501	6	0	0	8'-6"			PAVING BLOCK	TRANS.	
A502	0	6	0	7'-6"			PAVING BLOCK	TRANS.	
A503	0	0	3	9'-8"			SIDEWALK	TRANS.	
A504	0	0	2	8'-5"	X		SIDEWALK	TRANS.	
A505	15	14	3	2'-10"	X		PAVING BLOCK	VERT.	
A506	0	0	8	3'-4"	X		SIDEWALK	TRANS.	
A407	15	14	3	4'-2"	X		PAVING BLOCK	VERT.	

THE FIRST DIGIT OR FIRST TWO DIGITS OF THE BAR MARK SIGNIFIES THE BAR SIZE.
DIMENSIONS IN BENDING DETAILS ARE OUT-TO-OUT OF BAR.

ELEVATION
(LOOKING WEST)


8°30' SKEW TYP.

C/L STH 29 &
VERTICAL CONST.
JOINT

CONSTRUCTION
JOINT
STA. 675+47.07

PLAN

SECTION A-A



A407

A504

A505, A506

LEGEND

- (X) DENOTES WING NUMBER
- (X) DENOTES GIRDER NUMBER



BAR COUPLERS REQUIRED AT STAGE CONSTRUCTION JOINT. BAR LENGTHS ARE COMPUTED TO C/L OF CONSTRUCTION JOINT AND SHALL BE MODIFIED BY THE BAR COUPLER MANUFACTURERS RECOMMENDATIONS. SEE SHEET 8 FOR COUPLER DETAILS.

NO.	DATE	REVISION	BY
STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION			
STRUCTURE B-17-5			
DRAWN BY		WCAB	PLANS CK'D ETP
WEST ABUTMENT		SHEET 3 OF 8	

BILL OF BARS - EAST ABUTMENT

BAR MARK	NO. REQ'D			LENGTH	BENT	BAR SERIES	LOCATION	
	STAGE 1	STAGE 2	STAGE 3					
COATED BARS							TOTAL WEIGHT = 360 LBS	
B501	6	0	0	8'-6"			PAVING BLOCK	TRANS.
B502	0	6	0	7'-6"			PAVING BLOCK	TRANS.
B503	0	0	3	9'-8"			SIDEWALK	TRANS.
B504	0	0	2	8'-5"	X		SIDEWALK	TRANS.
B505	15	14	3	2'-10"	X		PAVING BLOCK	VERT.
B508	0	0	8	3'-4"	X		SIDEWALK	TRANS.
B409	15	14	3	4'-2"	X		PAVING BLOCK	VERT.


THE FIRST DIGIT OR FIRST TWO DIGITS OF THE BAR MARK SIGNIFIES THE BAR SIZE.
DIMENSIONS IN BENDING DETAILS ARE OUT-TO-OUT OF BAR.



LEGEND


- (X) DENOTES WING NUMBER
- (X) DENOTES GIRDER NUMBER
- BAR COUPLERS REQUIRED AT STAGE CONSTRUCTION JOINT. BAR LENGTHS ARE COMPUTED TO C/L OF CONSTRUCTION JOINT AND SHALL BE MODIFIED BY THE BAR COUPLER MANUFACTURERS RECOMMENDATIONS. SEE SHEET 8 FOR COUPLER DETAILS.

NO.	DATE	REVISION	BY
STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION			
STRUCTURE B-17-5			
DRAWN BY		WCAB	PLANS CK'D ETP
EAST ABUTMENT		SHEET 4 OF 8	



ELEVATION

(LOOKING EAST)



PLAN

LEGEND

- * ① NEOPRENE STRIP SEAL (4 - INCH) AND STEEL EXTRUSIONS. SET JOINT OPENING AT 1 3/4" (NORMAL TO JOINT).
- ② STUDS 3/8" DIA. X 6 3/8" LONG AT 6" ALTERNATE CENTERS. WELD TO EXTRUSIONS AND BEND AS SHOWN AFTER WELDING.
- 2A 1/2" THICK ANCHOR PLATE WITH 3/8" DIA. ROD (OR ALTERNATE STRIP SEAL ANCHOR). WELD ROD TO ANCHOR PLATE, WELD ANCHOR PLATE TO NO. 1. AT 1'-6" CENTERS BETWEEN GIRDERS. 3/4" DIA. THREADED ROD WITH 2 NUTS AND PLATE WASHERS. WELD
- ③ THREADED ROD TO TOP FLANGE OR ATTACH BY BOLTING THRU FLANGE. ON ABUTMENT SIDE GROUT THREADED ROD INTO FIELD DRILLED HOLES IN ABUTMENT BACKWALL AS SHOWN.
- ④ 3/4" DIA. THREADED ROD WITH NUT. TACK WELD NUT TO NO. 5.
- ⑤ FABRICATE SUPPORT FROM 3" X 1/2" BAR AS SHOWN OR EQUIVALENT, ONE PER GIRDER PER SIDE. SHOP OR FIELD WELD TO NO. 1. IF FIELD WELDED, COVER WELDED AREAS WITH EPOXY-COATING MATERIAL. PROVIDE 1 1/2" DIA. HOLE FOR NO. 3 AND 1" DIA. HOLE FOR NO. 4.
- ⑥ GALVANIZED PLATE 3/8" X 10" X 2'-0" LONG WITH HOLES FOR #7. BEND AS SHOWN.
- ⑦ 3/4" DIA. X 1 1/2" STAINLESS STEEL SOCKET FLAT HEAD SCREWS WITH ANTI-SEIZE LUBRICANT. PLACE IN COUNTERSUNK HOLE. RECESS 1/16" BELOW PLATE SURFACE.
- ⑧ 3/4" DIA. X 4" GALVANIZED HEX HEAD BOLT. BEND 45°.
- ⑨ 3/4" DIA. X 2 1/4" GALVANIZED THREADED COUPLING.
- ⑩ 1" X 5" SLOTTED COUNTERSUNK HOLE FOR NO. 7. PLACE SLOT PARALLEL TO DIRECTION OF MOVEMENT.
- ⑪ SIDEWALK COVER PLATE 3/8" X 2'-0" X LIMITS SHOWN. BEND DOWN FACE OF SIDEWALK WITH HOLES FOR NO. 7. GALVANIZE PLATE AFTER SLIP-RESISTANT SURFACE IS APPLIED.


- BARS PLACED PARALLEL TO GIRDERS. SPACING PERPENDICULAR TO C/L GIRDERS.
- ☒ EXISTING BARS ARE LIKELY TO BE CORRODED AND/OR DAMAGED DURING CONCRETE REMOVAL. SALVAGE AND INCORPORATE AS MUCH REBAR AS PRACTICAL.
- ☆ ADHESIVE ANCHORS NO. 5 BAR. EMBED 1'-0" IN CONCRETE. SPACE AT 1'-0". TURN 10" LEG AS NECESSARY TO FIT.
- DIMENSIONS GIVEN ARE NORMAL TO C/L OF SUBSTRUCTURE UNIT. INCORPORATE EXISTING REINFORCEMENT.

NOTES

DIAPHRAGM SUPPORT ANGLES SHALL BE ASTM A709 GRADE 36. BOLTS ARE 3/4" DIA. ALL BOLTS, NUTS WASHERS, SHALL BE ASTM A325 TYPE 1.


ALL SUPPORT ANGLES SHALL BE HOT-DIPPED GALVANIZED. ALL BOLTS, NUTS, AND WASHERS SHALL BE HOT-DIPPED GALVANIZED IN ACCORDANCE WITH ASTM A153 CLASS C. GALVANIZED NUTS SHALL BE TAPPED OVSIZED IN ACCORDANCE WITH THE REQUIREMENTS OF ASTM A563 AND SHALL MEET THE REQUIREMENTS OF SUPPLEMENTARY REQUIREMENT S1 OF ASTM A563, LUBRICANT AND TEST FOR COATED UNITS.

ALL DIAPHRAGM SUPPORT HARDWARE SHALL BE INCIDENTAL TO "CONCRETE MASONRY BRIDGES".



SECTION THRU JOINT AT ABUTMENT

NORMAL TO C/L SUBSTRUCTURE
(STRIP SEAL DETAILS)




AT PAVING BLOCK


AT DECK

SECTION THRU JOINT

ROADWAY TRAFFIC AREA BETWEEN EXTERIOR GIRDERS




PART PLAN




SECTION THRU JOINT AT ABUTMENT

NORMAL TO C/L SUBSTRUCTURE
(REINFORCEMENT DETAILS)




SECTION THRU JOINT

EXTERIOR GIRDER TO EDGE OF DECK AND AT PARAPET AND SIDEWALK




JOINT REPAIR-REMOVAL

NORMAL TO C/L SUBSTRUCTURE



PART TRANSVERSE SECTION AT DIAPHRAGM


(DECK REINFORCEMENT NOT SHOWN FOR CLARITY)




PART TRANSVERSE SECTION AT DIAPHRAGM

(DECK REINFORCEMENT NOT SHOWN FOR CLARITY)


NO.	DATE	REVISION	BY
STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION			
STRUCTURE B-17-5			
DRAWN BY WCAB		PLANS CK'D ETP	
STRIP SEAL EXPANSION JOINT DETAILS - 1		SHEET 5 OF 8	




PLAN AT SIDEWALK



SECTION AT SIDEWALK




SECTION B-B



PLAN OF SIDEWALK COVER PLATE WITH SLIP-RESISTANT SURFACE


PLACE SLIP-RESISTANT SURFACE ON TOP WALKING SURFACE IN SHADED AREA ONLY.

APPROVED SLIP-RESISTANT APPLIED SURFACES FOR STEEL PLATES		
PRODUCT	MANUFACTURER	CONTACT AT
SLIPNOT GRADE 2, STEEL	W. S. MOLNAR COMPANY	1-800-SLIPNOT
ALGRIP, STEEL	ROSS TECHNOLOGY CORP.	1-800-345-8170



SECTION A-A

* DIMENSION ALONG DIRECTION OF MOVEMENT



SIDEWALK REINFORCEMENT DETAILS

LEGEND

- (X) SEE SHEET 5 FOR DESCRIPTION
- ⊗ BLOCK OUT CONCRETE 2" EACH SIDE OF JOINT OPENING.
- ▣ JOINT OPENING DIMENSION ALONG SKEW PLUS 1/2".
- BARS TO BE PLACED PARALLEL TO GIRDERS. SPACING PERPENDICULAR TO C/L GIRDERS

NOTES

ONE FIELD SPLICE PERMITTED IN STEEL EXTRUSIONS, UNLESS MORE ARE REQUIRED FOR STAGED CONSTRUCTION, HANDLING OR GALVANIZING REQUIREMENTS. IF USED, ANCHOR PLATES SHALL BE PROVIDED 3" FROM EACH SIDE OF THE FIELD SPLICE. DETAILS SHALL BE SUBMITTED FOR APPROVAL. NO SPLICING PERMITTED IN NEOPRENE STRIP SEAL.

AFTER FABRICATION, BUT BEFORE SHIPMENT, STRAIGHTEN STEEL EXTRUSIONS SUCH THAT THEY SHALL BE FREE FROM WARP, TWIST AND SWEEP.


FABRICATOR SHALL PROVIDE MEANS OF KEEPING GALVANIZED EXTRUSIONS CLEAN AND SMOOTH DURING SHIPMENT AND PRIOR TO APPLYING LUBRICANT ADHESIVE FOR NEOPRENE GLAND INSTALLATION.

SANDBLAST PLATES, SUPPORTS AND EXTRUSIONS AFTER FABRICATION IN ACCORDANCE WITH SSPC SP. #6 "COMMERCIAL BLAST CLEANING". AFTER BLAST CLEANING, THE PLATES, SUPPORTS AND EXTRUSIONS SHALL BE HOT DIPPED GALVANIZED. SLIP-RESISTANT SURFACE IS APPLIED TO SIDEWALK COVER PLATES BY THE MANUFACTURER AND THEN HOT DIPPED GALVANIZED TO THEIR RECOMMENDATIONS TO MAINTAIN THE INTEGRITY OF THIS SURFACE.


ANCHOR SYSTEM NO. 8 AND NO. 9 SHALL CONFORM TO ASTM A307 AND SHALL BE GALVANIZED IN ACCORDANCE WITH ASTM A153 CLASS C AND D.

ALL MATERIAL IN THE EXPANSION JOINT ASSEMBLY, INCLUDING ANCHOR STUDS AND HARDWARE SHALL BE PAID AT THE UNIT PRICE BID FOR "EXPANSION DEVICE", LF.


NO.	DATE	REVISION	BY
STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION			
STRUCTURE B-17-5			
DRAWN BY		WCAB	PLANS CK'D ETP
STRIP SEAL EXPANSION JOINT DETAILS - 2		SHEET 6 OF 8	




PLAN AT SLOPED FACE PARAPET




ENLARGED SECTION A-A




REINFORCEMENT PLAN




SECTION D-D



SECTION C-C



SECTION A-A




VIEW OF PARAPET PLATE FROM ROADWAY

LEGEND


- ⊗ SEE SHEET 5 FOR DESCRIPTION
- ⊗ BLOCK OUT CONCRETE 2" EACH SIDE FOR JOINT OPENING.
- ▣ JOINT OPENING DIM. ALONG SKEW PLUS 1/2"
- ▲ SET JOINT OPENING AT 1 3/4" (NORMAL TO JOINT).

NO.	DATE	REVISION	BY
STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION			
STRUCTURE B-17-5			
DRAWN BY		WCAB	PLANS CK'D ETP
STRIP SEAL EXPANSION JOINT DETAILS - 3		SHEET 7 OF 8	




SECTION THRU DECK

ONE-PIECE THREADED COUPLER SHOWN,
OTHER LOCATIONS SIMILAR



DOWEL BAR COUPLER

STAGE 2 DOWEL SCREWS INTO
COUPLER PLACED IN STAGE 1




ONE PIECE THREADED COUPLER


BAR COUPLER ALTERNATIVES

NOTES


FOR DOWEL BAR COUPLERS, ALL DOWEL BARS SHALL
BE LAPPED AND TIED TO THE REINFORCEMENT BARS.




S415




S414




S413




S517



S405



S407



S510

BILL OF BARS - SUPERSTRUCTURE


BAR MARK	NO. REQ'D			LENGTH	BENT	BAR SERIES	LOCATION
	STAGE 1	STAGE 2	STAGE 3				
COATED BARS							TOTAL WEIGHT = 1,490 LBS
S401	18	0	0	15'-11"			DECK TRANS.
S402	0	18	0	15'-6"			DECK TRANS.
S403	0	0	18	7'-6"			DECK TRANS.
S404	8	8	4	2'-6"			DIAPHRAGM TRANS.
S405	36	36	14	4'-5"	X		DIAPHRAGM VERT.
S406	8	8	4	4'-9"			DIAPHRAGM - BTWN GIRDERS TRANS.
S407	0	0	20	2'-6"	X		SIDEWALK VERT.
S408	4	4	0	1'-11"			DIAPHRAGM TRANS.
S409	4	4	0	2'-4"			DIAPHRAGM - BTWN GIRDERS TRANS.
S510	0	0	16	7'-11"	X		SIDEWALK TRANS.
S611	20	20	10	3'-10"			DIAPHRAGM TRANS.
S612	10	10	0	1'-11"			DIAPHRAGM TRANS.
S413	14	0	0	4'-10"	X		PARAPET VERT.
S414	6	0	0	4'-7"	X		PARAPET VERT.
S415	8	0	0	4'-3"	X		PARAPET VERT.
S516	10	0	0	1'-2"			PARAPET LONGIT.
S517	10	0	0	3'-5"	X		PARAPET LONGIT.

THE FIRST DIGIT OR FIRST TWO DIGITS OF THE BAR MARK SIGNIFIES THE BAR SIZE.
DIMENSIONS IN BENDING DETAILS ARE OUT-TO-OUT OF BAR.

LEGEND

- BAR COUPLERS REQUIRED AT STAGE CONSTRUCTION JOINT. BAR LENGTHS ARE COMPUTED TO C/L OF CONSTRUCTION JOINT AND SHALL BE MODIFIED BY THE BAR COUPLER MANUFACTURERS RECOMMENDATIONS. SEE THIS SHEET FOR COUPLER DETAILS.
- ▲ BAR LENGTH ACCOUNTS FOR 2'-11" LAP SPLICE WITH S403

NO.	DATE	REVISION	BY
STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION			
STRUCTURE B-17-5			
DRAWN BY		WCAB	PLANS CK'D ETP
SUPERSTRUCTURE DETAILS		SHEET 8 OF 8	

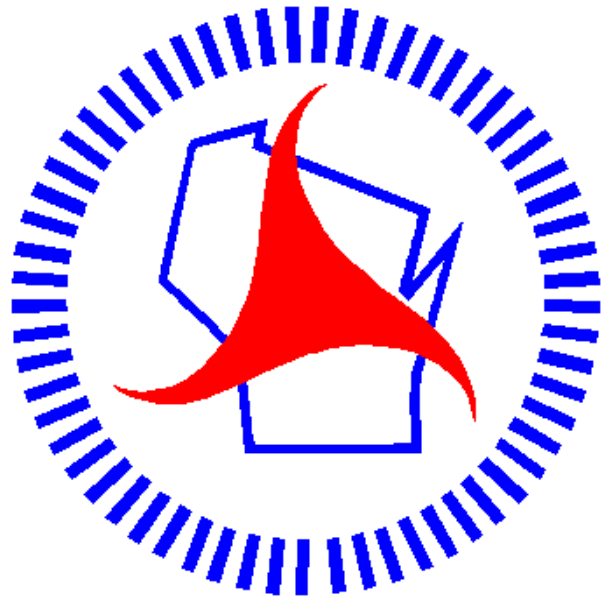

Wisconsin Department of Transportation

Dedicated people creating transportation solutions
through innovation and exceptional service.

<http://www.dot.wisconsin.gov>