



Wisconsin Department of Transportation

August 27, 2026

Division of Transportation Systems Development

Bureau of Project Development
4822 Madison Yards Way, 4th Floor South
Madison, WI 53705

Telephone: (608) 266-1631
Facsimile (FAX): (608) 266-8459

NOTICE TO ALL CONTRACTORS:

Proposal #09: 3180-03-74

Illinois – Lake Geneva
Bridge Ovr Nippersink Creek B64-007
STH 120
Walworth County

3180-05-71

Il State Line – Lake Geneva
Il State Line to Willow Road
STH 120
Walworth County

Letting of September 15, 2026

This is Addendum No. 01, which provides for the following:

Schedule of Items:

Revised Bid Item Quantities					
Bid Item	Item Description	Unit	Proposal Total Prior to Addendum	Proposal Quantity Change (-)	Proposal Total After Addendum
505.0600	Bar Steel Reinforcement HS Coated Structures	LB	28,970	70	29,040
SPV.0090.01	Special 01. Bar GFRP Reinforcement Structures	LF	11,328	590	11,918

Plan Sheets:

Revised Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of changes to sheet)
135	Structure Plans B-64-211: Quantities table updated.
143	Structure Plans B-64-211: Reinforcement spacing changed.
144	Structure Plans B-64-211: Reinforcement spacing changed.
145	Structure Plans B-64-211: Reinforcement spacing changed.
146	Structure Plans B-64-211: Bill of bars updated.

Schedule of Items

Attached, dated August 27, 2026, are the revised Schedule of Items Pages 2 and 9.

Plan Sheets

The following 8½ x 11-inch sheets are attached and made part of the plans for this proposal:

Revised: 135 and 143 – 146.


The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.

Sincerely,

Mike Coleman

Proposal Development Specialist
Proposal Management Section

END OF ADDENDUM

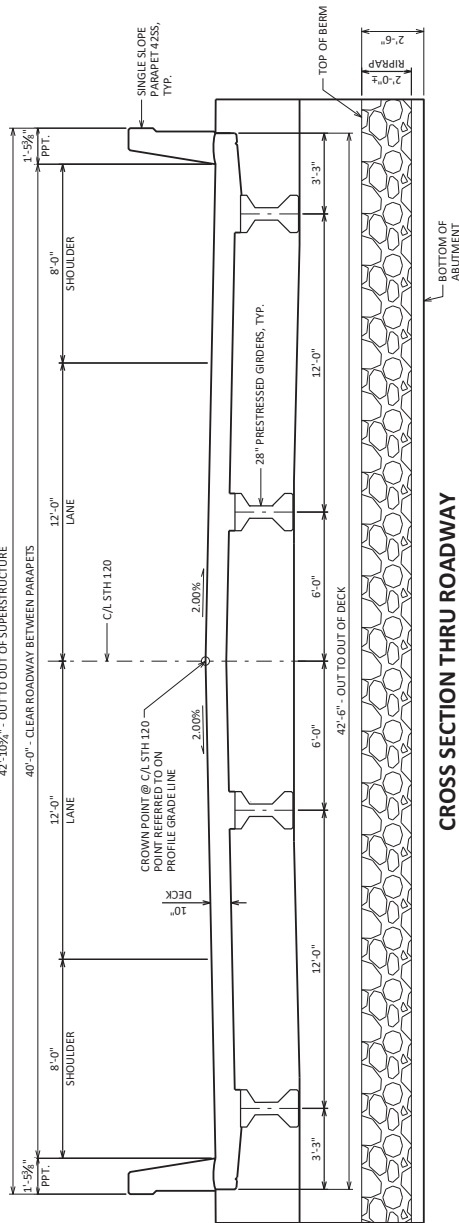

GENERAL NOTES

DRAWINGS SHALL NOT BE SCALED

BAR STEEL REINFORCEMENT SHALL BE EMBEDDED 2" CLEAR UNLESS OTHERWISE SHOWN OR NOTED.

THE FIRST OR FIRST TWO DIGITS OF THE BAR MARK SIGNIFIES THE BAR SIZE.

BEVEL EXPOSED EDGES OF CONCRETE $\frac{3}{4}$ " UNLESS OTHERWISE NOTED.

THE UPPER LIMITS OF "EXCAVATION FOR STRUCTURES BRIDGES B-64-211" SHALL BE THE EXISTING GROUNDLINE.

AT THE BACK FACE OF ABUTMENT ALL VOLUME WHICH CANNOT BE PLACED BEFORE ABUTMENT CONSTRUCTION AND IS NOT OCCUPIED BY THE NEW STRUCTURE SHALL BE BACKFILLED WITH STRUCTURE BACKFILL TYPE A. ALSO EXCLUDED IS THE "BASE AGGREGATE DENSE 1 1/4-INCH" AS DETAILED ON THE STRUCTURAL APPROACH SLAB SHEETS.

EXCAVATION BELOW THE ABUTMENT AND ABUTMENT BEDDING MATERIALS REQUIRES ENGINEER APPROVAL. GEOTEXTILE SHALL BE SET AT THE BOTTOM OF EXCAVATION AND EXTEND 2'-0" ABOVE BOTTOM OF ABUTMENT.

THE QUANTITY FOR BACKFILL STRUCTURE IS CALCULATED BASED ON THE DETAIL SHOWN IN THE PLANS.

ELASTOMERIC BEARING PADS NEED NOT BE INDIVIDUALLY MOLDED PROVIDED THE CUT EDGES ARE SMOOTH AND TRUE.


PROTECTIVE SURFACE TREATMENT TO BE APPLIED TO THE ENTIRE EXPOSED TOP OF DECK AND APPROACH SLAB SURFACES AND TO THE VERTICAL AND HORIZONTAL SURFACES OF THE PAVING NOTCHES AT ABUTMENT DIAPHRAGMS.

PIGMENTED SURFACE SEALER TO BE APPLIED TO THE FRONT FACE AND THE TOP OF THE PARAPETS, INCLUDING PARAPETS ON APPROACH SLABS.

THE SLOPE OF THE FILL IN FRONT OF THE ABUTMENTS SHALL BE COVERED WITH HEAVY RIPRAP, "GEOTEXTILE TYPE HR", AND "BASE AGGREGATE DENSE 1½-INCH MATERIAL FOR TRAVEL CORRIDOR" TO THE EXTENT SHOWN ON SHEET 1 AND THE ABUTMENT SHEETS.

THE HAUNCH CONCRETE QUANTITY IS BASED ON THE AVERAGE HAUNCH SHOWN ON THE "28 INCH PRESTRESSED GIRDER DETAILS" SHEET.

AT ABUTMENTS, CONCRETE POURED UNDER WATER WILL BE ALLOWED AND SHALL BE DONE IN ACCORDANCE WITH SECTION 502.3.5.3 OF THE STANDARD SPECIFICATIONS.





RODENT SHIELD DETAIL

* DIMENSIONS ARE APPROXIMATE. THE GRATE IS SIZED TO FIT INTO A PIPE COUPLING. ORIENT SO SLOTS ARE VERTICAL.

THE RODENT SHIELD, PIPE COUPLING AND SCREWS SHALL BE CONSIDERED INCIDENTAL TO THE BID ITEM "PIPE UNDERDRAIN WRAPPED 6-INCH".

THE RODENT SHIELD SHALL BE A PVC GRATE SIMILAR TO THIS DETAIL. THE GRATE IS COMMERCIALY AVAILABLE AS A FLOOR STRAINER. A PIPE COUPLING IS REQUIRED FOR THE ATTACHMENT OF THIS SHIELD TO THE EXPOSED END OF THE PIPE UNDERDRAIN. THE SHIELD SHALL BE FASTENED TO THE PIPE COUPLING WITH TWO OR MORE NO. 10 X 1-INCH STAINLESS STEEL SHEET METAL SCREWS.



TYPICAL SECTION THRU ABUTMENT

▲ BACKFILL PAY LIMITS. BACKFILL BEYOND BACKFILL PAY LIMITS SHALL BE INCIDENTAL TO EXCAVATION FOR STRUCTURES. LIMITS OF EXCAVATION SHALL BE DETERMINED BY THE CONTRACTOR.


 PIPE UNDERDRAIN WRAPPED (6-INCH). SLOPE 0.5% MIN. TO SUITABLE DRAINAGE. ATTACH RODENT SHIELD AT ENDS OF PIPE UNDERDRAIN.

TOTAL ESTIMATED QUANTITIES

BID ITEM NUMBER	BID ITEMS	UNIT	SUPER	S. STRUCT. APP. SIAB	SOUTH ABUT.	NORTH ABUT.	N. STRUCT. APP. SIAB	TOTALS
203.0260	REMOVING STRUCTURE OVER WATERWAY MINIMAL DEBRIS 6'-64'-007	EACH	---	---	---	---	---	1
206.1001	EXCAVATION FOR STRUCTURES BRIDGES 6'-64'-211	EACH	---	---	---	---	---	1
210.1500	BACKFILL STRUCTURE TYPE A	TON	---	---	110	---	---	220
305.0120	BASE AGGREGATE DENSE 1 1/4-INCH	TON	---	---	---	---	---	270
502.0100	CONCRETE MASONRY BRIDGES	CY	95.0	135	45.0	---	135	303
502.0100	PROTECTIVE SURFACE TREATMENT	SY	203	90	---	---	---	383
502.3210	PIGMENTED SURFACE SEALER	SY	40	20	---	---	---	80
503.0128	PRESTRESSED GIRDER TYPE I 28-INCH	LF	156	---	---	---	---	156
505.0400	BAR STEEL REINFORCEMENT HS STRUCTURES	LB	---	---	2,535	---	---	5,070
505.0600	BAR STEEL REINFORCEMENT HS COATED STRUCTURES	LB	6,230 (1)	10,020	1,390	10,020	---	29,040
505.0800.3	BAR STEEL REINFORCEMENT HS STAINLESS STRUCTURES	LB	1,430	---	---	---	---	1,430
506.2605	BEARING PADS ELASTOMERIC NON-LAMINATED	EACH	8	---	---	---	---	8
506.4000	STEEL DIAPHRAGMS 6'-64'-211	EACH	3	---	---	---	---	3
516.0500	RUBBERIZED MEMBRANE WATERPROOFING	SY	---	---	12	12	---	24
550.0500	PILE POINTS	EACH	---	---	7	---	---	14
550.2108	PILING CIP CONCRETE 10 3/4 X 0.50-INCH	LF	---	---	490	455	---	945
606.0300	RIPRAP HEAVY	CY	---	---	110	215	---	215
612.0406	PIPE UNDERDRAIN WRAPPED 6-INCH	LF	---	---	100	100	---	200
614.0150	ANCHOR ASSEMBLIES FOR STEEL BEAM GUARD	EACH	4	---	---	---	---	4
645.0111	GEOTEXTILE TYPE OF SCHEDULE A	SY	---	---	37	37	---	74
645.0120	GEOTEXTILE TYPE HR	SY	---	---	185	175	---	360
SPV.0090	BAR GRP REINFORCEMENT STRUCTURES	LF	11,918 (1)	---	---	---	---	11,918
SPV.0195	BASE AGGREGATE DENSE 1 1/4-INCH MATERIAL FOR TRAVEL CORRIDOR	TON	---	---	15	15	---	30
	NON-BID ITEMS							
	FILLER	SIZE	---	---	---	---	---	3/4", 3/8", 1/4"

Addendum No. 01
ID 3180-03-74
Revised Sheet 143
August 27, 2026

NO.	8/7/26	TRANSVERSE BAR SPACING	CAD
REVISION	DATE	BY	
STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION STRUCTURES DESIGN SECTION			
STRUCTURE B-64-211		DESIGNED BY JPH	EMF
SUPERSTRUCTURE PLAN		SHEET 10	143

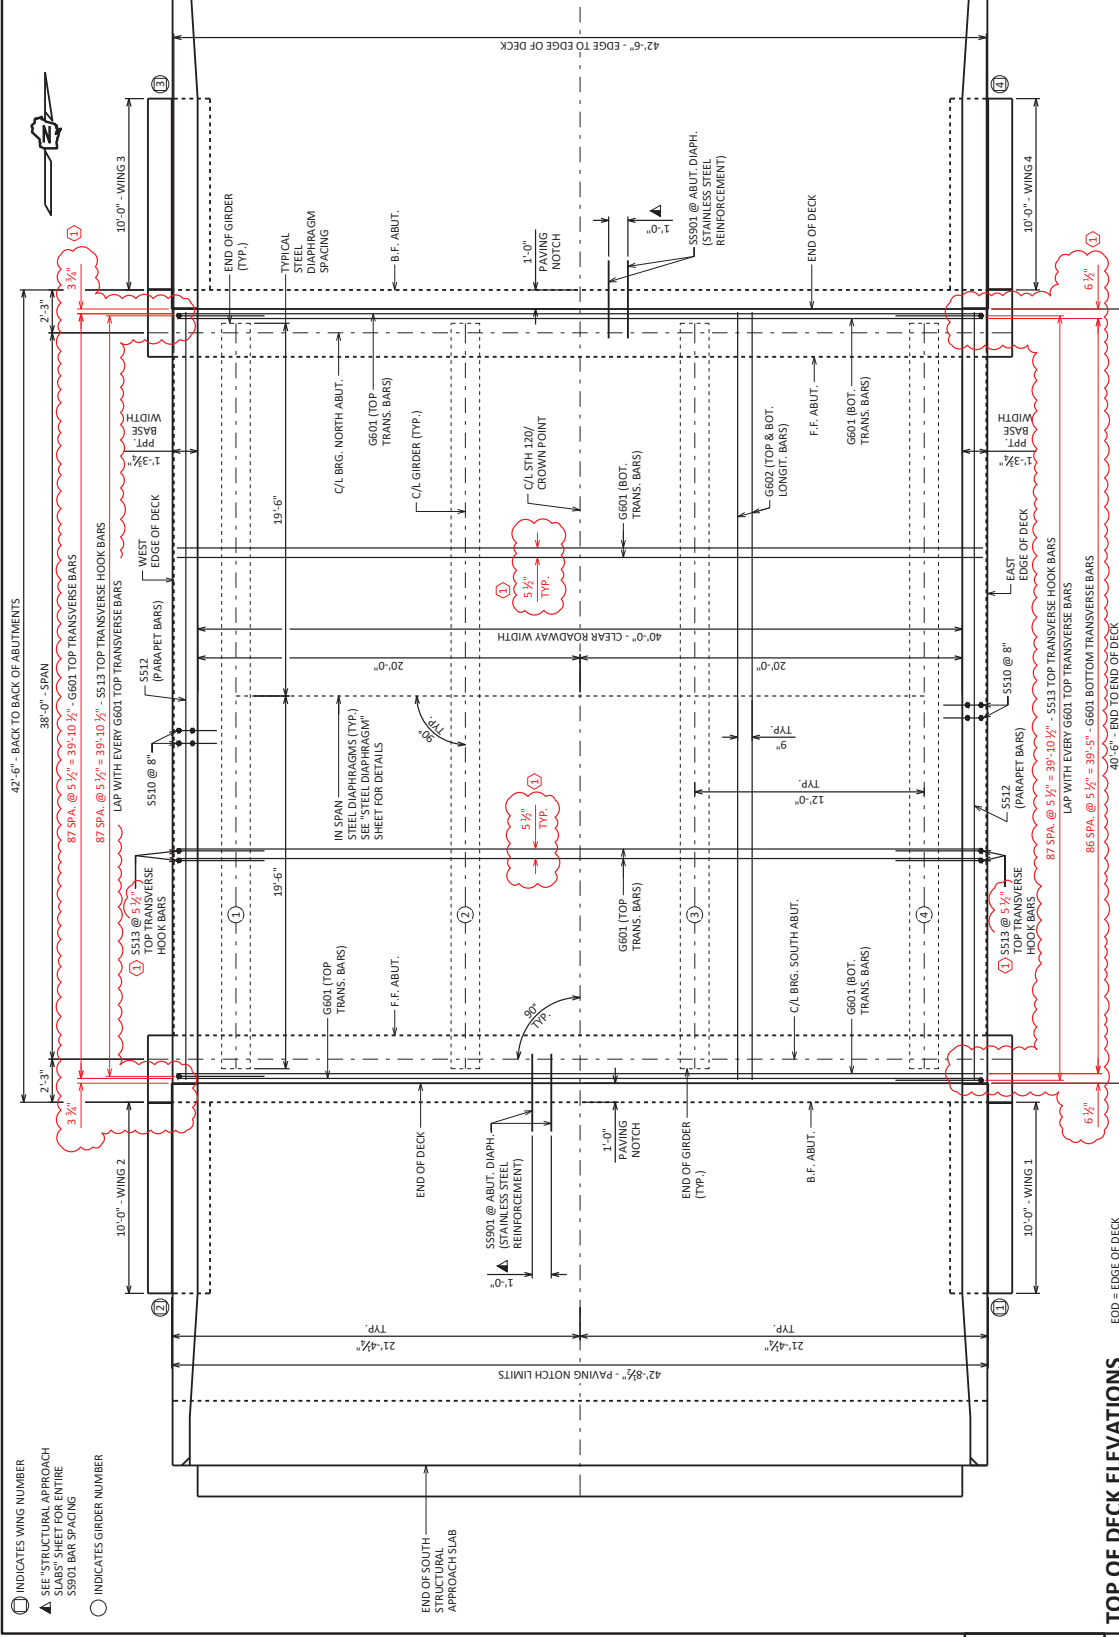


PLAN

TOP OF DECK ELEVATIONS

LOCATION	C/L BRG. S. ABUT.	1/10 PT.	3/10 PT.	1/2 PT.	2/3 PT.	3/4 PT.	5/8 PT.	7/8 PT.	C/L BRG. N. ABUT.
WEST EOD	899.11	899.09	899.07	899.05	899.03	899.01	898.99	898.97	898.94
C/L GIRDER 1	899.15	899.13	899.11	899.09	899.07	899.05	899.03	899.01	898.98
C/L GIRDER 2	899.39	899.37	899.35	899.33	899.31	899.29	899.27	899.25	899.22
C/L 5TH 120	899.51	899.49	899.47	899.45	899.43	899.41	899.39	899.37	899.34
C/L GIRDER 3	899.39	899.37	899.35	899.33	899.31	899.29	899.27	899.25	899.22
C/L GIRDER 4	899.15	899.13	899.11	899.09	899.07	899.05	899.03	899.01	898.98
EAST EOD	899.11	899.09	899.07	899.05	899.03	899.01	898.99	898.97	898.94

Addendum No. 01
ID 3180-03-74
Revised Sheet 145
August 27, 2026

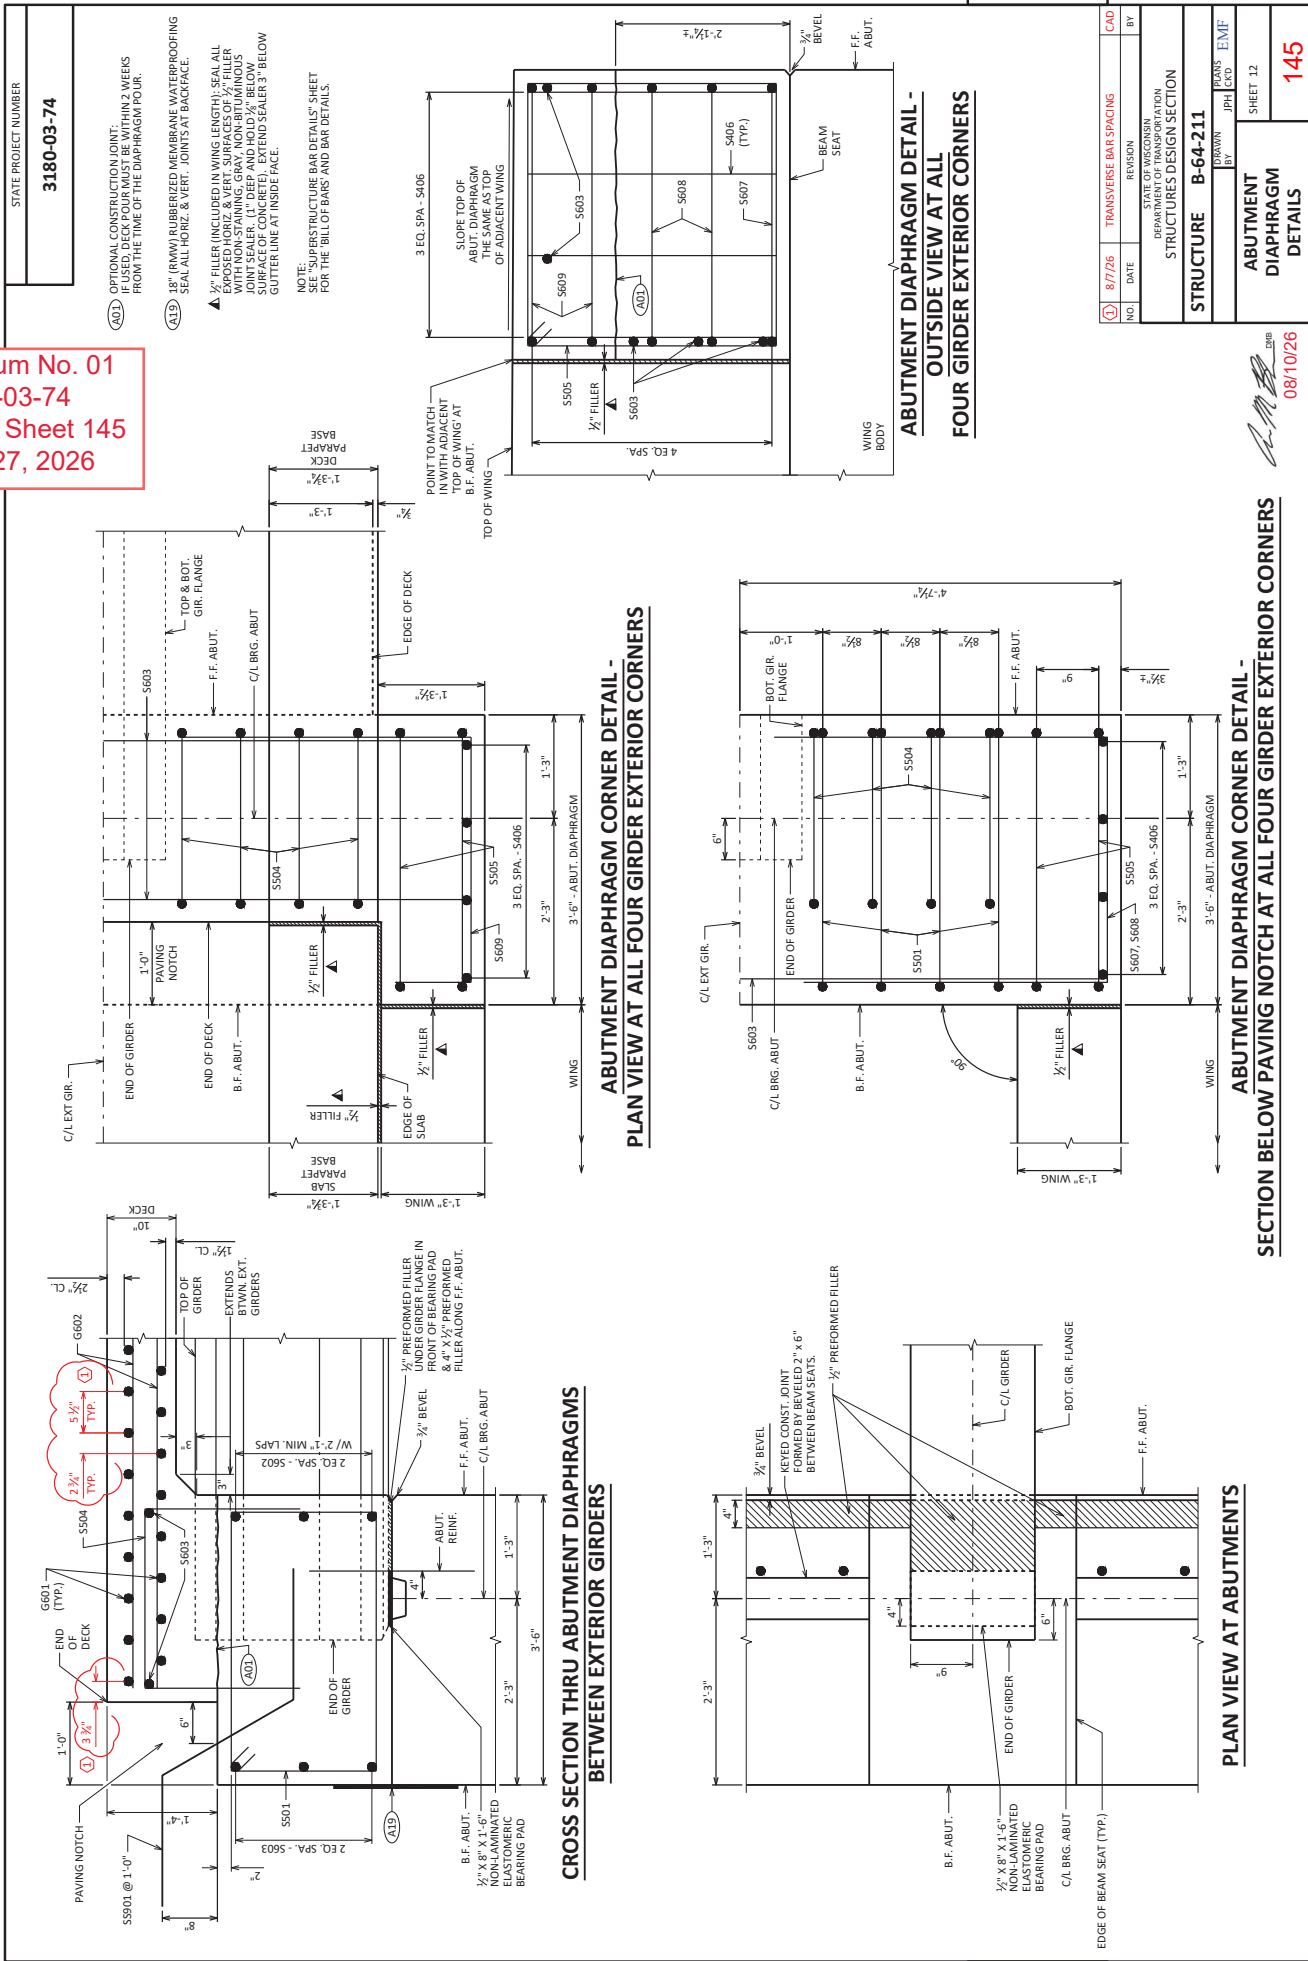



Proposal Schedule of Items

Page 2 of 9

Proposal ID: 20260915009 Project(s): 3180-03-74, 3180-05-71

Federal ID(s): N/A, N/A

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0032	305.0120 Base Aggregate Dense 1 1/4-Inch	2,743.000 TON	_____.	_____.
0034	415.0080 Concrete Pavement 8-Inch	49.000 SY	_____.	_____.
0036	415.0410 Concrete Pavement Approach Slab	80.000 SY	_____.	_____.
0038	455.0605 Tack Coat	10,153.000 GAL	_____.	_____.
0040	460.2000 Incentive Density HMA Pavement	11,782.000 DOL	1.00000	11,782.00
0042	460.6223 HMA Pavement 3 MT 58-28 S	11,167.000 TON	_____.	_____.
0044	460.6424 HMA Pavement 4 MT 58-28 H	7,297.000 TON	_____.	_____.
0046	465.0125 Asphaltic Surface Temporary	4.000 TON	_____.	_____.
0048	465.0560 Asphaltic Rumble Strips, Centerline	17,940.000 LF	_____.	_____.
0050	502.0100 Concrete Masonry Bridges	303.000 CY	_____.	_____.
0052	502.3200 Protective Surface Treatment	383.000 SY	_____.	_____.
0054	502.3210 Pigmented Surface Sealer	80.000 SY	_____.	_____.
0056	503.0128 Prestressed Girder Type I 28-Inch	156.000 LF	_____.	_____.
0058	505.0400 Bar Steel Reinforcement HS Structures	5,070.000 LB	_____.	_____.
0060	505.0600 Bar Steel Reinforcement HS Coated Structures	29,040.000 LB	_____.	_____.



Proposal Schedule of Items

Page 9 of 9

Proposal ID: 20260915009 Project(s): 3180-03-74, 3180-05-71

Federal ID(s): N/A, N/A

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0238	715.0502 Incentive Strength Concrete Structures	1,818.000 DOL	1.00000	1,818.00
0240	715.0603 Incentive Strength Concrete Barrier	30.000 DOL	1.00000	30.00
0242	740.0440 Incentive IRI Ride	12,800.000 DOL	1.00000	12,800.00
0244	SPV.0060 Special 01. Section Corner Monuments	8.000 EACH	_____.	_____.
0246	SPV.0090 Special 01. Bar GFRP Reinforcement Structures	11,918.000 LF	_____.	_____.
0248	SPV.0180 Special 01. Enhanced Turbidity Barrier	147.000 SY	_____.	_____.
0250	SPV.0195 Special 01. Asphalt Repair	140.000 TON	_____.	_____.
0252	SPV.0195 Special 02. Base Aggregate Dense 1-1/4 Inch Material for Travel Corridor	30.000 TON	_____.	_____.
Section: 0001			Total:	_____.

Total Bid: _____.

